

Derwent  
Top 100  
Global  
Innovator  
2020

# XGT Series

Programmable Logic Controller



**LS** ELECTRIC

XGT series, innovative solutions for system integration  
from field to information level.

Open Network System Integration



neXt Generation Technology  
**XGT** Series



**FEATURES** 4 ~ 13



**CPU** 14 ~ 31



**SYSTEM** 32 ~ 43



**NETWORK** 44 ~ 89



**SPECIAL** 90 ~ 123



**SOFTWARE** 124 ~ 147

FEATURES

CPU

SYSTEM

NETWORK

SPECIAL

SOFTWARE

## Welcome to XGT World!

XGT series will meet your needs and expectations, enabling the highest possible productivity and performance levels and more.





## Features

XGT series is the next-generation solution with a new concept providing advanced engineering environment based on open network, fastest processing speed, compact size and user-friendly software.



**The smallest size**

The smallest size(Dimensions 27 X 98 X 90) achieves cost-efficiency and various applications.

Item	Power Supply	CPU	8-slot Base
<b>Size (WxHxD)</b>	55x98x90	27x98x90	318x98x17


## Features

XGT series, neXt Generation Technology for easier, faster and smarter automation, will provide you with future-oriented solutions, bringing greener, safer and more convenient life for you...

### System Integration of Open Network

XGT series support various communication solutions ranging from field control to information level with Fast Ethernet, Profibus-DP, DeviceNet, Modbus, etc.




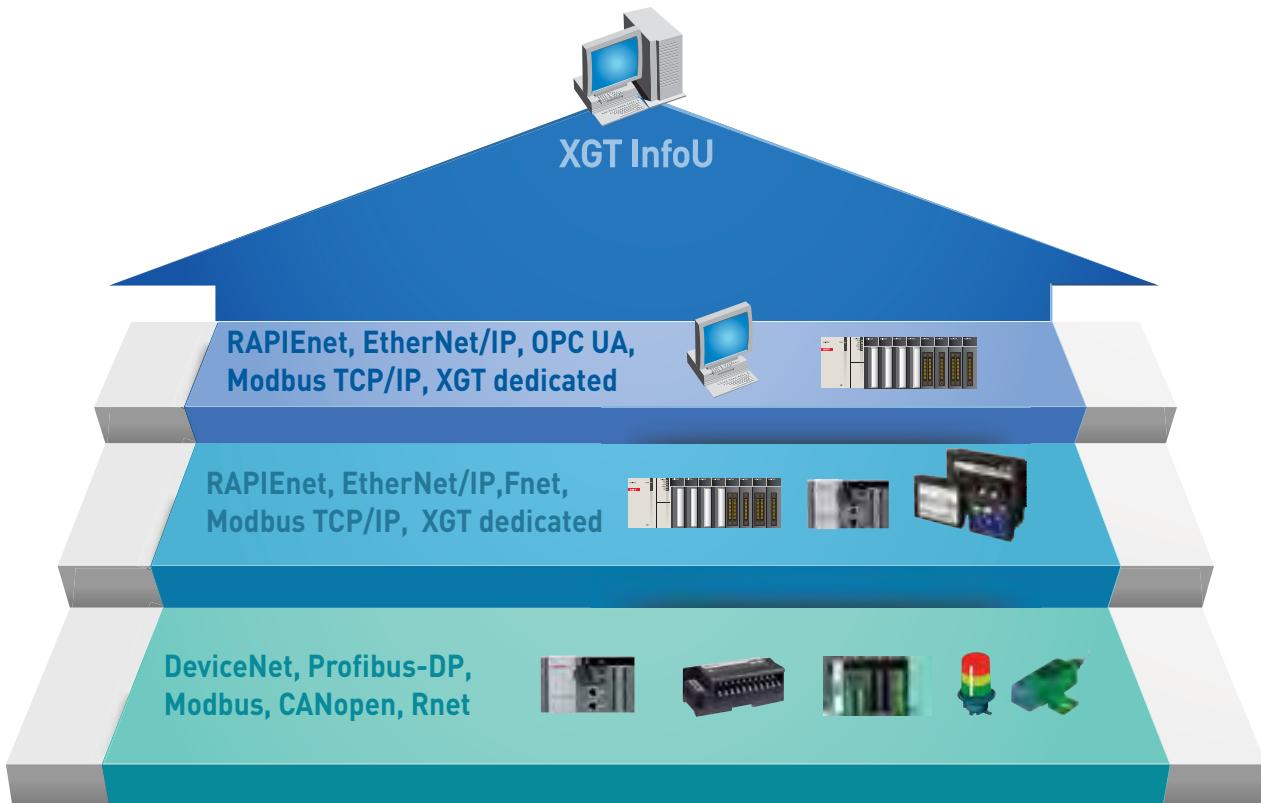

Do you want more  
powerful features and performance?  
answer is LSIS

### XGT New CPU


New XGT CPU has 3 times faster cpu processing speed,  
2 times larger memory capacity and built in ethernet port.

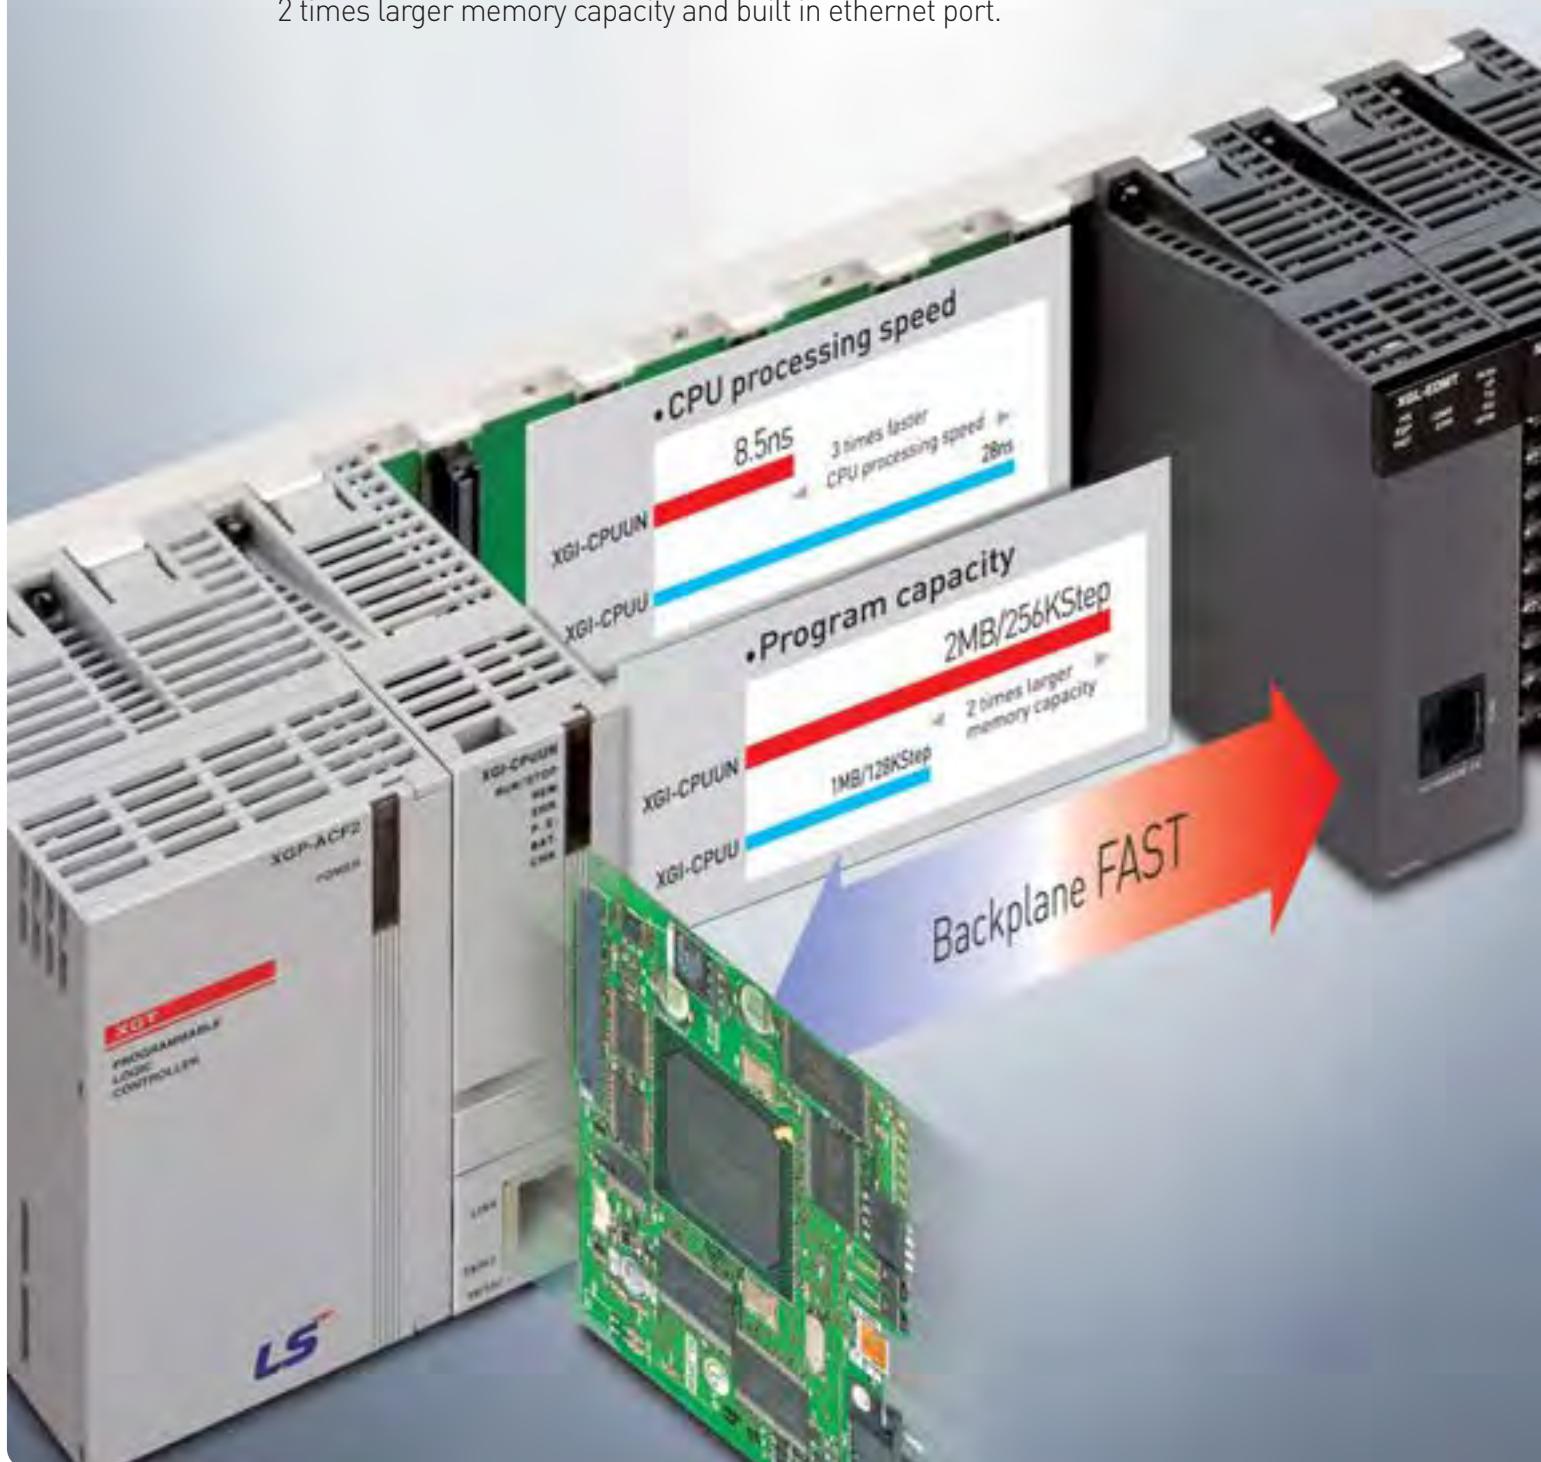

## Compare of scan time between XGI-CPUU and XGI-CPUUN


### Using 1 MOVE word

Item	XGI-CPUUN	XGI-CPUU/D	XGI-CPUU	XGI-CPUH	XGI-CPUS
Current scan time	0.2ms	0.6ms	0.9ms	1.0ms	0.8ms
Min. scan time	0.2ms	0.6ms	0.8ms	1.0ms	0.7ms
Max. scan time	0.4ms	0.9ms	1.5ms	1.8ms	1.7ms

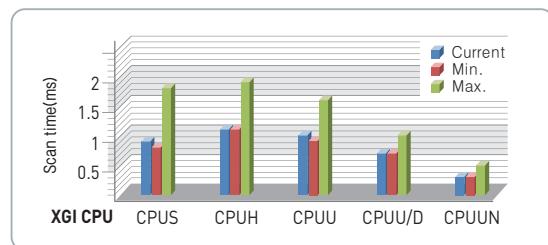


### Using 1,000 MOVE word

Item	XGI-CPUUN	XGI-CPUU/D	XGI-CPUU	XGI-CPUH	XGI-CPUS
Current scan time	0.5ms	1.2ms	1.7ms	1.7ms	1.5ms
Min. scan time	0.5ms	1.2ms	1.6ms	1.6ms	1.5ms
Max. scan time	0.7ms	1.5ms	2.3ms	2.5ms	2.3ms

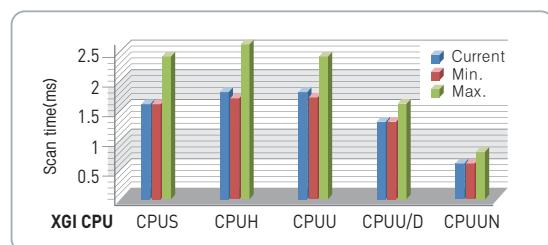


## Device memory range

CPU	Device memory	XGI-CPUU	XGI-CPUUN
XGI CPU	A	512KB	1024KB
	M	256KB	512KB
XGK CPU	P/M/K	32,768 point	65,536 point
	T	T000 – T2047	T000 – T8191
C/S/Z, R/ZR		2 ~ 8 times larger	

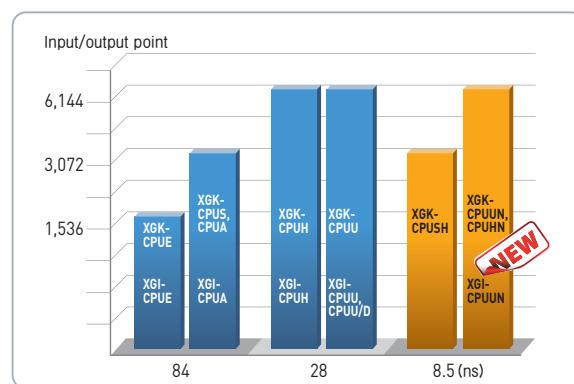

## Easy connection

- Local ethernet connect with XG5000
- Program upload / download
- Set parameter

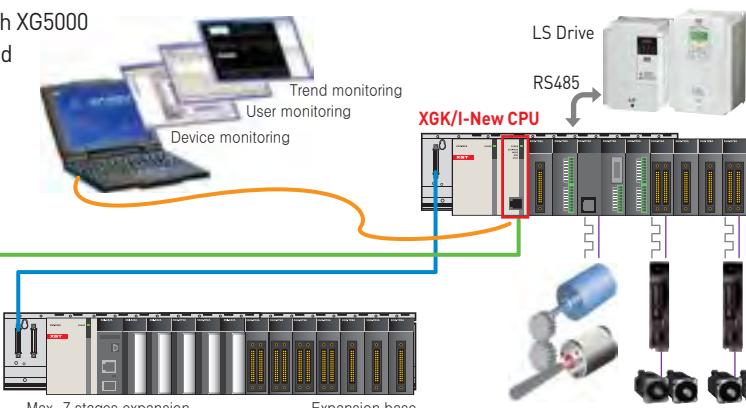

# Engineering & Programming

## Innovation Easy

### Special Register

XGT series expand device memory and support advanced programming environment with Index register (Z), File register (U), and Analog register (U).



#### File register

As a non-volatile memory type, data are secured even in times of blackout or CPU reset.



#### Analog register


Assigning base, slot and memory buffer of an analog module to device, A/D conversion data can be accessed without analog commands.



#### Index register



Index register is used in the sequence program for array operation.

### Example of Analog Register

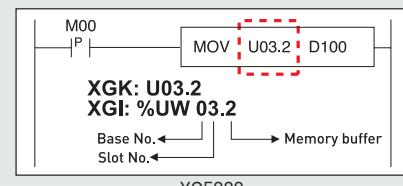

### Analog Operation without Programming

Special module setup and operation is achieved by just parameter setting without additional program.

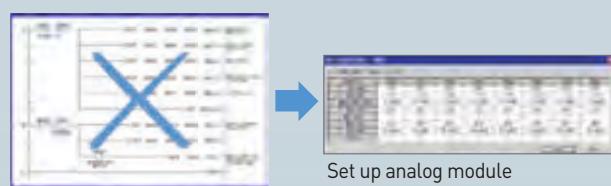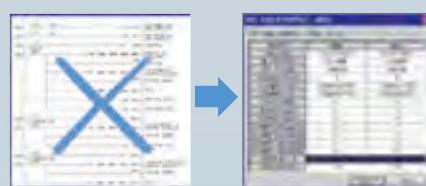

### Program Modularization and Task Operation

Available to run multiful programs through medulization of scan programs based on functions and author, and to operate task programs triggered by specific conditions.


Program type	Description	Number
Scan program	Scan	256-task
Task program	Initialization task	1
	Time driven task	32
	Internal task	32
	External interrupt task	32

## IEC standard language (XGI): LD, SFC, ST

Ladder Diagram



SFC

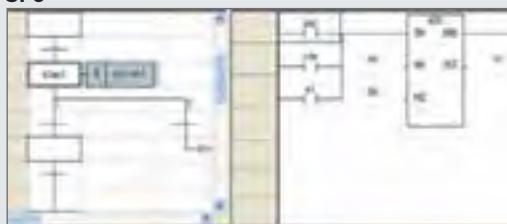

ST

```



18    LD 2+ C = 0 - 50010337(2.000) 1
19 END_IF :1
20
21
22 // CRASH (0.07)
23 TM := M8000_DCB_TO_INT(TIMEBASELL);
24 T0_ERROR := #1;
25 CASE T0 OF
26   1,5: DISPLAY := 2000_T0P2;
27   2,6: DISPLAY := 0000_T0P2;
28   3,4: DISPLAY := 0000_T0P3;
29   8,9: DISPLAY := 0000_T0P4;
30   5,7: DISPLAY := 0000_T0P5;
31   10: DISPLAY := 0000_T0P6;
32   ELSE: DISPLAY := #1;
33 END_CASE;
34 GOTO T0 := END_TO_HDG_MOTOR(DISPLAY);
35
36 // FOR(0..0.07)
37 G0 := #1;
38 FOR I := 1 TO 3 DO
39   T0 := I;
40   IF V100 THEN EXIT; END_IF;
41   SIN := S0H + I*2;
42   END_FOR;
43 S0H := S0H + 1;
44 END_FOR;

```

### ST features

- High-level Language
- Fit for the complicate algorithm
- Various open source (Compatibility)
- Easy data processing
- Convenient text editor

## User defined Function block (XGI)

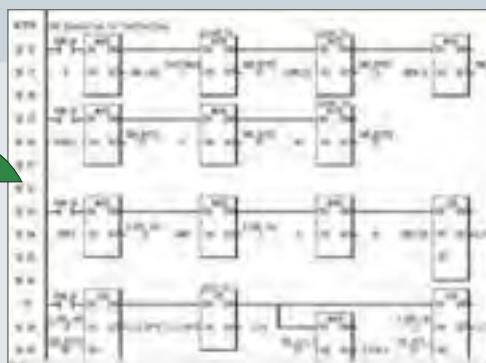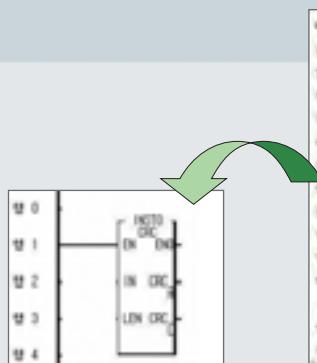

• Standardize the program using function or function block

• Register the standardized program as a library file and reuse the library for another project





# CPU & System Configuration

XGT series contain variety of CPU types for customized solutions which support wide coverage from small / middle- to large size-system control.

Contents    16 CPU module  
              24 I/O module



**XGK CPU (LS Standard)**

Premium CPU for high-speed and large scale application

**XGK-CPUUN**

- Program capacity: 256K steps
- I/O points: 6,144
- I/O device point: 65,536  
(Remote I/O)
- Processing speed: 8.5ns/step

**XGK-CPUHN**

- Program capacity: 128K steps
- I/O points: 6,144
- I/O device point: 65,536  
(Remote I/O)
- Processing speed: 8.5ns/step

**XGK-CPUSN**

- Program capacity: 64K steps
- I/O points: 3,072
- I/O device point: 65,536  
(Remote I/O)
- Processing speed: 8.5ns/step

**XGK-CPUU (Ultra compact)**

- Program capacity: 128K steps
- I/O points: 6,144
- I/O device point: 32,768  
(Remote I/O)
- Processing speed: 28ns/step

**XGK-CPUH (High performance)**

- Program capacity: 64K steps
- I/O points: 6,144
- I/O device point: 32,768  
(Remote I/O)
- Processing speed: 28ns/step

**XGK-CPUA (Advanced)**

- Program capacity: 32K steps
- I/O points: 3,072
- I/O device point: 32,768  
(Remote I/O)
- Processing speed: 28ns/step

## General sequence controller PLC CPU

**XGK-CPUS (Standard)**

- Program capacity: 32K steps
- I/O points: 3,072
- I/O device point: 32,768  
(Remote I/O)
- Processing speed: 84ns/step

**XGK-CPUE (Economic)**

- Program capacity: 16K step
- I/O point: 1,536
- I/O device point: 32,768  
(Remote I/O)
- Processing speed: 84ns/step

**XGI CPU (IEC Standard)**

Premium CPU for high-speed and large scale application

**XGI-CPUUN**

- Program capacity: 2MBytes
- I/O points: 6,144
- I/O device point: 131,072  
(Remote I/O)
- Processing speed: 8.5ns/step

**XGI-CPUU**

- Program capacity: 1MBytes
- I/O points: 6,144
- I/O device point: 131,072  
(Remote I/O)
- Processing speed: 28ns/step

**XGI-CPUH**

- Program capacity: 512KBytes
- I/O points: 6,144
- I/O device point: 131,072  
(Remote I/O)
- Processing speed: 28ns/step

## General sequence controller PLC CPU


**XGI-CPUS (IEC Standard)**

- Program capacity: 128KBytes
- I/O points: 3,072
- I/O device point: 32,768  
(Remote I/O)
- Processing speed: 28ns/step

**XGI-CPUE (IEC Standard)**

- Program capacity: 64KBytes
- I/O points: 1,536
- I/O device point: 32,768  
(Remote I/O)
- Processing speed: 84ns/step

## CPU Module System composition

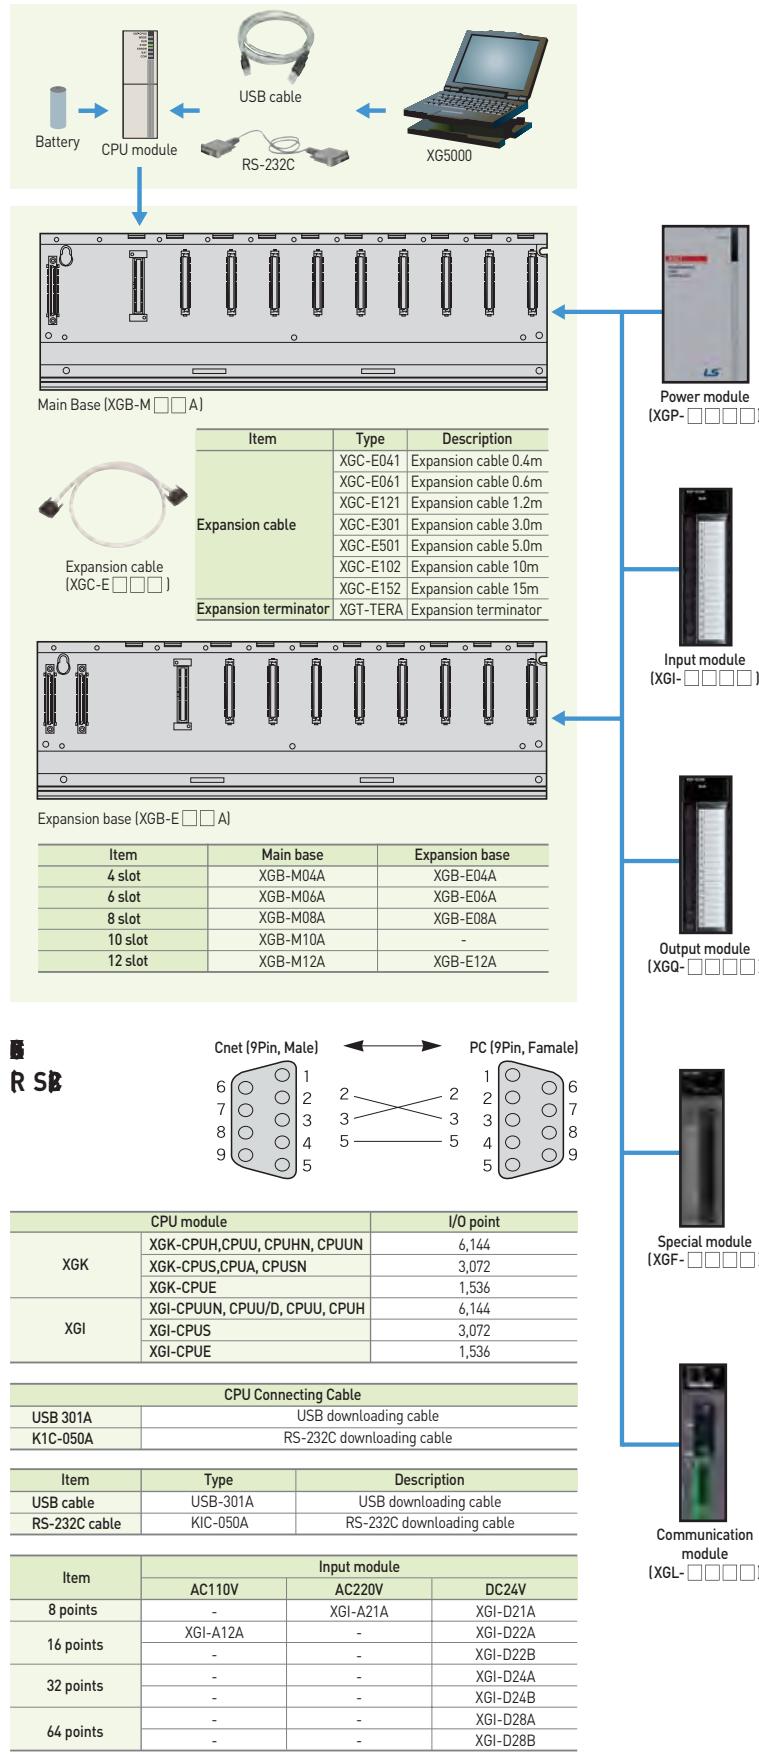

CPU

## Specifications

Item	Description			Standard
Ambient temperature	0 ~ 55 °C			
Storage temperature	-25 ~ +70 °C			
Ambient humidity	5 ~ 95%RH, (Non-condensing)			
Storage humidity	5 ~ 95%RH, (Non-condensing)			
Vibration resistance	Occasional vibration			-
	Frequency	Acceleration	Pulse width	
	10 ≤ f < 57Hz	-	0.075mm	
	57 ≤ f < 150Hz	9.8m/s <sup>2</sup> {1G}	-	
	Frequency	Acceleration	Pulse width	
	10 ≤ f < 57Hz	-	0.035mm	
	57 ≤ f < 150Hz	4.9m/s <sup>2</sup> {0.5G}	-	
	* Peak acceleration: 147 m/s{15G} * Duration: 11ms * Half-sine, 3 times each direction per each axis			IEC 61131-2
Shock resistance	Square wave impulse noise		± 1,500 V	LSIS Standard
	Electrostatic discharge		± 4kV	IEC 61131-2, IEC 61000-4-2
	Radiated electromagnetic field noise		27 ~ 500 MHz, 10 V/m	IEC 61131-2, IEC 61000-4-3
	Fast transient / Burst noise		0.25kV	IEC 61131-2, IEC 61000-4-4
Operating Ambience	Free from corrosive gases and excessive dust			
Altitude	Up to 2,000m			
Pollution degree	Less than equal to 2			
Cooling	Air-cooling			

\* Pollution degree 2 is nonconductive pollution of the sort where occasionally a temporary conductivity caused by condensation must be expected.

## XGK

Item		Description			Remarks		
		XGK-CPUUN	XGK-CPUHN	XGK-CPUSN			
Operation method		Cyclic execution of stored program, Time-driven interrupt, Process-driven interrupt					
I/O control method		Batch processing by scan synchronization (Refresh), Direct input/output by instruction					
Program language		Ladder diagram, Instruction list, SFC(Sequential Function Chart), ST(Structured Text)					
Number of instructions	Basic	40					
	Application	700					
Processing speed	LD	0.0085 μs/Step					
	MOVE	0.255 μs/Step					
	Real number operation	±: 182.2ns (S), 327.3ns (D) ×: 336ns (S), 427ns (D) ÷: 345ns (S), 808ns (D)			S: Single real number D: Double real number		
Program capacity		256Kstep (2,048KB)	128Kstep (1,024KB)	64Kstep (512KB)			
I/O points (available to install)		6,144	6,144	3,072			
Data area	P	P00000 ~ P4095F(65,536 points )					
	M	M00000 ~ M4095F(65,536 points )					
	K	K00000 ~ K4095F(65,536 points )					
	L	L0000 ~ L11263F(180,224 points )					
	F	F0000 ~ F4095F(65,536 points )					
	T	100ms : T0000 - T2999 10ms : T3000 - T5999 1ms : T6000 - T7999 0.1ms : T8000 - T8191			Timer (Adjustable)		
	C	C0000 ~ C4095					
	S	S00.00 ~ S255.99					
	D	D0000 ~ D524287		D0000 ~ D262143			
	U	U0.0-U7F.31		U0.0-U3F.31	Special module data refresh area		
Z	256 points						
N	N00000 ~ N21503						
R	16 block	8 block	2 block	32K word per 1 block [R0 ~ R32767]			
Flash area	2M byte, 32 blocks			Controllable by R device			
Program type	Total program	256					
	Initialization	1 (_INT)					
	Time-driven	32					
	Internal	32					
Operation mode	RUN, STOP, DEBUG						
Self-diagnosis	Execution, Delay, Memory error, I/O error, Battery error, Power error			Modbus slave			
Programming port	RS-232C (1Ch), USB (1Ch)						
Data retention at power failure	Set "retain" at data declaration						
Max. expansion stage	7		3	Total length 15m			
Current consumption (mA)	960						
Weight (Kg)	0.12						

XGK

CPU


Item		Description					Remarks		
		XGK-CPUU	XGK-CPUH	XGK-CPUA	XGK-CPUS	XGK-CPUE			
<b>Operation method</b>		Cyclic execution of stored program, Time-driven interrupt, Process-driven interrupt					-		
<b>I/O control method</b>		Batch processing by scan synchronization [Refresh], Direct input/output by instruction					-		
<b>Program language</b>		Ladder diagram, Instruction list, SFC[Sequential Function Chart], ST[Structured Text]					-		
<b>Number of instructions</b>	Basic	40					-		
	Application	700					-		
<b>Processing speed</b>	LD	0.028 $\mu$ s/Step		0.084 $\mu$ s/Step		-			
	MOVE	0.084 $\mu$ s/Step		0.252 $\mu$ s/Step		-			
<b>Real number operation</b>		$\pm : 0.602\mu$ s (S), 1.078 $\mu$ s (D)		$\pm : 1.442\mu$ s (S), 2.87 $\mu$ s (D)		S: Single real number D: Double real number			
		$\times : 1.106\mu$ s (S), 2.394 $\mu$ s (D)		$\times : 1.948\mu$ s (S), 4.186 $\mu$ s (D)					
$\div : 1.134\mu$ s (S), 2.66 $\mu$ s (D)		$\div : 1.442\mu$ s (S), 4.2 $\mu$ s (D)							
<b>Program capacity</b>		128Kstep[512KB]	64Kstep[256KB]	32Kstep[128KB]		16Kstep[64KB]	-		
<b>I/O points (available to install)</b>		6,144		3,072		1,536	-		
<b>Data area</b>	P	P0000 ~ P2047F(32,768 points)					-		
	M	M00000 ~ M2047F(32,768 points)					-		
	K	K00000 ~ K2047F(32,768 points)					-		
	L	L0000 ~ L11263F(180,224 points)					-		
	F	F0000 ~ F2047F(32,768 points)					-		
	T	10ms : T1000 - T1499		100ms : T0000 - T0999		Change area is available by Parameter setting			
		1ms : T2000 - T2047		1ms : T1500 - T1999					
	C	C0000 ~ C2047							
	S	S00.00 ~ S127.99							
	D	D0000 ~ D32,767							
	U	U0.0-U7F.31	U0.0-U3F.31	U0.0-U3F.31	U0.0-U1F.31	Special module data refresh area			
	Z	128 points							
	N	N00000 ~ N21503							
	R	2 block		1 block		32K word per 1 block [R0 ~ R32767]			
<b>Flash area</b>		2M byte, 32 blocks					Controllable by R device		
<b>Program type</b>	Total program	256							
	Initialization	1 [INT]							
	Time-driven	32							
	Internal	32							
<b>Operation mode</b>		RUN, STOP, DEBUG							
<b>Self-diagnosis</b>		Execution, Delay, Memory error, I/O error, Battery error, Power error					Modbus slave		
<b>Programming port</b>		RS-232C (1Ch), USB (1Ch)							
<b>Data retention at power failure</b>		Set "retain" at data declaration							
<b>Max. expansion stage</b>		7		3		1	Total length 15m		
<b>Current consumption (mA)</b>		960			940				
<b>Weight (Kg)</b>		0.12							

## XGI

Item	XGI-CPUUN	XGI-CPUU/D	XGI-CPUU	XGI-CPUH	XGI-CPUS	XGI-CPUE	Remarks		
Operation system	Reiterative operation, fixed cycle operation, constant scan								
I/O Control system	Scan synchronous batch processing system[refresh system], direct system by command								
Program language	Ladder Diagram, SFC (Sequential Function Chart), ST (Structured Text)								
Operation processing speed (basic command)	Operator	18							
	Basic function	136 types + real number operation function							
	Basic function block	43							
	Dedicated function block	Dedicated function blocks by special function modules, communication dedicated function block(P2P)							
	Basic	0.0085 $\mu$ s /step	0.028 $\mu$ s /step			0.084 $\mu$ s /step			
	MOVE	0.255 $\mu$ s /step	0.084 $\mu$ s /step			0.252 $\mu$ s /step			
	Real number operation	$\pm$ : 0.119 $\mu$ s(S), 0.281 $\mu$ s(D) $\times$ : 0.272 $\mu$ s(S), 0.680 $\mu$ s(D) $\div$ : 0.281 $\mu$ s(S), 0.685 $\mu$ s(D)	$\pm$ : 0.392 $\mu$ s(S), 0.924 $\mu$ s(D) $\times$ : 0.896 $\mu$ s(S), 2.240 $\mu$ s(D) $\div$ : 0.924 $\mu$ s(S), 2.254 $\mu$ s(D)			$\pm$ : 1.442 $\mu$ s(S), 2.87 $\mu$ s(D) $\times$ : 1.948 $\mu$ s(S), 4.186 $\mu$ s(D) $\div$ : 1.442 $\mu$ s(S), 4.2 $\mu$ s(D)	S: Single real number D: Double real number		
	Program memory capacity	2M	1M	512KB	128KB	64KB			
	I/O points (installable)	6,144 points			3,072 points	1,536 points			
Data memory	Max. I/O memory contact		131,072 points			32,768 points			
	Symbolic variable area(A)		1024KB {max. 512KB retain settable}	512KB {max. 256KB retain settable}	128KB {max. 64KB retain settable}	64KB {max. 32KB retain settable}			
	I variable(I)		16KB			4KB			
	Q variable(Q)		16KB			4KB			
	Direct variable	M	512KB {max. 256KB retain settable}	256KB {max. 128KB retain settable}	64KB {max. 32KB retain settable}	32KB {max. 16KB retain settable}			
		R	64KB × 16block	64KB × 2block	64KB × 1block	32KB × 1block			
	Flag variable	W	1,024KB	128KB	64KByte	32KByte	R		
		F	8KB	4KB			System flag		
		K	16KB		4KB		PID flag		
		L	22KB				High speed link flag		
		N	42KB				P2P Parameters		
		U		8KB	4KB	2KB	Analog data Refresh		
Flash area		2MB, 32block					1MB, 16block		
Timer		No point limit Time range: 0.001~ 4,294,967.295 second(1,193 hours)					20 bytes of symbolic variable area per point		
Counter		No point limit Coefficient range : 64 bit expression					8 bytes of symbolic variable area per point		
Program structure	Total no. of programs	256							
	Initialization task	1							
	Fixed cycle task	32							
	Internal device task	32							
Operation mode		RUN, STOP, DEBUG							
Restart mode		Cold, Warm							
Self diagnosis		Operation delay monitoring, memory fault, I/O fault, battery fault, power fault and etc							
Data protection in case of power failure		Retain area setting by basic parameters							
Max. base extension		7			3	1	Total length 15m		
Current consumption (mA)		960mA			940mA				
Weight (kg)		0.12kg							

## XGK/XGI CPU built-in Ethernet specification

Item		XGK-CPUSN, CPUHN, CPUUN / XGI-CPUUN	Remarks
Ethernet	Feature	1 Port	-
		10/100BASE-TX	-
		Auto negotiation (Full-duplex and half duplex)	-
		Auto MDIX Crossover	-
		Max. Support 4 channel	Support 8Kbyte each send and receive channel
		Max. Distance between nodes : 100m	-
		Max. Protocol size : 1500Byte	IP Fragmentation is not supported.
Cable	UTP, STP, FTP cables is available	FTP, STP is recommended to prevent noise	
	Setting communication parameters with XG5000	-	
	Loader service (XG5000 connection) supported	Remote stage 1 connection with PLC is available	
	LS protocol(XGT) supported.	Server & TCP supported.	
Other company's protocol (Modbus TCP/IP) supported		Client & UDP not supported.	

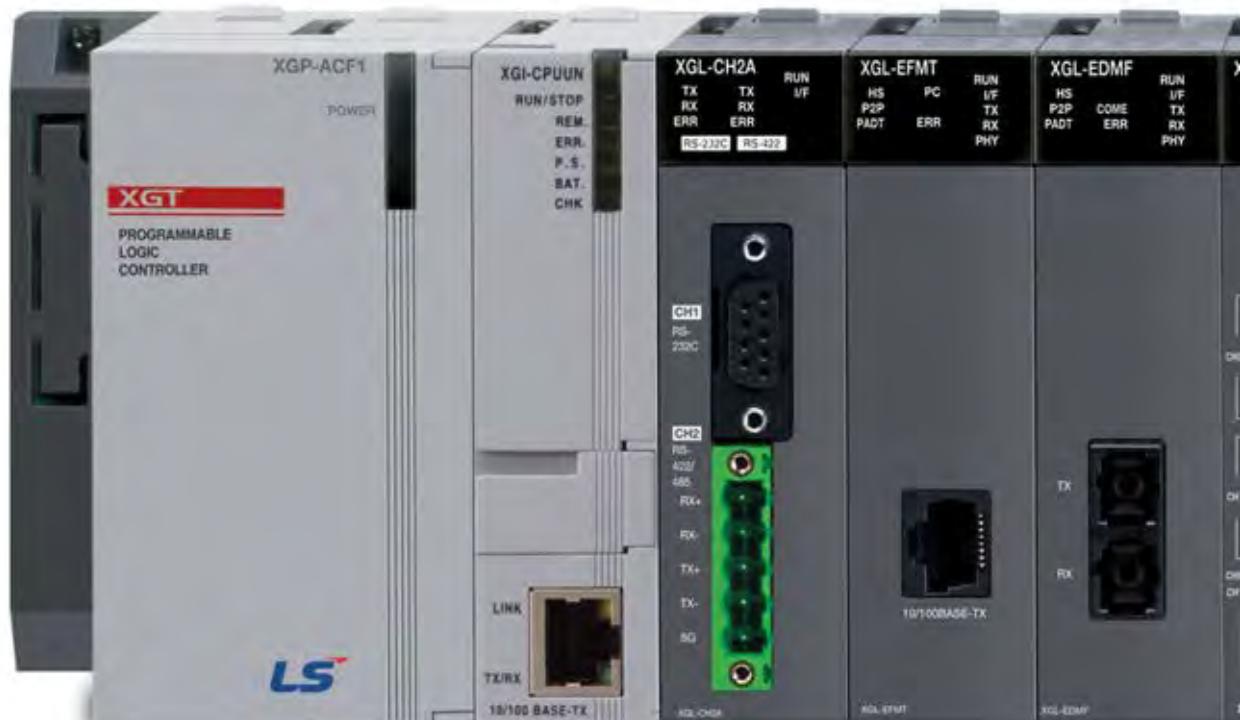


CPU

## XGK system configuration


Item	XGK-CPUE	XGK-CPUS, CPUSN	XGK-CPUA	XGK-CPUH, CPUHN	XGK-CPUU, CPUUN																																																																									
Max. expansion stage	1 Stage	3 Stage	3 Stage	7 Stage	7 Stage																																																																									
Max. installation of module	24 Module	48 Module	48 Module	96 Module	96 Module																																																																									
Max. number of I/O point	1,536 Points	3,072 Points	3,072 Points	6,144 Points	6,144 Points																																																																									
Max. expansion distance			15m																																																																											
Assignment of I/O number (Fixed)	<ul style="list-style-type: none"> <li>64 points are assigned to each slot of base regardless of installation of module.</li> <li>I/O numbers equivalent to 12 slots are assigned to a base.</li> <li>The starting number of base 0 is P0000.</li> </ul> <p>Refer to the following figure regarding the I/O number assignment of 12 slots</p>																																																																													
	<table border="1"> <thead> <tr> <th>Slot number:</th><th>0</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th></tr> <tr> <th>Power</th><th>CPU</th><th>0</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th></tr> </thead> <tbody> <tr> <td>P00</td><td>P40</td><td>P80</td><td>P120</td><td>P160</td><td>P200</td><td>P240</td><td>P280</td><td>P320</td><td>P360</td><td>P400</td><td>P440</td></tr> <tr> <td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>P3F</td><td>P7F</td><td>P11F</td><td>P15F</td><td>P19F</td><td>P23F</td><td>P27F</td><td>P31F</td><td>P35F</td><td>P39F</td><td>P43F</td><td>P47F</td></tr> <tr> <td></td><td></td><td>16 points</td><td>16 points</td><td>32 points</td><td>64 points</td><td>16 points</td><td>32 points</td><td>64 points</td><td>32 points</td><td>16 points</td><td>32 points</td></tr> </tbody> </table>					Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	Power	CPU	0	1	2	3	4	5	6	7	8	9	10	P00	P40	P80	P120	P160	P200	P240	P280	P320	P360	P400	P440	-	-	-	-	-	-	-	-	-	-	-	-	P3F	P7F	P11F	P15F	P19F	P23F	P27F	P31F	P35F	P39F	P43F	P47F			16 points	16 points	32 points	64 points	16 points	32 points	64 points	32 points	16 points
Slot number:	0	1	2	3	4	5	6	7	8	9	10	11																																																																		
Power	CPU	0	1	2	3	4	5	6	7	8	9	10																																																																		
P00	P40	P80	P120	P160	P200	P240	P280	P320	P360	P400	P440																																																																			
-	-	-	-	-	-	-	-	-	-	-	-																																																																			
P3F	P7F	P11F	P15F	P19F	P23F	P27F	P31F	P35F	P39F	P43F	P47F																																																																			
		16 points	16 points	32 points	64 points	16 points	32 points	64 points	32 points	16 points	32 points																																																																			
I/O assignment (Variable)	<ul style="list-style-type: none"> <li>I/O point is assigned automatically according to the installed module.</li> <li>I/O parameter is used to install modules.</li> <li>The starting number of base 0 is P0000.</li> <li>16 points are assigned automatically to the slot of special or communication module.</li> </ul> <p>Refer to the following figure regarding the I/O number assignment of 12 slots.</p>																																																																													
	<table border="1"> <thead> <tr> <th>Slot number:</th><th>0</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th><th>11</th></tr> <tr> <th>Power</th><th>CPU</th><th>0</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th><th>9</th><th>10</th></tr> </thead> <tbody> <tr> <td>P00</td><td>P10</td><td>P20</td><td>P40</td><td>P80</td><td>P90</td><td>P110</td><td>P130</td><td>P170</td><td>P190</td><td>P200</td><td>P220</td></tr> <tr> <td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>P0F</td><td>P1F</td><td>P3F</td><td>P7F</td><td>P8F</td><td>P10F</td><td>P12F</td><td>P14F</td><td>P18F</td><td>P19F</td><td>P21F</td><td>P23F</td></tr> <tr> <td></td><td></td><td>16 points</td><td>16 points</td><td>32 points</td><td>64 points</td><td>16 points</td><td>32 points</td><td>64 points</td><td>32 points</td><td>16 points</td><td>32 points</td></tr> </tbody> </table>					Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	Power	CPU	0	1	2	3	4	5	6	7	8	9	10	P00	P10	P20	P40	P80	P90	P110	P130	P170	P190	P200	P220	-	-	-	-	-	-	-	-	-	-	-	-	P0F	P1F	P3F	P7F	P8F	P10F	P12F	P14F	P18F	P19F	P21F	P23F			16 points	16 points	32 points	64 points	16 points	32 points	64 points	32 points	16 points
Slot number:	0	1	2	3	4	5	6	7	8	9	10	11																																																																		
Power	CPU	0	1	2	3	4	5	6	7	8	9	10																																																																		
P00	P10	P20	P40	P80	P90	P110	P130	P170	P190	P200	P220																																																																			
-	-	-	-	-	-	-	-	-	-	-	-																																																																			
P0F	P1F	P3F	P7F	P8F	P10F	P12F	P14F	P18F	P19F	P21F	P23F																																																																			
		16 points	16 points	32 points	64 points	16 points	32 points	64 points	32 points	16 points	32 points																																																																			

# XGI system configuration

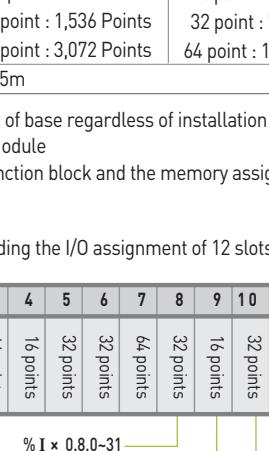
Item	XGI-CPUU, CPUH, CPUU/D, CPUUN	XGI-CPUS	XGI-CPUE																																						
Max. expansion stage	7 Stage	3 Stage	1 Stage																																						
Max. installation of module	96 Module	48 Module	24 Module																																						
Max. number of I/O point	16 point : 1,536 Points 32 point : 3,072 Points 64 point : 6,144 Points	16 point : 768 Points 32 point : 1,536 Points 64 point : 3,072 Points	16 point : 384 Points 32 point : 768 Points 64 point : 1,536 Points																																						
Max. expansion distance		15m																																							
I/O assignment		<ul style="list-style-type: none"> <li>▪ 64 points are assigned to each slot of base regardless of installation of module.</li> <li>▪ No limit in installation of special module</li> <li>▪ Special module is controlled by function block and the memory assignment is done automatically</li> <li>▪ Refer to the following figure regarding the I/O assignment of 12 slots</li> </ul> <table border="1" style="margin-top: 10px; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Slot number:</th> <th>0</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> <th>11</th> </tr> </thead> <tbody> <tr> <td>Power</td> <td>16 points</td> <td>16 points</td> <td>32 points</td> <td>64 points</td> <td>16 points</td> <td>32 points</td> <td>64 points</td> <td>32 points</td> <td>16 points</td> <td>32 points</td> <td>64 points</td> <td>32 points</td> </tr> <tr> <td>CPU</td> <td></td> </tr> </tbody> </table>  <p>The graph shows the following memory assignments:</p> <ul style="list-style-type: none"> <li>%I x 0.8.0-31 (Slot 0)</li> <li>%Qx 0.9.0-15 (Slot 1)</li> <li>%Qy 0.10.0-31 (Slot 2)</li> <li>%Qz 0.11.0-31 (Slot 3)</li> <li>%Qw 0.12.0-31 (Slot 4)</li> </ul>	Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	Power	16 points	16 points	32 points	64 points	16 points	32 points	64 points	32 points	16 points	32 points	64 points	32 points	CPU												
Slot number:	0	1	2	3	4	5	6	7	8	9	10	11																													
Power	16 points	16 points	32 points	64 points	16 points	32 points	64 points	32 points	16 points	32 points	64 points	32 points																													
CPU																																									

## Expansion system composition

1. The following figure is the example of expansion system with the fixed I/O point type of XGK-CPUH.
2. The address of I/O point is adjustable by XG5000 parameter.

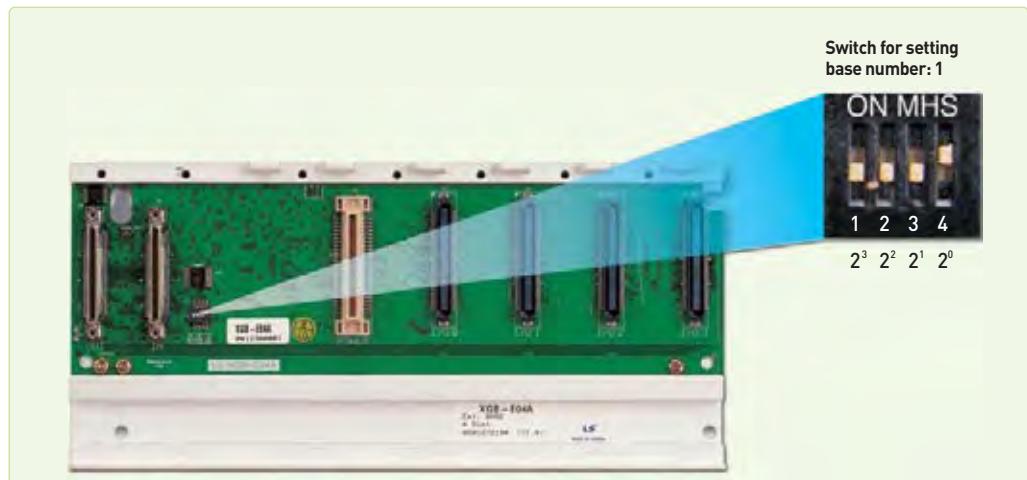

The lowest expansion base should be connected to the upper stage with expansion terminator(XGT-TERA).

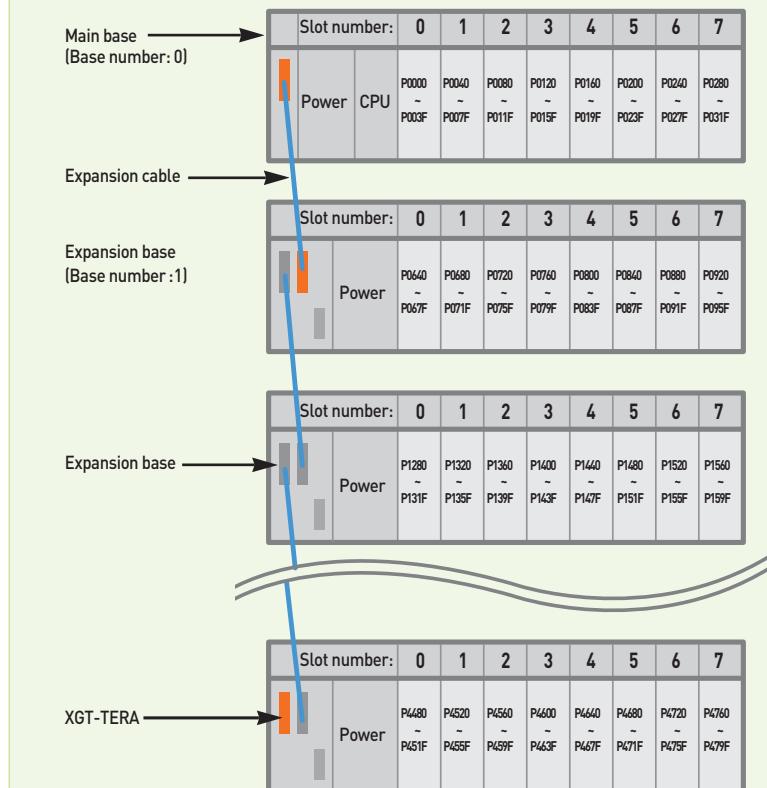

XGT-TERA should be installed at the end of the last expansion base.

**Features**

- 8, 16, 32, 64 points I/O module
- Operation monitoring by LED display
- Easy maintenance: Terminal block type, one-touch installation of module

**Input module specifications**


Item		DC input						AC input					
Type		XGI-D21A	XGI-D22A	XGI-D22B	XGI-D24A	XGI-D24B	XGI-D28A	XGI-D28B	XGI-A12A	XGI-A21A	XGI-A21C		
Input point		8	16	32	64				16	8	8		
Rated input voltage		DC24V			AC100-120V			Free voltage DC100/240V					
Rated input current		4mA			8mA			17mA					
ON voltage/current		19V or more / 3mA or less			AC80V or more / 5mA or less			AC130V or more / 10mA or less					
OFF voltage/current		DC11V or more / 1.7mA or less			AC80V or more / 5mA or less			AC60V or more / 2mA or less					
Response	Off→On	1ms/5ms/10ms/20ms/70ms (set by CPU parameter) Initial value: 3ms						15mA or less					
	On→Off	1ms/5ms/10ms/20ms/70ms (set by CPU parameter) Initial value: 3ms						25mA or less					
Common (COM)		8 points/COM	16 points/COM	32 points/COM	64 points/COM	16 points/COM	8 points/COM	1 points/COM					
Insulation method		Photocoupler						Photocoupler					
Current consumption [mA]		20	30	50	60	30	20	20					
Weight [Kg]		0.1	0.12	0.1	0.15	0.13	0.13	0.13					

**Output module specifications**

Item		Relay		Transistor				Triac							
Type		XGQ-RY1A	XGQ-RY2A	XGQ-RY2B	XGQ-TR1C	XGQ-TR2A	XGQ-TR2B	XGQ-TR4A	XGQ-TR4B	XGQ-TR8A	XGQ-TR8B	XGQ-SS2A			
Output point		8	16	8	16	32	64	16	32	64	16				
Rated input voltage		DC12/24V, AC110/220V				DC12/24V				AC110/220V					
Rated input current	1 Point	2A		2A	0.5A	0.1A			0.6A						
	Common	5A		0.1A	4A	2A			4A						
Response time	Off→On	10ms or less		3ms or less	1ms or less				1ms or less						
	On→Off	12ms or less		10ms or less	1ms or less				0.5cycle +1ms or less						
Common (COM)		1 point/COM	16 points/COM	1 points/COM	32 points/COM				16 points/COM						
Insulation method		Relay		Photocoupler											
Current consumption [mA]		260	500	100	70	130	230	300							
Weight (Kg)		0.13	0.17	0.19	0.11	0.11	0.1	0.15	0.2						
Surge killer		-	Varistor	Zener diode				Varistor							
External power supply		-	DC12/24V	DC				-							




Note] B1, B2 of 32, 62 points terminal [connector] are shorted inside of the product.

## Wiring diagram for input modules

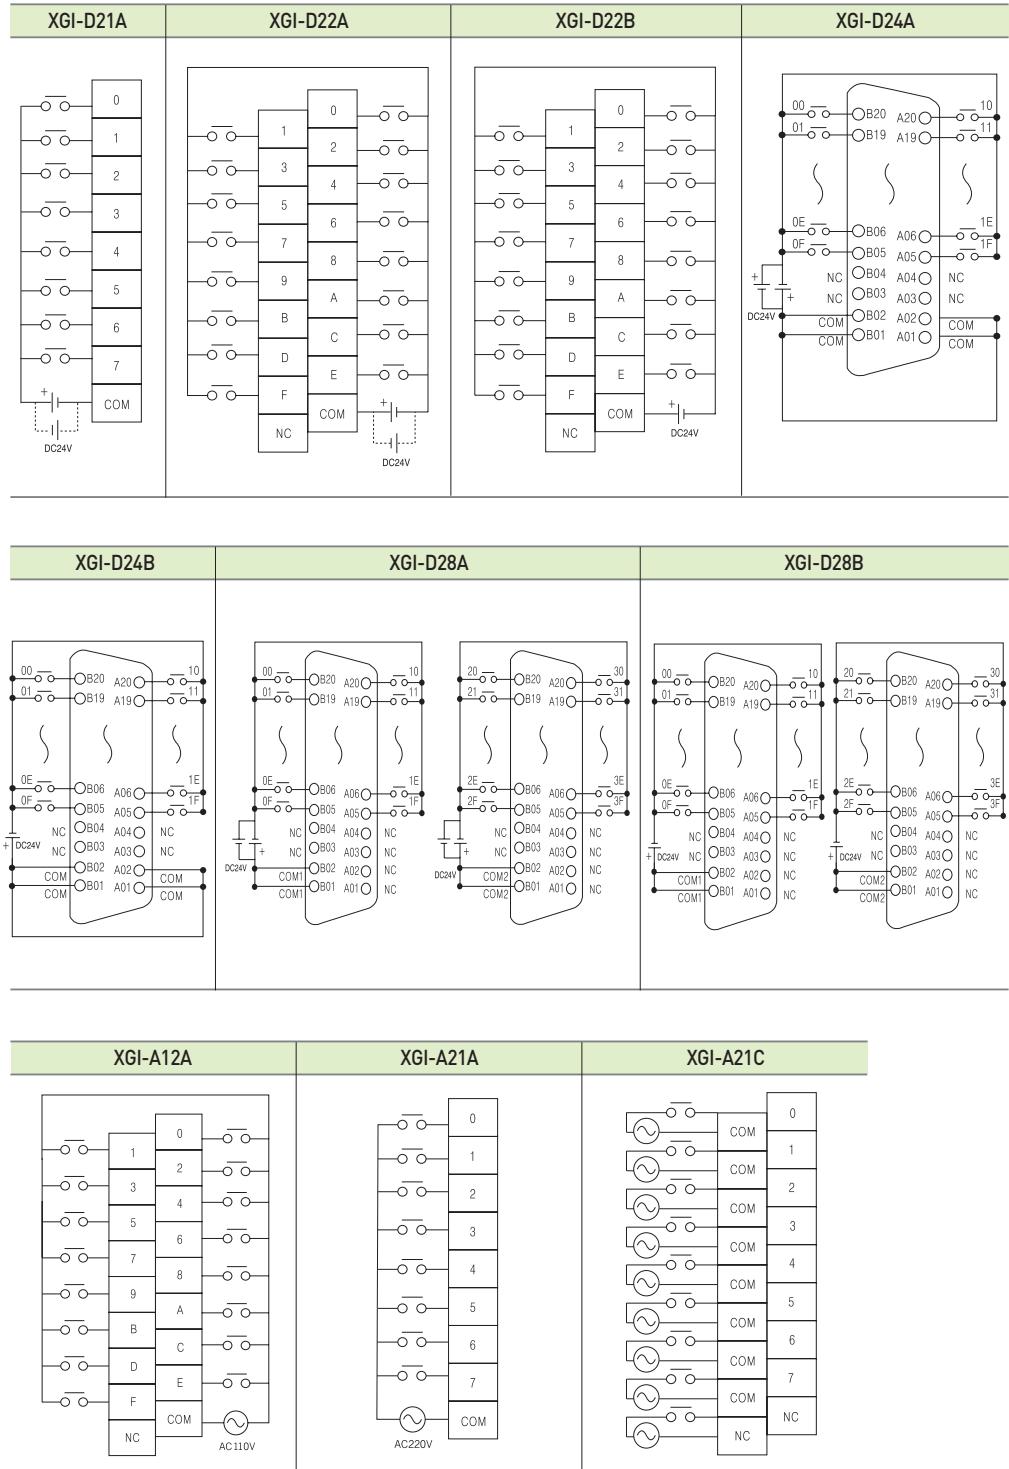


CPU

### Wiring diagram for output modules

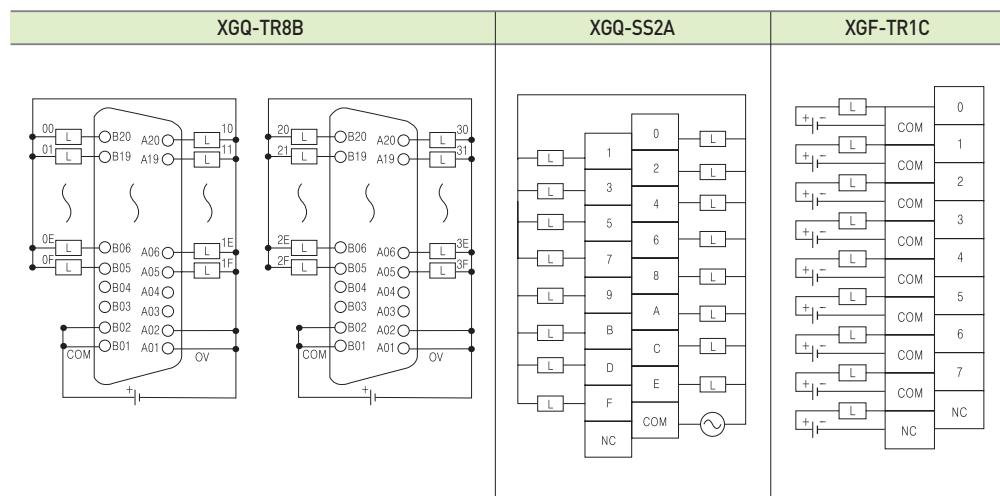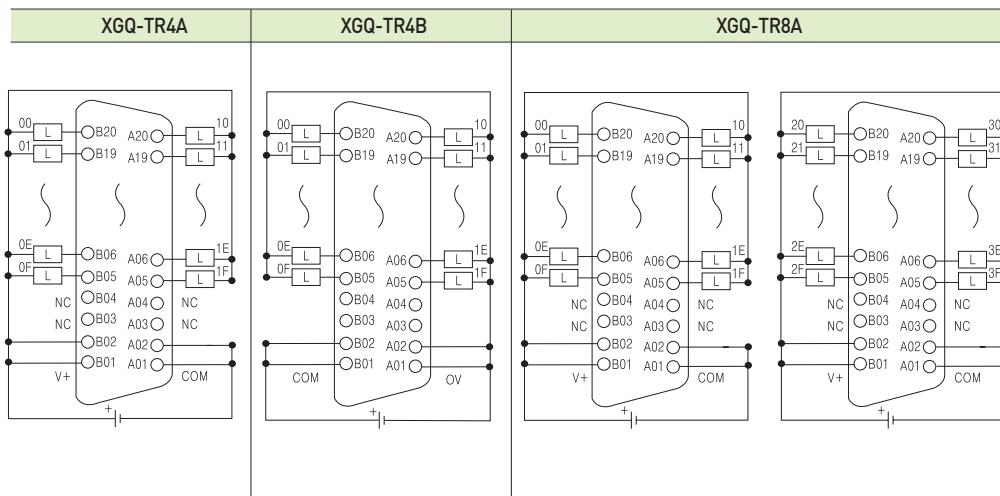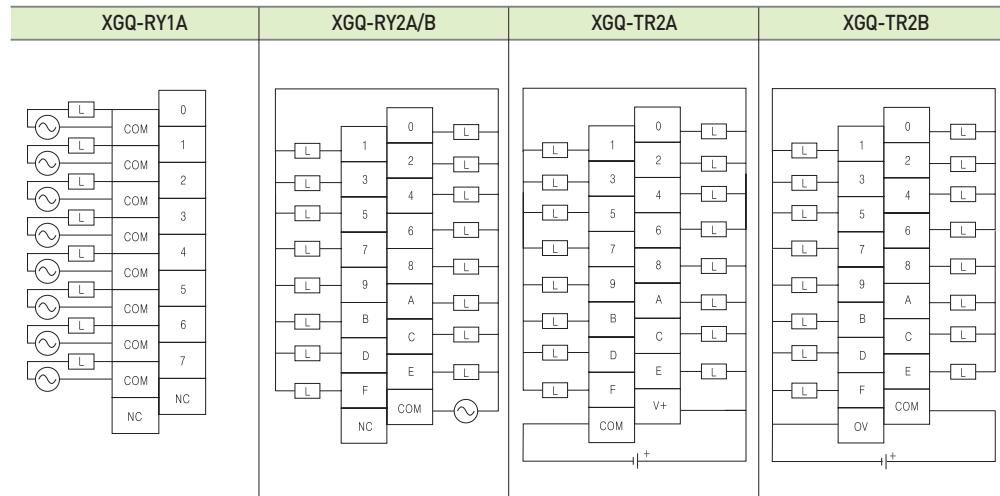


## Diagnostic Digital Input Module(XGI-D21D)

- Diagnostic Digital Input module receives and processes DC 24V input signal.  
It has a wire break detection function of each input signal.
- Input signal and wire break detection signal are displayed on the device  
of the CPU module, it can be used in the PLC program.

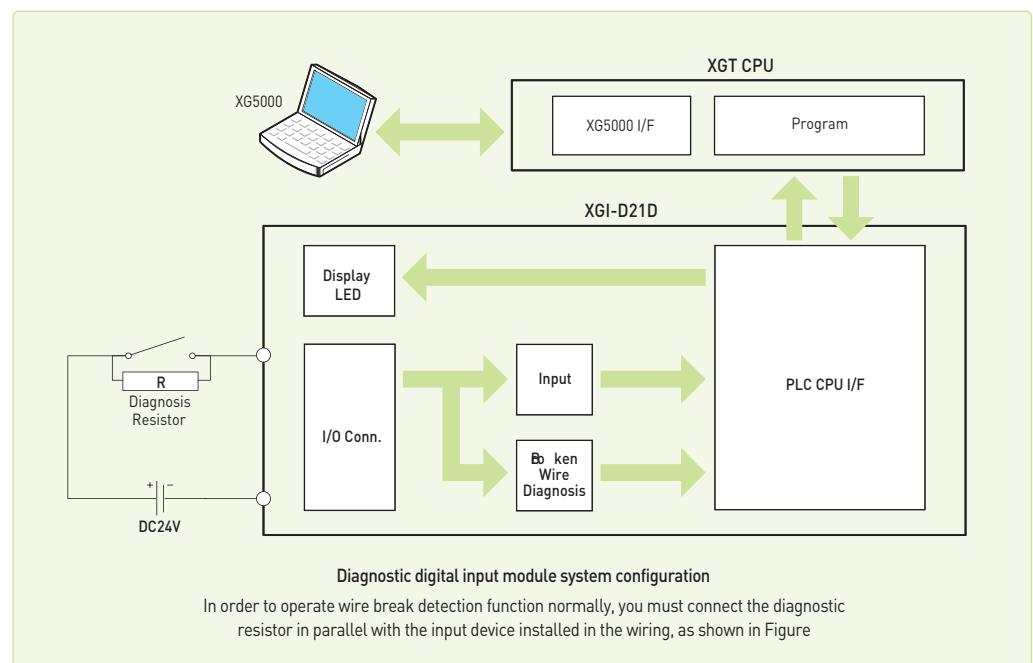

## Specifications

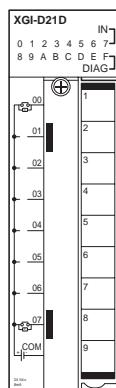


- IN: Input status(0~7)  
 • On: Input On  
 • Off: Input Off  
 DIAG: Diagnosis status(8~F)  
 • On: broken wire occurs  
 • Off: Normal state

Item		Specifications
Input point		8 points
Insulation method		Photo coupler insulation
Rated input voltage / current		DC24V / Approx. 8mA
Voltage range		DC20.4~28.8V (5% and lower ripple rate)
On voltage / On current		19V and higher / 5.2mA and higher
Off voltage / On current		11V and lower / 4.7mA and lower
Response time (Input filter)	Off→On On→Off	1ms/3ms/5ms/10ms/20ms/70ms/100ms, Initial value:3ms 1ms/3ms/5ms/10ms/20ms/70ms/100ms, Initial value:3ms
Insulation withstand voltage		DC 500V
Insulation resistance		10Ω and higher by Insulation ohmmeter
Diagnosis function		Wire break detection
Common method		8 point / 1COM
Suitable cable size		Stranded cable between 0.3~0.75mm <sup>2</sup> (2.8mm and smaller outer dia.)
Suitable clamped terminal		R1.25-3 (Sleeve built-in clamped terminal is not available)
Current consumption[mA]		60mA
Operation display		LED On with input On LED On during wire break
External connection method		9 point Terminal strip connector [M3 X 6 screws]
Weight		95g


CPU

### Diagnostic Digital Output Module(XGQ-RY1D)

- Diagnostic digital output module outputs output signal via the relay to the outside. It has a diagnostic function of the internal signal and wire break detection for each output signal.
- Diagnostic signals are displayed on the device of the CPU module, it can be used in the PLC program.

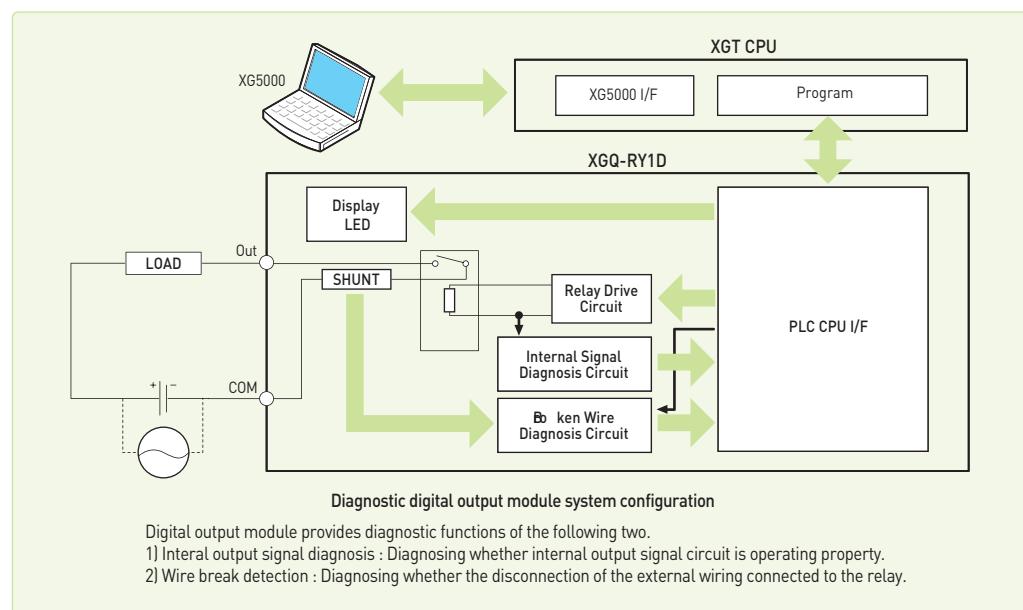

### Specifications

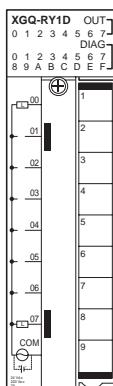

OUT: Output status [0 ~ 7]

- On: Relay output On
- Off: Relay output Off

DIAG : Diagnosis status  
Internal output signal diagnosis [0 ~ 7]


- On: Internal output signal fail
  - Off: Normal state
- Wire break detection[8-F]
- On: broken wire occurs
  - Off: Normal state

Item		Specifications
Output point		8 points
Insulation method		Relay insulation Photo coupler insulation
Rated load voltage		DC24V (resistance load) / AC220V ( $\cos \phi = 1$ )
Rated load current	1point Common	2A 5A
Min. load voltage / current	DC5V / 1mA	
Max. load voltage / current	AC250V, DC125V / 2A	
Leakage current at Off	0.1mA (AC220V, 60Hz)	
Max. switching frequency	1,800 times/hour	
Surge killer	None	
Life	Mechanical	20 million and more times Rated load voltage/current 100 thousand and more times
	Electrical	AC200V / 1.5A, AC240V / 1A ( $\cos \phi = 0.7$ ) 100 thousand and more times
		AC200V / 1A, AC240V / 0.5A ( $\cos \phi = 0.35$ ) 100 thousand and more times
		DC24V / 1A, DC100V / 0.1A ( $L / R = 7ms$ ) 100 thousand and more times
Response time	Off → On On → Off	10ms and lower 12ms and lower
Diagnosis function		Wire break detection Internal output signal diagnosis
Common method		8 point/1COM
Current consumption(mA)		Max. 400mA
Operation display		LED On with output On LED On during wire break LED On when the internal output signal fail
External connection method		9 point Terminal strip connector [M3 X 6 screws]
Weight		145g

## Input/output mixed Type (XGH-DT4A)

Input		Output			
Input points	16 points	Input points	16 points		
Insulation method	Photo coupler	Insulation method	Photo coupler		
Rated input voltage	DC24V	Rated input voltage	DC12/24V		
Rated input current	4mA	Rated input current	DC10.2-26.4V		
Input voltage range	DC20.4-28.8V	Input voltage range	0.1A/point, 1.6A/COM		
Insulation pressure	AC560Vrms / 3Cycle	Insulation pressure	0.1mA or less		
On voltage/current	DC19V or more / 3mA or more	On voltage/current	0.7A/10ms or less		
Off voltage/current	DC11V or more / 1.7mA or more	Off voltage/current	Zener diode		
Input resistance	5.6Ω	Input resistance	DC 0.2V or less		
Response	Off→On 1ms/3ms/5ms/10ms/20ms/70ms/100ms (Setting by CPU parameter) Initial value: 3ms	Off→On	1ms or less		
On→Off		On→Off	1ms or less (rated load, resistance load)		
Common (COM)	16 points/COM				
Operation display	LED lighting when output is ON				
Internal current consumption	100mA				
External connection	40-point connector				
Weight (kg)	0.1				


## Wiring diagram for mixed type

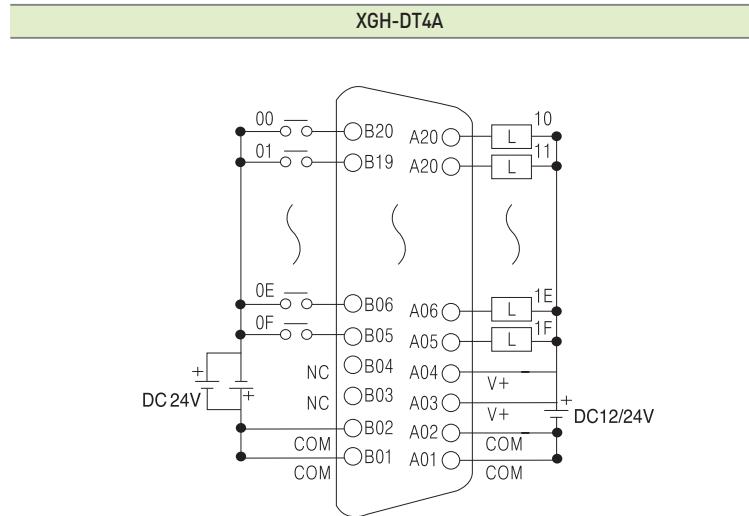


[NOTE] Input address for XGK CPU is P00-P0F and Output address is P10-P1F when it is installed on the slot 0.  
Input address for XGI CPU is %IX0.0.0-%IX0.0.15 and Output address is %QX0.0.16-%QX0.0.31

### Precaution during installation of I/O module


- XGT has 2 kinds of digital input type: Current sink input, Current source input. For DC input module has different wiring depending on the input type, digital input type should be selected with consideration about connected input device.
- Max. number of simultaneous input point differs according to the module type. Therefore, review specification of input module before its application.
- Use an interrupt module when a response of high-speed input is demanded. But only one interrupt module can be installed per CPU module.
- If switching frequency is high or inductive switching load is used, the lifespan of relay output module will be reduced. Therefore, it is recommended to use transistor output module or triac output module.
- When driving an inductive load with output module, set the maximum switching frequency as 'ON' for 1 second and 'OFF' for 1 second.
- When using counter or timer with DC/DC converter, it is possible to have inrush current which cause a break down. Therefore to reduce an effect of inrush current, connect resistor or inductor to load or use the module whose max. load current is high.

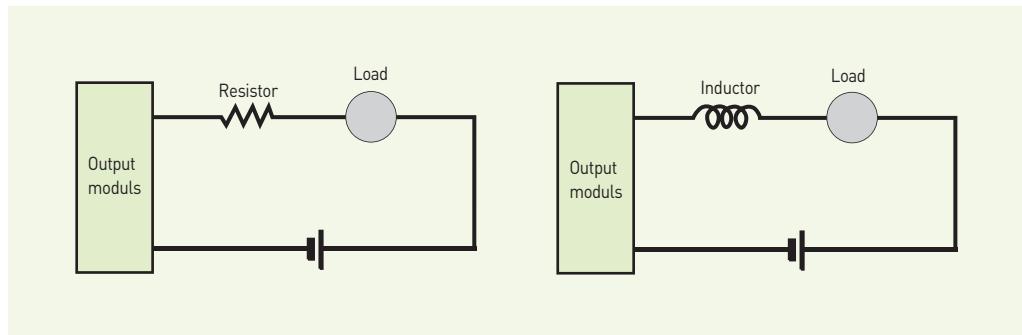

- Fuse of output module is not exchangeable to prevent a damage of external wiring when output module has a short-circuit.
- The number of simultaneous 'ON' points varies depending on input voltage, ambient temperature. Refer to the specification of input module.
- The following graph presents the relay lifespan of relay output module. It shows the maximum lifespan of relay which is used in the relay output.

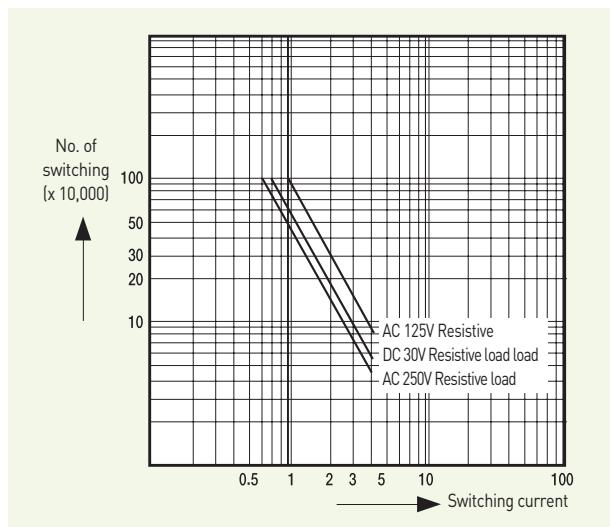


- Compressed terminal attaching sleeve cannot be mounted to XGT terminal block. The following picture shows appropriate compressed terminals for terminal block.

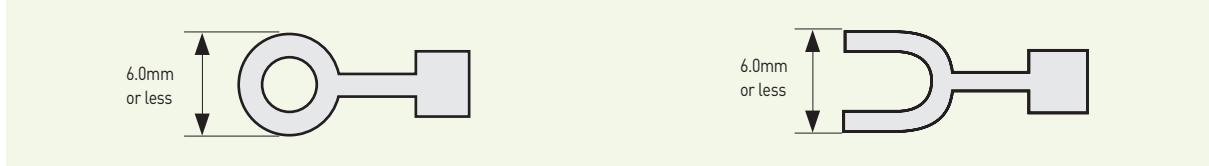

- Use 0.3~0.75mm twisted pair, below 2.8mm thickness cable for connecting to terminal block.
- Be careful when choosing and using the cable since the permissible current differs according to the insulation thickness.
- Joint torque of fixed screw and terminal block screw of the module needs to be within the range in the following table.

Joint	Joint torque range
I/O module terminal block screw (M3)	42~58 N·cm
I/O module terminal block fixed screw (M3)	68~89 N·cm

- Thermal protector is built in transistor module. Thermal protector is a function that protects PLC from an overload and overheating.

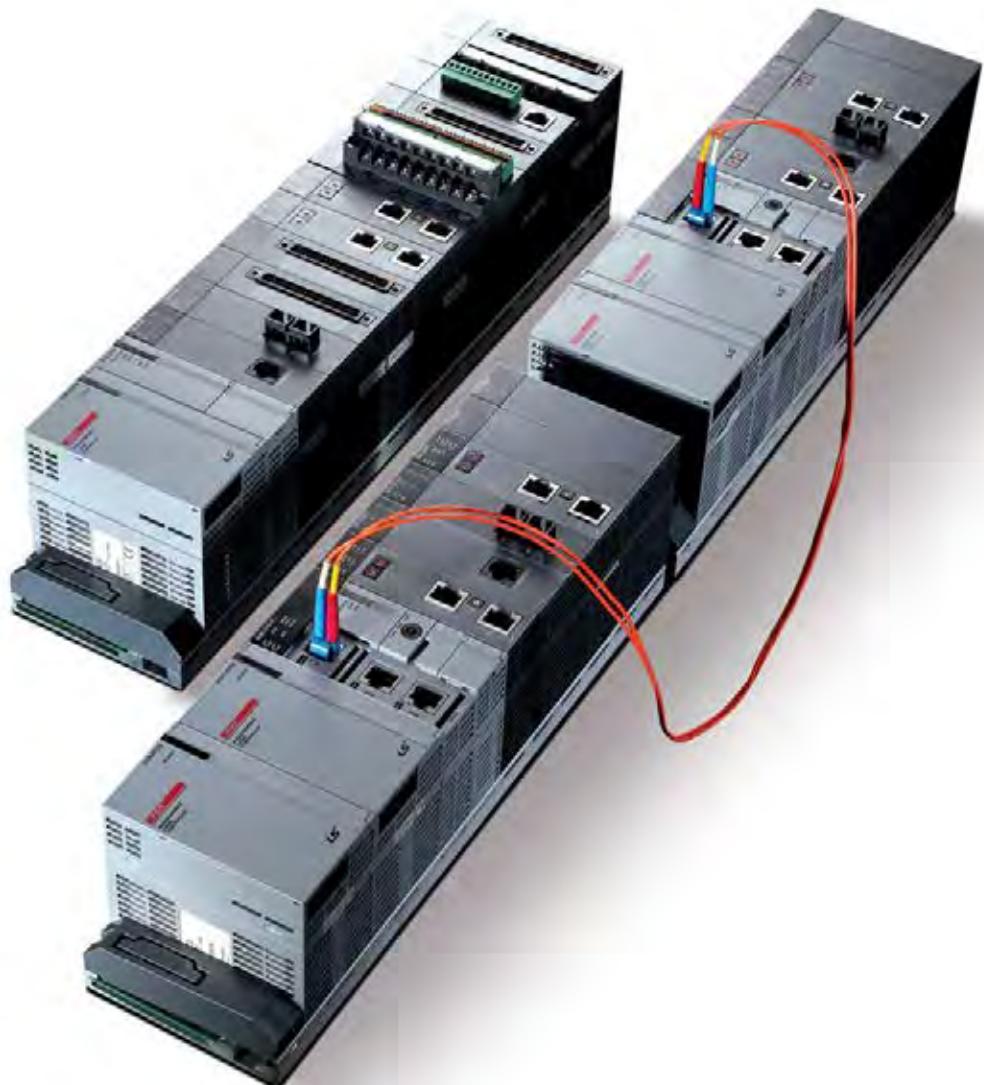





## XGR Redundancy System

**Redundancy system for high-speed process control based on IEC**


- Processing speed: 42ns/step
- I/O Points: Max. 131,072
- Total memory: 25MB (Program 7MB, Data 2MB, Flash 16MB)
- Switching over time: Min 4.3ms, Max 22ms
- Built-in 256 PID loops control

Contents    [34 XGR Configuration](#)  
[36 System configuration](#)  
[38 Application](#)




### XGR Configuration

- Base, Power, CPU, Network redundancy
- Dual port and 3 kinds of media (Twisted-Twisted, Optic-Optic, Twisted-Optic)

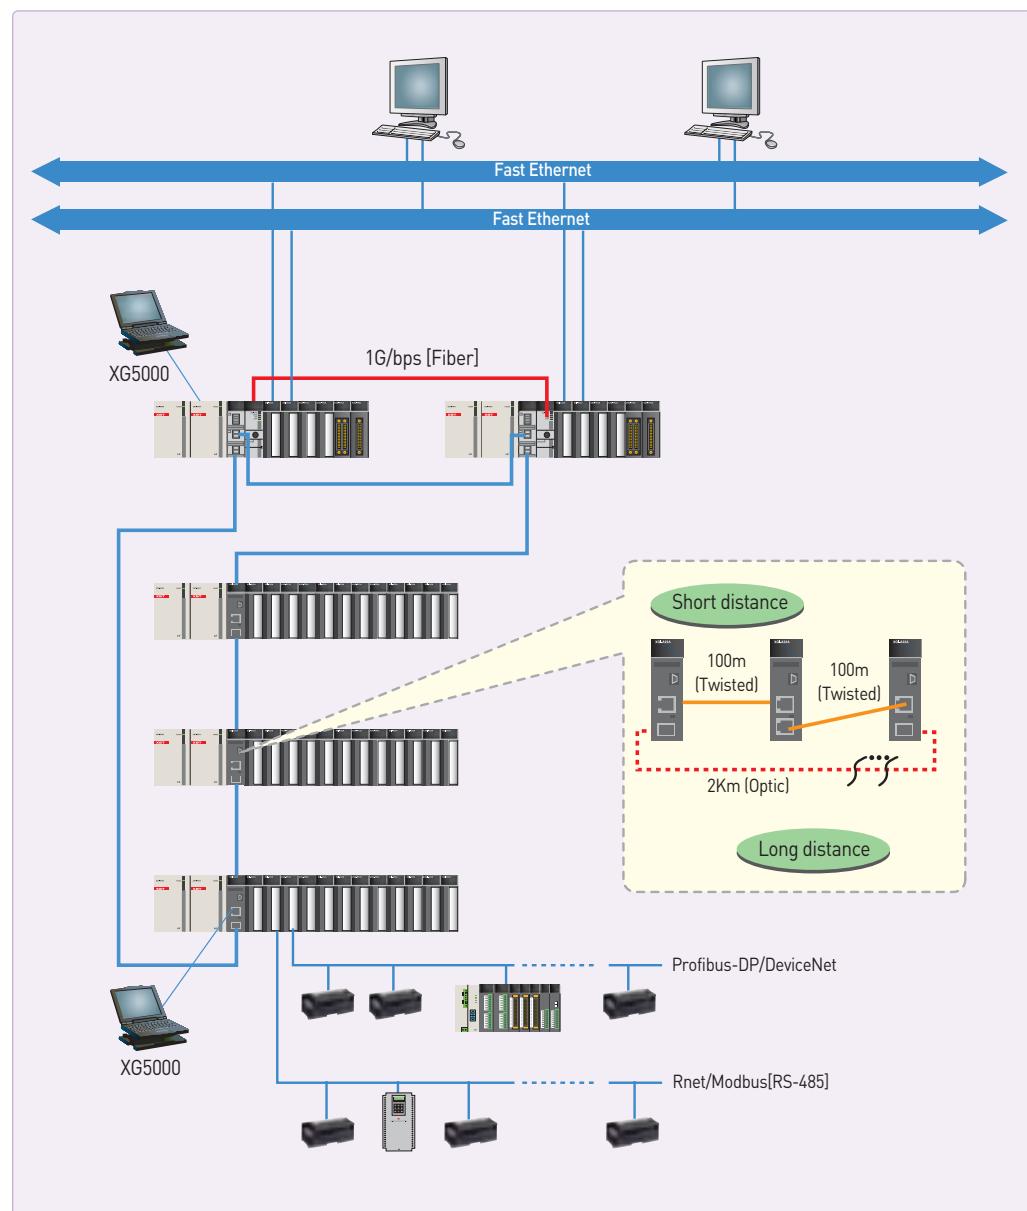


## System configuration method


### Fiber-optic

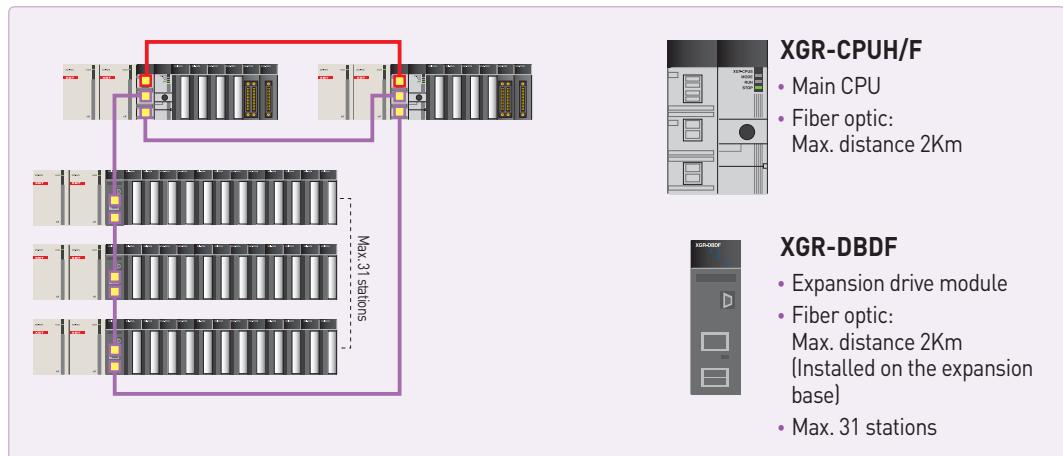

### Twisted pair

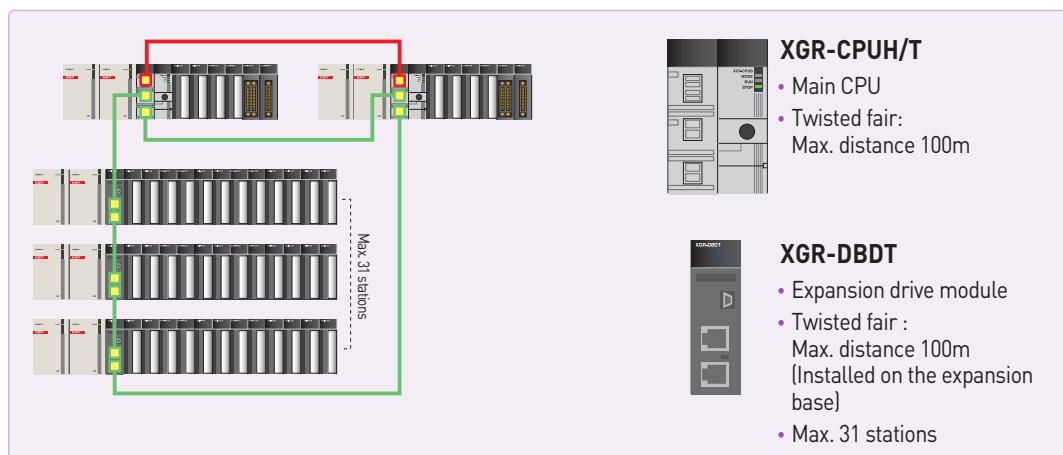


### Hybrid ( Twisted pair + Fiber Optic )

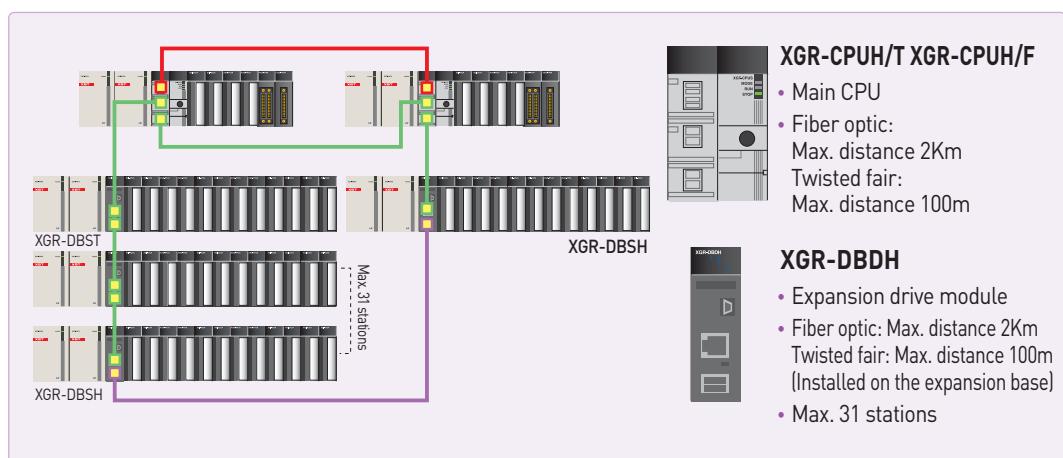


\* Max. expandable distance: Fiber optic 60km, Twisted fair 3km  
 \* CPU synchronization cable: 2m, 5m

# System configuration

## System configuration

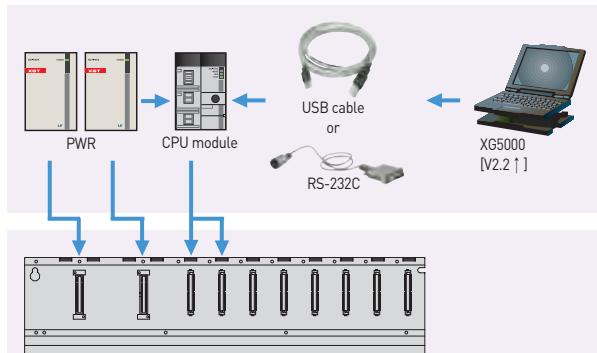


Main base [A Side] XGR-M06P / XGR-M02P

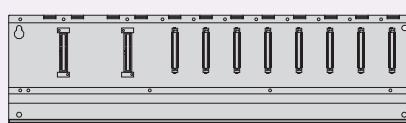

Main base [B Side] XGR-M06P / XGR-M02P

### Main base

- 2 types of CPU (Fiber optic, Twisted fair)
- Power: AC110V, AC220V
- 6slot base: enable to install 6 communication modules

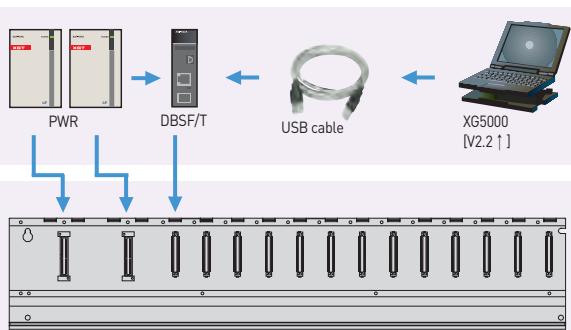

Expansion base XGR-E12P / XGR-E12H

### Expansion base

- Power : 8.5A/AC110V, 8.5A/AC220V
- Expansion drive: Fiber optic, Twisted fair, Hybrid
- EFM\* and EIM\*: not available with 12slot base

XGR module		
CPU	XGR-CPUH/T	Twisted pair
	XGR-CPUH/F	Fiber optic(2km)
	XGR-CPUH/S	Fiber optic(15km)
Power	XGR-AC12	110V, 5.5A[Main base]
	XGR-AC13	110V, 8.5A[Expansion base]
	XGR-AC22	220V, 5.5A[Main base]
	XGR-AC23	220V, 8.5A[Expansion base]
	XGR-DC42	DC24V/DC5V 7A, Main[Expansion base]
Base	XGR-M02P	2Slot[Main base]
	XGR-M06P	6Slot[Main base]
	XGR-E08P	8Slot[Expansion base]
	XGR-E12P	12Slot[Expansion base]
	XGR-E12H	12Slot[Expansion base, Drive Redundancy]
Expansion drive	XGR-DBST	Twisted pair - Twisted
	XGR-DBSF	Pair Fiber optic - Fiber optic(2km)
	XGR-DBSH	Twisted pair - Fiber optic(2km)
	XGR-DBSFS	Pair Fiber optic - Fiber optic(15km)
	XGR-DBSHS	Twisted pair - Fiber optic(15km)

XGR module		
Expansion drive redundancy	XGR-DBDT	Twisted pair - Twisted
	XGR-DBDF	Pair Fiber optic - Fiber optic(2km)
	XGR-DBDH	Twisted pair - Fiber optic(2km)
Sync & Expansion cable	XGC-F201	2m [Fiber optic]
	XGC-F501	5m [Fiber optic]

Item	Input module		
	AC110V	AC220V	DC24V
8 points	-	XGI-A21A, XGI-A21C	XGI-D21A
16 points	XGI-A12A	-	XGI-D22A
32 points	-	-	XGI-D24A
64 points	-	-	XGI-D28A

Item	Output module		
	Relay	Triac	Transistor
8 points	XGQ-RY1A	-	XGQ-TR1C
16 points	XGQ-RY2A	XGQ-SS2A	XGQ-TR2B
32 points	XGQ-RY2B	-	XGQ-TR4A
64 points	-	-	XGQ-TR4B

Item	Input/Output mixed module	
	16-point DC input	16-point TR output

Special module	
XGF-AV8A	Voltage input type, 8Ch
XGF-AC8A	Current input type, 8Ch
XGF-AD8A	Voltage/ Current input, 8Ch
XGF-AD4S	Voltage/ Current input, 4Ch [Isolated]
XGF-AD16A	Voltage/ Current input, 16Ch
XGF-AW4S	2-wire, Voltage/ Current input, 4Ch [Isolated]
XGF-DV4A	Voltage output type, 4Ch
XGF-DC4A	Current output type, 4Ch
XGF-DV8A	Voltage output type, 8Ch
XGF-DC8A	Current output type, 8Ch
XGF-DV4S	Voltage output, 4Ch [Isolated]
XGF-DC4S	Current output, 4Ch [Isolated]
XGF-AH6A	Input: 4ch, Voltage/ Current Output: 2Ch Voltage/ Current
XGF-HO2A	Pulse (OC) input type, 2Ch
XGF-HD2A	Pulse (LD) input type, 2Ch
XGF-P01A-P03A	Open collector, 1-3axes
XGF-P01H-P04H	Line drive, 1-3axes
XGF-P01H-P04H	Open collector, 1-4axes
XGF-P01H-P04H	Line drive, 1-4axes
XGF-PN8A	LS Standard EtherCAT Net, 8axes
XGF-PN8B	Standard EtherCAT Net, 8axes
XGF-M32E	Standard EtherCAT Nee, 32axes
XGF-TC4S	Thermocouple input, 4Ch
XGF-RD4A	RTD input, 4Ch
XGF-RD4S	RTD input, 4Ch [Insulated]
XGF-TC4UD	Input: 4ch,[Voltage/Current, RTD/TC] Output: 8ch,[TR/Current]
XGF-TC4RT	Controller: 4 loops Input: 4ch,[RTD] Output: 4ch,[TR] Controller: 4 loops
XGF-SOEA	DC24V, 32points

Communication module	
RAPIEnet+	XGL-EFMTB Master/Client, Twisted fair 2ch.
-RAPIEnet v2	XGL-EFMB Master/Client, Fiber optic 2ch.
-EtherNet/IP	XGL-EFMB Master/Client, Twisted fair/fiber optic
-Modbus TCP/IP	XOL-ES4T Stand alone switch twisted pair 4ch.
-Dedicated XGT Network	XOL-ES4H Stand alone switch twisted 2ch. fiber 2ch.
Computer	XGL-EH5T Open Ethernet switching hub
Link [Cnet]	XGL-CH2B RS-232C 1ch, RS-422/485 1ch
DeviceNet[Dnet]	XGL-C22B RS-232C 2ch
Profibus-DP (Pnet)	XGL-C42B RS-422/485 2ch
Rnet	XGL-DMEB DeviceNet, Master
XGL-PMEB Profibus-DP, Master	
XGL-PSRA Profibus-DP Slave, Remote interface	
XGL-PSEA Profibus-DP Slave	
GOL-RR8T Rnet, Master, TP	
GOL-RR8T Rnet stand alone repeater hub	
Fnet	XGL-FMEA Fnet, Master
BACnet/IP	XGL-BIPT BACnet client/server

## Specification

Item		Description		Remark
		XGR-CPUH/F	XGR-CPUH/T	
Media		Fiber optic	Twisted pair	
Operation method		Cyclic execution, Periodic operation, Interrupt operation, Fixed scan		
I/O control method		Scan synchronized batch processing method (Refresh method)		
Program language		LD (Ladder Diagram), ST (Structured Text), SFC (Sequential Function Chart), IL (Read only)		
Number of Instructions	Operator	18		
	Standard function	130 + Real type function		
	Standard function block	41		
Special function/ function block		Special function block, Process control function block		
Processing speed	LD	0.042μs/Step		
	MOV	0.126μs/Step		
	Real type	± : 0.602μs(S), 1.078μs(D) x : 1.106μs(S), 2.394μs(D) ÷ : 1.134μs(S), 2.66 μs(D)		S: Real type D : Long real type
I/O points		I: 131,072 points, Q: 131,072 points (Total: 1131,072)		
DRAM	Program memory	7MB		Including Upload, Parameter, System area *Battery back-up memory : 8MB
	Data memory	2MB		
	Reserved memory	7MB		
Flash memory		16MB		
Data memory	Direct variable	256k Byte		
	Auto allocated variable	512k Byte		
	Timer	No limitation, Range: 0.001sec ~ 4,259,967.295sec [1,193hours]		
	Counter	No limitation, Range: -32,768 ~ +32,767		
	System	4k Byte		
Flag	Communication	64k Byte	L, N area	
	Special	2k Byte (32 base, 16 slot, 32 channel)	U area : Analog device area	
File register		64k Byte *2	R area : read/write [Command, XG5000]	
Program	Number of program blocks	256		
	Initial task	1 (_INT)		
	Cycle task	32		
	Internal device task	32		
Operation mode		RUN, STOP, DEBUG		
Restart mode		Warm, Cold		
Self diagnostic functions		Watchdog timer, Memory error, I/O error, Battery error, Power Supply error		
Program download		RS-232C (1CH), USB (1CH)		
Data retain		Auto allocated variable: set by variable definition Direct variable: set by parameter		
Max. expansion base		31 stages		


## Specification

Item	Hardware		Remark
CPU module	2 slot / Fiber, Twisted fair		
Expansion drive module	1 slot / Fiber, Twisted fair, Hybrid		
Base	Main base: 6 slot, Expansion base: 12 slot		
Power	AC110V	5V-5.5A	
	AC220V	5V-5.5A	
	AC110V	5V-8.5A	
	AC220V	5V-8.5A	
Expansion method and Max. expansion base	31 stages by network		
Base number setting	Rotary switch of expansion drive module		
Distance between expansion bases	Twisted fair: 100m (3km), Fiber: 2km (60km)		
Master/Standby switching over time	50ms or less		


## Available modules for each base

	Base	Available modules
1	Main base	CPU, Ethernet module (XGL-EFMx), RAPIEnet module (XGL-EIMx) * x: T (Twisted fair), F (Fiber optic), H (Hybrid)
2	Expansion base	I/O modules for XGI [Ethernet based communication module should be installed on Main base] Number of communication module: 12 for High-speed link, 8 for P2P Number of analog module: Analog input (139), Analog output (250)


### Water power generation or Dam door control

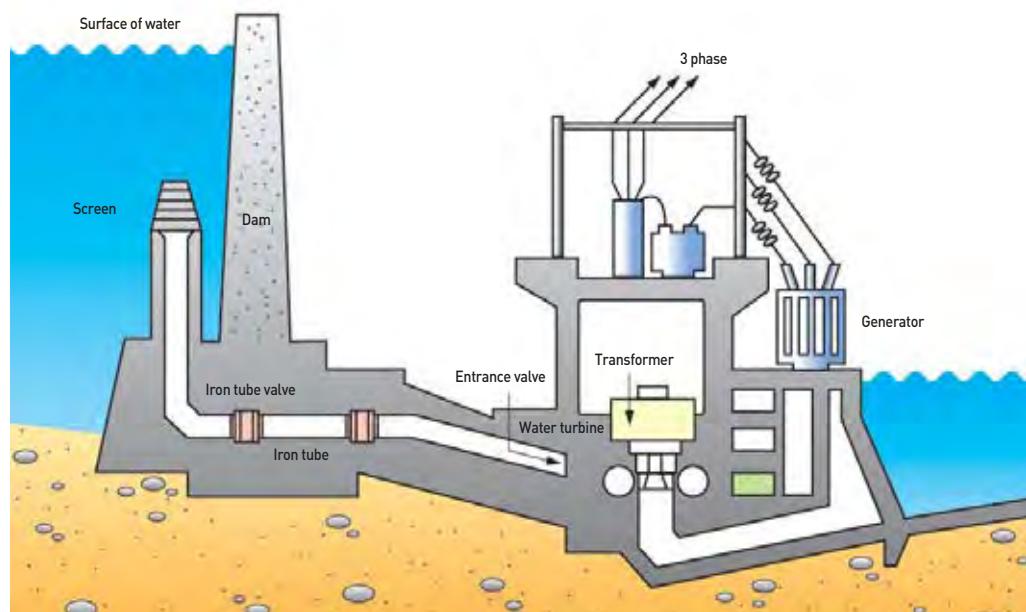


### System configuration

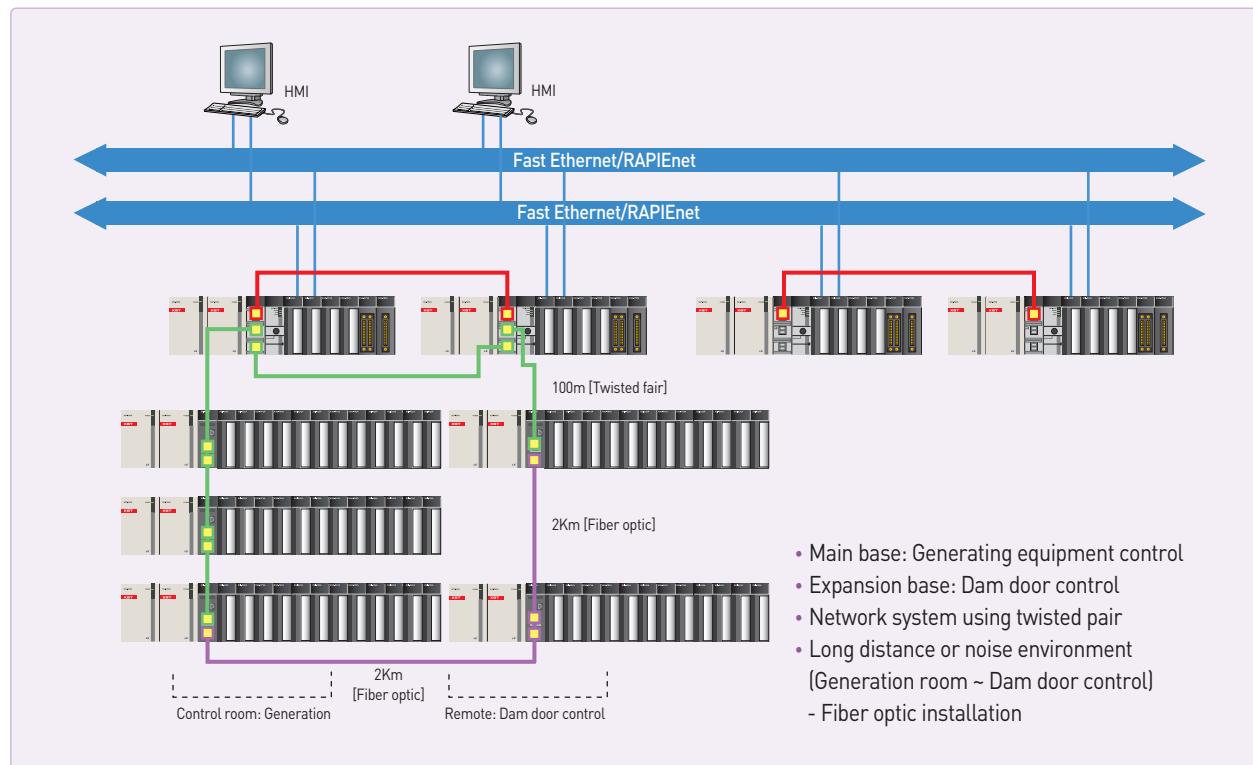


## Generating boiler control

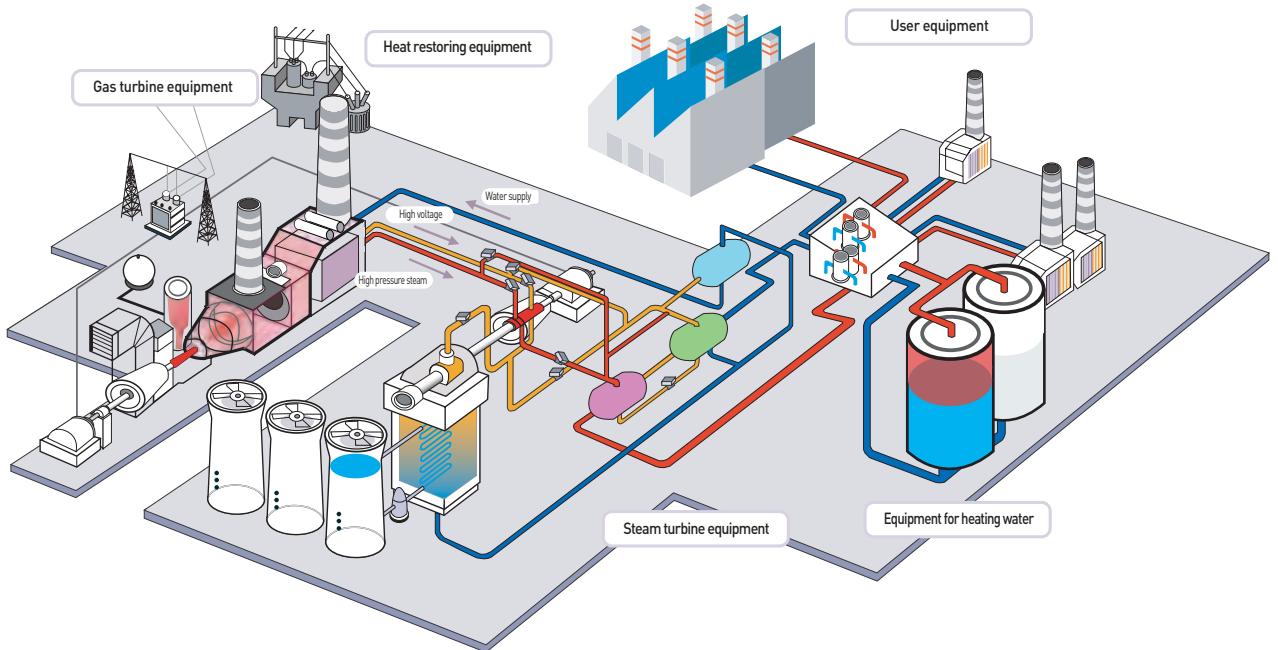


## System configuration

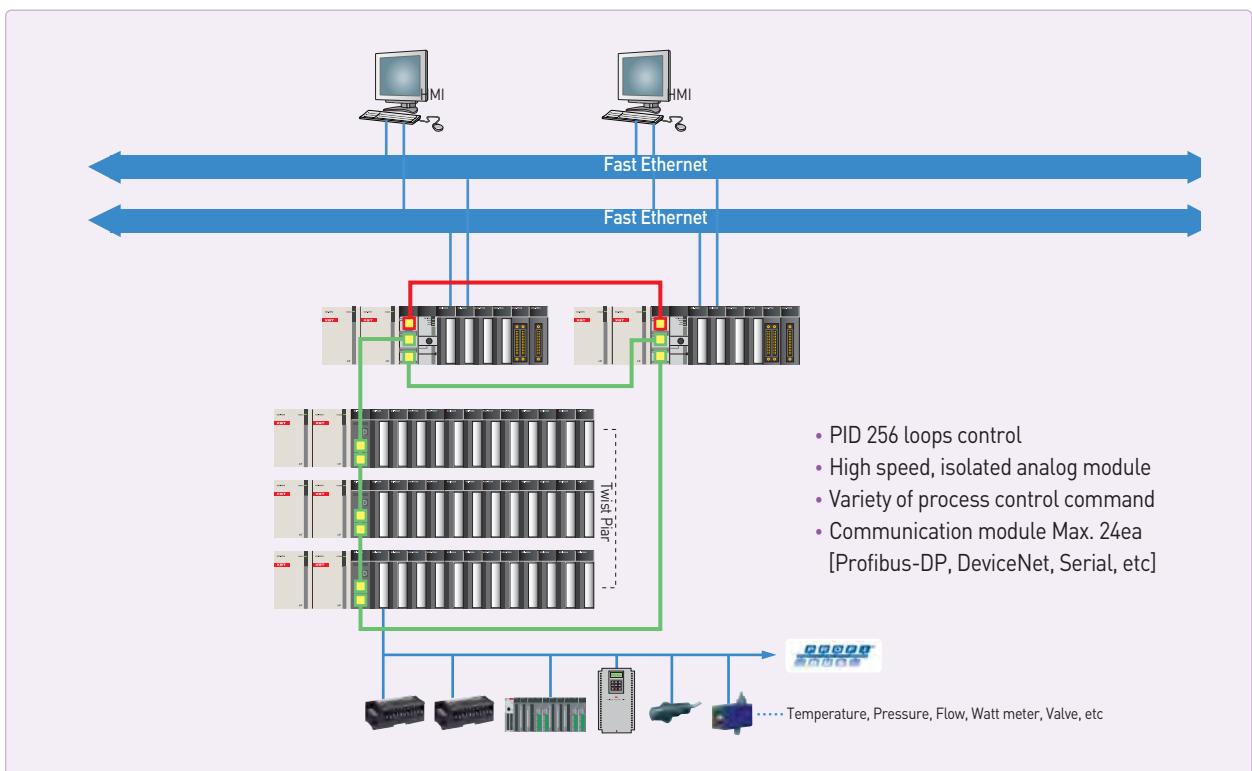


### Stage control

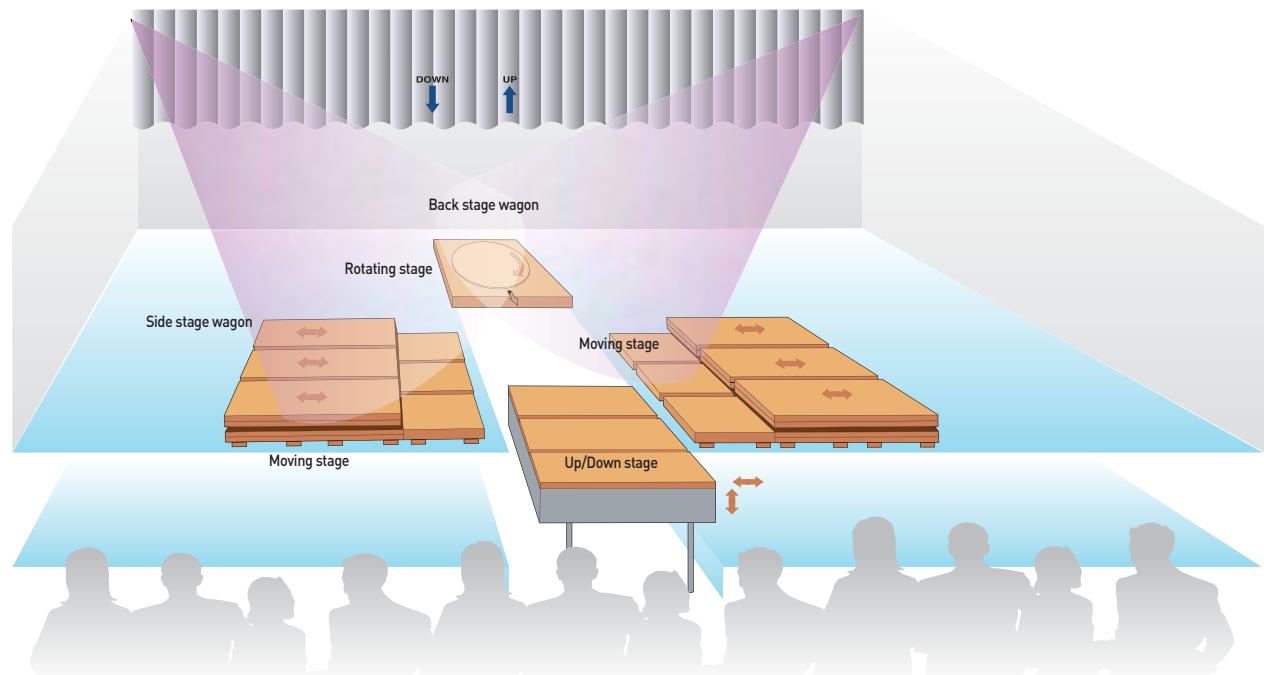


### System configuration

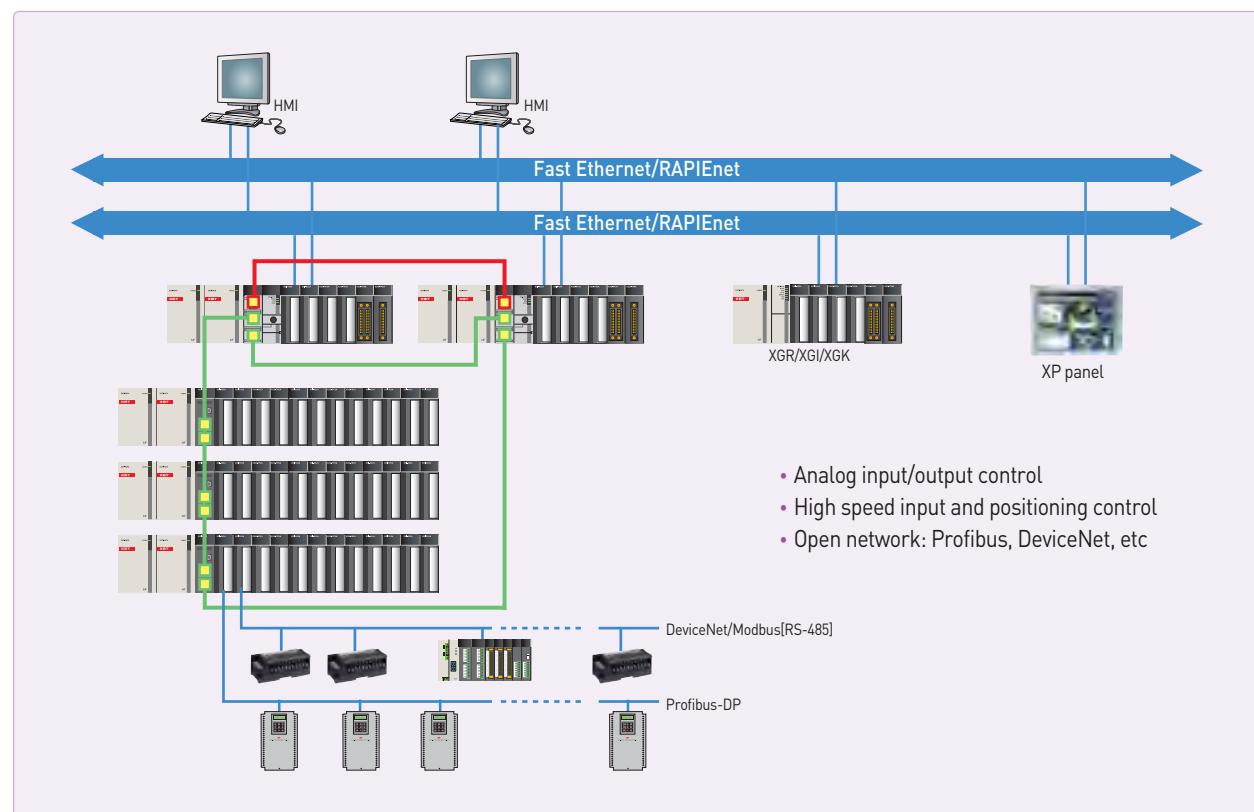


## Water processing control

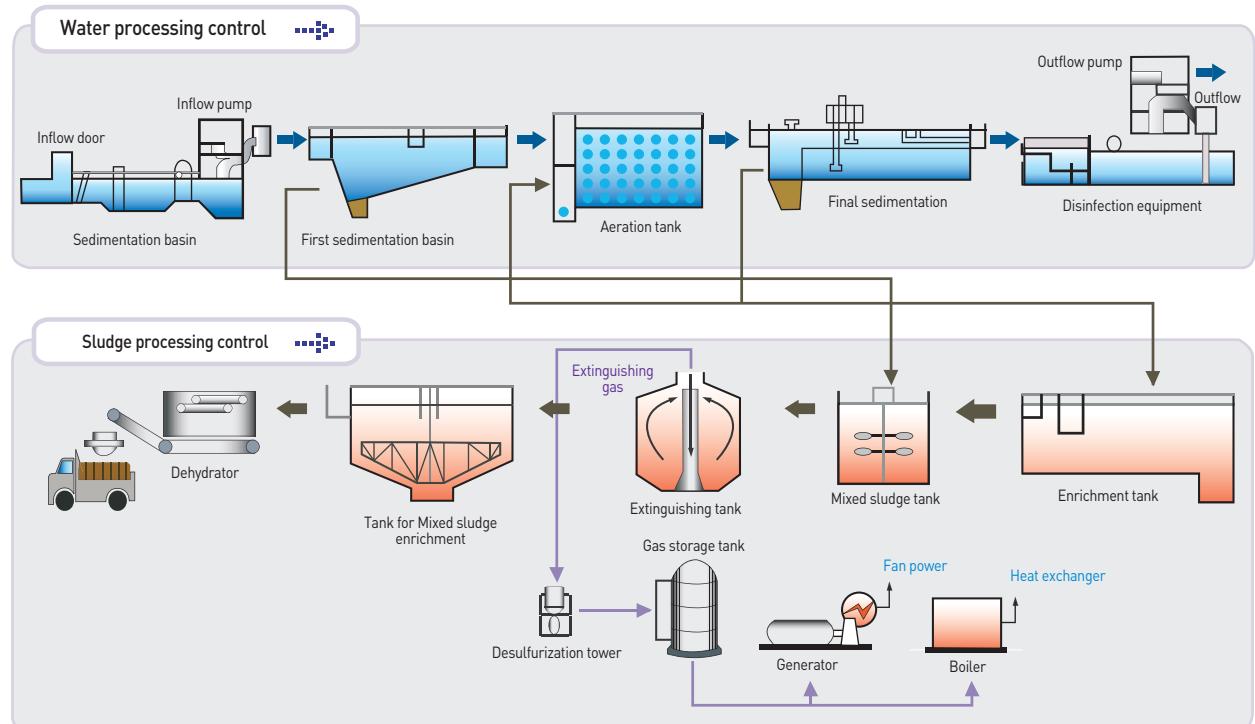


## System configuration

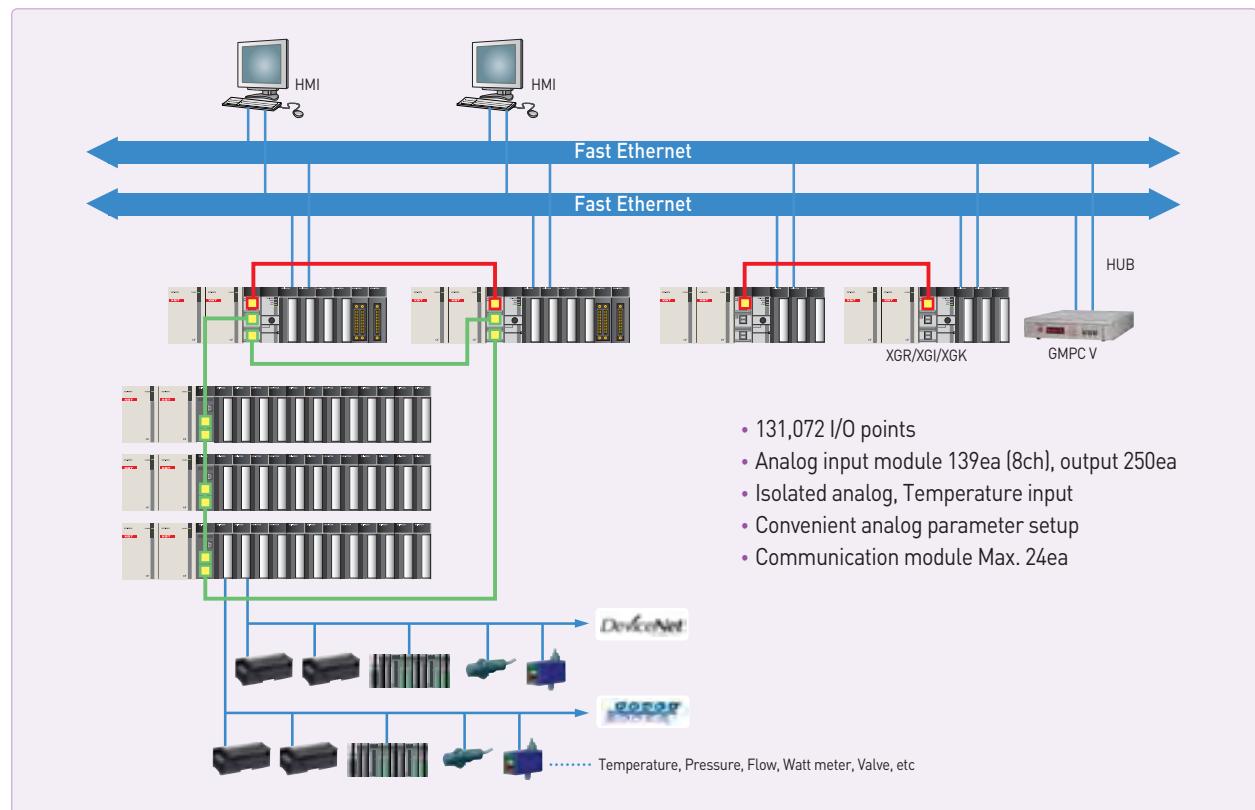


### Incinerator control

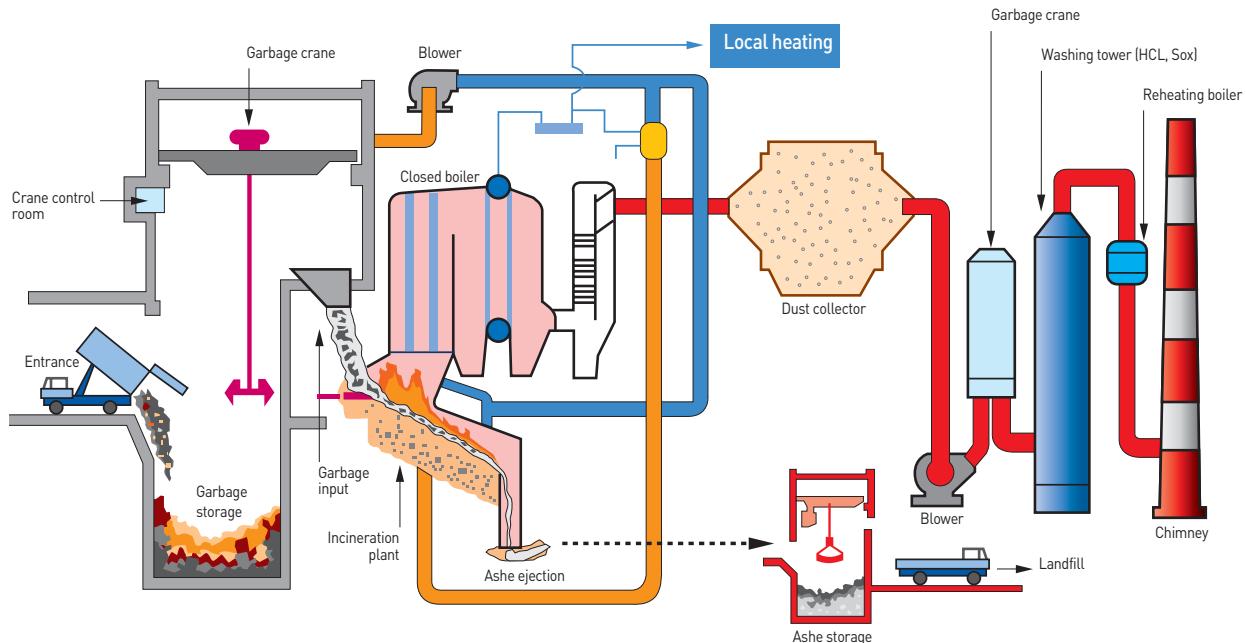

### System configuration

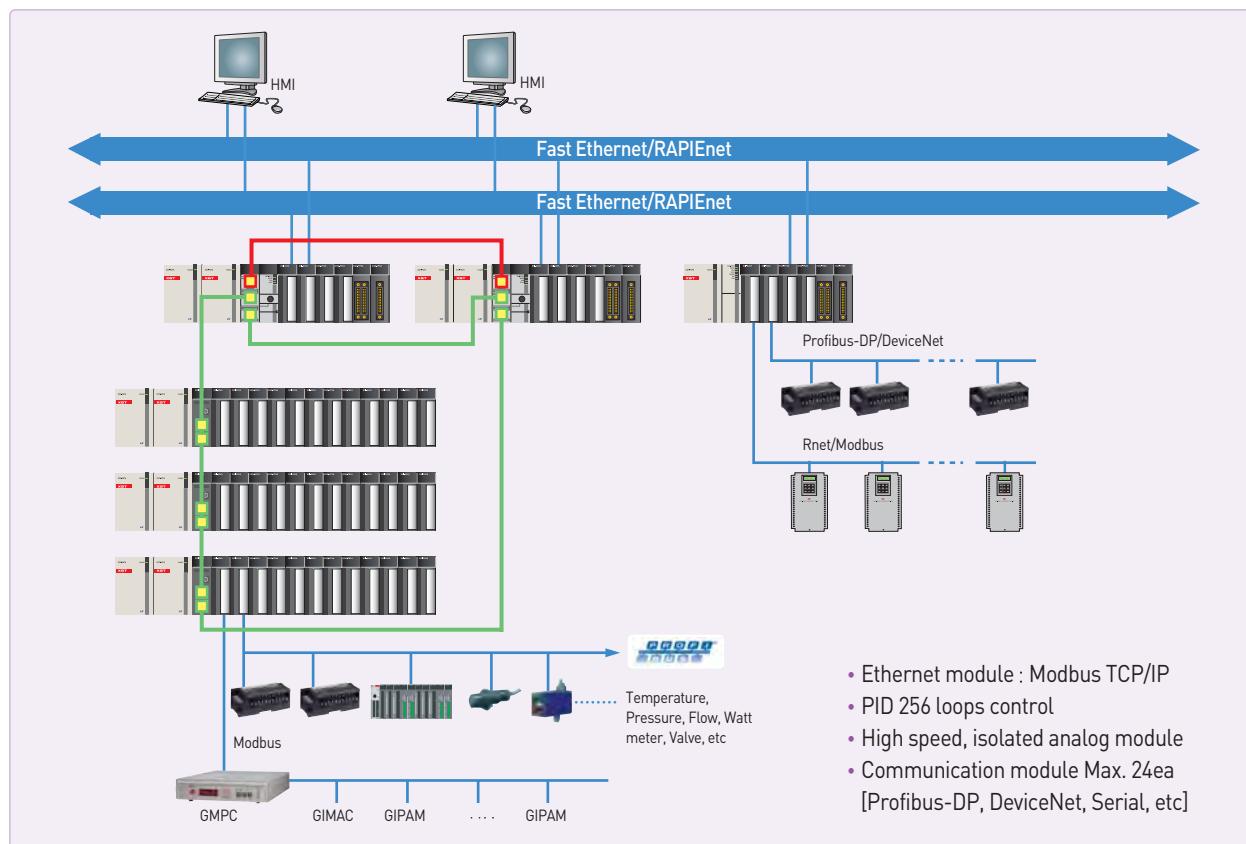


## Broad casting system

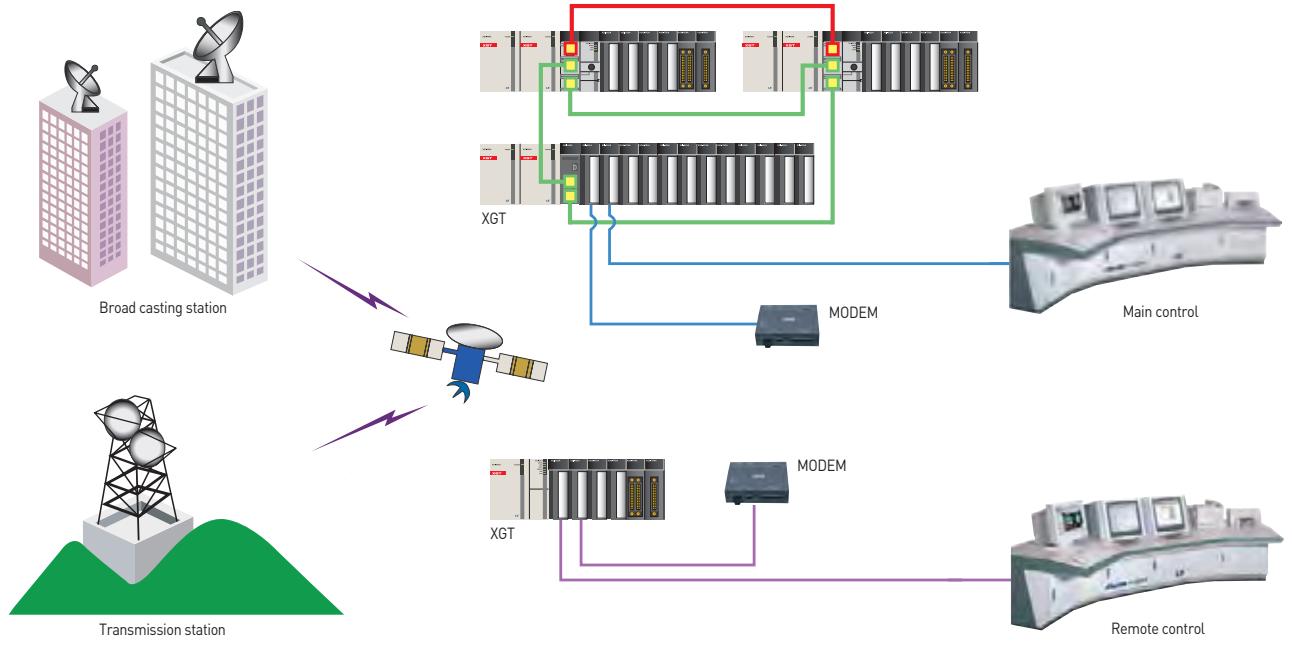

SYSTEM

## System configuration

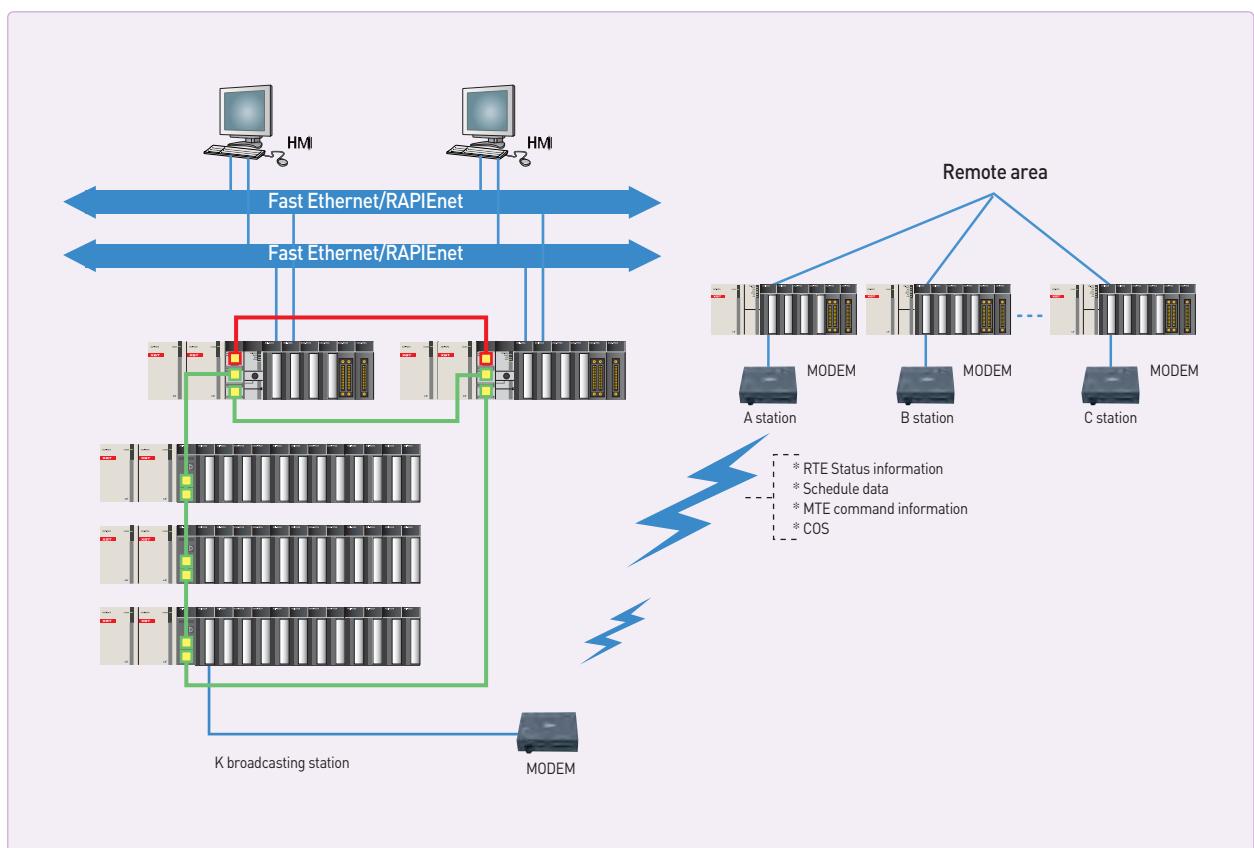





# Network

Along with Ethernet, Profibus-DP, and DeviceNet, XGT series provide the maximum in control integration and communication flexibility.

## Contents

- |   |   |
|---|---|
| 46 XGT Network system                                   | 72 Fnet   |
| 48 RAPIEnet <sup>+</sup>                                | 74 BACnet/IP  |
| 50 RAPIEnet <sup>+</sup> System Configuration           | 76 Computer-Link  |
| 52 RAPIEnet <sup>+</sup> Master(Client) module          | 88 Communication example [Ethernet]   |
| 54 RAPIEnet <sup>+</sup> Expansion driver module        | 80 Communication example [Rnet]   |
| 56 RAPIEnet <sup>+</sup> Smart I/O [Stand alone type]   | 82 Communication example [DeviceNet]<br>[SyCon setting Profibus, DeviceNet] |
| 58 RAPIEnet <sup>+</sup> Smart I/O [Expandable type]    | 83 SMART I/O [Stand alone]  |
| 60 RAPIEnet <sup>+</sup> Multiport RAPIEnet switch[MRS] | 84 SMART I/O<br>[Modbus/TCP, Ether Net/IP Adapter]                          |
| 62 Computer-Link [Cnet]                                 | 86 SMART I/O [DeviceNet adapter]  |
| 64 DeviceNet [Dnet]                                     | 87 SMART I/O [Profibus-DP adapter]  |
| 66 Profibus-DP [Pnet] system                            | 88 SMART I/O [Rnet adapter]   |
| 67 Profibus-DP[Pnet] Slave I/F system                   | 89 SMART I/O [Features]   |
| 68 Profibus-DP [Pnet] Remote I/F system                 |   |
| 70 Rnet   |   |

## Features



※CIM:Computer Integrated Manufacturing

#### About RAPIEnet<sup>+</sup>

Real-time, hybrid & ring topology-based industrial Ethernet solution, integrating Modbus TCP/IP, EtherNet/IP and RAPIEnet for IoT, future-oriented technology for high performance & efficiency.

#### RAPIEnet

- IEC standard (RAPIEnet) communication technology applied
- Dedicated network for LS PLC
- Communication speed: 100Mbps, 1Gbps
- Topology : Star, Line, Ring
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Max read/write data size : 1,400 byte
- Max No. of connected stations per network : 64 stations

#### EtherNet/IP


- Topology : Star, Line
- Communication speed: 100Mbps, 1Gbps
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Max read/write data size : 1,400 byte(Non-periodic tag)
- Max No. of connected stations per network : 64 stations

#### Modbus TCP/IP

- Eopology : Star, Line
- Communication speed: 100Mbps, 1Gbps
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Max read/write data size : 125/123 Word
- Max No. of connected stations per network : 64 stations

#### XGT dedicated

- Topology : Star, Line
- Communication speed: 100Mbps, 1Gbps
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Max read/write data size : 1,400 byte
- Max No. of connected stations per network : 64 stations

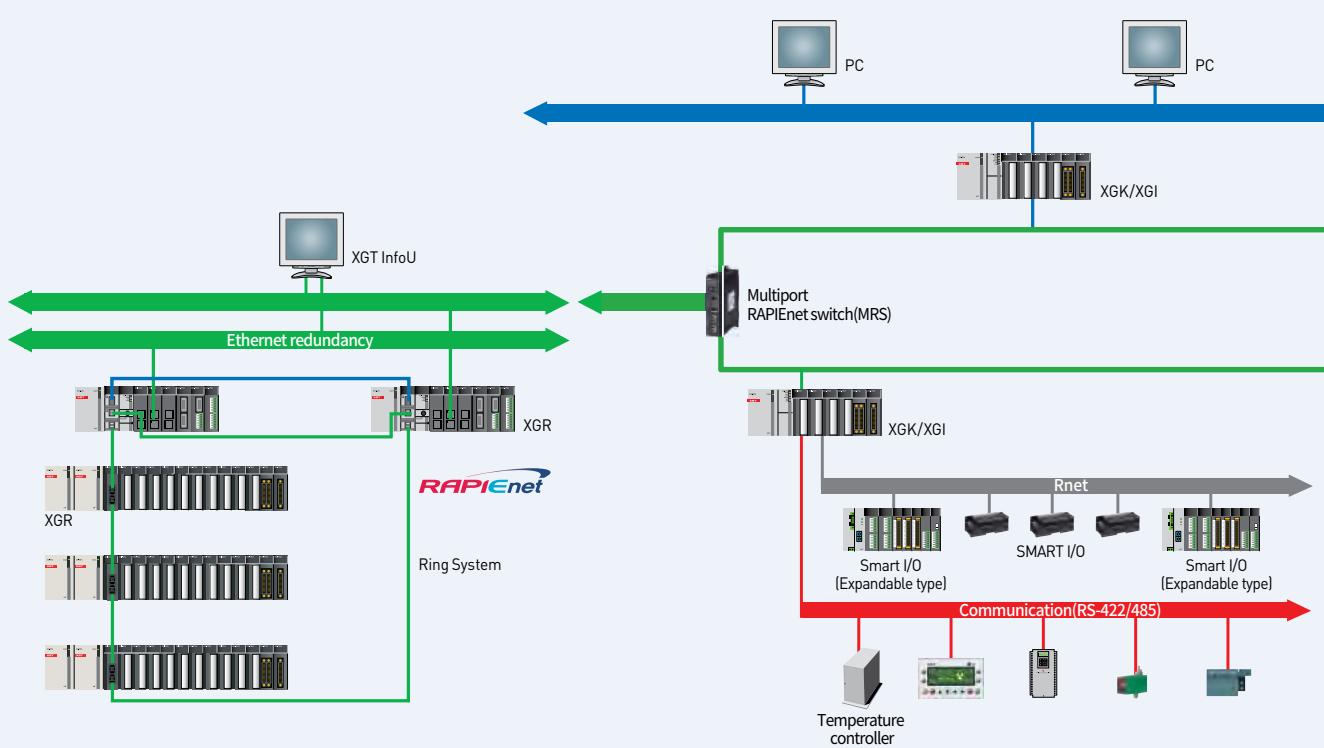

### Computer Link(Cnet)

- RS-232C/485/422 communication
- Long-distance communication via modem connection
- Various connection to HMI S/W (XGT, Modbus RTU, Modbus ASCII)
- User-defined communication
- Convenient P2P master (XGT, Modbus)

### Fnet

- Dedicated network for LS PLC
- Easy high-speed link parameter setup
- 1Mbps high-speed communication
- Max. 750m
- Max. 6ea repeater available (Max. expansion 5.25km)
- Network management through Auto scan

### Rnet

- High-speed communication 1Mbps
- Long communication distance Max.750m
- Max. 6 repeaters (up to 5.25km)
- Network management using Auto-scan (Slave module information)

### DeviceNet(Dnet)


- Connectable to other PLCs and control device
- Compliance of the ODVA standard
- Flexible communication speed setting: 125/250/500Kbps
- Multi-drop and T branch connection
- Long communication distance: Max. 500m


### Profibus-DP(Pnet)

- Optimum communication for a master automation device and distributed slave I/O devices
- Fast slave communication omitting application layer
- Long communication distance: Max. 1200m
- Communication using High-speed link parameter

### Installation number of network module available

Item	XGK / XGI / XGR CPU
Total network module	24
High-speed link module	12
P2P service	8

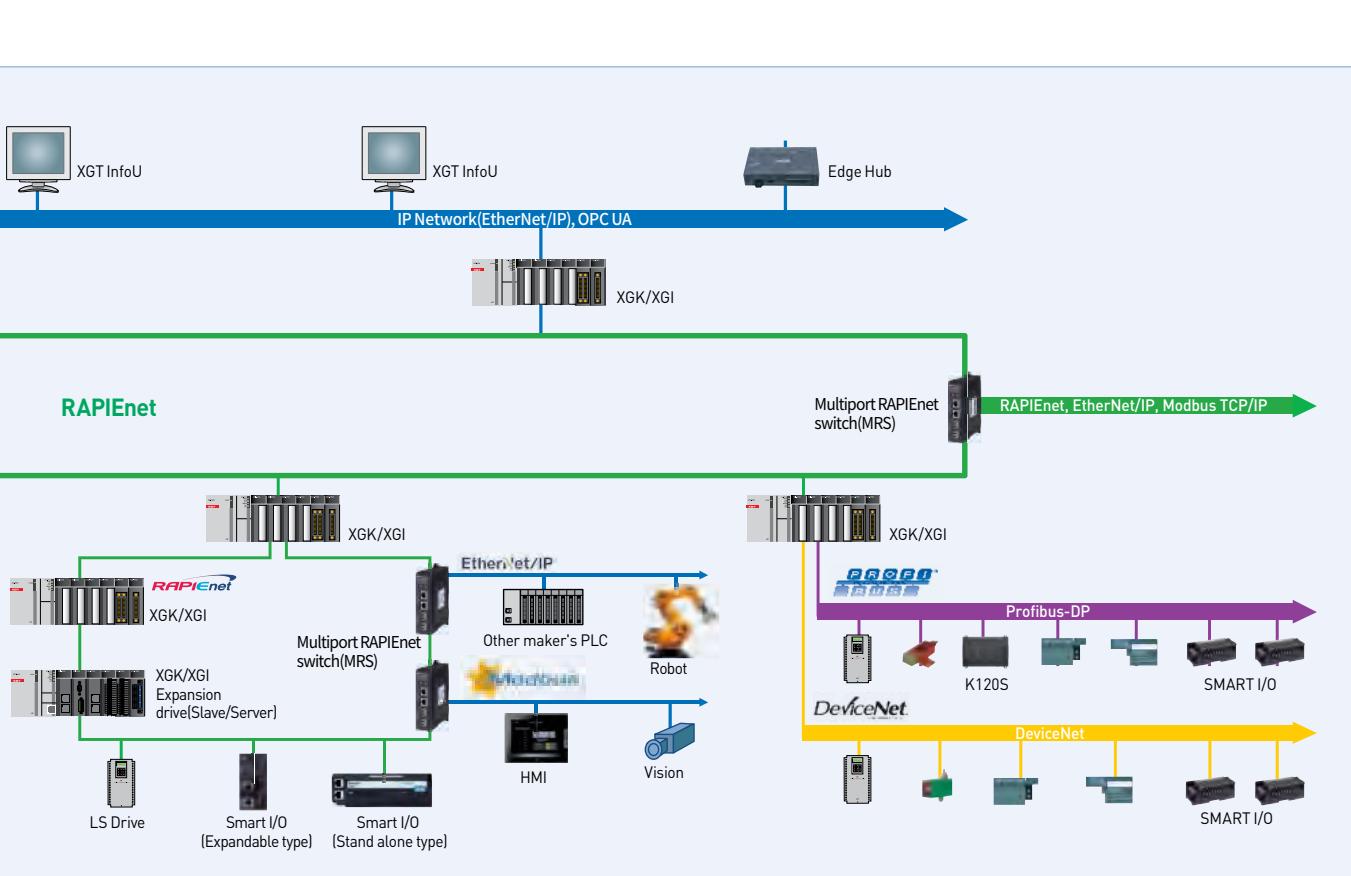

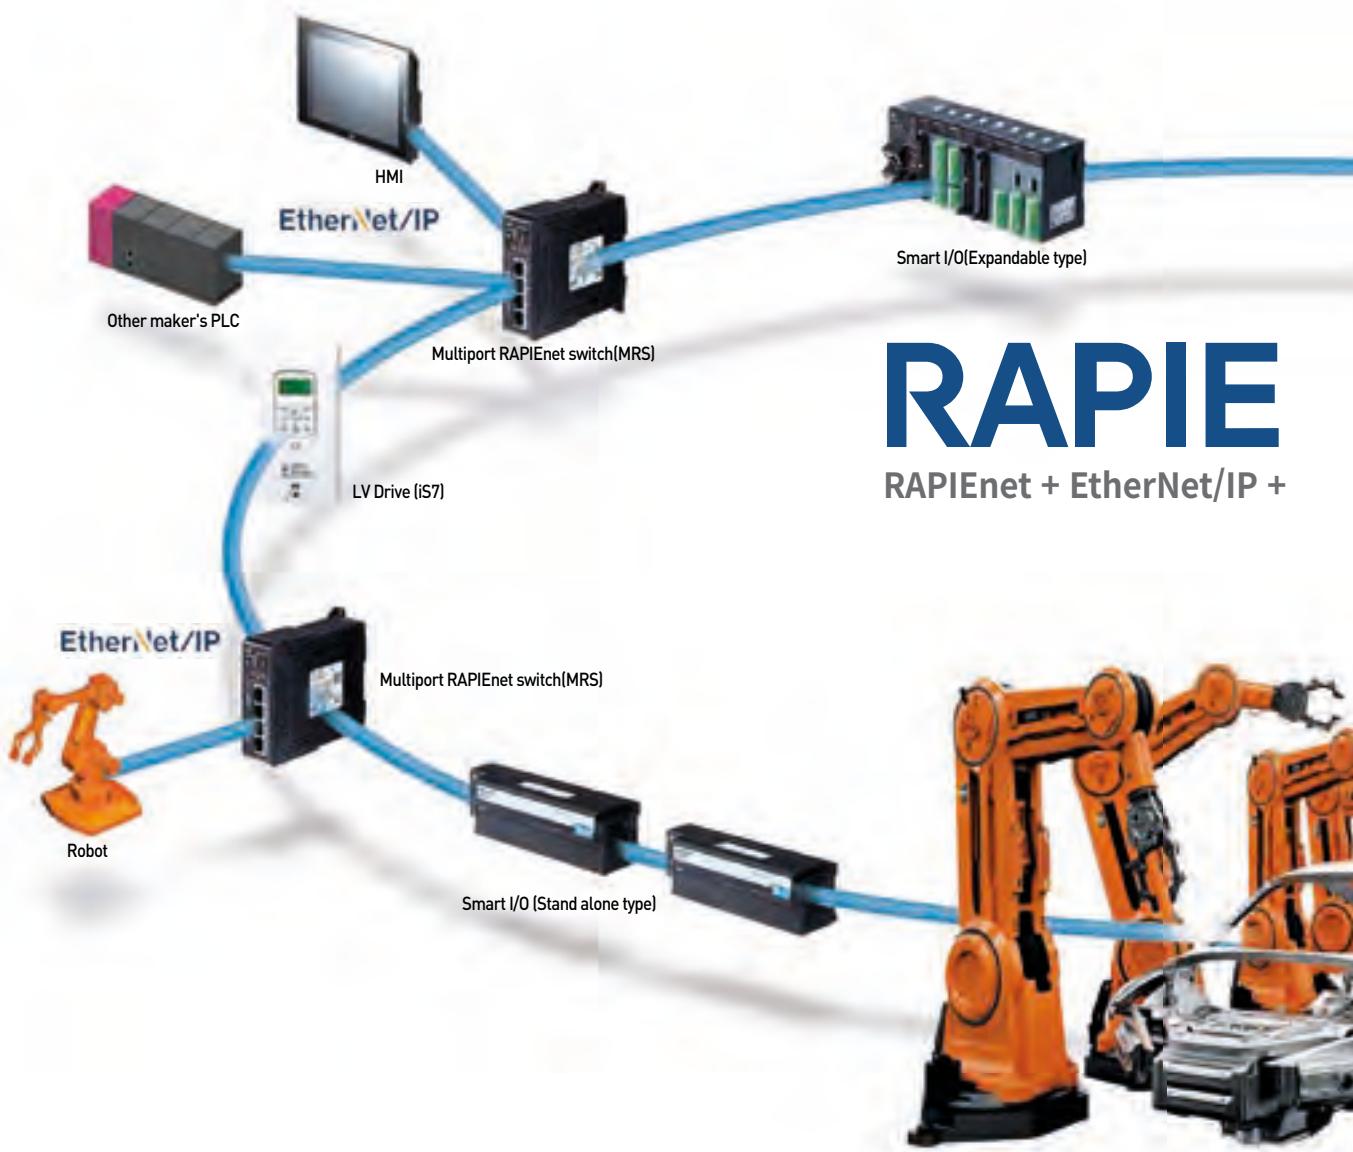


## About RAPIEnet+

Real-time, hybrid & ring topology-based industrial Ethernet solution, integrating Modbus TCP/IP, EtherNet/IP and RAPIEnet for IoT and future-oriented technology for high performance & efficiency.



### Professional

- Integrated hybrid network solution
- Three protocols in a single product: Modbus TCP/IP, EtherNet/IP, RAPIEnet
- Various and convenient network system configuration with smart extension service
- IEC standard (RAPIEnet) communication technology applied
- Gigabit Ethernet from 100Mbps to 1Gbps for large networks

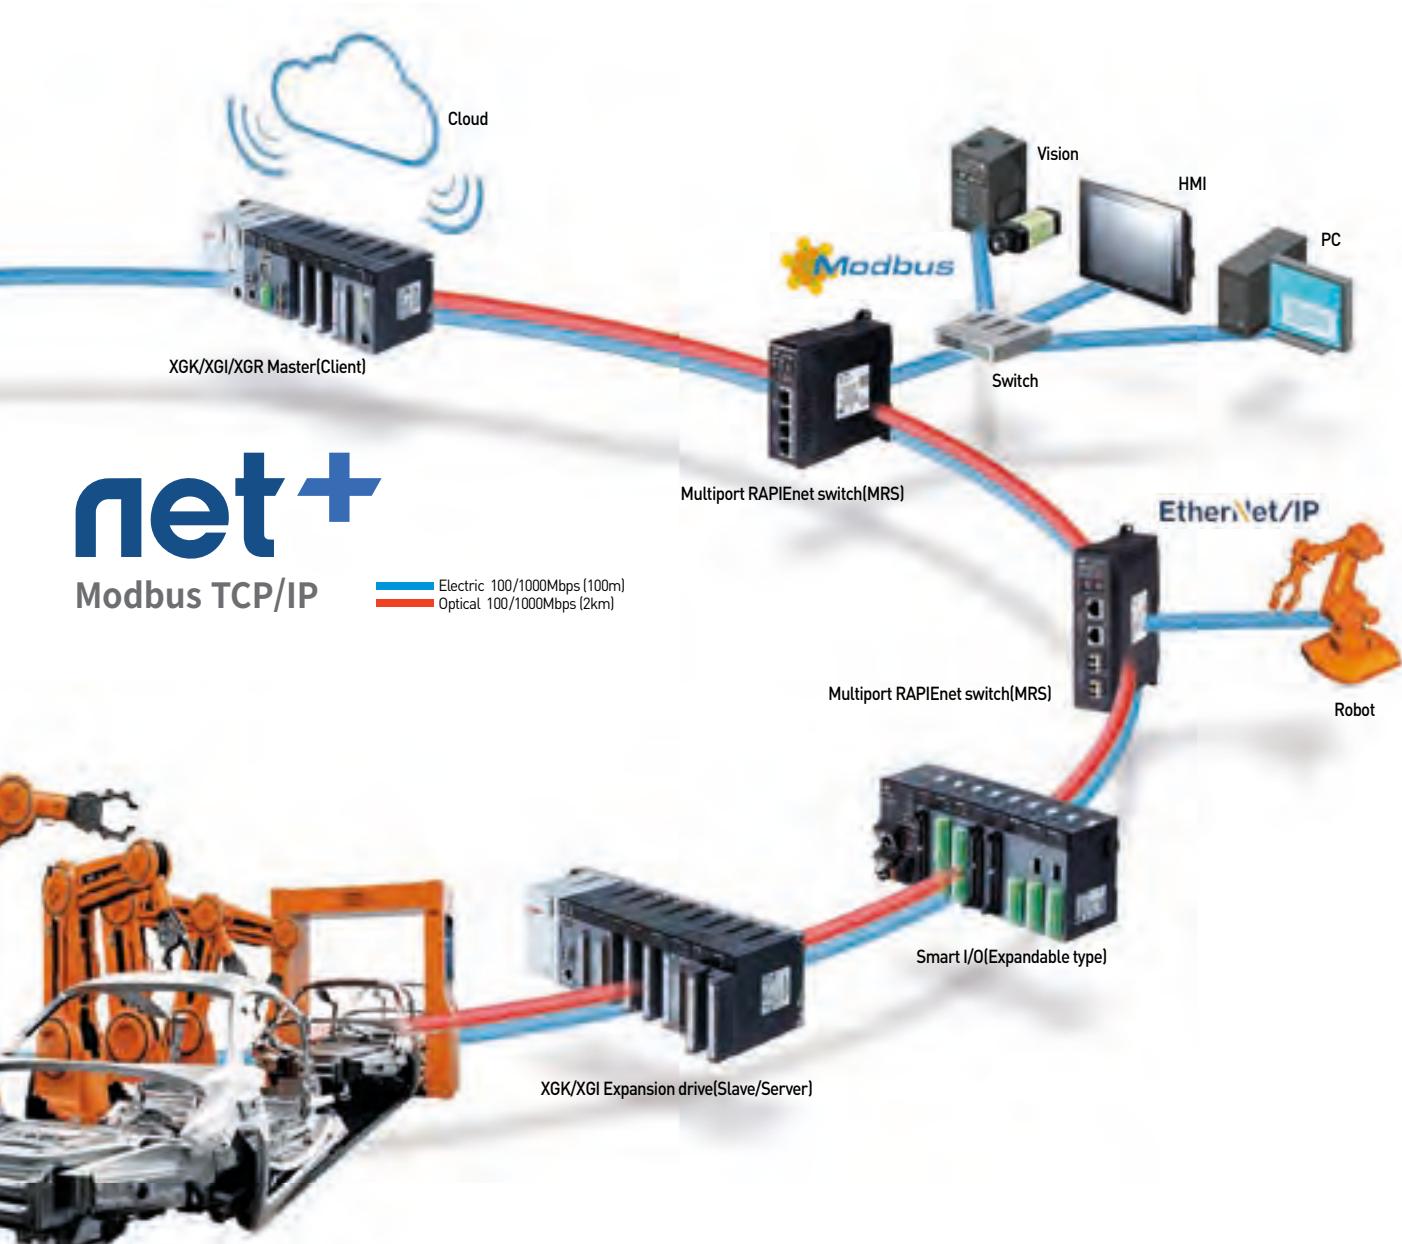

### Efficiency

- Efficient network configuration with 2-port Ethernet
- Network cost reduction using electrical to fiber optic cable
- Optimized system configuration with automation products (PLC, remote I/O, Drive, etc.)
- Easy engineering via intuitive and user-friendly programming tool (XG5000)



### Convenience

- Autoscan for network registration
- Min. parameter and programming setup
- Simple editing (add/change) for modules of operating system
- Variable maintenance available: service status, diagnosis, comm. history, etc.




### Reliability

- Reliability improvement for ring topology network
- Various functions for network monitoring and diagnosis
- Noise reduction by fiber-optic network

### Ring Type

- Ring topology and configuration with third-party devices: reliability & product/wiring reduction
- Hybrid network (electric/fiber-optic): system cost reduction


Electric 100/1000Mbps (100m)  
 Optical 100/1000Mbps (2km)

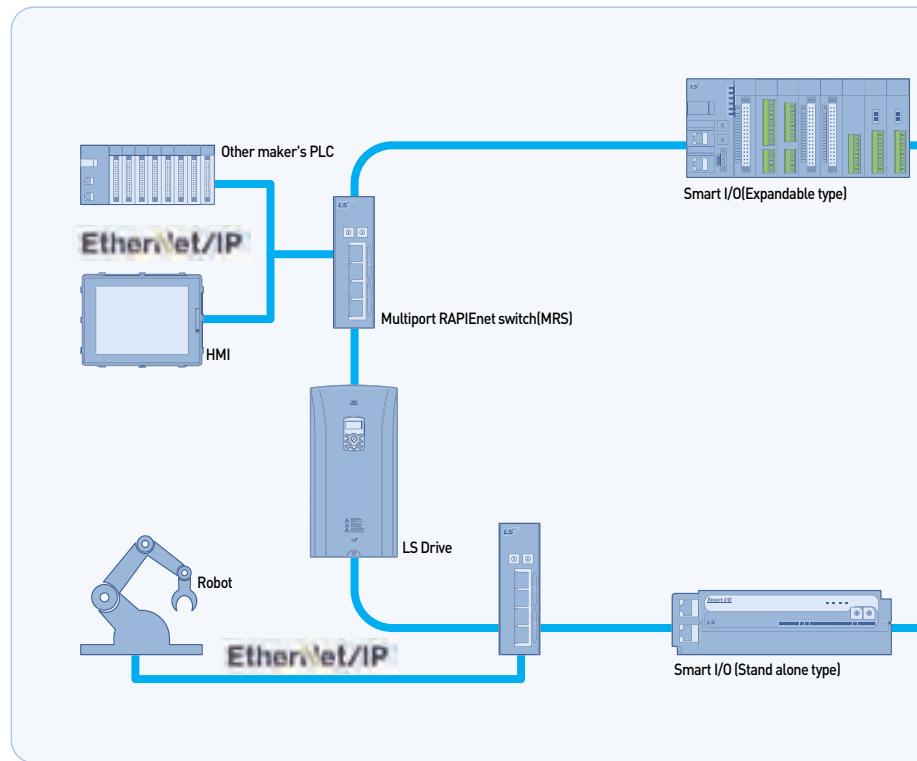

### Daisy-chain Type

- Integrated network configuration with third-party devices
- EtherNet/IP and Modbus Hybrid communication: product/wiring reduction

Electric 100/1000Mbps (100m)  
 Optical 100/1000Mbps (2km)

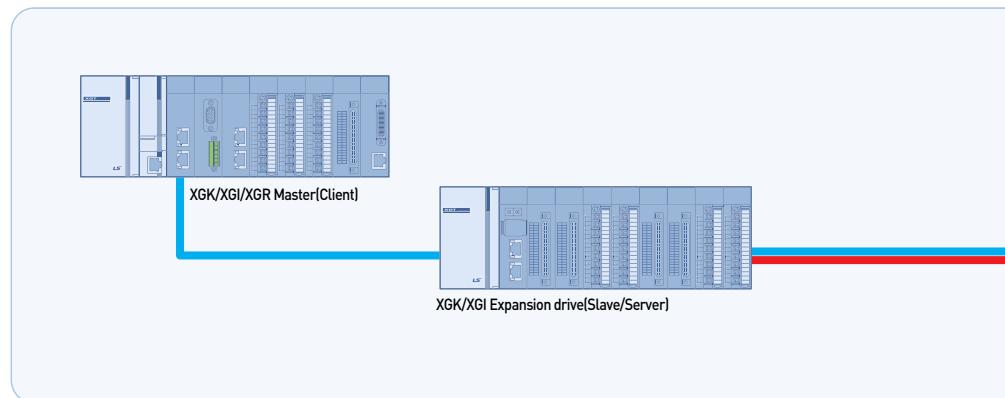




### Star Type

- Integrated network configuration with third-party devices
- Various network configuration (general switch application available)

Electric 100/1000Mbps (100m)



# RAPIEnet+

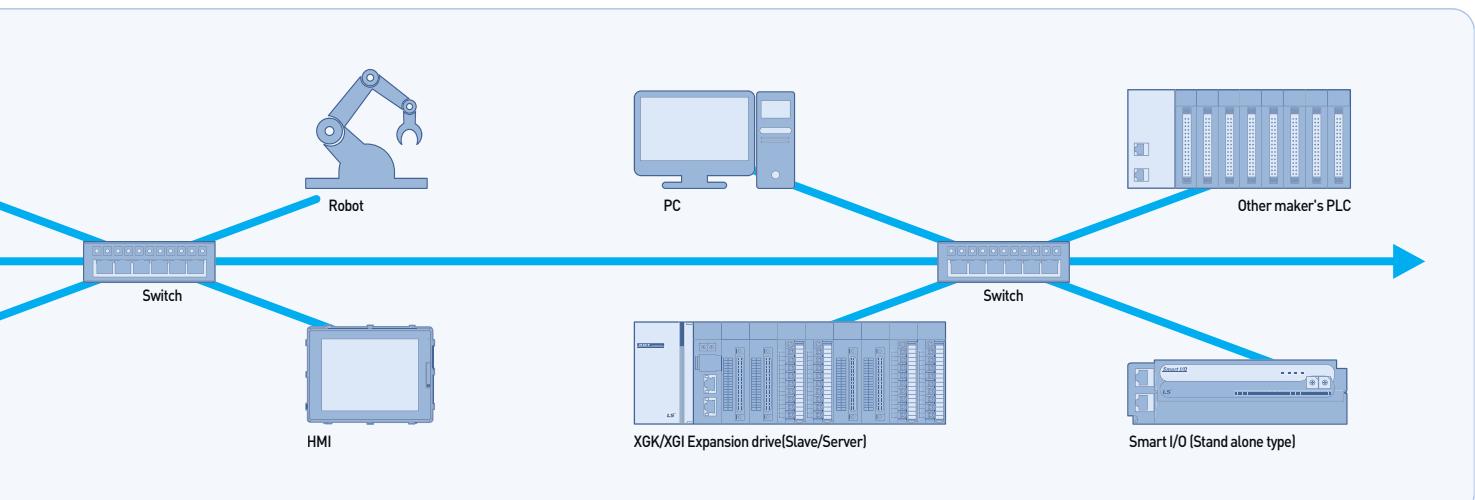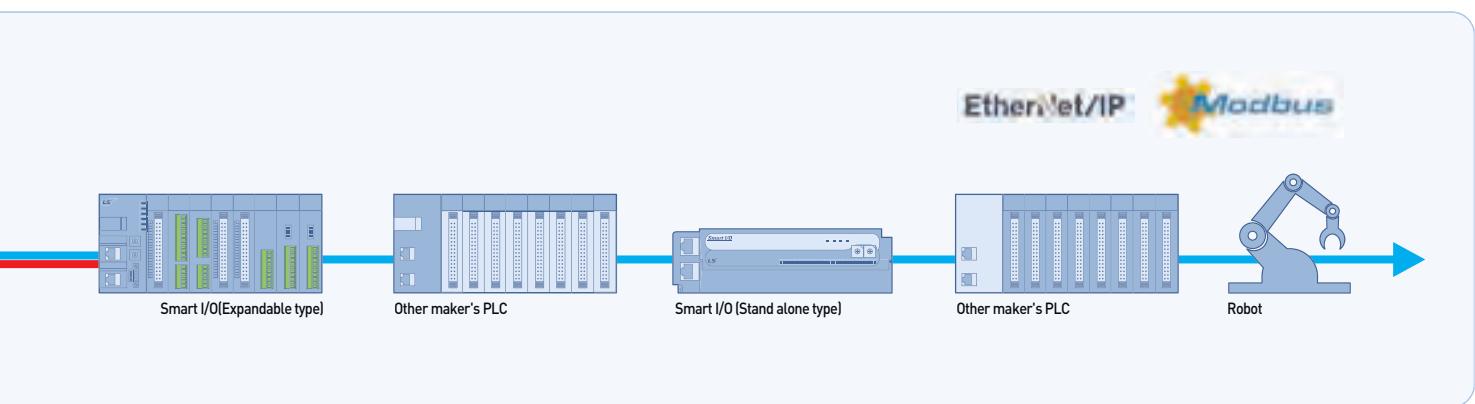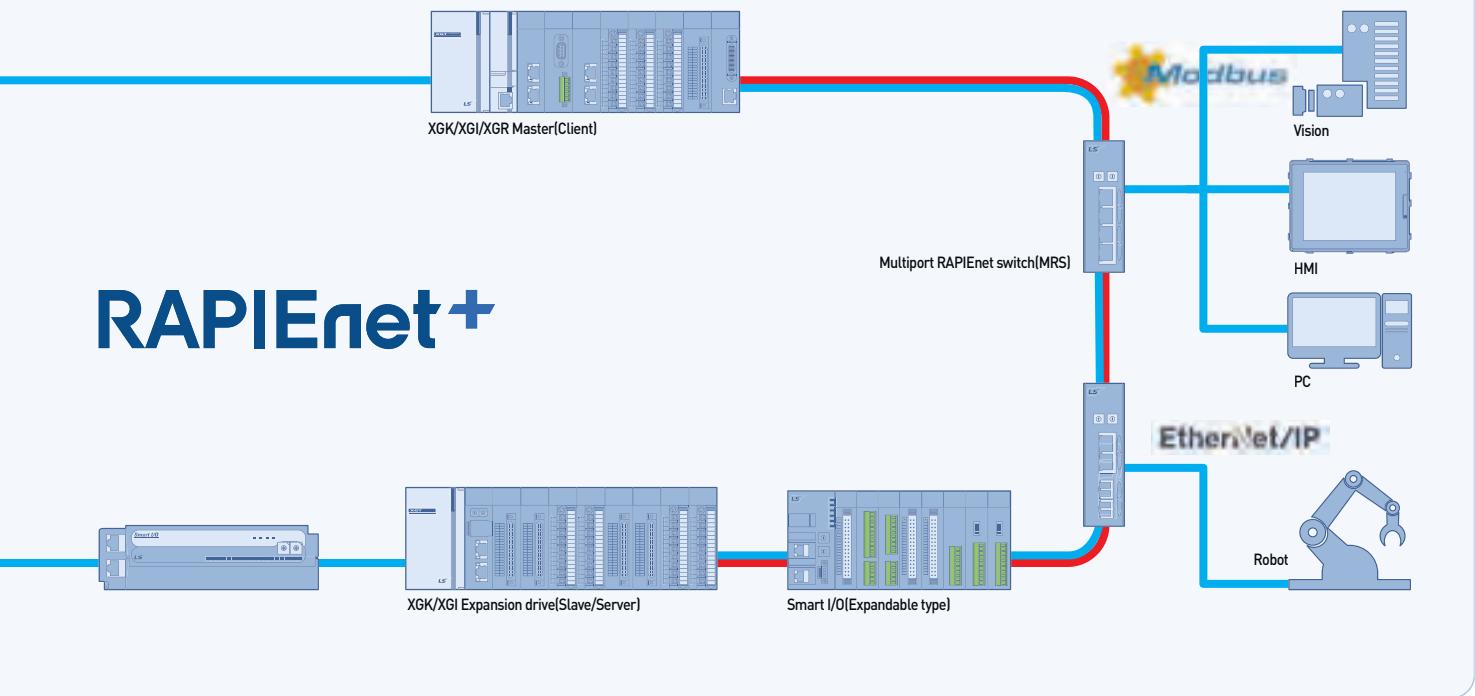

**XGL-EFMTB, XGL-EFMFB, XGL-EFMHB**

- Gigabit Ethernet (1Gbps)
- Two-port support
- Ring/Line topology configuration support:  
no additional switch required
- Modbus TCP/IP, RAPIEnet (v6.0 or higher),  
EtherNet/IP (v6.0 or higher) protocol support
- Max 5.000pps network load (based on server operation)
- Data processing speed: 1ms
- Various and convenient network system configuraion with  
Smart Extension Service (v8.0 or higher)
- XG5000 network setup and programming (v4.30 or higher)
- User protocol editing and P2P service:  
(network with third-party devices)
- Various diagnostic functions and module/  
network status information
- Network module check function (Ping test)
- Network service information (HS link, P2P, media status, etc)
- OPC UA Server support (OPC UA Specification v1.03, XGL-EFMxB v7.0)
  - OS replacement for OPC UA Server of XGL-EFMxB in XG5000 is required.  
(Please refer to user's manual).

**Specification**

Item			XGL-EFMTB	XGL-EFMFB	XGL-EFMHB		
Transm ission Specific ations	Transmission speed (Mbps)	10/100/1000		100/1000	Electric: 10/100/1000 Optical: 100/1000		
	Transmission method	Baseband					
	Maximum distance between nodes	100m (Node-Switch)	2km (Multi-mode)	Electric: 100m Optical: 2km			
	Send media	Electric: Category 5E or higher STP (Shielded Twisted-pair) cable Optical: Multi mode(MMF)/Single mode(SMF) cable					
	Maximum protocol size	1,500 Byte					
	Communication network access method	CSMA/CD					
	Frame error check method	CRC32					
Max. load			Ethernet: 10,000pps, RAPIEnet: 40,000pps				
Topology			Line, Tree, Star, Ring (RAPIEnet Enable)				
Diagnosis function			Station number / IP collision detection function, Diagnosis using XG5000				
Station number / IP setting method			Rotary switch, XG5000, BOOTP/DHCP				
Station number / IP setting range			Station number setting value set by the tool(XG5000) [0 to 220] - IP: 192.168.1.xx(xx:100 + rotary switch 1~99)				
External connecting terminal			RJ45, SFP : PADT connection, data communication				
Basic Specific	Current consumption (mA)	100Mbps	560	750	670		
	1Gbps		900	740	670		
Weight(g)			146	130	120		

## Network service specification

	Item	XGL-EFMTB	XGL-EFMFB	XGL-EFMHB
RAPIDnet	Data processing unit	Byte(8bit)		
	Max read/write data size	1,400 byte		
	Max No. of connected stations per network	221 stations (However, 64 stations are used for the Smart extension service.)		
EtherNet/IP	Data processing unit	Byte(8bit)		
	Max read/write data size	Non-periodic tag: 1,400 Byte Non-periodic object : 1,024 Byte Cycle 1,024 Byte		
	Available communication type	Connection-type (Cycle) messages: Class1 Non connection type(Non-periodic ) message: Tag, Object		
Modbus / TCP	Maximum number of connections	Connection-type (periodic)+ Non connection type(Non-periodic ):64		
	Data processing unit	Word(16bit),bit		
	Max read data size	125 Word(2,000 Bits)		
	Max write data size	123 Word(1,968 Bits)		
XGT dedicated	Maximum number of connections	64		
	Data processing unit	Byte(8bit)		
	Max read/write data size	1,400 byte		
	Maximum number of connections	64		

## Smart extension master

Smart extension service is network service between LS Automation products to enable users to extend several PLCs and drives without network parameter and programming, including EtherNet/IP client service.

Smart Extension Setup Wizard	Users could do network setup easily with 'Smart Extension Setup Wizard' in XG5000.
Smart Extension Autoscan	Autoscan execution of network & control setting during online.
Remote Device Setting	* Automatic execution of I/O and Basic Parameter Setting via XGL-EFMxB (master) * Hot swap seting for slave module replacement
Smart Extension Diagnosis Flag	Diagnostic infomration service for network devices and modules of Smart Extension system
Remote network	Device IP/Station No. change Remote network device IP and station no. change during online based on user setting (master)

**XGL-DBDT, XGL-DBDF, XGL-DBDH**

- Large PLC system configuration with XGL-DBDx(slave module) installation on CPU slot of XGK/XGK main base
  - PLC extension system configuration: 63-stage network extension (XGT base extension: 7 stage)
  - Extension distance: electric 100m, fiber-optic 2km (XGT base extension: 15m)
  - I/O point: Max. 49,152 (XGT base extension: 6,144)
- Modbus TCP/IP, RAPIEnet, EtherNet/IP protocol simultaneous support
- Electric/Fiber-optic/Hybrid module comm. speed: Max. 1Gbps
- 2-port (dual port) support
  - No additional switch required for ring/line topology configuration
- Hot swap for base replacement (add/delete available)
  - Base replacement without system in case of extension base error
- Ring-to-line: fast reconfiguration to line topology for a line fault of ring
- Extension base power redundancy (with XGR extension base)
- Diagnostic function for service status

**Specification**

	Item	XGL-DBDT	XGL-DBDF	XGL-DBDH
Transm ission Specific ations	Transmission speed (Mbps)	100/1000	100/1000	Electric: 100/1000 Optical: 100/1000
	Transmission method	Base band		
	Maximum distance between nodes	100m@CAT5E or higher	2km@100Mbps.MM	Electric: 100m Optical: 2km
	Send media	Electric: Category 5E or higher STP [Shielded Twisted-pair] cable Optical: Multi mode(MMF)/Single mode(SMF) cable		
	Maximum protocol size	1,500Bytes		
	Communication network access method	CSMA/CD		
	Frame error check method	CRC32		
Max. load Topology Diagnosis function Station number / IP setting method Station number / IP setting range External connecting terminal Status indication LED Parameter setting Device file Maximum number of modules to be installed	Max. load	Ethernet: 10,000pps, RAPIEnet: 40,000pps		
	Topology	When using RAPIEnet : Lines, Ring (using MRS if you use a different topology) When not using RAPIEnet : Line, Tree, Star etc. (with switch)		
	Diagnosis function	Station number/IP collision detection function, self-diagnosis service, diagnosis using XG5000		
	Station number / IP setting method	Rotary switch, XG5000, BOOTP/DHCP		
	Station number / IP setting range	Station number: Rotary switch(1 ~ 99) IP: 192.168.1.xx(xx:100 + rotary switch 1~99)		
	External connecting terminal	USB mini B : PADT connection RJ45, SFP : PADT connection, data communication		
	Status indication LED	PWR, RUN, SVR, I/F, RELAY, PADT, CHK, ERR, FAULT, LINK, ACT		
	Parameter setting	XG5000(USB, Ethernet port)		
	Device file	EDS file(Only EtherNet/IP)		
	Maximum number of modules to be installed	12		

## Network service specification

	Item	XGL-DBDT	XGL-DBDF	XGL-DBDH
RAPIDnet	Data processing unit	Byte[8bit]		
	Max read data size	1,400 Byte		
	Max write data size	1,400 Byte		
	Max No. of connected stations per network	64 station		
EtherNet/IP	Data processing unit	Byte[8bit]		
	Max read data size	Non-periodic tag: 1,400 Byte / Non-periodic object: 1,024 Byte / Cycle: 1,024 Byte		
	Max write data size	Non-periodic tag: 1,400 Byte / Non-periodic object: 1,024 Byte / Cycle: 1,024 Byte		
	Available communication type	Connection-type (Cycle) messages: Class1 Non connection type(Non-periodic ) message: Tag, Object		
	Maximum number of connections	Connection-type (Cycle):10 Non connection type(Non-periodic ) message(Tag, Object):10		
Modbus TCP/IP	Data processing unit	Word[16bit],bit		
	Max read data size	125 Word[2,000 Bits]		
	Max write data size	123 Word[1,968 Bits]		
	Maximum number of connections	64		

## Available Module

	Item	I/O module		Item	I/O module
Digital	Input	XGI-D21A	Input	XGF-AD16A	
		XGI-D22A/B		XGF-AC4H	
		XGI-D24A/B		XGF-AW4S	
		XGI-D28A/B		XGF-DV4A	
		XGI-A12A		XGF-DV8A	
		XGI-A21A/C		XGF-DC4A	
		XGI-D21D		XGF-DC8A	
	Output	XGQ-RY1A	Output	XGF-DV4S	
		XGQ-RY2A/B		XGF-DC4S	
		XGQ-TR1C		XGF-DC4H	
		XGQ-TR2A/B		XGF-HO2A	
		XGQ-TR4A/B		XGF-HD2A	
		XGQ-TR8A/B		XGF-HO8A	
		XGQ-SS2A		XGF-RD4A	
Analog	Input/Output	XGQ-RY1D	RTD & thermocouple	XGF-RD4S	
		XGH-DT4A		XGF-TC4S	
	Input	XGF-AV8A		XGF-RD8A	
		XGF-AC8A		XGF-AH6A	
		XGF-AD4S		XGF-TC4UD	
		XGF-AD8A		XGF-TC4RT	

**GEL-D24C, GEL-DT4C1, GEL-TR4C1, GEL-RY2C, GEL-AV8C, GEL-AC8C, GEL-DV4C, GEL-DC4C**

- Modbus TCP/IP, RAPIEnet, EtherNet/IP protocol support
- RJ45 connector
- Flexibility in network topology (ring, line)
  - Redundancy support in ring topology
- Simple module setting with station no. setup (No IP setup required)
- Easy & Simple parameter setup: Autoscan for module add, checkbox for parameter setup (No program required)
- High-speed data processing
- Cost reduction in wiring
- Various diagnostic service
  - Station no. collision error
  - Remote batch processing in O/S upgrade via master module
  - Network status check by CRC error flag
  - Enhanced Autoscan function: station collision, module information, etc.
  - Error flag: comm. error between master and Smart I/Os

**Specification**

Item		Content
Transmission Specifications	Transmission speed	PORT1/2: 100Mbps
	Transmission method	Base band
	Maximum distance between nodes	100m@CAT5E or higher
	Send media	Electric: Category 5E or higher STP (Shielded Twisted-pair) cable
	Maximum protocol size	1,500Bytes
	Communication network access method	CSMA/CD
	Frame error check method	CRC32
Max. load		Ethernet: 10,000pps, RAPIEnet: 40,000pps
Topology		When using RAPIEnet : Lines, Ring (using MRS if you use a different topology) When not using RAPIEnet : Line, Tree, Star etc. (with switch)
Diagnosis function		Station number / IP collision detection function, self-diagnosis service, diagnosis using XG5000
Station number / IP setting method		Rotary switch, XG5000, BOOTP/DHCP
Station number / IP setting range		Station number: Rotary switch(1 ~ 99) IP: 192.168.1.xx(xx:100 + rotary switch 1~99)
Status indication LED		STATUS,PORT1,PORT2,LACTH(output Only)
Parameter setting		XG5000(Ethernet)
Device file		EDS file(Only EtherNet/IP)
Protocol		RAPIEnet, EtherNet/IP, Modbus-TCP, BOOTP, DHCP(RAPIEnet, EtherNet/IP can be Smart extension with XGL-EFMxB)
I/O Refresh size	Max inputs: refresh size	64 bytes
	Max outputs: refresh size	64 bytes

## Network service specification

Item		Content
RAPIDnet	Data processing unit	Byte[8bit]
	Max read data size	1,400 byte
	Max write data size	1,400 byte
	Max No. of connected stations per network	64 station
EtherNet/IP	Data processing unit	Byte[8bit]
	Max read data size	Non-periodic tag: 1,400 Byte Non-periodic object : 1,024 Byte Cycle: 1,024 Byte
	Max write data size	Non-periodic tag: 1,400 Byte Non-periodic object : 1,024 Byte Cycle: 1,024 Byte
	Available communication type	Connection-type (Cycle) messages: Class1 Non connection type(Non-periodic ) message: Tag, Object
	Maximum number of connections	Connection-type (Cycle) :10 Non connection type(Non-periodic ) message(Tag, Object):10
Modbus TCP/IP	Data processing unit	Word[16bit],bit
	Max read data size	125 Word(2,000 Bits)
	Max write data size	123 Word(1,968 Bits)
	Maximum number of connections	64

## Input/output specification

Item		GEL-D24C	GEL-DT4C1	GEL-TR4C1	GEL-RY2C		
Digital I/O	Points	32(Input)	16/16(In/Out)	32(Output)	16(Outputs)		
	Rated input current	5mA		-	-		
	Rated load voltage	-	DC24V		DC24V/AC220V, 2A/point, 5A/COM		
	Max. load current	-	0.5A/point, 3A/COM		AC250V, DC110V, 1,200times/hour		
	On voltage	DC 19V or higher		-	Min. switching load :		
	Off voltage	DC 6V or less		-	DC 5V/1mA		
	Insulation method	Photo coupler insulation					
Item		GEL-AV8C	GEL-AC8C	GEL-DV4C	GEL-DC4C		
Analog I/O	Channels	8		4			
	Input/output type	Voltage	Current	Voltage	Current		
	Input/output range	1 ~ 5V	4 ~ 20mA	1 ~ 5V	4 ~ 20mA		
		0 ~ 5V		0 ~ 5V			
	Accuracy	0 ~ 10V	0 ~ 20mA	0 ~ 10V	0 ~ 20mA		
		-10 ~ 10V		-10 ~ 10V			
	Max. resolution	0.3% (ambient air temperature 0 ~ 55D)					
Max. conversion rate		1/16,000					
Insulation method		10ms / channels					
		insulation between input / output terminal and PLC power (no insulation between channels)					

# RAPIEnet+ Smart I/O (Expandable type)

## XEL-BSSRT, XEL-BSSRF, XEL-BSSRH

- Slave PLC system configuration: XEL-BSSRx (extension Smart I/O adaptor) with XGB I/Os (DI/DO/AI/AO)
  - No. of XGB extension I/O: 8
- Modbus TCP/IP, RAPIEnet, EtherNet/IP protocol support
- Electric/Fiber-optic/Hybrid module comm. speed: Max. 1Gbps
- 2-port (dual port) support
  - No additional switch required for ring/line topology configuration
- Ring-to-line: fast reconfiguration to line topology for a line fault of ring
- Diagnostic function for service status



## Specification


	Item	XEL-BSSRT	XEL-BSSRF	XEL-BSSRH
Transmission Specifications	Transmission speed (Mbps)	100/1000	100/1000	Electric: 100/1000 Optical: 100/1000
	Transmission method	DDDDDD		
	Maximum distance between nodes	100m@CAT5E or higher	2km@100Mbps.MM	Electric: 100m Optical: 2km
	Send media	Electric: Category 5E or higher STP (Shielded Twisted-pair) cable Optical: Multi mode(MMF)/Single mode(SMF) cable		
	Maximum protocol size	1,500Bytes		
	Communication network access method	CSMA/CD		
	Frame error check method	CRC32		
Max. load		Ethernet: 10,000pps, RAPIEnet: 40,000pps		
Topology		When using RAPIEnet : Lines, Ring (using MRS if you use a different topology) When not using RAPIEnet : Line, Tree, Star etc. (with switch)		
Diagnosis function		Station number / IP collision detection function, self-diagnosis service, diagnosis using XG5000		
Station number / IP setting method		Rotary switch, XG5000, BOOTP/DHCP		
Station number / IP setting range		Station number: Rotary switch(1 ~ 99) IP: 192.168.1.xx(xx:100 + rotary switch 1~99)		
External connecting terminal		USB mini B : PADT connection RJ45, SFP : PADT connection, data communication 3pin Push in/Screw fixed type connector : power Input		
Status indication LED		RUN, RMS, RNS, RELAY, LINK/ACT1, LINK/ACT2 6 types		
Parameter setting		XG5000(USB, Ethernet)		
Device file		EDS file(Only EtherNet/IP)		
Maximum number of modules to be installed		8ea		
Protocol		RAPIEnet, EtherNet/IP, Modbus-TCP, BOOTP, DHCP (RAPIEnet, EtherNet / IP can be Smart extension with XGL-EFMxB)		

## Network service specification

	Item	XEL-BSSRT	XEL-BSSRF	XEL-BSSRH
RAPIDnet	Data processing unit	Byte(8bit)		
	Max read data size	1,400 Byte		
	Max write data size	1,400 Byte		
	Max No. of connected stations per network	64 station		
EtherNet/IP	Data processing unit	Byte(8bit)		
	Max read data size	Non-periodic tag: 1,400 Byte / Non-periodic object : 1,024 Byte / Cycle: 1,024 Byte		
	Max write data size	Non-periodic tag: 1,400 Byte / Non-periodic object : 1,024 Byte / Cycle: 1,024 Byte		
	Available communication type	Connection-type (Cycle) messages: Class1 Non connection type(Non-periodic ) message: Tag, Object		
	Maximum number of connections	Connection-type (Cycle): 10 Non connection type(Non-periodic ) message(Tag, Object): 10		
Modbus TCP/IP	Data processing unit	Word(16bit),bit		
	Max read data size	125 Word(2,000 Bits)		
	Max write data size	123 Word(1,968 Bits)		
	Maximum number of connections	64		





## Available XGB I/O Module

	Item	Module		Item	Module
Digital	Input	XBE-DC08A	Output	XBF-DV04A	
		XBE-DC16A/B		XBF-DC04A	
		XBE-DC32A		XBF-DC04B	
		XBE-AC08A		XBF-DV04C	
	Output	XBE-TN/TP08A		XBF-DC04C	
		XBE-TN/TP16A		XBF-AH04A	
		XBE-TN/TP32A		XBF-RD04A	
		XBE-RY08A/B		XBF-RD01A	
		XBE-RY16A		XBF-TC04B	
	Input/output	XBE-DR16A	TC	XBF-TC04S	
		XBE-DN32A		XBF-LD02S	
Analog	Input	XBF-AD04A	Load cell	XBF-H002A	
		XBF-AD08A		XBF-HD02A	
		XBF-AD04C			
Analog	Output	XBF-AD04A	High-speed counter	XBF-AD04A	
		XBF-AD08A		XBF-AD08A	
		XBF-AD04C		XBF-AD04C	
		XBF-AD16A		XBF-AD16A	
		XBF-AD32A		XBF-AD32A	
		XBF-AD64A		XBF-AD64A	
		XBF-AD128A		XBF-AD128A	
		XBF-AD256A		XBF-AD256A	
		XBF-AD512A		XBF-AD512A	
		XBF-AD1024A		XBF-AD1024A	

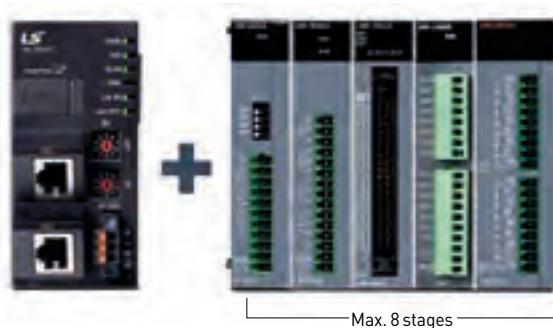

**XOL-ES4T, XOL-ES4H**

- Multi-port switch to integrate RAPIEnet, Modbus TCP/IP and EtherNet/IP network
- Max. 221 stations including master module
- Simple module setup with station no.: no additional S/W required.
- Module status information in XG5000 (Autoscan)
- Available from RAPIEnet v2.0 or later.

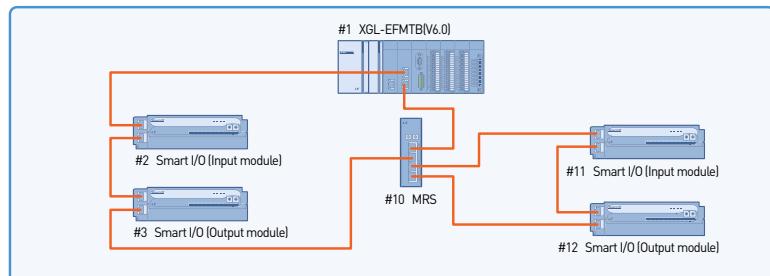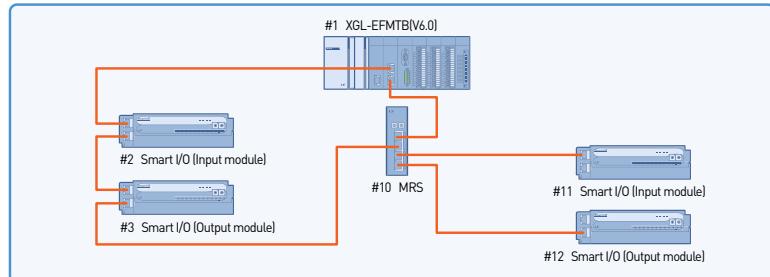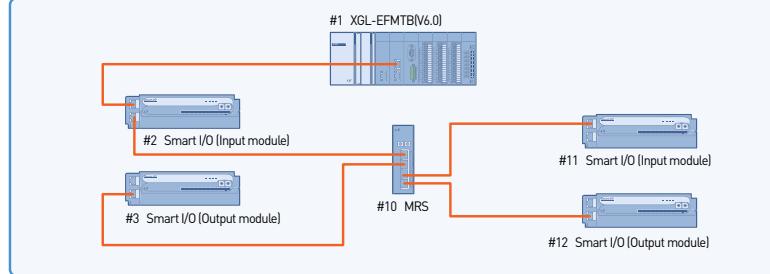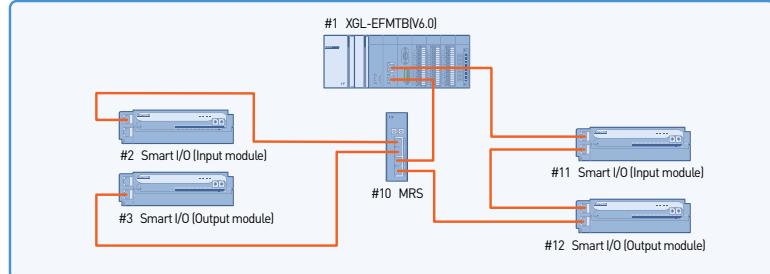
**Various system methods can be configured by using MRS****2 Ring System (Ring to Ring)****1 Ring / 1 Line System (Ring to Line)****2 Line System (Line to Line)****1 Line / 1 Ring System (Line to Ring)**

**Specification**




Item		RAPIEnet	
		XOL-ES4T	XOL-ES4H
Transmission Specifications	Transmission speed	100Mbps(1,2 port) 100Mbps 1 Gbps (3,4 port)	100Mbps/1 Gbps (1,2 port, electric) 100Mbps/1 Gbps (3,4 port,optical)
	Port type and number of ports	RJ45 4Ports	RJ45 2Ports, LC 2Ports
	Transmission distance	100m	100m/2km
	Diagnosis function	LED display	LED display
Basic Specifications	Power supply(DC)	24V(Input range:20.4~28.8V)	
	Current consumption(mA)	300	300
	Weight(g)	200	280

**Various system methods can be configured by using MRS (Ethernet compatibility)**

RAPIEnet(1,2 Port), Ethernet(3,4 Port)

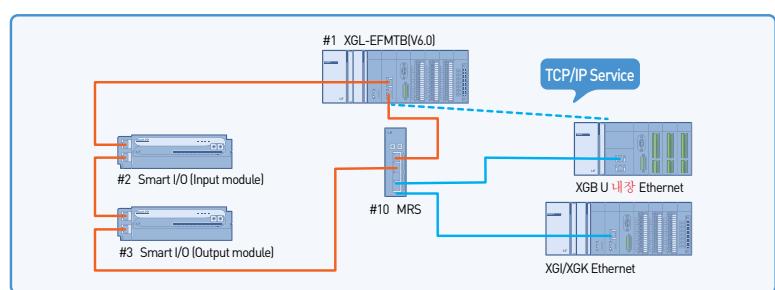

Ethernet(1,2 Port), RAPIEnet(3,4 Port)

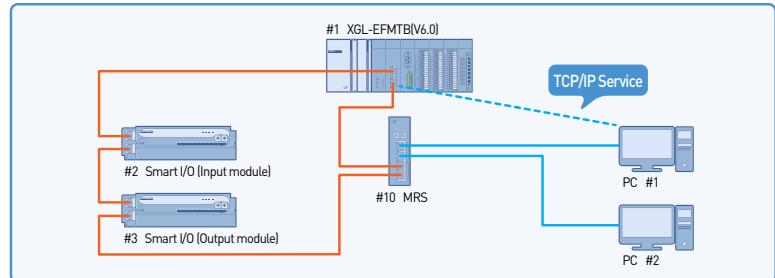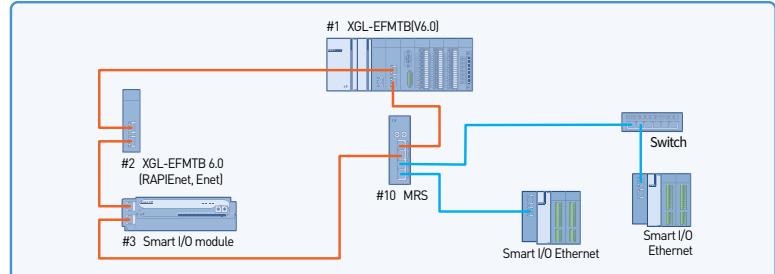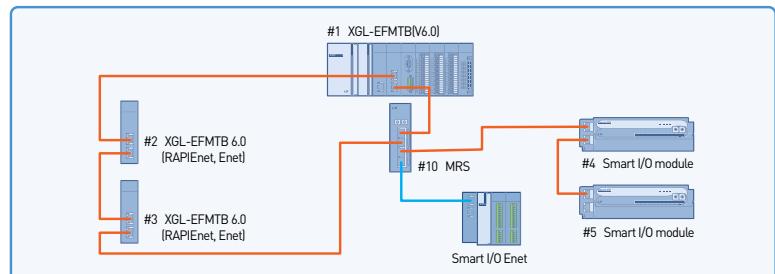Ethernet, RAPIEnet(1,2 Port),  
Ethernet(3,4 Port)RAPIEnet, Ethernet(1,2 Port),  
RAPIEnet, Ethernet(3,4 Port)

### XGL-C22B, XGL-CH2B, XGL-C42B


- Smart server recognizes the protocol (XGT dedicated communication or Modbus RTU/ASCII) automatically and operates.
- Repeater mode is able to use as an insulated repeater or convert RS-232C to RS422/485.
- Contains built-in termination resistor and it can be set in the basic parameter window.
- Easy protocol editing and communication parameter setting: XG5000
- Long-distance communication via modem connection
- Dedicated protocol for multi-drop configuration connectable up to 32 units
- RS-232C/422 communication port
- Flexible communication speed setting (300~115,200bps)
- Supporting full duplex and half duplex communication
- Max. 12 modules available in one CPU
- P2P service: User-defined communication and XGT/ Modbus master
- Various connection to MMI S/W(XGT, Modbus RTU, Modbus ASCII)
- Various diagnosis functions using XG5000 (I/O, link status, service status)
- Communication service information (Dedicated service, P2P service)
- Supporting simultaneously dedicated service in remote connection
- Communication without additional setting when replacing communication module




### Various independent operation mode

- Operation mode
- Dedicated protocol mode (Simultaneous support)
- Program upload/download by XG5000 protocol (RS-232C)  
Communication using LS ELECTRIC dedicated protocol
- User-defined communication of P2P mode and XGT/Modbus master

### Communication via RS-232C/422

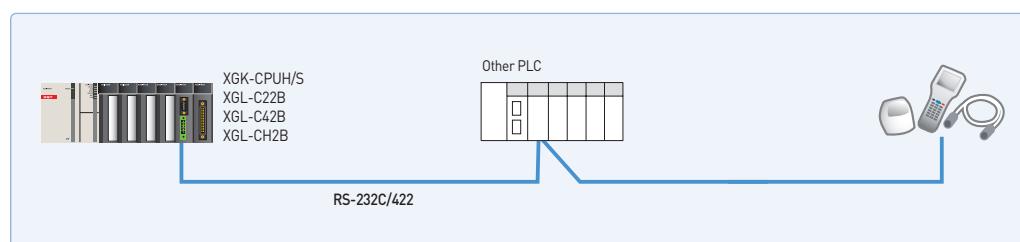

### 1: N and N: M connection (LS ELECTRIC and other)

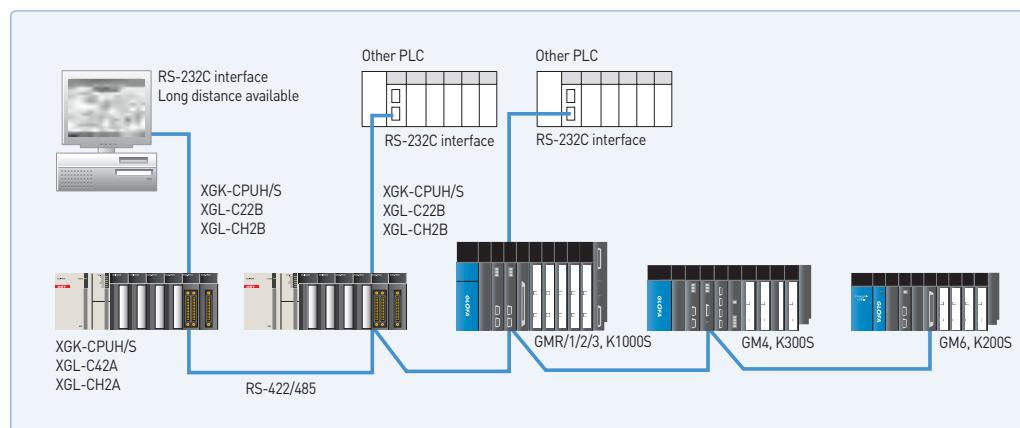


## Specifications


Item		Specification				
		XGL-C22B	XGL-CH2B	XGL-C42B		
Serial communication channel	RS-232C	2 channels	1 channel	-		
		Conforms to RS-232C standard				
	RS-422/485	1:1		-		
		-	1 channel			
Line config			Conforms to RS-422/485 standards			
Modem connection function		1:1, 1:n, n:1		-		
Operating mode (specified per port)	P2P	Remote communication with external devices is available via public telephone line by connecting external modem to the module.				
	SERVER	XGT client, Modbus ASCII/RTU client, User defined communication XGT server, Modbus ASCII/RTU server				
Data type	Start Bit	1				
	Data Bit	7 or 8				
	Stop Bit	1 or 2				
	Parity	Even/Odd/None				
Synchronization type		Asynchronous type				
Detecting error		BYTE SUM, WORD SUM, BYTE XOR, DLE AB, DLE SIEMENS, LS ELECTRICCRC, CRC 16, BYTE SUM 2' COMP, BYTE SUM 1's COMP 7BIT SUM, 7BIT XOR, CRC 16 IBM, CRC 16 CCITT				
Transmission speed (bps)		300/600/1,200/1,800/2,400/3,600/4,800/7,200/9,600/19,200/38,400/57,600/64,000/76,800/115,200 bps				
Station No. setting		Setting range : 0-31, Max. station No. : 32 stations				
Transmission Distance(m)	RS-232C: Max.15 (extendible if modem used)		-			
	-		RS-422/485: Max. 1,200m			
Diagnosis function		Status LED diagnosis XG5000 diagnosis service(Frame monitor, Status by service, Loop-Back diagnosis) History, Saving history				
Appearance size(mm)		98(H) X 27(W) X 90(D)				
Current consumption(mA)		420	480	520		
Weight(g)		121	119	116		

\* XGL-CH2A / C42A and XGL-CH2B / C42B differ from RS-422 / 485 communication connector wiring, you refer to the operation manual.

## Modbus

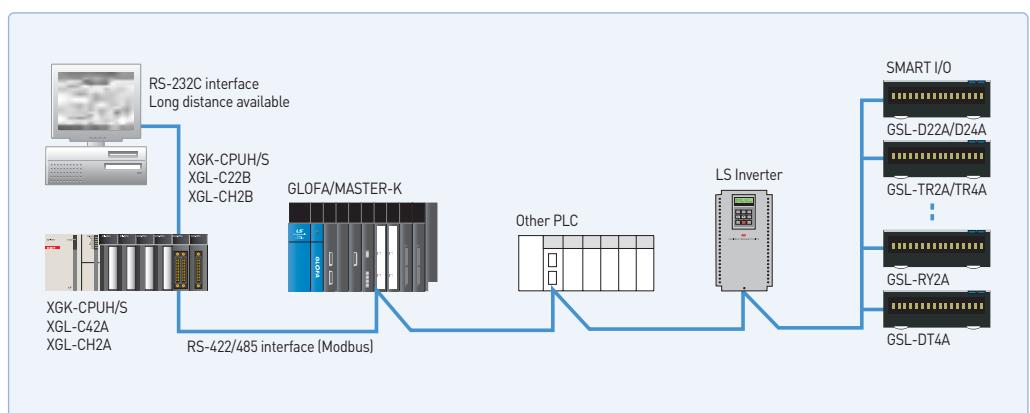


## Cnet cable connection

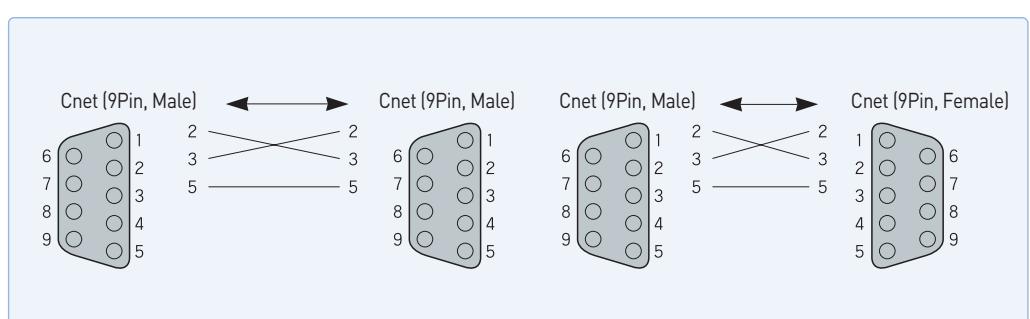

**XGL-DMEB**


- DeviceNet protocol
- Direct control of various I/O devices via Dnet system
- Max. 63 slave modules controlled by one master module
- Flexibility in network configuration: Multi-drop and T branch connection
- Connectable to other master module and various slave modules
- Providing ‘Auto Network Scan’ function and various information with configuration tool (N Configurator)
- Communication using High-speed link parameter
- Connectable to various slave I/O including other module  
(Common I/O, Actuator, Switch, Optical switch, Valve, Inverter, A/D module, Position controller etc..)
- Automatic monitoring of slave modules in the network: Auto-scan (XG5000)
- Easy expansion: up to 12 master modules
- Network setting by N Configurator/XG5000(Parameter setting, diagnosis and monitoring)

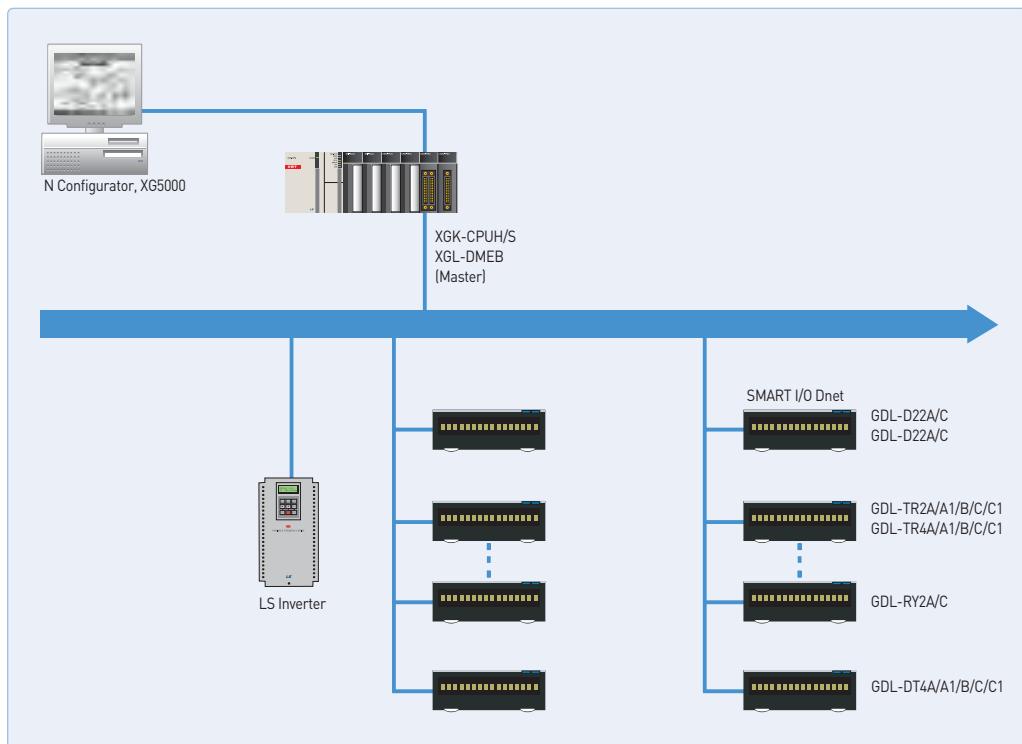**System configuration with LS ELECTRIC products**

## Specifications


Item		Performance Specifications
Transmission Specification		125/250/500
Transmission Type	I/O Connection	G2, UCMM
	I/O Communication	Poll, Bit strobe, COS, Cyclic
Communication distance(m)	Thick Cable	500 (125kbps)/250 (250kbps)/100 (500kbps)
	Thin Cable	100 (125/250/500kbps)
Terminal resistance [W]		121 (1%, 1/4W)
	125 kbps	6 (Max. extended length 156)
Max.drop length(m)	250 kbps	6 (Max. extended length 78)
	500 kbps	6 (Max. extended length 39)
	Data Packet	0~8 Bytes
Message Access Control		CSMA/NBA
Network Structure		Trunk/drop line Power/Signal cable inside the identical network cable
Bus Type		Poll type
Max. number of nodes		Up to 64 (including master) MAC IDs (MAC Identifier)
System Features		Insertion and removal of node available in voltage On status
Operation Voltage		DC 24V
Diagnosis Function		Module: Checks duplicated station/ Checks CRC error N Configurator: Detects defective station/Checks BusOff/Auto-scan function XG5000: Monitors High-speed link
Master/Slave Operation		Available only in master
Parameter setting		1) N Configurator [CONFIG Port of Dnet I/F] 2) Setting to High-speed link of XG5000 (RS-232C of CPU module or USB port)
XG5000 (High-speed link)	Data process unit	Byte
	Send/Receive period	Select among 20ms, 50ms, 100ms, 200ms, 500ms, 1s, 5s and 10s - Default : 20ms
	Max. communication point	Send 128,520 points, Receive 128,520 points, 16,065 bytes respectively
	Max. block number	63 (Setting range: 0~62)
	Max. point number per block	2040 points (255 bytes)
	Max. modules installed	Up to 12 (available on basic base and added base)
	Internal-consumed current (mA)	350mA
Basic Specification	Weight (g)	81g

## System configuration with other products

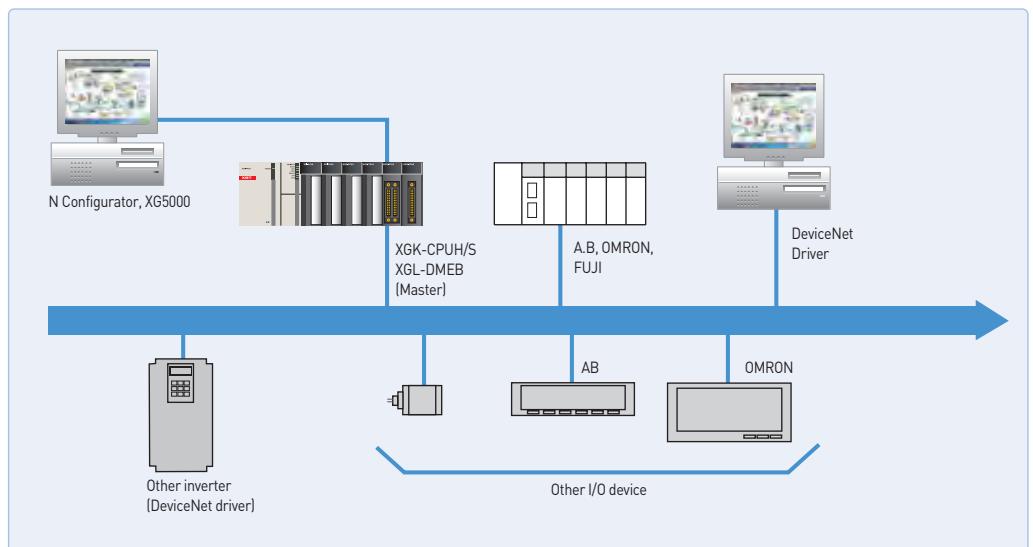

**XGL-PMEB**


- Profibus-DP protocol
- Proper to communicate among a master automation device and distributed slave I/O devices.
- Fast slave communication without application layer
- Transmission speed: 9.6Kbps ~ 12Mbps
- Transmission distance: Max. 1,200m
- Max. 126 slave stations available (32 stations per segment)
- Network setting using N Configurator / XG5000 (Parameter setting, diagnosis and monitoring)
- I/O data of master station: 7kbytes
- Automatic monitoring of slave modules in the network: Auto-scan (XG5000)
- Multi master
- Easy configuration tool : N Configurator / XG5000

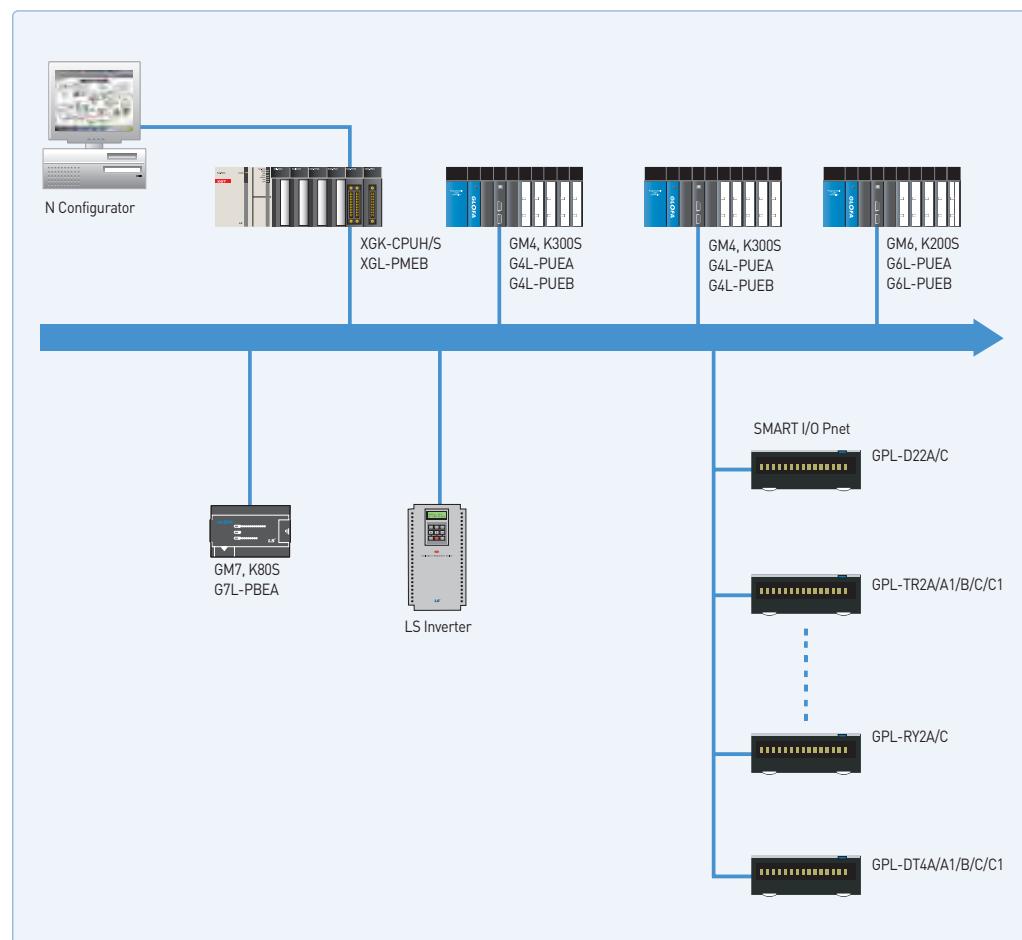**System configuration with LS ELECTRIC products**

## Specifications


Item	XGL-PMEB	
Module Type	Master	
Network Type	Profibus-DP	
Standard	EN50170/DIN19245	
Interface	RS-485 (Electric)	
Transmission Route	Bus type	
Modulation Type	NRZ	
MAC	Local Token Ring	
Max. Distance & Transmission Speed	Distance (m)	Transmission Speed (bps)
	1,200	9.6k/19.2k/31.25k/45.45k/93.7k
	1,000	187.5k
	400	500k
	200	1.5M
	100	3M/6M/12M
Max. number of stations per network	126	
Max. number of stations per segment	32 (including master & repeater)	
Max. number of modules per node	24 modules	
Cable used	Electric-twist shielded pair cable	
Max. communication size	7 KB	
Max. size per slave	244 bytes	
Max. number of units to be installed	XGK-CPUH/XGI-CPUU	XGK-CPUS/CPUA/CPUE
	12	12
Installation Position	XGK-CPUH/XGI-CPUU	XGK-CPUS/CPUA/CPUE
	Basic base ~ expansion stage 7	Basic base ~ expansion stage 3
Communication Parameters to set	XG5000 , SyCon (XGL-PMEA Dedicated Configuration Tool), N Configurator (XGL-PMEB/C Dedicated Configuration Tool)	
Internal-consumed current(mA)	500	
Weight (g)	88	

## System configuration with other products

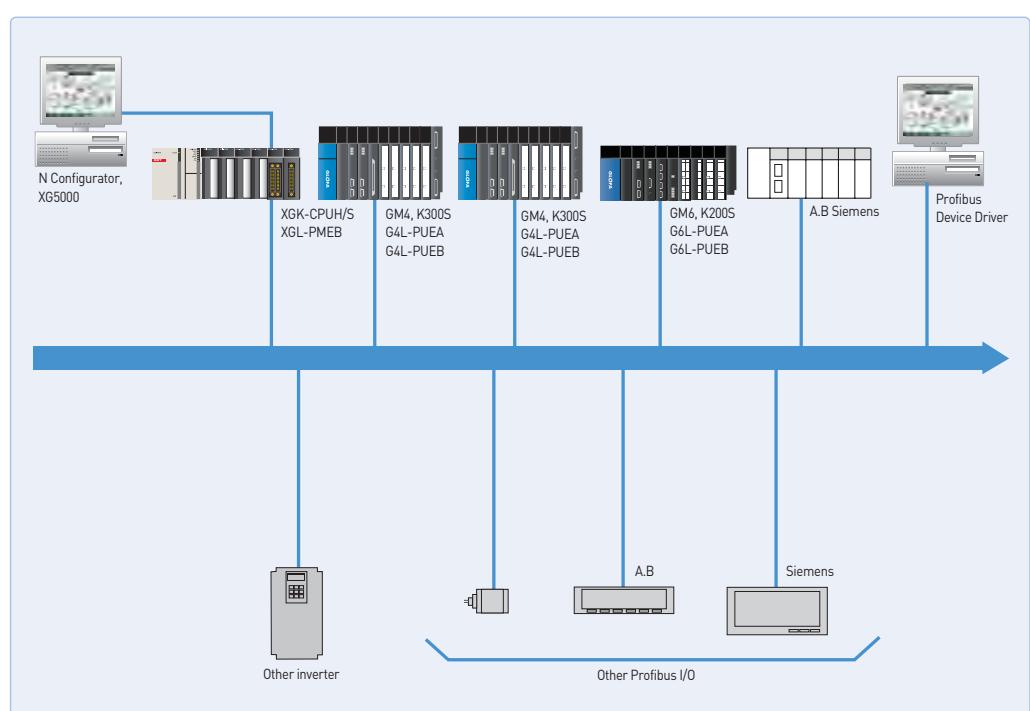

**XGL-PSEA**

- Profibus-DP
- Max. 98 stations available
- Other product Master <-> Pnet Slave I/F Module connect
- I/O configuration through XG5000 high-speed link parameter
- Provides online network status monitoring
- Global Command
  - Sync, Unsync, Freeze, Unfreeze

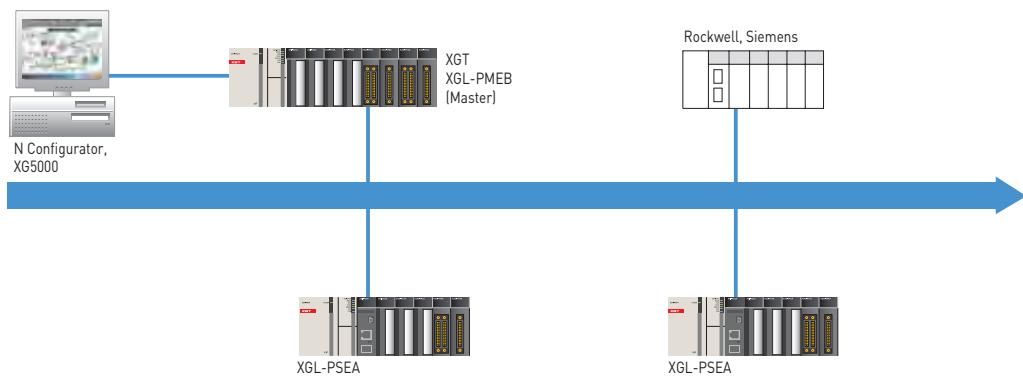**System configuration with other products****Specifications**


Item		XGL-PSEA							
Standard		EN50170 / DIN 19245							
Interface		RS-485(Electric)							
Media access		Polling							
Topology		Bus							
Modulation		NRZ							
Network Interface		Auto baud rate							
Master / Slave		Slave							
Max. number of slave per network		99							
Max. number of slave per segment		32							
Cable		Shield twisted pair cable							
Max. I/O data		244 byte							
Configuration tool		XG5000							
Transmission distance and speed	Trans. speed(kbps)	9.6	19.2	93.75	187.5	500			
	Max. network length(m)	1200	1200	1200	1000	400			
	Trans. speed(kbps)	1500	3000	6000	12000	-			
	Max. network length(m)	200	100	100	100	-			
Max num. of node		99[0~98]							
Max num. of transmission block		24							
Max num. of installation		12ea (XGR: Max. 6ea)							
Installation	XGK-CPUU/H, XGI-CPUU			Main base ~ 7 <sup>th</sup> Expansion base					
	XGK-CPUE, XGI-CPUE			Main base ~ 1 <sup>st</sup> Expansion base					
	XGK-CPUA/S, XGI-CPUH/S			Main base ~ 3 <sup>rd</sup> Expansion base					
	XGR-CPUH/F, XGR-CPUH/T			Main base					
Current consumption (mA)		410							
Weight (g)		103							

## XGL-PSRA

- Profibus-DP
- Remote base implementation
- Max. 98 stations available
- Various I/O module
  - DI/DO module
  - AI/AO/RTD/TC module
- Provides online network status monitoring
- Hot swap function



## System configuration with other products

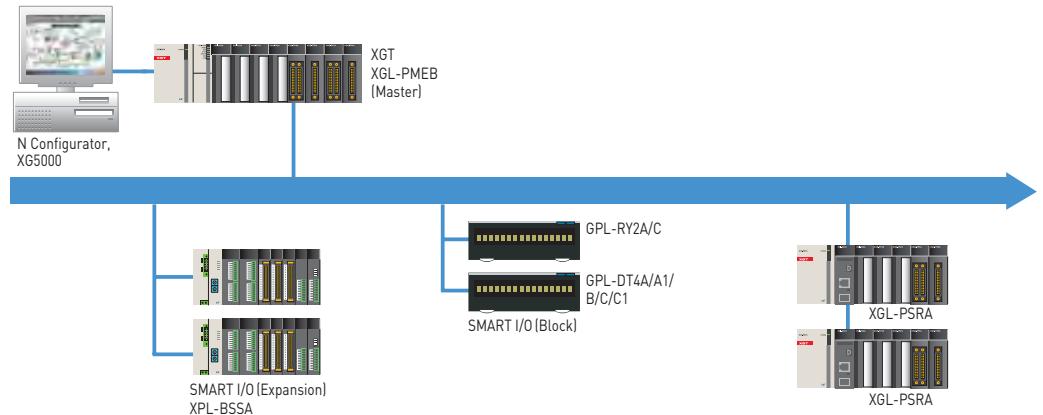


## Specifications

Item		XGL-PSRA				
Standard		EN50170 / DIN 19245				
Interface		RS-485(Electric)				
Media access		Polling				
Topology		Bus				
Modulation		NRZ				
Network Interface		Auto baud rate				
Master / Slave		Slave				
Max. number of slave per network		100				
Max. number of slave per segment		32				
Cable		Shield twisted pair cable				
Max. number of communication points		244 byte				
Transmission distance and speed	Trans. speed(kbps)	9.6	19.2	93.75	187.5	500
	Max. network length(m)	1200	1200	1200	1000	400
	Trans. speed(kbps)	1500	3000	6000	12000	-
	Max. network length(m)	200	100	100	100	-
Max num. of node		100 [0~99]				
Max. number of installation		12				
Max. digital I/O		768				
Max Analog I/O Channel		Input : 122ch. / Output : 96ch				
Current consumption (mA)		600				
Weight (g)		114				

**XGL-RMEB**

- Communication speed: 1Mbps
- Communication distance: Max. 750m
- Available to use max. 6 repeaters (Up to 5.25Km)
- Network management using Auto-scan (Slave module information)
- Multi-drop network with smart I/O
- Network diagnosis and monitoring by XG5000
- Max. 63 stations of slave modules controlled by one master module

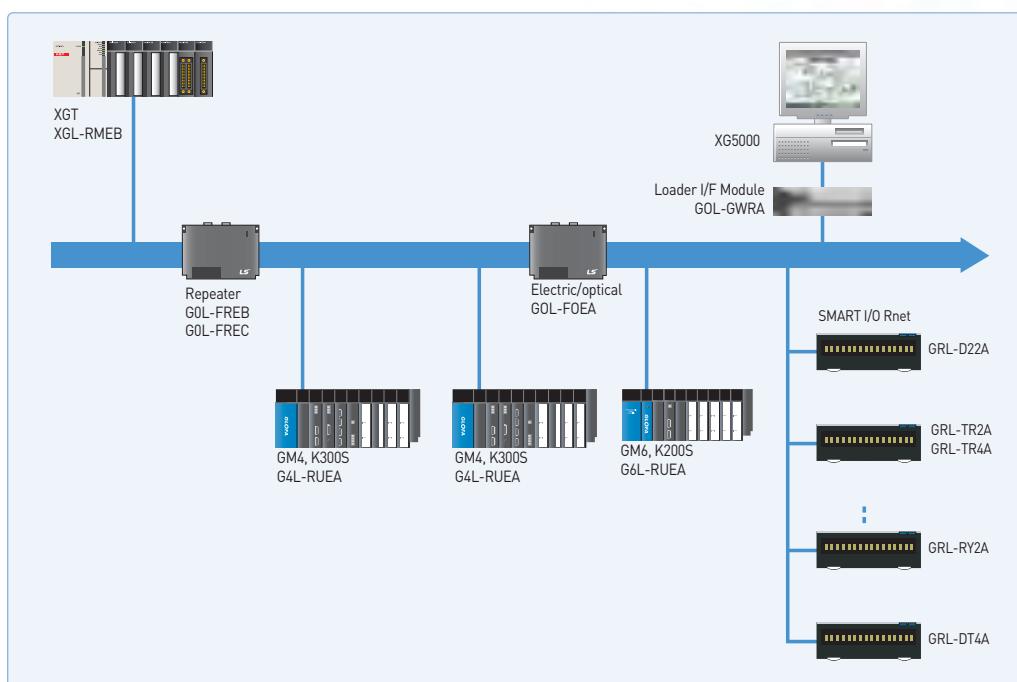**System configuration****Specifications**

Item		Specifications
Transmission Speed		1Mbps [Rnet I/F modules common]
Max. Tx distance		Max. 750m
Connection Cable		Twisted pair shielded cable - LIREV-AMESB 1Px22AWG [7/0.254]-LS Cables
Maximum stations connected	Network	Master station 1[station no:0]fixed]] + Slave station 31[station no:1~63] = Max. 32 stations (In case of 32 stations, you have to use repeater.) - Only 1 master is available in the network.
Diagnostic function		XG5000 : High Speed Link Monitoring
System characteristic		Available detachment and attachment of slave module during communication
Terminal resistance(Ω)		110(5%,1/2W)
Master/Slave operation		Only available as Master
XG5000 (HS Link)	Data Processing unit	Byte
	Tx/Rx cycle	Selection among 20ms, 50ms, 100ms, 200ms, 500ms, 1s, 5s, 10s(default :200ms)
	Max. Communication points.	3,720bytes(slave 31stations * 120bytes/station)
	Max. Block number	63(setting range : 0~62)
	Max. points by Block	120 Byte(60words)
	Max. Tx Block number	32 Blocks
Specification	HS Link number	Max. 12
	Max. module mounted	12 modules(Main Base + Extension Base)
	Internal current consumption(mA)	410
	Weight(g)	115

## SMART I/O

- Reduction of wiring and real-time control of distributed I/O
- Various I/O module (16/32 points)



## Repeater specifications

Item	Specifications
Type	GOL-FREB: AC110V ~ AC220V, GOL-FREC: DC 24V
Communication speed	1Mbps
Transmission method	Twisted pair shield cable
Transmission distance	Max. 750m per repeater
Max. number of installation between stations	Max. 6 repeaters
Max. distance between stations	5.25Km (when 6 repeaters are installed)
Fault data reception	Error data transmission
Frame error check	CRC 16 check

## Network cable and peripheral devices


Item	Specifications	Remarks
Twisted pair electric cable	LIREV-AMESB, 2×1mm, 18AWG	LS cable
RF terminator	110 Ω, 1/2 W	-

**XGL-FMEA**

- Dedicated network for LS PLC
- Easy high-speed link parameter setup
- 1Mbps high-speed communication
- Max. 750m
- Max. 6ea repeater available (Max. expansion 5.25km)
- Network management through Auto scan
- Max. 12ea on 1ea base
- Deterministic Network through Token Passing & Broadcasting
- 3,840 Word for each station  
(Send 1920 Word /Receive 1920 Word)
- Max. number of block: Send 32blocks, Receive 64blocks, 60words for each block
- Max. communication points: 3840words  
(64block × 60word)
- Setup: Parameter download via XG5000
- Diagnosis by XG5000: Communication module information, High speed link fault, Auto scan

**Specification**

Item	Description
Communication speed	1Mbps
Encoding method	Manchester Biphasic-L
Transmission length (for one segment)	Max. 750m
Transmission length (via repeater)	Max. 750m × {6ea repeaters+1}=5.25km
Transmission cable	Twisted pair shield cable
Max. number of connection	64stations [32stations /segment, 64stations for repeater]
Max. protocol size	256 bytes
Access method	Circulated Token Passing
Frame error check	CRC 16 check
Max. number of installation	12ea
Installation base	Main base or expansion base
Current consumption (mA)	410
Weight (g)	120

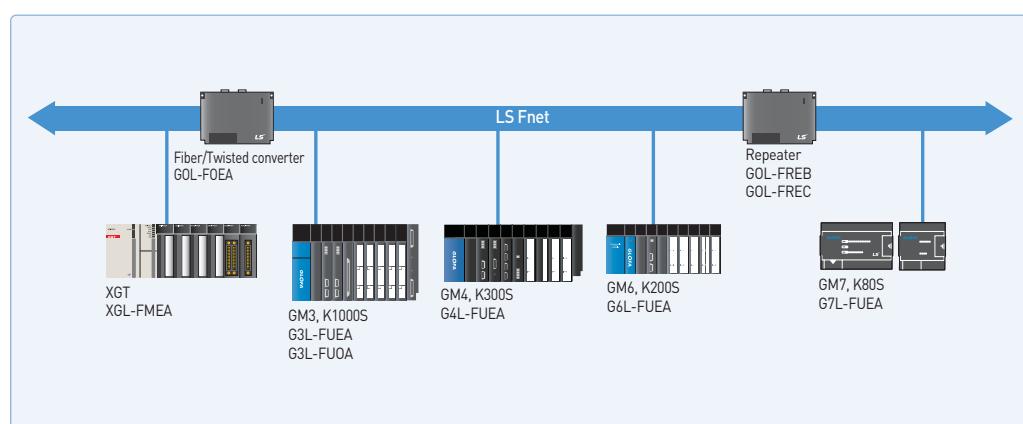**System configuration**

# Ethernet switching hub

Programmable Logic Controller 72 / 73

## XGL-EH5


- Rack type: No external power
- Reliability for industrial standard
- Auto Crossover
- FG (Frame Ground) for RJ-45 connector
  - Decreased communication error by shielded FTP/STP cable



## Specification

	Item	XGL-EH5
Transmission	Communication speed	10/100Mbps
	Port type	10/100BASE-TX, TP cable, RJ-45 socket, 5ports
	Interface	Auto-Crossing, Auto-Nego., Auto-Polarity
	Distance	100m
	Diagnosis	LED (PWR, Link status, Data)
Current consumption (mA)		550
Weight (g)		90

## System configuration

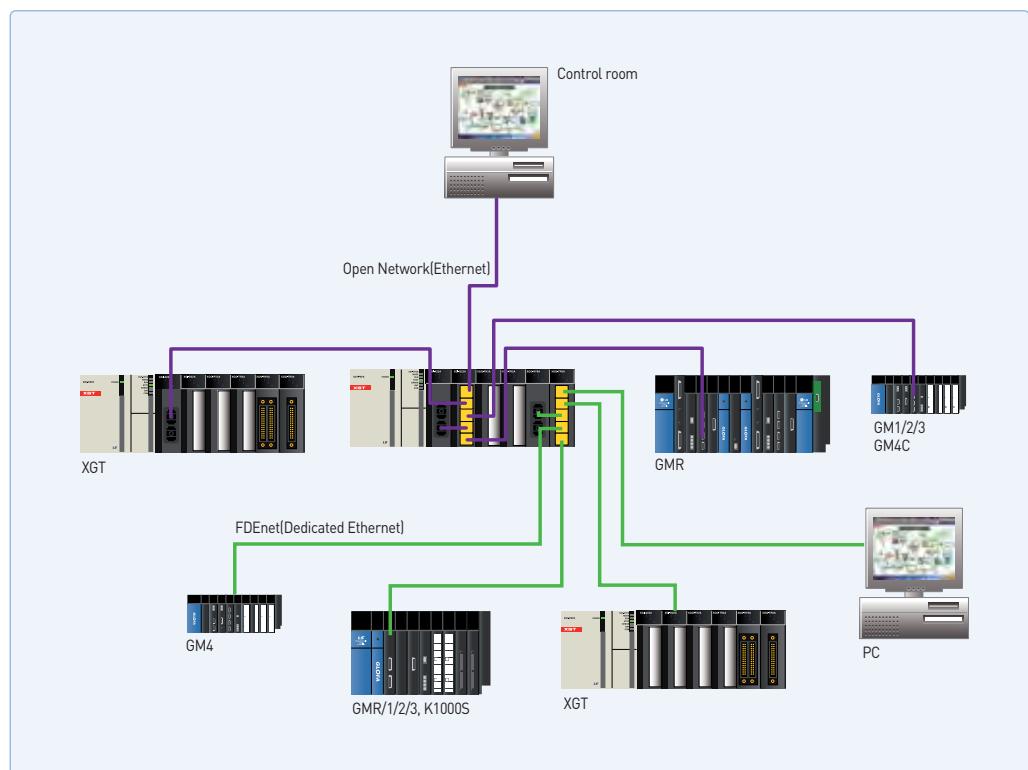


**XGL-BIPT**

- Compatibility: compatible with ANSI/ASHRAE 135-1995
- Provides 100BASE-TX media, and supports 100Mbps/Full Duplex.
- Up to 24 modules can be equipped per CPU module, and can be installed on main base or augmenting base. However, they can be installed only on main base in XGR system.
- With its internal switch function, it requires no switch or HUB, which reduces wires and provides flexibility in terms of installation.
- Makes cable works easier with its auto cross-over function.
- Provides various diagnosis functions and status information for modules and networks.

**System configuration**

XGL-BIPT module can be connected to BACnet Network using client/server, XGL-BIPT module is used as BACnet server, and sub-device can be controlled by being connected with exclusive power line communication (PLC).

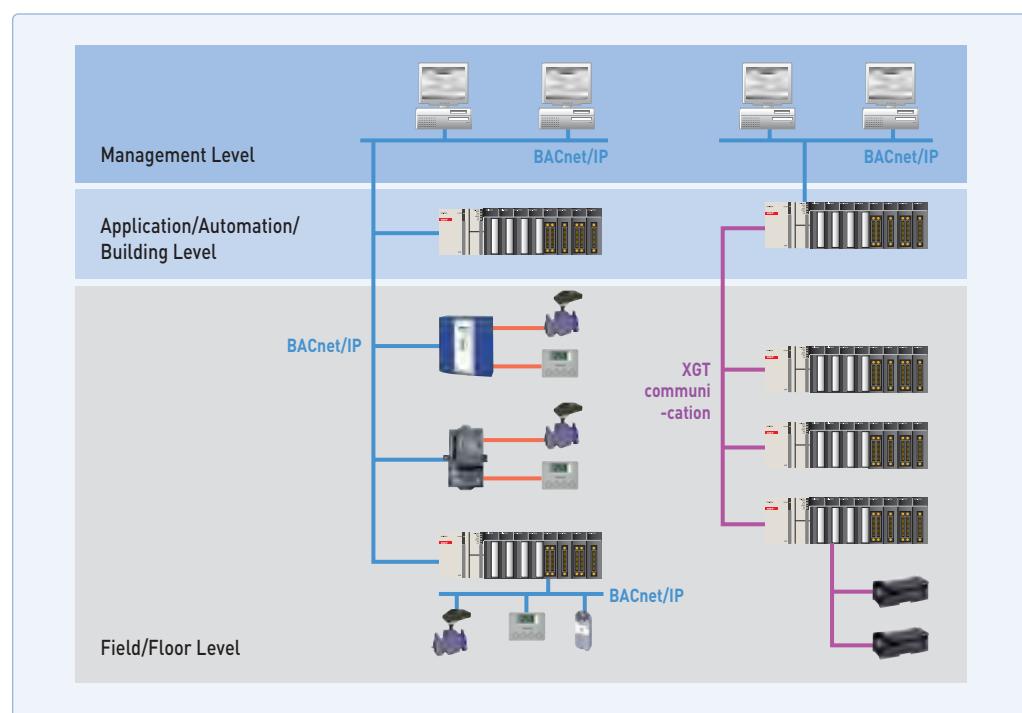

Device Profile	B-ASC + Client
Data Sharing	DS-RP-A, B DS-RPM-A, B DS-P-A, B DS-WPM-A, B
Device & Network Management	DM-DDB-B DM-DOB-B DM-DCC-A, B

## Specifications

	Item	Specification
Transmission standards	Transmission speed	100Mbps
	Transmission method	Base band
	Maximum extension distance between nodes	100m
	Maximum size of protocol	1,536 bytes
	Communication access method	CSMA/CD
	Frame error check method	CRC 32 = $X^{32}+X^{28}+X^{23}+ \dots +X^2+X+1$
Service	Maximum number of units installed	24 units
	Service type	P2P/Server
	Maximum communication data	1,400 bytes
	Support object(Server)	Device Object Binary Input Object Binary Output Object Analog Input Object Analog Output Object
	Diagnostic function	Communication module information Service status information Media information Ping test Auto scan DCC(Device Communication Control) System log
	External dimensions(mm)	90(H) x 27(W) x 90(D)
Basic standards	Current consumption(mA)	400
	Weight(g)	102

## Communication among PLCs


This is a system configuration communicating between XGT PLCs by serial communication.

In this case, PLC 1 is the master (Client) and other PLC should be slaves (Server).

It is called Master/Slave communication. Master PLC is defined by comm. basic parameter and P2P setting. And slave PLC is defined by basic parameter and driver setting.

## Configuration

PLC1 reads present value, C0000 of PLC 2's up-counter and then saves it in M0200 of PLC1.

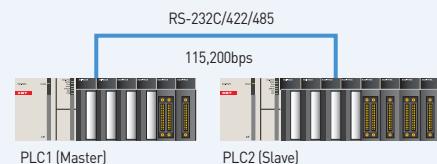


## Data memory

PLC station	PLC memory	Setting Item
PLC 1	M0100	1. XG5000 parameter setting, 2. XG5000 programming
PLC 2	C0000	1. XG5000 parameter setting, 2. XG5000 programming

## XG5000 setting


### PLC setting 1 (Master)

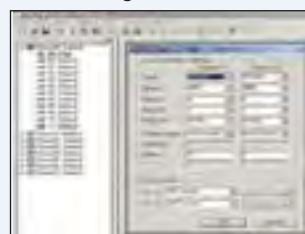


Communication basic parameter setting  
Setting up station number, communication speed, etc. And setting up the operation mode as P2P



P2P channel setting  
Setting up channel 01 as [XGT client]

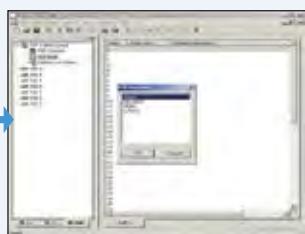


P2P setting  
Setting up P2P block (READ)

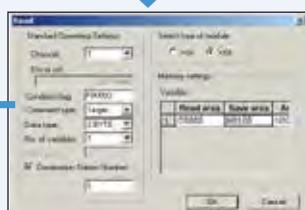


Communication data setting  
Setting up Read area, Save area, etc.

### PLC setting 2 (Slave)

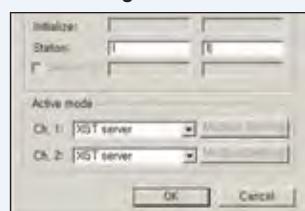

Communication parameter setting  
Setting up station number and channel 01 mode as 1 and XGT server

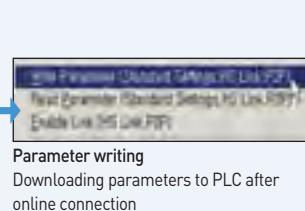


Parameter writing  
Downloading parameters to PLC after online connection

\* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

## XG5000 programming

### PLC station 2 setting

Make up-counter program using CTU command

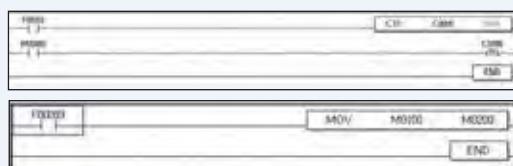

### PLC station 1 setting


Check out the counter value of M0100 is transmitted.

## HMI communication configuration

This is a system configuration to monitor and control PLC (XGT) by XP (HMI). In this case, PLC is the slave (Server) and XP should be the master (Client). PLC is defined by comm. basic parameter and driver setting.

### configuration

Making On/Off touch tag for controlling M0001 of XGT

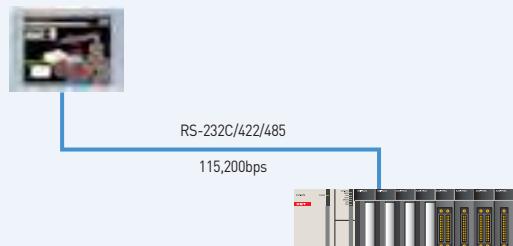

### Data memory

PLC memory	Setting item	PMU
M000D1	1. XG5000 parameter setting	Using touch tag
	2. XG5000 programming	

### XG5000 setting



\* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

### XG5000 programming

Create program that P00010 is on right after M00001 is on.




# Communication example (Ethernet)

## HMI communication configuration

### configuration


This is a data communication system configuration among XGT PLCs via Ethernet network. In this case, communication is possible by HS link among PLCs. It just needs basic parameter setting and HS link item setting.

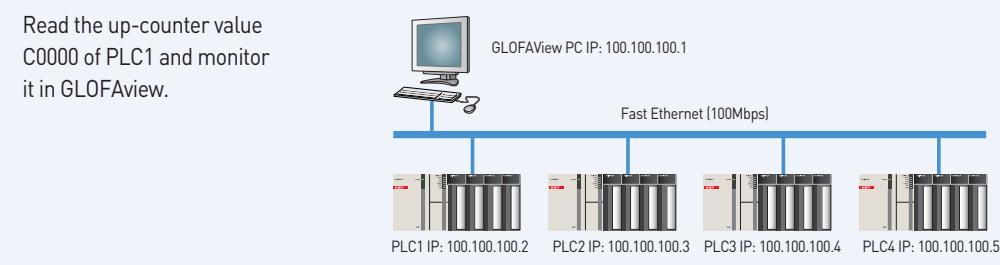

### Data memory

PLC station	Setting item	GLOFAView
C0000	1. XG5000 parameter setting	Using analog tag
	2. XG5000 programming	

### XG5000 setting

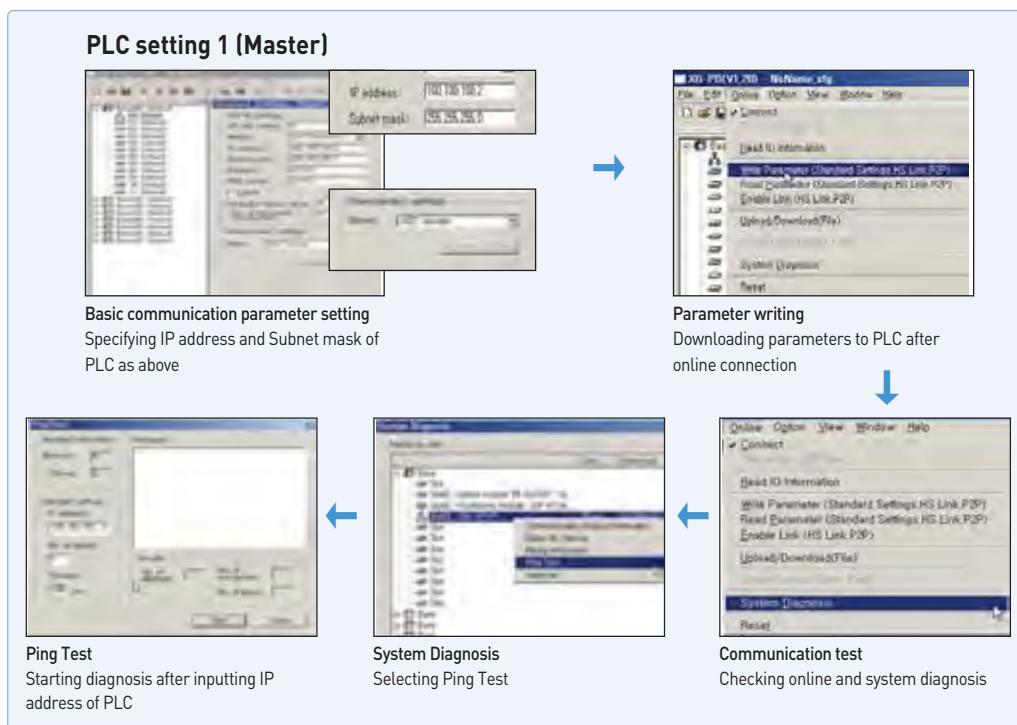

### XG5000 programming

Make the up-counter program using CTU command.

Check out if the counter value of CTU value is transmitted.




## High-speed link communication

### configuration

This is a configuration for XGT to communicate each other via Ethernet.  
It just needs communication basic parameter setting and High-speed link item setting.

Read present value C0000 of PLC1 and transmit it to M0000 of PLC2.

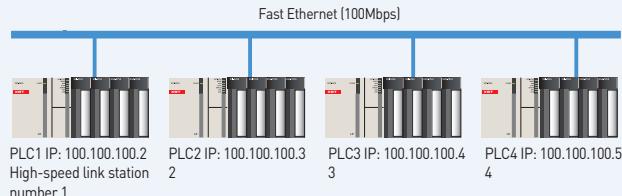


### Data memory


PLC station	PLC memory	Setting Item
PLC 1	C0000	1. XG5000 parameter setting, 2. XG5000 programming
PLC 2	M0100	1. XG5000 parameter setting, 2. XG5000 programming

### XG5000 setting


#### PLC station 1 (setting)

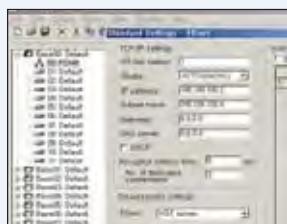

Basic communication parameter setting  
Specifying HS link station, IP address and Subnet mask of PLC as above

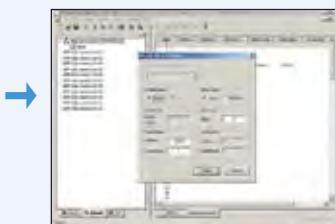


Communication data setting  
Setting up communication data in HS link item as above

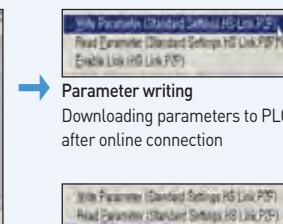


Parameter writing  
Downloading parameters to PLC after online connection

Enable Link  
Enabling link for communication start


#### PLC station 2 (setting)

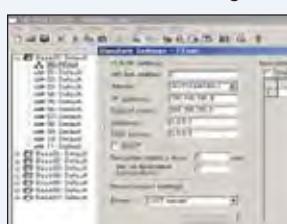

Basic communication parameter setting  
Specifying HS link station, IP address and Subnet mask of PLC as above

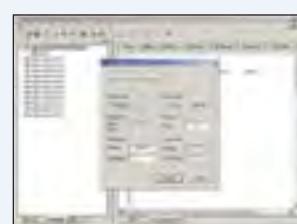

Communication data setting  
Setting up communication data in HS link item as above



Parameter writing  
Downloading parameters to PLC after online connection


Enable Link  
Enabling link for communication start

\* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

### XG5000 programming


#### PLC1 setting

Make the up-counter program using CTU command



#### PLC2 setting

Check out if the counter value of M0100 is transmitted.




# Communication example (Rnet)

## Remote I/O configuration

LS ELECTRIC developed communication method is Rnet which is 'Distributed Control System' using Smart I/O. In this case, PLC is the master and the other Smart I/O are slaves.

It just needs basic parameter setting for communication and High-speed link setting.

## configuration

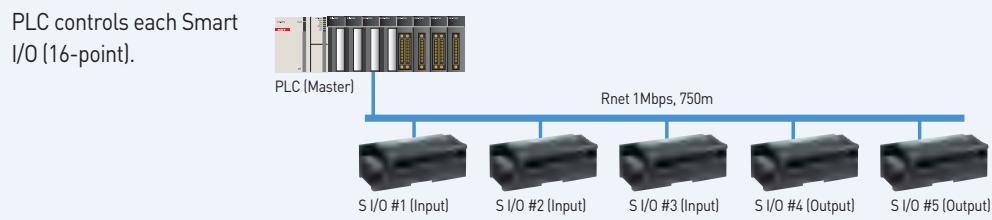


## Data memory

Smart I/O #	Smart I/O address	PLC address	Setting item
1	P0000	P0010 (P00100~P0010F)	1. XG5000 parameter setting, 2. XG5000 programming
2	P0000	P0011 (P00110~P0011F)	
3	P0000	P0012 (P00120~P0012F)	
4	P0000	P0013 (P00130~P0013F)	
5	P0000	P0014 (P00140~P0014F)	

## XG5000 setting

### Communication data setting

Setting up type name, station number, address of each station's Smart I/O in HS link item as following example.

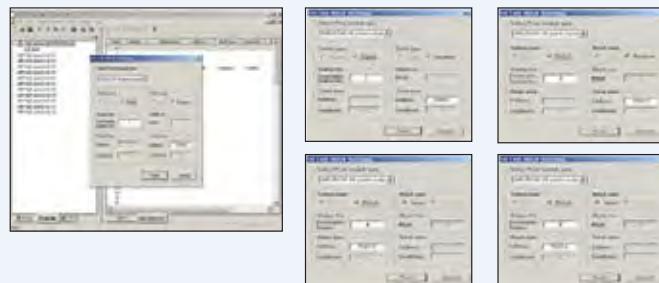

HS link registration completed

Parameter writing

Downloading parameters to PLC after online connection

Enable Link

Enabling link for communication start

\* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

## XG5000 programming

Write a program using I/O address of Smart I/O.




## High-speed link communication among PLCs

XGT can create ‘Distributed Control System’ with Smart I/O, Inverter, pneumatic device via Profibus-DP. In this case, PLC is the master and the other devices such as Smart I/O are slaves.

It just needs SyCon, basic parameter and High-speed link setting.


### configuration

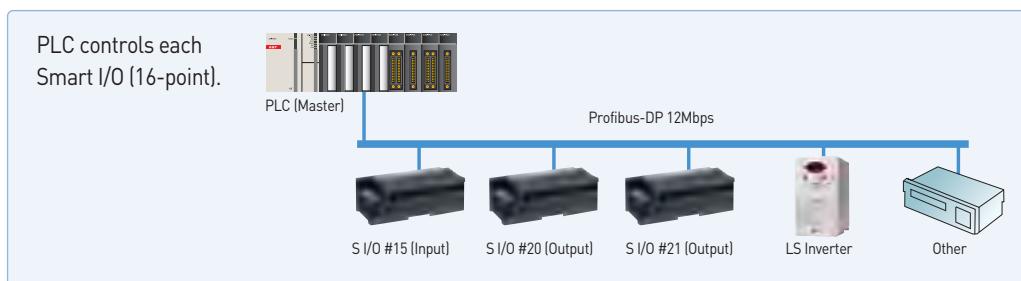

### Data memory

Smart I/O #	Smart I/O address	PLC address	Setting item
15	P0000	P0010 [P00100-P0010F]	1. SyCon setting
20	P0000	P0011 [P00110-P0011F]	2. XG5000 parameter setting,
21	P0000	P0012 [P00120-P0012F]	3. XG5000 programming


### XG5000 setting

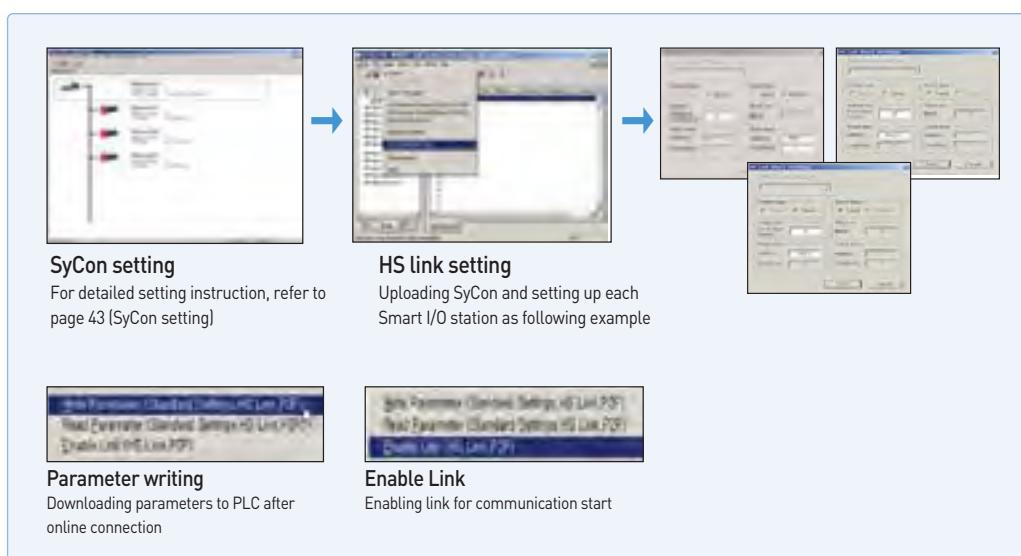

\* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

### XG5000 programming

Write a program using I/O address of Smart I/O Pnet

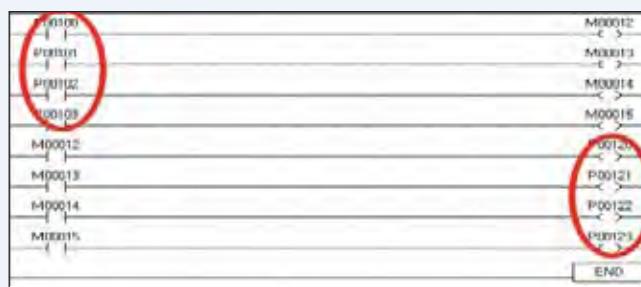


# Communication example (DeviceNet)

## High-speed link communication among PLCs

XGT can create ‘Distributed Control System’ with Smart I/O, Inverter, pneumatic device via Dnet. In this case, PLC is the master and the other devices such as Smart I/O are Slaves.

It just needs SyCon, basic parameter and High-speed link setting.


## configuration

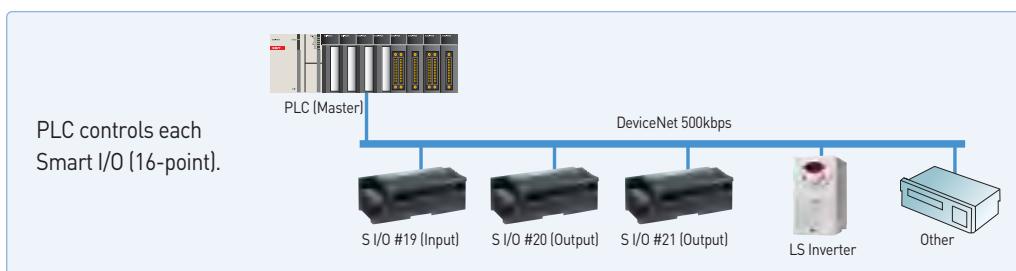

## Data memory

Smart I/O #	Smart I/O address	PLC address	Setting item
19	P0000	P0010 [P00100~P0010F]	1. SyCon setting 2. XG5000 parameter setting, 3. XG5000 programming
20	P0000	P0011 [P00110~P0011F]	
21	P0000	P0012 [P00120~P0012F]	

## XG5000 setting

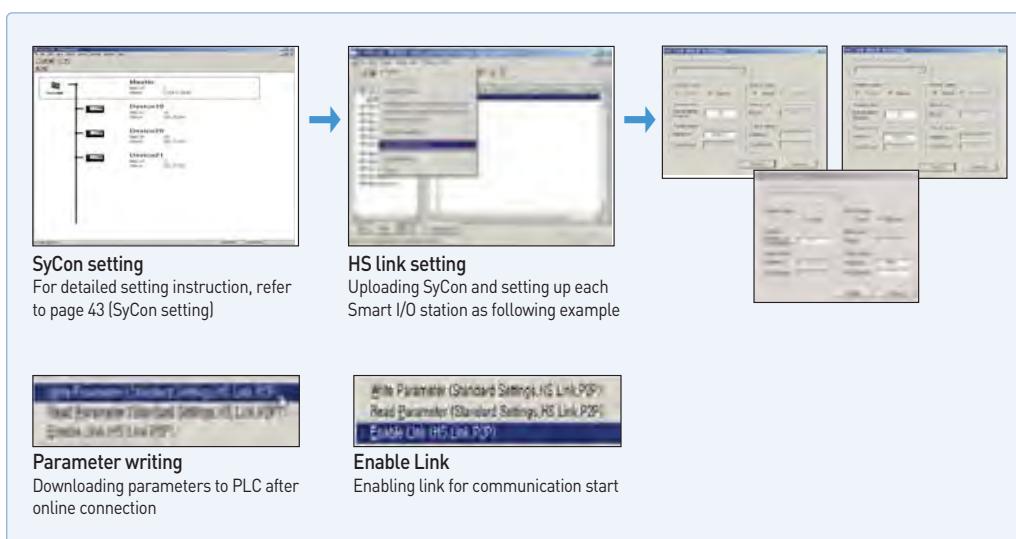

\* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

## XG5000 programming

Write a program using I/O address of Smart I/O Dent.



# (SyCon setting Profibus, DeviceNet)

82 / 83

SyCon is the dedicated software that help user set up the communication environment for Profibus-DP and DeviceNet more easily and conveniently.

## Example of application

**New file**  
Select fieldbus that is used.

**Basic communication parameter setting**  
Select [Master] in Insert menu.  
Select [COM-C-DNM] for DeviceNet.  
Select [COM-C-DPM] for Profibus-DP.

**Bus parameter setting**  
Set up communication speed of master module.

**Master module setting**  
After clicking the port button, check, the right check-box.

**Automatic network scan of connected Smart I/O**  
Perform automatic network scan after station number setting and wiring with remote device such as Smart I/O.  
At this time, all remote devices should be in normal connection (Power-On, etc).  
After network scan is completed, press [Automatic Configuration] button and [OK] button.

**Network checking**  
Check normal network (remote) condition.

**Parameter download**

**Disconnect**  
Disconnect the port in Device Assignment.

**Features**

- Wiring reduction and real time control of distributed I/O
- Supporting Rnet, DeviceNet, Profibus-DP, Modbus (RS-422/485), RAPIEnet
- Various I/O (DC/TR/Relay) modules with the unit of 16/32 points

**Digital I/O specifications**

Item	Input		Output		Mixed module	
	DC (Sink/Source)		Transistor (Sink)	Relay	DC (Sink/Source)	Transistor (Sink)
No. of point	16	32	16	32	16	16
Rated input (Load voltage)	DC 24 V		DC 24 V	DC 24 V/AC 110 V/220 V	DC 24 V	DC 24 V
Input current (Load current)	7 mA		0.1 A/2 A, 0.5 A/3 A	2 A/5 A	7 mA 0.1 A/2 A, 0.5 A/3 A	
Response time	Off → On	3 ms or less	3 ms or less	3 ms or less	3 ms or less	3 ms or less
	On → Off	3 ms or less	3 ms or less	3 ms or less	3 ms or less	3 ms or less
Common	16 points/COM		16 points/COM	16 points/COM	16 points/COM	16 points/COM
Current consumption	200 mA	300 mA	280 mA	380 mA	550 mA	350 mA
Network	Rnet	GRL-D22C	GRL-D24C	GRL-TR2C1	GRL-TR4C1	GRL-RY2C
	Profibus-DP	GPL-D22C	GPL-D24C	GPL-TR2C/TR2C1	GPL-TR4C/TR4C1	GPL-RY2C
	DeviceNet	GDL-D22C	GDL-D24C	GDL-TR2C/TR2C1	GDL-TR4C/TR4C1	GDL-RY2C
	Modbus	GSL-D22C	GSL-D24C	GSL-TR2C1	GSL-TR4C1	GSL-RY2C
RAPIEnet	-	GEL-D24C	-	GEL-TR4C1	GEL-RY2C	-

Note① C Source, Rated current: 0.5A, terminal separated type

C1 Sink, Rated current: 0.5A terminal separated type

**Analog I/O specifications**

Item	GPL-AV8C/GEL-AV8C	GPL-AC8C/GEL-AC8C	Item	GPL-DV4C/GEL-DV4C	GPL-DC4C/GEL-DC4C
Input channels	8 channels		Output channels	4 channels	
Analog input	DC 1~5 V, 0~5 V, 0~10 V, -10~+10 V	0~20 mA, 4~20 mA, -20~20 mA	Digital input	0~4000, 0~8000, -8000~8000	0~8000
Digital output	0~4000, 0~8000, -8000~8000	0~4000, -8000~8000	Analog output	DC 1~5 V, 0~5 V, 0~10 V, -10~+10 V	0~20 mA, 4~20 mA
Input impedance	1 M Ω	250 Ω	Load impedance	1 K Ω or more (0~5 V or 1~5 V) 2 K Ω or more (0~10 V or -10~10 V)	500 Ω or less
Max. resolution	±15 V	±30 mA	Resolution	1.25 mV	2.5 μA
	1.25 mV	2.5 μA	Accuracy	±0.3% [full scale, Ta=0~55 °C] ±0.4% [full scale, Ta=0~55 °C]	±0.3% [full scale, Ta=23 °C ± 5 °C] ±0.4% [full scale, Ta=0~55 °C]
Accuracy	±0.3% [full scale, Ta=0~55 °C]	±0.3% [full scale, Ta=23 °C ± 5 °C]	Conversion speed	10 ms or less/4 channel	10 ms or less/4 channel
Conversion speed	10 ms or less/8 channel		Response period	10 ms or less/8 channels + Transmission period (ms)	Analog input/output terminal with FG→Insulation
Response period	10 ms or less/8 channels + Transmission period (ms)	Analog input/output terminal with FG→Insulation	Insulation method	Analog input/output terminal with Communication terminal→Insulation Analog input/output terminal with each channel→No insulation	Analog input/output terminal with Communication terminal→Insulation Analog input/output terminal with each channel→No insulation
Insulation method	Analog input/output terminal with Communication terminal→Insulation Analog input/output terminal with each channel→No insulation	External power supply	External power supply	DC 24 V (21.6 ~ 26.4)	DC 24 V (20.4 ~ 28.8)
External power supply	DC 24 V (21.6 ~ 26.4)	External current consumption	External current consumption	insulation	DC 24 V (20.4 ~ 28.8)
External current consumption	DC 24 V: 220 mA	Weight (kg)	Weight (kg)	210 mA	240 mA
Weight (kg)	0.313	0.313	Weight (kg)	0.314	0.322

**Communication specifications**

Item	Rnet (LS dedicated network)	Profibus-DP	DeviceNet	MODBUS	RAPIEnet(RJ-45)
Protocol	LS ELECTRIC dedicated protocol (Fnet for Remote)	Profibus-DP (RS-485/EN50170)	DeviceNet (CAN)	MODBUS (RS-422/485)	Fast Ethernet
Transmission speed	1 Mbps	9.6 Kbps ~ 12 Mbps	125/250/500 Kbps	2.4 Kbps ~ 38.4 Kbps	100Mbps
Transmission distance	750 m/segment	100 m ~ 1.2 km	500/250/125 m (Thin cable: 100 m)	500 m	100M
Topology	Bus Token	Bus	Trunk & Drop	Bus	CRC32
Transmission	Pass & Broadcast	Token Pass & Master/Slave (Poll)	CSMA/NBA (Poll, Cyclic, COS, Bit Strobe)	Master/Slave (Poll)	CSMA/CD
No. of stations	32/segment (Input: 32, Output: 32)	32/segment, 99/network	64	32	64

# (Modbus TCP/IP, Ether Net/IP Adapter) 84 / 85

## Features

- IEEE 802.3 standard
- Modbus TCP/IP, EtherNet/IP
- 10/100BASE-TX media
- Ethernet Twisted pair 2ports (RJ-45)
- 2channels Ethernet MAC
- Auto-Negotiation/Auto-Crossover
- Various system configuration




## Specification

	Items	XEL-BSSA	XEL-BSSB
I/F	Protocol	Modbus TCP	EtherNet/ IP
	Transmission speed	10 /100Mbps	
	Connector	RJ-45(2ports)	
	Topology	Software(BootpServer)	
	IP setup	Bus, Star	
Max. expansion module		8ea	
Max. digital I/O point		256 points	
Max. analog I/O channel		32ch (Input 16ch, Output 16ch)	
Operating power	Rated voltage	DC 24V	
	Range	DC19.2 ~ 28.8V	
	Rated current	1.5A	
	Insulation	Non-Insulation, Comm. Part insulation	

## System configuration


Items	Description	Max. I/O point
XBE-DC08A	DC24V input 8pt	Max. 256 points
XBE-DC16A	DC24V input 16pt	
XBE-DC32A	DC24V input 32pt	
XBE-RY08A	Relay output 8pt	
XBE-RY16A	Relay output 16pt	
XBE-TN08A	Tr output 8pt, Sink	
XBE-TP08A	Tr output 8pt, Source	
XBE-TN16A	Tr output 16pt, Sink	
XBE-TP16A	Tr output 16pt, Source	
XBE-TN32A	Tr output 32pt, Sink	
XBE-TP32A	Tr output 32pt, Source	Max. 256 points
XBE-DN16A	DC24V input 8pt, Tr output 8pt	
XBF-AD04A	Current/Voltage input 4Ch	
XBF-AD04C	4-channel analog input (current/voltage, resolution : 1/1600)	
XBF-DC04A	Current output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
XBF-DV04A	Voltage output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
XBF-RD04A	RTD input 4Ch	
XBF-TC04S	TC input 4Ch	
* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes [Ex] If 4ch analog input is used, Digital input can be used max. 192points		Input Max. 16ch Output Max. 16ch

## Externals and inscriptions

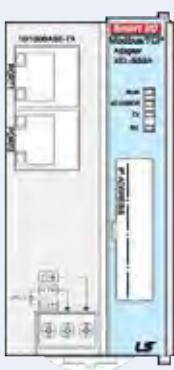

Item	LED status
RUN	Operation status On: Normal operation Off: Abnormal operation
	Interface status of expansion module On: Expansion module error Off: Normal operation
I/O ERROR	Data send status to master On: Under transmission Off: No data
	Data receive status from master On: Under receiving Off: No data
TX	
RX	

## Dimension

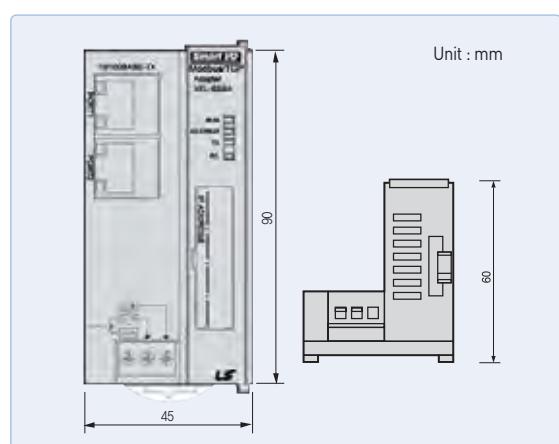

## Features

- Max. 63 stations
- Flexible connection via DeviceNet
- Utilize same I/O modules with XGB
  - Max. 512 I/O points
  - Max. 32 channels analog input/output



## Specification

Items		Description		
Communication Specification		Poll, Bit-strobe, COS/Cyclic		
		Group 2 only slave		
		Auto baud rate		
Module's Type		Slave		
Max. Node Number (MAC ID)		64[0-63]		
Number of Expansion I/O Slots		8		
Max. DC I/O Data Size		Input:32bytes / Output:32bytes		
Max. Analog Channels		Input : 16Channels / Output : 16Channels		
Speed & Distance	Comm. Speed	125 kbps	250 kbps	500 kbps
	Distance	500 m	250 m	100 m
System Power		DC 24V		
Input Power	Range	19.2V ~ 28.8V(11V operate)		
	Output Voltage/ Current	5V(±20%) / 1.5A		
Weight(g)		100		


\* When I/O module is installed, check the current consumption  
(Max. Current: 1.5A)

## System configuration


Items	Description	Max. I/O point
XBE-DC08A	DC24V input 8pt	256points
XBE-DC16A	DC24V input 16pt	
XBE-DC32A	DC24V input 32pt	
XBE-RY08A	Relay output 8pt	
XBE-RY16A	Relay output 16pt	
XBE-TN08A	Tr output 8pt, Sink	
XBE-TP08A	Tr output 8pt, Source	
XBE-TN16A	Tr output 16pt, Sink	
XBE-TP16A	Tr output 16pt, Source	
XBE-TN32A	Tr output 32pt, Sink	
XBE-TP32A	Tr output 32pt, Source	16channels
XBE-DN16A	DC24V input 8pt, Tr output 8pt	
XBF-AD04A	Current/Voltage input 4Ch	
XBF-AD04C	4-channel analog input (current / voltage, resolution : 1/1600)	
XBF-DC04A	Current output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
XBF-DV04A	Voltage output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
XBF-RD04A	RTD input 4Ch	
XBF-TC04S	TC input 4Ch	

\* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes  
(Ex) If 4ch analog input is used, Digital input can be used max. 192points

## Externals and inscriptions

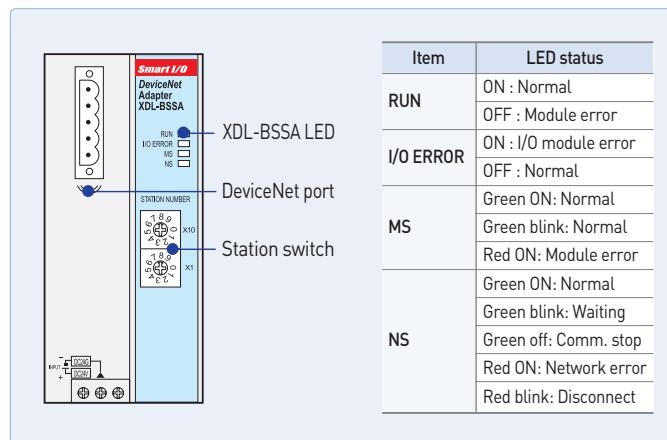

## Dimension

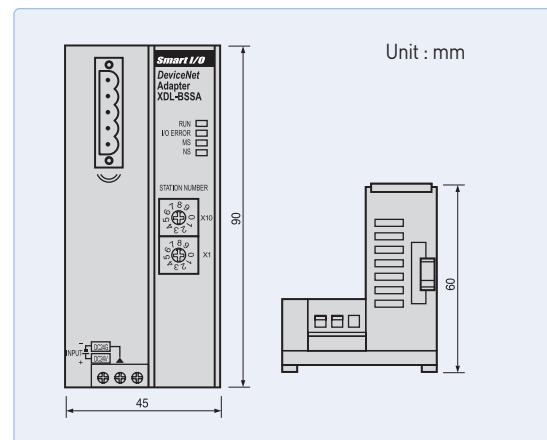

## Features

- Max. 100 stations (32stations per segment)
- Flexible connection via Profibus
- Utilize same I/O modules with XGB
  - Max. 512 I/O points
  - Max. 32 channels analog input/output




## Specification

Item		Performance Specification				
Transmission	Standard	EN50170 / DIN 19245				
	Interface	RS-485(Electric)				
	Media Access	Polling				
	Topology	BUS				
	Encoding Method	NRZ				
	Interface	Sync mode , Freeze mode Auto baud rate				
	Master/Slave	Slave				
	Cable Type	Twisted Pair Shielded Cable				
	Comm. Distance	Kbps	9.6	19.2	93.75	187.5
		m	1200	1200	1200	1000
		kbytes	1500	3000	6000	12000
		m	200	100	100	100
	Max. Node Number	100 [ 0 ~ 99 ]				
	Number of Expansion I/O Slots	8				
	I/O Data Size	64bytes (Input:32bytes/Output:32bytes)				
	Number of Analog Channels	32Channels (Input : 16Channels/Output :16Channels)				
Input Power	System Power	Supply Voltage : DC 24Vdc 19.2 ~ 28.8Vdc				
	Output Voltage/ Current	5V(±20%) / 1.5A				
	Weight(g)	100				

\* When I/O module is installed, check the current consumption  
(Max. Current: 1.5A)

## Externals and inscriptions

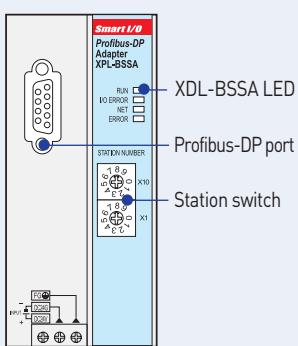


## System configuration

Items	Description	Max. I/O point
XBE-DC08A	DC24V input 8pt	256points
XBE-DC16A	DC24V input 16pt	
XBE-DC32A	DC24V input 32pt	
XBE-RY08A	Relay output 8pt	
XBE-RY16A	Relay output 16pt	
XBE-TN08A	Tr output 8pt, Sink	
XBE-TP08A	Tr output 8pt, Source	
XBE-TN16A	Tr output 16pt, Sink	
XBE-TP16A	Tr output 16pt, Source	
XBE-TN32A	Tr output 32pt, Sink	
XBE-TP32A	Tr output 32pt, Source	16channels
XBE-DN16A	DC24V input 8pt, Tr output 8pt	
XBF-AD04A	Current/Voltage input 4Ch	
XBF-AD04C	4-channel analog input (current/voltage, resolution : 1/16000)	
XBF-DC04A	Current output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
XBF-DV04A	Voltage output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
XBF-RD04A	RTD input 4Ch	
XBF-TC04S	TC input 4Ch	

\* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes  
(Ex) If 4ch analog input is used, Digital input can be used max. 192points

## Dimension

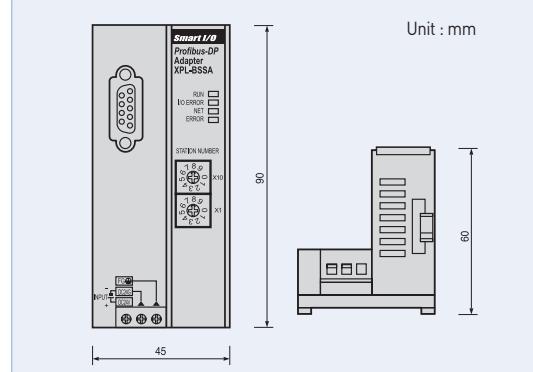

## Features

- Max. 63 stations
- LS dedicated protocol (Rnet)
- Utilize same I/O modules with XGB
- Max. 512 I/O points
- Max. 32 channels analog input/output



## Specification

Item		Performance Specification
Transmission	Tran. Rate	1Mbps
	Transmission Path	Bus type
	Method	750m
	Max. Cable Length	5 pin connector
	Connector type	Twisted Pair Shielded Cable
	Cable type	32(non-used repeater),
	No. of Station	64( used repeater)
	[Included Master]	512(Input : 256, Output: 256)
	Max. Digital I/O points	96
	Max. Analog I/O points	Digital I/O 8
	Number of I/O Slots	Analog I/O 4
	Selection of Latch/Clear	handling of mode change switch
Rated Voltage/current		DC24V/0.55A
Weight (g)		100


\* When I/O module is installed, check the current consumption  
(Max. Current: 1.5A)

## System configuration

Items	Description	Max. I/O point
XBE-DC08A	DC24V input 8pt	256points
XBE-DC16A	DC24V input 16pt	
XBE-DC32A	DC24V input 32pt	
XBE-RY08A	Relay output 8pt	
XBE-RY16A	Relay output 16pt	
XBE-TN08A	Tr output 8pt, Sink	
XBE-TP08A	Tr output 8pt, Source	
XBE-TN16A	Tr output 16pt, Sink	
XBE-TP16A	Tr output 16pt, Source	
XBE-TN32A	Tr output 32pt, Sink	
XBE-TP32A	Tr output 32pt, Source	16channels
XBE-DN16A	DC24V input 8pt, Tr output 8pt	
XBF-AD04A	Current/Voltage input 4Ch	
XBF-AD04C	4-channel analog input (current / voltage, resolution : 1/16000)	
XBF-DC04A	Current output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
XBF-DV04A	Voltage output 4Ch	
XBF-DV04C	4-channel analog input (voltage, resolution : 1/16000)	
XBF-RD04A	RTD input 4Ch	
XBF-TC04S	TC input 4Ch	


\* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes  
(Ex) If 4ch analog input is used, Digital input can be used max. 192points.

## Externals and inscriptions

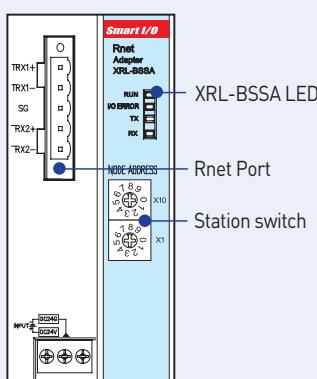


Item	LED status
RUN	ON : Normal OFF : Module error
I/O ERROR	ON : I/O module error OFF : Normal
TX	Data send
RX	Data receive

## Dimension

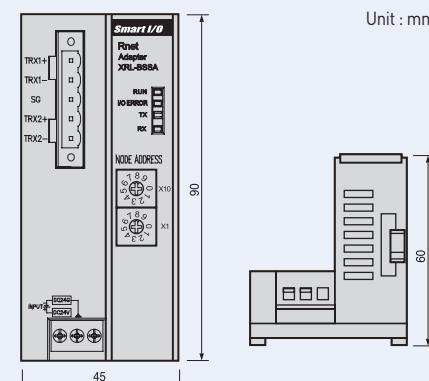


# SMART I/O (Features)


## Smart I/O Rnet system

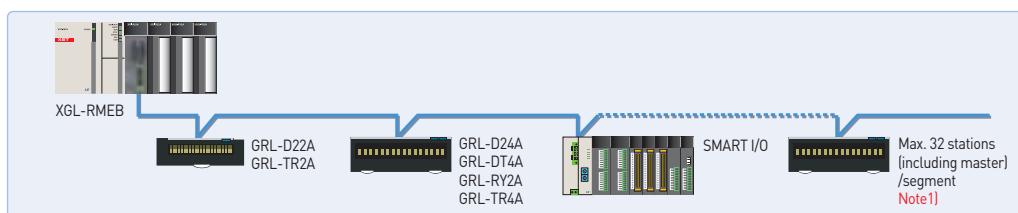


# Smart I/O Modbus system

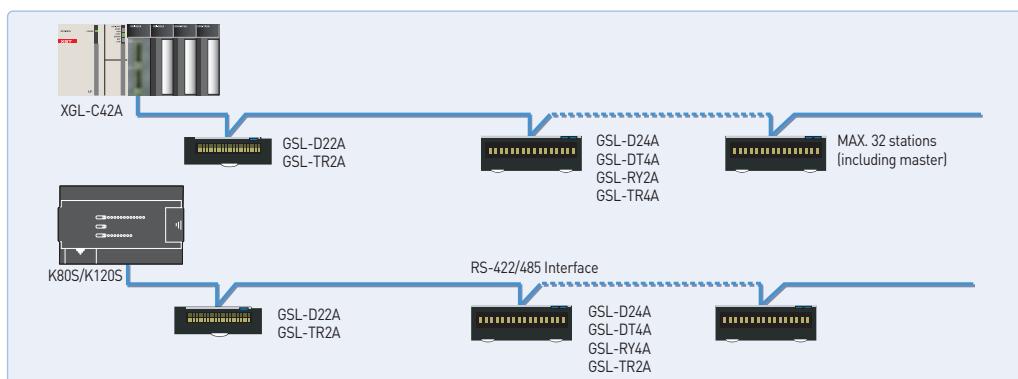

# Smart I/O Profibus-DP system

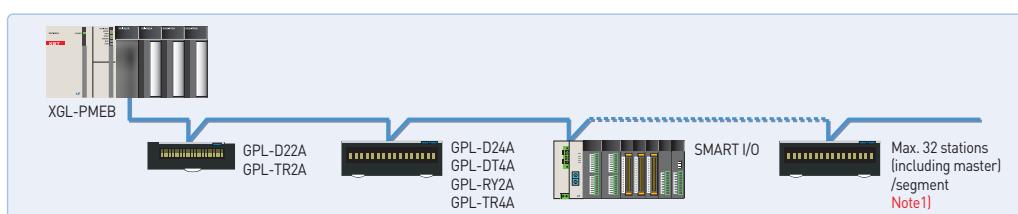


# Smart I/O DeviceNet system

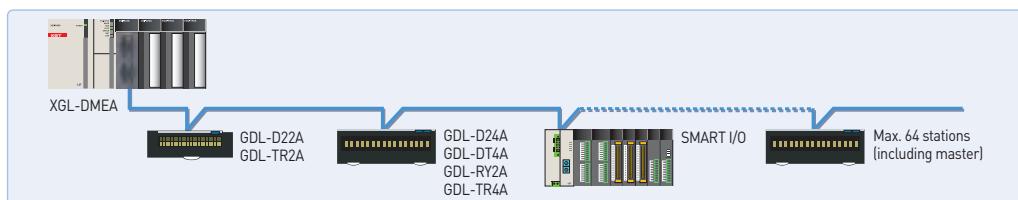

**Note1)** Segment: Communication section that does not use repeater or second master.

## Dimensions

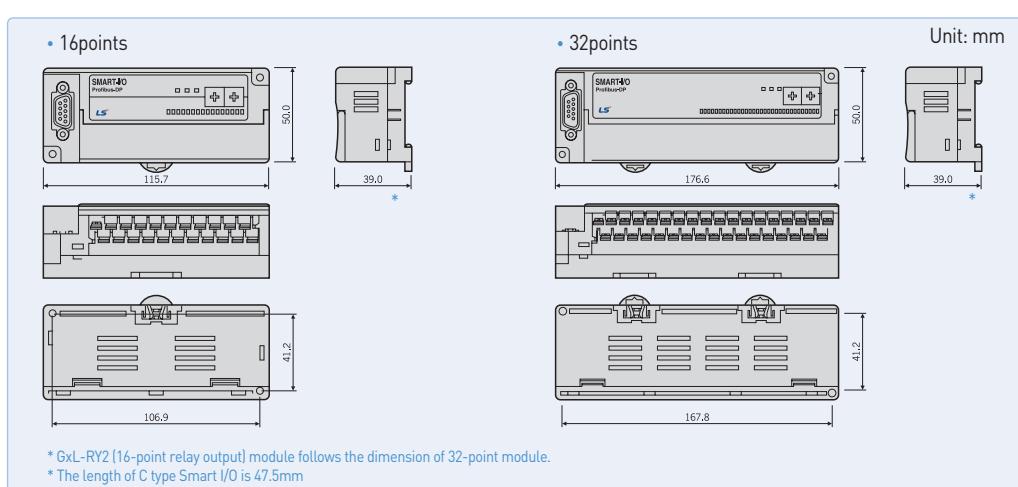

## Network Standard

Item	Rnet (LS dedicated network)	Profibus-DP	DeviceNet	MODBUS	RAPIEnet(RJ-45)
Protocol	LSELECTRIC dedicated protocol (Fnet for Remote)	Profibus-DP (RS-485/EN50170)	DeviceNet (CAN)	MODBUS (RS-422/485)	Fast Ethernet
Transmission speed	1 Mbps	9.6 Kbps ~ 12 Mbps	125/250/500 Kbps	2.4 Kbps ~ 38.4 Kbps	100Mbps
Transmission distance	750 m/segment	100 m ~ 1.2 km	500/250/125 m (Thin cable: 100 m)	500 m	100M
Topology	Bus Token	Bus	Trunk & Drop	Bus	CRC32
Transmission	Pass & Broadcast	Token Pass & Master/Slave (Poll)	CSMA/NBA (Poll, Cyclic, COS, Bit Strobel)	Token Pass & Master/Slave (Poll)	CSMA/CD
No. of stations	32/segment (Input: 32, Output: 32)	32/segment, 99/network	64	32	64





# Special

XGT series offer diverse special modules such as analog, HSC, and positioning to satisfy complicated industrial needs

## Contents

- 92 XGT speial module
- 94 Analog input module
- 96 2Wire Analog input module
- 97 Analog input module [Isolated]
- 98 Analog input module [Example]
- 99 Analog output module
- 100 Analog output module [Example]
- 101 Analog input/output module
- 102 HART interface  
analogue/digital conversion module
- 103 High-speed counter module
- 106 8-Channel high peed counter module
- 107 High-speed counter module [Example]
- 110 Positioning module [APM]
- 112 Positioning module (XPM)
- 114 Positioning module (Network Type)
- 116 XG5000
- 117 Motion Module [EtherCAT]
- 118 RTD input module
- 119 Thermocouple module
- 120 Temperature controller
- 122 Event input module
- 123 Datalog module

## Revolution of easy to use ... XGT Special module

### Fast processing of parameter and data of special module


- Continually refreshing operation data of special module by CPU module
- Including contact points such as conversion data of AD/DA module and command of HSC & positioning module

### Easy- to-use(Easy operation parameter setting and data monitoring)

- Convenient parameter setting available through XG5000
- Providing useful functions that can monitor and test operation data and contact points through XG5000

### Simple maintenance (Changing online module)

- Without turning off and holding CPU, users can change special module with ease.

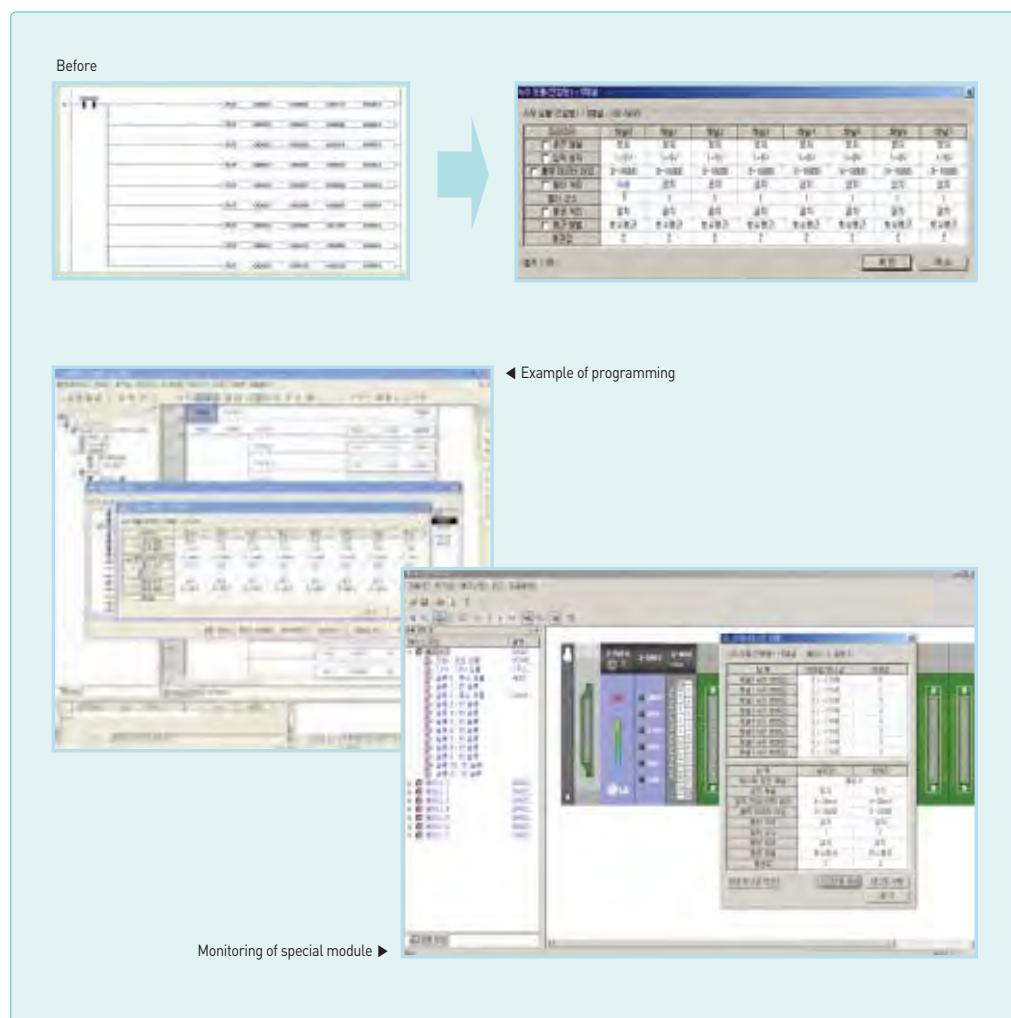

## Analog input/output module



Analog input module

XGF-AV8A	8 channels, voltage
XGF-AC8A	8 channels, current
XGF-AD8A	8 channels, voltage/current
XGF-AD4S	4 channels, voltage/current
XGF-AD16A	16 channels, voltage/current
XGF-AW4S	2-wire, Voltage/ Current input, 4Ch (Isolated)



Analog output module

XGF-DV4A	4 channels, voltage
XGF-DC4A	4 channels, current
XGF-DV8A	8 channels, voltage
XGF-DC8A	8 channels, current
XGF-DV4S	4 channels, voltage, Isolated
XGF-DC4S	4 channels, current, Isolated

Analog input/output module

XGF-AH6A	Input: 4ch, Voltage/ Current Output: 2Ch Voltage/ Current
----------	--

## Temperature module



Temperature input module

XGF-TC4S	4 channels, thermocouple input, Isolated
XGF-RD4A	4 channels, RTD input
XGF-RD4S	4 channels, RTD input, Isolated



Temperature controller

XGF-RD8A	8 channels input: RTD
XGF-TC4UD	4 channels input: voltage/current/TC/RTD 8 channels output: current/TR
XGF-TC4RT	4 channels input: RTD 4 channels output: TR Control: 4loop

## Positioning module/Motion controller



Positioning module

XGF-P01A-P03A	Open collector, 1~3axis
XGF-PD1A-PD3A	Line drive, 1~3axis
XGF-P01H-P04H	Open collector, 1~4axis
XGF-PD1H-PD4H	Line drive, 1~4axis

## Motion module



Motion module

XGF-M32E	Standard EtherCAT Net, 32 axes
----------	--------------------------------

## High speed counter module



High-speed counter module

XGF-HO2A	2 channels, Open collector
XGF-HD2A	2 channels, Line driver
XGF-HO8A	8-channels high speed counter module, 8Ch

## Event input module



High-speed counter module

XGF-SOEA	DC24V, 32points
----------	-----------------

SPECIAL




## Features

- Fast conversion processing
- High resolution
- Setting and monitoring the special module parameter through XG5000
- Supporting 4 types of digital output data format


## Specifications

Item	XGF-AV8A (Voltage input)	XGF-AC8A (Current input)	XGF-AD4S (Voltage/Current input)													
No. of input channel	8 channels		4 channels													
Analog input	DC 1~5V, 0~5V, 0~10V, -10~10V	DC 4~20mA, 0~20mA	DC 1~5V, 0~5V, 0~10V, -10~10V DC 4~20mA, 0~20mA													
Selection of input range in program or S/W package (Available to be set per channel)																
Digital output	XGF-AV8A	Analog input		1~5V	0~5V	0~10V	-10~10V									
		Digital output	Unsigned value	0~16,000												
			Signed value	-8000~8,000												
			Precise value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000									
Digital output	XGF-AC8A	Analog input		4~20mA		0~20mA										
		Digital output	Unsigned value	0~16,000												
			Signed value	-8,000~8,000												
			Precise value	4,000~20,000		0~20,000										
Digital output	XGF-AD4S	Analog input		0~10,000	0~10,000											
		Digital output	Signed value	-32,000~32,000												
			Precise value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000	0~20,000							
			Percentile value	0~10,000												
Resolution	1/16,000				1/64,000											
	1~5V	0.250mV	4~20mA	1.0µA	1~5V	62.5µV	4~20mA	250nA								
	0~5V	0.3125mV			0~5V	78.1µV										
	0~10V	0.625mV	0~20mA	1.25µA	0~10V	156.3µV	0~20mA	312.5nA								
Accuracy	-10V~10V	1.250mV			±10V	312.5µV										
	$\pm 0.2\%$ or less (Ambient temperature 25°C) $\pm 0.3\%$ or less (Range of operation temperature)				$\pm 0.05\%$ or less (Ambient temperature 25°C) Temp. coefficient $\pm 16.7\text{ppm}/^\circ\text{C}$ (Range of operation temperature)											
	Conversion speed Max. absolute input				250µs/channel 15V											
	Voltage: $\pm 15\text{V}$ , Current: $\pm 30\text{mA}$				Voltage: $\pm 15\text{V}$ , Current: $\pm 30\text{mA}$											
Insulation method	Photo-coupler Insulation between input terminal and power supply				No insulation between channels											
	No insulation between channels				Insulation between channels											
Connection terminal	18 points															
No. of occupied	Fixed type [Setting in basic parameter]: 64 points															
I/O points	Variable type [Dissolving in basic parameter]: 16 points															
Current consumption	420mA				610mA											
Weight (Kg)	0.14															

## Configuration

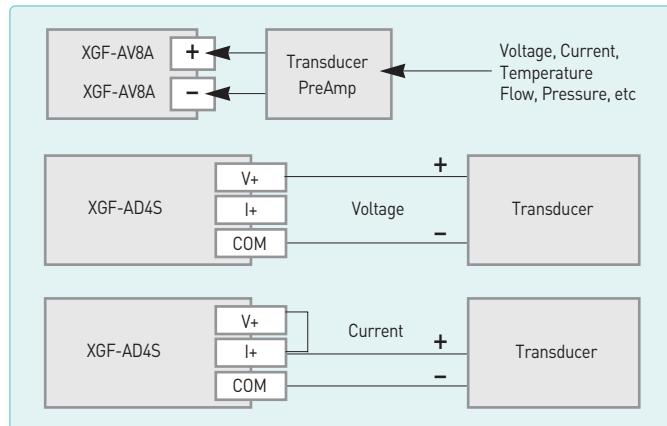

## A/D conversion characteristics

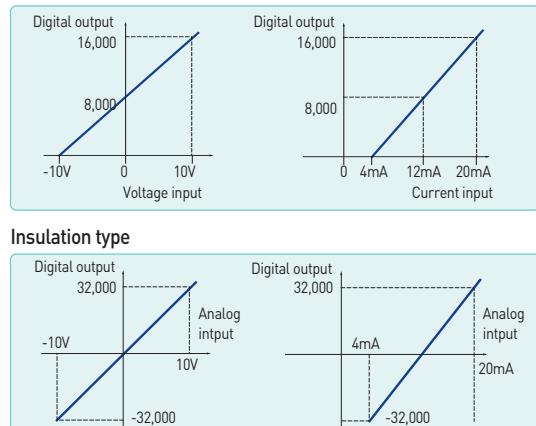

## Features


- Fast conversion processing
- High resolution
- Setting and monitoring the special module parameter through XG5000
- Supporting 4 types of digital output data format




## Specifications

	Item	XGF-AD16A		XGF-AD8A	
	No. of input channel	16 channels		8 channels	
Analog input	Voltage input	DC 1~5V, DC 0~5V, DC 0~10V, DC -10~10V (Input resistance: 1MΩ)			
	Current input	DC4~20mA, DC 0~20mA (Input resistance: 250Ω)			
	Input selection	Dip switch			
	Range selection	Selection of input range in the program or S / W package (Available to set per each channel)			
Digital output	Input type	Voltage input		Current input	
		DC 1~5V	DC 0~5V	DC 0~10V	DC -10~10V
		DC 4~20mA	DC 0~20mA	DC 0~20mA	DC 0~20mA
Digital output	Unsigned value	0~16,000			
	Signed value	-8,000~8,000			
	Precise value	0~10,000			
	Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000
	Resolution(1/16000)	0.2500mV	0.3215mV	0.6250mV	1.250mV
	Range selection	Selection of input type by program or parameter (Available to be set per each channel)			
	Resolution	$\pm 0.2\%$ or less (Ambient temperature 25°C), $\pm 0.3\%$ or less (Range of operation temperature)			
	Max. absolute input	$\pm 15V$		$\pm 30mA$	
	Conversion speed	500μs/channels		250μs/channels	
	Insulation method	Photo-coupler insulation between terminal and power supply			
	Terminal	32 points		18 points	
	No. of occupied I/O points (XGK)	Fixed type [Setting in basic parameter]: 64 points		Variable type [Dissolving in basic parameter]: 16 points	
	Current consumption	DC 5V : 420mA			
	Weight	140g			

## Configuration

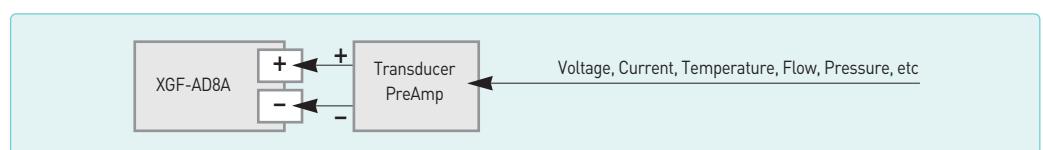

## A/D conversion characteristics

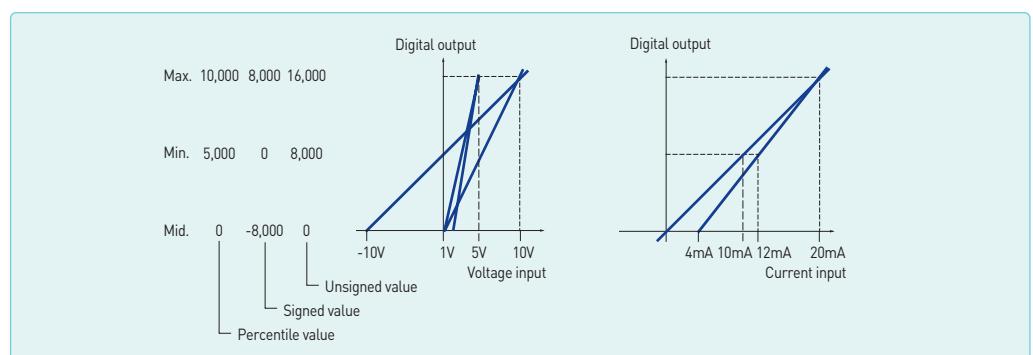

# 2Wire Analog input module

## Features


- 2Wire sensor (transmitter) input
- 1/64000 resolution
- Channel insulation
- Various additional functions




## Specifications

Item		XGF-AW4S			
No. of input channel		4channels			
Voltage input		DC 1~5V[Input resistance: 11MΩ]	DC 4~20mA[Input resistance : 250Ω]		
Digital output	Signed value	-32,000~32,000	-32,000~32,000		
	Precise value	1,000~5,000	4,000~20,000		
	Percentile value	0~10,000	0~10,000		
	Resolution(1/64000)	0.25mV	1uA		
	Range selection	Selection of input range in program or S/W package (Available to be set per channel)			
Resolution		$\pm 0.05\%$ or less [Ambient temperature 25°C], Temp. coefficient $\pm 70\text{ppm}/^\circ\text{C}$ [Range of operation temperature]			
Max. absolute input		$\pm 6\text{V}$	$\pm 30\text{mA}$		
Conversion speed		10ms/4channels			
Insulation	Item	Method	Withstand voltage	Resistance	
	Channel	Transformer	500VAC, 50/60Hz, 1min,	500VDC, 10MΩ or more	
	Terminal - Power	Photo-coupler	Leakage current: 10mA or less		
Transmitter	Voltage	DC 24V $\pm 15\%$			
	Max. current	30mA			
	Short circuit protection	Limit current: 25 ~35mA			
External power		DC 24V + 20%, -15%			
Terminal		18 point terminal			
No. of occupied I/O points [XGK]		Fixed type [Setting in basic parameter]: 64 points, Variable type [Dissolving in basic parameter]: 16 points			
Current	DC 5V	180mA			
consumption	DC 24V	480mA			
Wight		140			

## Configuration

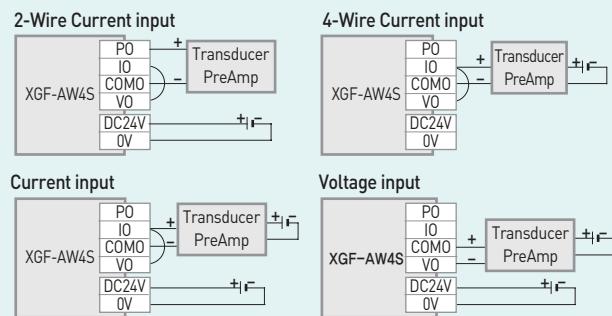

## A/D conversion characteristics

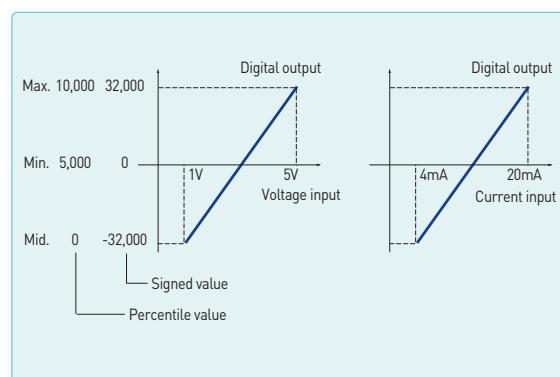

# Analog input module(Isolated)

96 / 97

## Features

- Channel isolation
- 1/64000 resolution
- $\pm 0.05\%$ (25°C) fixed density
- Setting and monitoring the special module parameter through XG5000




## Specifications


Item		XGF-AD4S									
No. of input channel		4 channel									
Analog input	Voltage input	DC 1~5V, DC 0~5V, DC 0~10V, DC -10~10V (Input resistance: 1MΩ)									
	Current input	DC 4~20mA, DC 0~20mA (Input resistance: 250Ω)									
	Input selection	Dip switch		-							
	Range selection	Selection input range in the program or S/W package(Available to set per each channel)									
	Input type	Voltage input				Current input					
		DC 1~5V	DC 0~5V	DC 0~10V	DC -10~10V	DC 4~20mA	DC 0~20mA				
Digital output	Signed value	-32,000~32,000									
	Precise value	0~10,000									
	Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000	0~20,000				
	Resolution(1/64,000)	0.0625mV	0.0781mV	0.1563mV	0.3125mV	0.25μA	0.3125μA				
	Range selection	Selection input range in the program or S/W package(Available to set per each channel)									
Resolution		±0.2% or less(Ambient temperatue 25°C), ±0.3% or less(Range of operation temperature)									
Max. absolute input		±15V				±30mA					
Conversion speed		10ms/4 channel									
Isolation Standards	Item	Isolation Method		Isolation withstand voltage		Isolation resistance					
	Channels	Transformer isolation		500VAC, 50/60Hz		10MΩ or more					
	Input-PLC Power	Photo-coupler isolation									
Terminal		18 points									
No. of occupied I/O points (XGK)		Fixed type(Setting in basic parameter):64points, Variable type(Dissolving in basic parameter): 16points									
Current consumption		DC 5V: 610mA									
Wight		140									

## System Configuration

This is a simple example to start Analog input module setting. For more details, refer to user's manual.

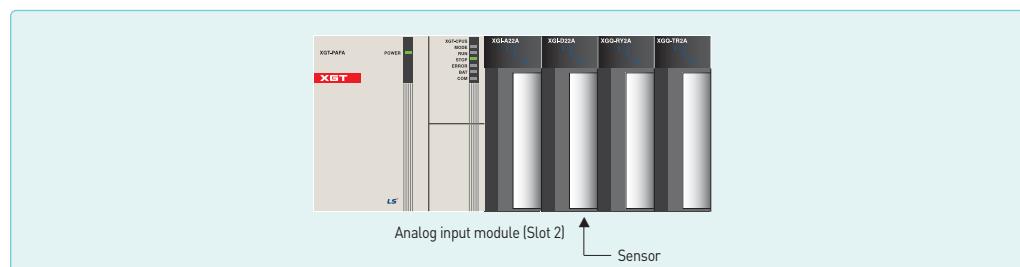


## Wiring

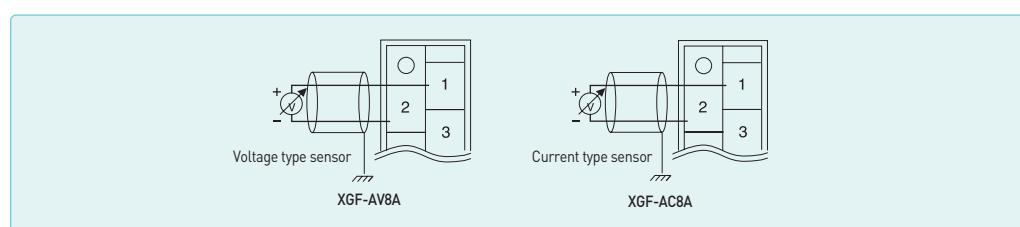

## Parameter setting

In the parameter setting box, select slot and analog module that you want to use.  
(This example shows to select '0' channel of voltage input type.)

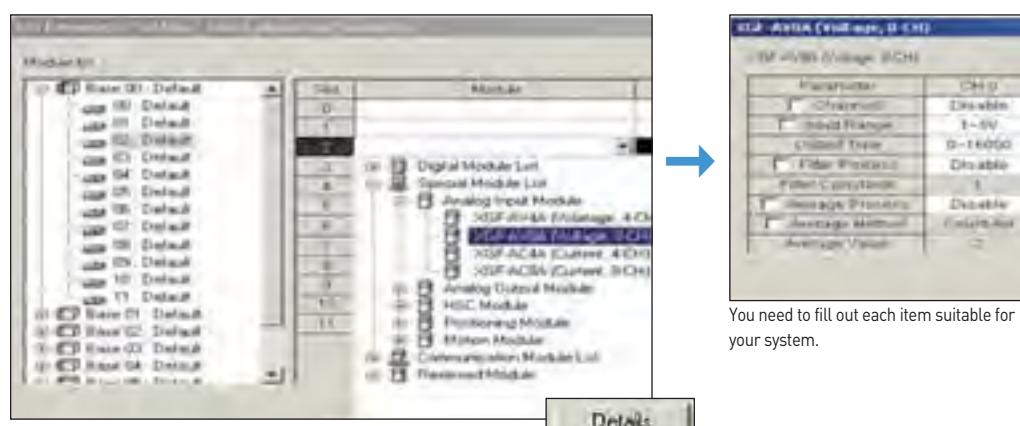

Press the <Details> button at lower end of parameter setting box after selecting the module.

## Programming

Create a program for A/D conversion (0~10V to 0~16,000).

### Special devices for programming


Refer to user's manual for more details.

U02.00: Error

U02.11.0: Requesting error-clear

U02.02: Memory of channel A/D value

Uxy.aa.bb  
x: Base number  
y: Slot number  
aa,bb: Refer to user's manual.

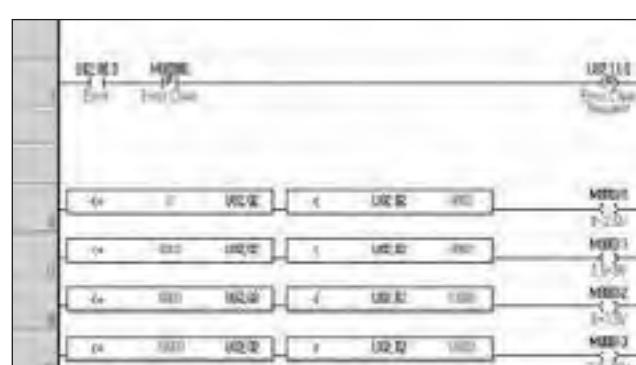

# Analog output module

Programmable Logic Controller 98 / 99

## Features


- Fast conversion processing
- High resolution
- Setting and monitoring the special module parameter through XG5000
- Supporting 4 types of digital input data format




## Specifications

Item	XGF-DV4A, XGF-DV8A, XGF-DV4S (Voltage output type)			XGF-DC4A, XGF-DC8A, XGF-DC4S (Current output type)								
No. of output channel	XGF-DV4A/4S, XGF-DC4A/4S : 4 channels / XGF-DV8A, XGF-DC8A : 8 channels											
	DC 1~5V, 0~5V			DC 4~20mA								
Analog output range	DC 0~10V, -10~10V			DC 0~20mA								
Selection of input range in the program or S/W package (Available to set per each channel)												
Digital input range	Analog output	Voltage type	1~5V	0~5V	0~10V	-10~10V						
		Unsigned value	0~16,000									
		Signed value	-8,000~8,000									
		Precise value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000						
	Digital input	Percentile value	0~10,000									
		Current type	4~20mA		0~20mA							
		Unsigned value	0~16,000									
		Signed value	-8,000~8,000									
16-bit binary value: selection of input type by program or parameter (Available to be set per each channel)												
Max. resolution	1/16,000 (Per each input range)											
	1~5V	0.250mV	4~20mA		1.0µA							
	0~5V	0.3125mV										
	0~10V	0.625mV	0~20mA		1.25µA							
Accuracy	XGF-DV4A/8A, DC4A/8A : ±0.2% or less (Ambient temperature 25°C), ±0.3% or less (Range of operation temperature)											
	XGF-DV4S/DC4S : ±0.1% or less (Ambient temperature 25°C), temp coefficient: ±80ppm/°C											
Conversion speed	250µs/channel											
Max. absolute output	±15V			±24mA								
Insulation method	Photo-coupler insulation between terminal and power supply XGF-DV4A/8A, XGF-DC4A/8A: No insulation between channels XGF-DV4S, XGF-DC4S (Insulation type): Insulation between channels											
Connection terminal	18 point terminal											
No. of occupied points	Fixed type (Setting in basic parameter): assign 64 points Variable type (Dissolving in basic parameter): assign 16 points											
Current consumption (mA)	DV4A	DV8A	DV4S	DC4A	DC8A	DC4S						
	Internal	190	190	200	190	200						
Weight (Kg)	0.15											


## Output wiring

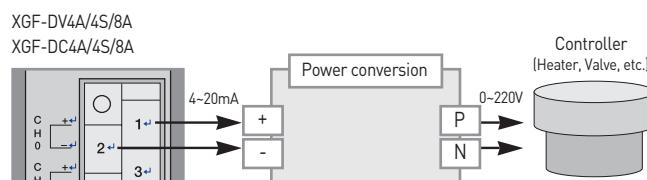

## I/O conversion characteristics

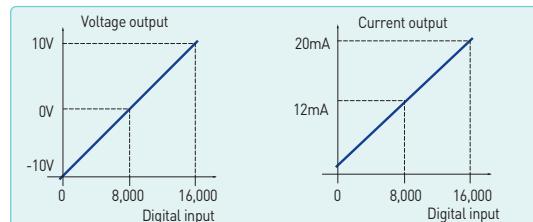


### Insulation type

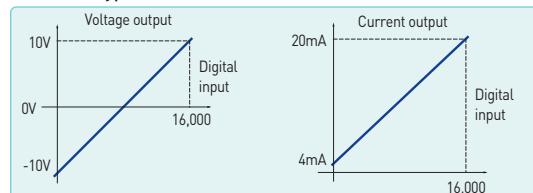


## System Configuration

This is a simple example to start Analog output module setting. For more details, refer to user's manual.

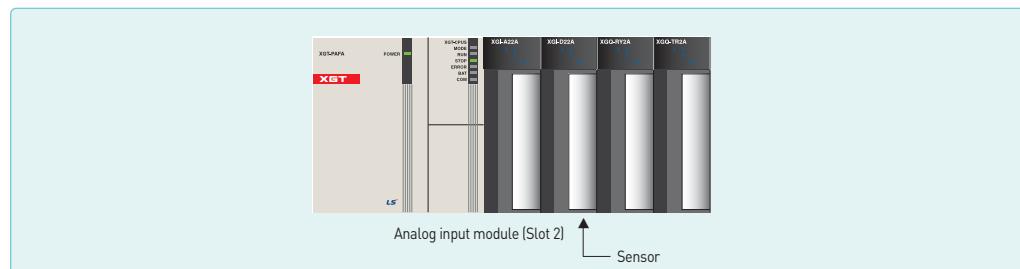


## Wiring

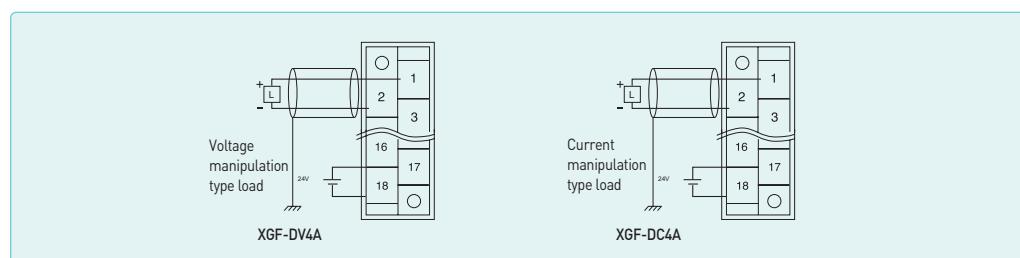

## Parameter setting

In the parameter setting box, select slot and analog module that you want to use.  
(This example shows to select '0' channel of voltage output type.)

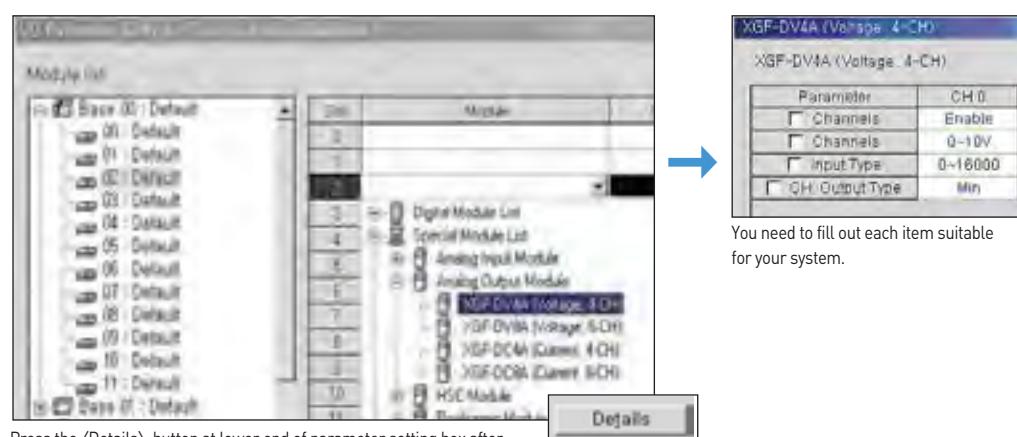

Press the <Details> button at lower end of parameter setting box after selecting the module.


## Programming

Create a program for D/A conversion  
(0~16000 to 0~10V).

### Special devices for programming

Refer to user's manual for more details.  
U02.02.0: Admitting Channel 0 output  
U02.03: Output data of channel 0

Uxy.aa.bb  
x: Base number  
y: Slot number  
aa,bb: Refer to user's manual.

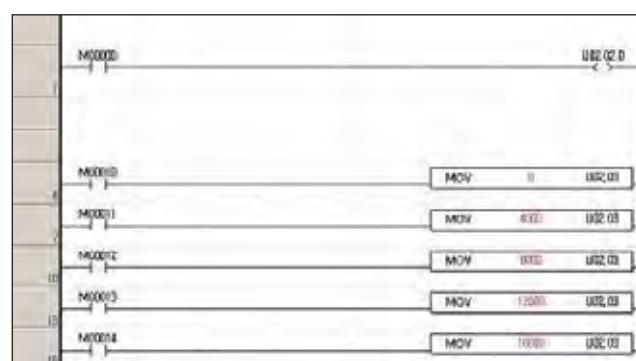

# Analog input/output module

100 / 101

## Features


- Input 4channels Output 2channels
- 4channels, 1/8000 resolution
- Parameter setting and monitoring by XG5000



## Specifications

Item		XGF-AH6A				
Input	No. of input channel	4channels				
	Range	DC1~5V	DC0~5V	DC0~10V	DC-10~10V	DC4~20mA
	Resistance	1MΩ				
	Selection	V+ and COM				
	Unsigned value	0~8,000				
	Signed value	-4,000~4,000				
Digital output	Precise value	0~10,000				
	Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000
	Resolution(1/8000)	0.5mV	0.625mV	1.25mV	2.5mV	2.0uA
	Range selection	Selection of input range in program or S/W package [Available to be set per channel]				
	Resolution	±0.2% or less [Ambient temperature 25°C], ±0.3% or less [Range of operation temperature]				
	Max. absolute input	±15V				
Output	Conversion speed	500ms/channels				
	No. of input channel	2channels				
	Range	DC1~5V	DC0~5V	DC0~10V	DC-10~10V	DC4~20mA
	Resistance	1kΩ or more				
	Selection	V+ and COM				
	Unsigned value	0~8,000				
Digital output	Signed value	-4,000~4,000				
	Precise value	0~10,000				
	Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000
	Resolution(1/8000)	0.5mV	0.625mV	1.25mV	2.5mV	2.0uA
	Range selection	Selection of input range in program or S/W package [Available to be set per channel]				
	Resolution	±0.2% or less [Ambient temperature 25°C], ±0.3% or less [Range of operation temperature]				
Insulation method	Max. absolute input	±15V				
	Conversion speed	500us/channels				
	Insulation method	Photo-coupler insulation between terminal and power supply				
	Terminal	18 point terminal				
	No. of occupied I/O points (XGK)	Fixed type (Setting in basic parameter): 64 points, Variable type (Dissolving in basic parameter): 16 points				
	Current consumption (DC5V)	770mA				
Power	Wight	140				

## Wiring

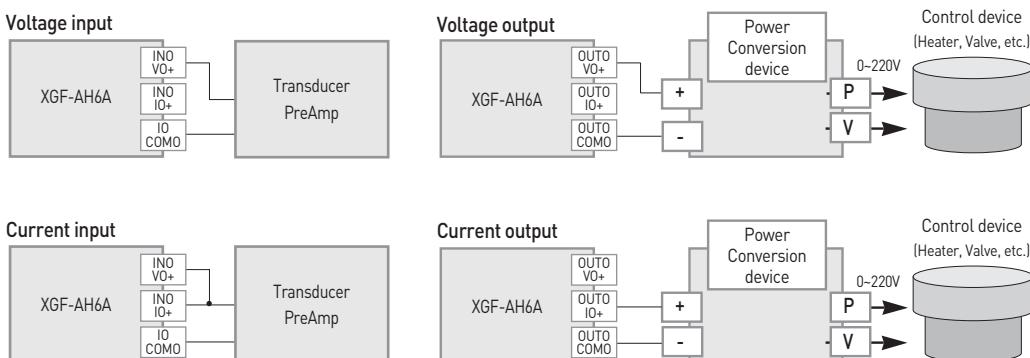

SPECIAL

**Features**

- It supports HART protocol  
In the input range of 4 ~ 20mA, bi-directional digital communication is available by using analog signal wiring. If analog wiring is currently used, there is no need to add wiring for HART communication (HART communication is not supported in the range of 0 ~ 20mA)
- High accuracy
- Operation parameters setting/monitoring
- Input disconnection detection function

**Specifications**

Item		XGF-AC4H		XGF-DC4H			
No. of Channels		4channels			4channels		
Analog input/output range		DC4~20mA,DC 0~20mA, (Input Resistance 250Ω )			DC 4~20mA,DC 0~20mA, (Load resistance 600Ω or less)		
Digital input/ output	Analog output/Digital input	DC4~20mA	DC0~20mA	DC4~20mA	DC0~20mA		
	Signed value	-32000~32000		-8000~8000			
	Unsigned value	-		0~1600			
	Precise value	4000~2000	0~2000	4000~2000	0~2000		
	Percentile value	0~10000					
Max. resolution		0 / 64000					
		4~20mA:250.0nA, 0~20mA:312.5nA		4~20mA:1.00nA, 0~20mA:1.25nA			
Accuracy		±0.10% or less (when ambient temperature is 25°C ±5°C)			±0.10% or less (when ambient temperature is 25°C ±5°C)		
		±0.25% or less (when ambient temperature is 0°C~55°C)			±0.3% or less (when ambient temperature is 0°C~55°C)		
Conversion speed		10ms/4channels					
Absolute Max. input/output		±3mA		DC 24mA			
Analog input points		4 channels / 1module					
Isolation specification		Photo-coupler isolation between input terminal and PLC power (no isolation between channels)					
Terminal connected		18-point terminal					
I/O points occupied		Fixed type: 64 points, Non fixed type : 16 points					
HART communication method		Mono drop only Primary master only					
Internal-consumed current		DC5V:340mA		DC5V:200mA, DC24V:220mA			
Weight (g)		145		150			

## Features

- Parameter setting and monitoring using XG5000
- Incremental encoder available
- Supporting various pulse input (5V, 12V, 24V)
- Various multiplication (1/2 phase pulse input)
- External present input
- Providing function to prevent from counting external signal
- Supporting HTL-level incremental encoder in the line-drive input type



## Specifications



Item		XGF-H02A			XGF-HD2A		
No. of command	Signal	A Phase, B Phase					
	Input type	Voltage input (Open Collector)			Differential input (Line Driver)		
	Signal level	DC 5/12/24V			RS-422 Line Drive/HTL LEVEL Line Drive		
	Input voltage	24V DC (17.0V ~ 26.4V)	12V DC (9.8V ~ 13.2V)	5V DC (4.5V ~ 5.5V)			
	Input current	7-11mA	7-11mA	7-11mA			
	Min. On guaranteed voltage	17.0V	9.8V	4.5V			
	Max. Off guaranteed voltage	4.5V	3.0V	1.7V			
Counter enable		Set by program (Count only in 'Enable')					
Max. counting speed		200Kpps		500Kpps (HTL input: 250Kpps)			
No. of channels		2 channels					
Counting range		Signed 32 Bit (-2,147,483,647 ~ 2,147,483,647)					
Counting type (Program setting)		Linear count (Generating Carry/Borrow when exceeding counting range, Max/Min value)					
Input mode (Program setting)		1 Phase input					
		2 Phase input					
		CW/CCW input					
Signal type		Voltage					
Up/Down counter setting	1-phase input	Program or B-phase					
	2-phase input	Phase difference					
	CW/CCW	A-phase input: Up count B-phase input: Down count					
Multiplication	1-phase input	1/2 multiplication (Programming)					
	2-phase input	1/2/4 multiplication (Programming)					
	CW/CCW	1 multiplication					
Control input	Signal	Preset signal, Signal to admit additional signal (Setting by terminal block or programming)					
	Signal level	DC 5V/12V/24V input type (Selecting terminal)					
	Signal type	Voltage					
External output	No. of output point	2 points/channel: Terminal output available					
	Type	Single comparison ( $>$ , $\geq$ , $=$ , $\leq$ , $<$ ) or section comparison					
	Output type	Open Collector (Sink)					
Operating status display	Input signal	A-phase, B-phase, Preset signal, Signal to admit additional signal					
	Output signal	OUT1, OUT2					
	Operation status	Module Ready, Pulse input status of A, B phase					
Addition functions (Program setting)		<ul style="list-style-type: none"> <li>• Count clear, Count latch</li> <li>• Section count (Set time value: 1~60000ms)</li> <li>• Measuring counting number per a unit time (Set time value: 1~60000ms)</li> <li>• Preventing from counting (Setting by internal/external input during counting)</li> </ul>					
No. of occupied		Fixed type (Setting in basic parameter): 64 points					
I/O points		Variable type (Dissolving in basic parameter): 16 points					
Terminal block		40-pin connector					
Current consumption		270		330			
Weight [Kg]		0.09					

### Terminal block configuration

XGF-H02A



Pin layout	Pin number		Signal name
	CH0	CH1	
A12V A24V	1	17	A12V A phase DC12V input
ACOM A5V	2	18	A24V A phase DC24V input
B12V B24V	3	19	A_C A phase COM
BCOM B5V	4	20	A5V A phase DC5V input
P12V P24V	5	21	B12V B phase DC12V input
PCOM P5V	6	22	B24V B phase DC24V input
G12V G24V	7	23	B_C B phase COM
GCOM G5V	8	24	B5V B phase DC5V input
A12V A24V	9	25	P12V Preset DC12V input
ACOM A5V	10	26	P24V Preset DC24V input
B12V B24V	11	27	P_C Preset COM
BCOM B5V	12	28	P5V Preset DC5V input
P12V P24V	13	29	G12V Gate DC12V input
PCOM P5V	14	30	G24V Gate DC24V input
G12V G24V	15	31	G_C Gate COM
GCOM G5V	16	32	G5V Gate DC5V input
CH0 OUT1 OUT0	33	35	OUT1 Comparison output OUT1
CH1 OUT1 OUT0	34	36	OUT0 Comparison output OUT0
24V 24V	37	38	24V External power supply
24G 24G	39	40	24G DC24V

### Configuration

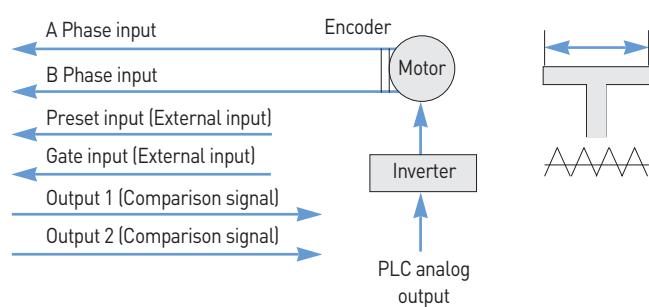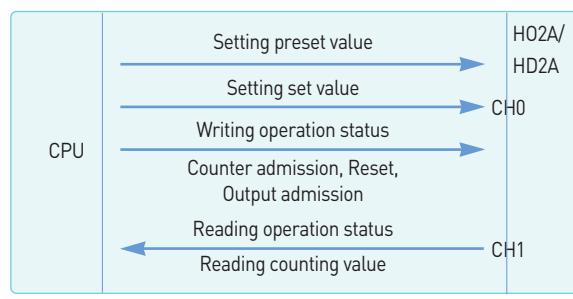

**XGF-HD2A**

Pin layout		Pin number		Signal name	
		CH0	CH1		
		1	17	AI-	AI-Input (LINE DRIVE TTL LEVEL Input)
		2	18	AI+	AI+Input (LINE DRIVE TTL LEVEL Input)
		3	19	AII-	AII-Input (LINE DRIVE TTL LEVEL Input)
		4	20	AII+	AII+Input (LINE DRIVE TTL LEVEL Input)
		5	21	BI-	BI-Input (LINE DRIVE TTL LEVEL Input)
		6	22	BI+	BI+Input (LINE DRIVE TTL LEVEL Input)
		7	23	BII-	BII-Input (LINE DRIVE TTL LEVEL Input)
		8	24	BII+	BII+Input (LINE DRIVE TTL LEVEL Input)
		9	25	P12V	Preset DC12V input
		10	26	P24V	Preset DC24V input
		11	27	P_C	Preset COM
		12	28	P5V	Preset DC5V input
		13	29	G12V	Gate DC12V input
		14	30	G24V	Gate DC24V input
		15	31	G_C	Gate COM
		16	32	G5V	Gate DC5V input
		33	35	OUT1	Comparison output OUT1
		34	36	OUT0	Comparison output OUT0
		37	38	24V	External power supply
		39	40	24G	DC24V

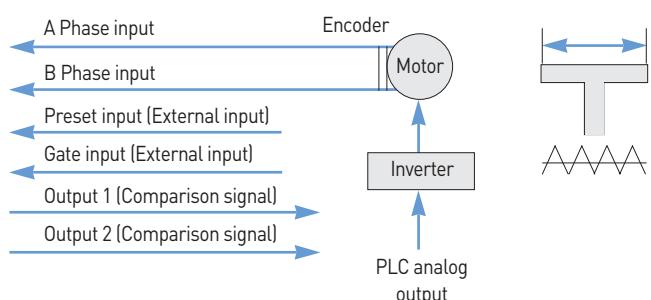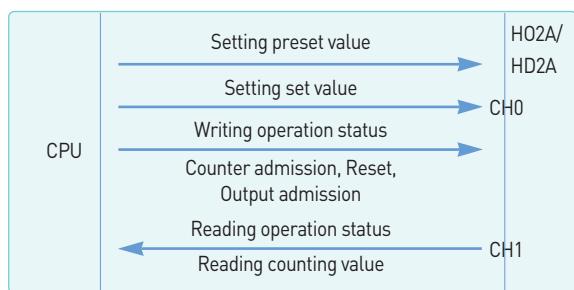**Configuration**

**Features**

- Multiple high-speed counter input support(8ch, 80-pin connector)
- Only improve performance and safety caused by the use of FPGA enhanced
- Program controlled by the preset function
- Per 1 channel output 1 point(Program setting)
- Input filter can be set (100kpps, 10kpps, 1kpps, 0.1kpps)
- The output signal through the operation status display

**Specifications**


Item	XGF-H08A						
No. of Channels	8 channels						
Phase	1-phase input, 2-phase input						
Signal level	5V DC [7 to 11mA], 24V DC [7 to 11mA]						
Input type	1/2/4 multiplication, CW/CCW						
Max. counting speed	200 kpps						
Input filter	None, 100kpps, 10kpps, 1kpps, 0.1kpps						
Counting range	Signed 32bit [-2147483648 ~ 2147483647]						
Counting type	Linear counter, Ring counter						
Up/Down Counter setting	<table border="0"> <tr> <td>1-phase input</td> <td>B-phase : Up/Down count</td> </tr> <tr> <td>2-phase input</td> <td>Phase difference</td> </tr> <tr> <td>CW/CCW</td> <td>A-phase : Up count, B-phase : Down count</td> </tr> </table>	1-phase input	B-phase : Up/Down count	2-phase input	Phase difference	CW/CCW	A-phase : Up count, B-phase : Down count
1-phase input	B-phase : Up/Down count						
2-phase input	Phase difference						
CW/CCW	A-phase : Up count, B-phase : Down count						
Multiplication	<table border="0"> <tr> <td>1-phase input</td> <td>1/2 multiplication(Programming)</td> </tr> <tr> <td>2-phase input</td> <td>1/2/4 multiplication(Programming)</td> </tr> <tr> <td>CW/CCW</td> <td>1 multiplication</td> </tr> </table>	1-phase input	1/2 multiplication(Programming)	2-phase input	1/2/4 multiplication(Programming)	CW/CCW	1 multiplication
1-phase input	1/2 multiplication(Programming)						
2-phase input	1/2/4 multiplication(Programming)						
CW/CCW	1 multiplication						
External output type	<table border="0"> <tr> <td>Comparison detection</td> <td>Single comparison(<math>\rightarrow</math>, <math>\rightarrow=</math>, <math>=\leftarrow</math>, <math>\leftarrow</math>) or Section comparison</td> </tr> <tr> <td>Output points</td> <td>1 point/channels : Internal or External output (programming)</td> </tr> <tr> <td></td> <td>Open collector output(Sink)</td> </tr> </table>	Comparison detection	Single comparison( $\rightarrow$ , $\rightarrow=$ , $=\leftarrow$ , $\leftarrow$ ) or Section comparison	Output points	1 point/channels : Internal or External output (programming)		Open collector output(Sink)
Comparison detection	Single comparison( $\rightarrow$ , $\rightarrow=$ , $=\leftarrow$ , $\leftarrow$ ) or Section comparison						
Output points	1 point/channels : Internal or External output (programming)						
	Open collector output(Sink)						
Operating status display	<table border="0"> <tr> <td>Input signal</td> <td>A-phase, B-phase</td> </tr> <tr> <td>Output signal</td> <td>OUT</td> </tr> <tr> <td>Operating condition</td> <td>Module ready</td> </tr> </table>	Input signal	A-phase, B-phase	Output signal	OUT	Operating condition	Module ready
Input signal	A-phase, B-phase						
Output signal	OUT						
Operating condition	Module ready						
Addition functions(Program setting)							
<table border="0"> <tr> <td>Power</td> <td>DC5V (600mA)</td> </tr> <tr> <td>Terminal block</td> <td>80-pin connector</td> </tr> </table>		Power	DC5V (600mA)	Terminal block	80-pin connector		
Power	DC5V (600mA)						
Terminal block	80-pin connector						

# High-speed counter module (Example)


106 / 107

## System Configuration

This is a simple example of high-speed counter module setting.  
For more details, refer to user's manual.

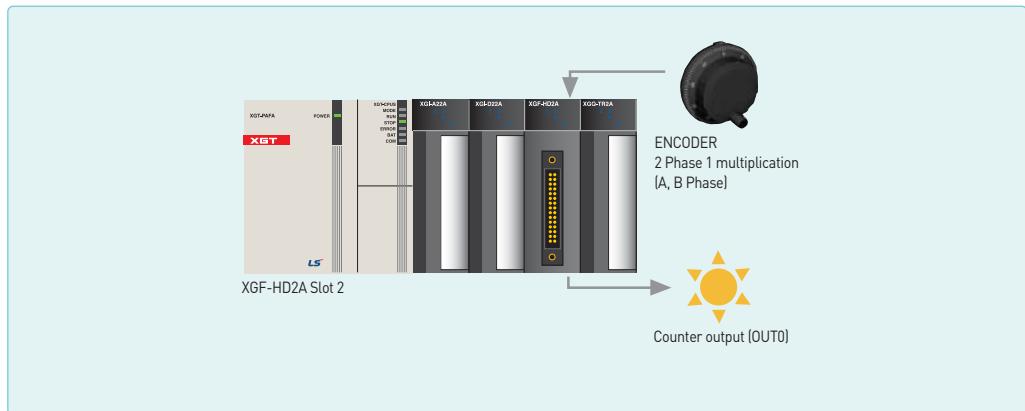

## Wiring

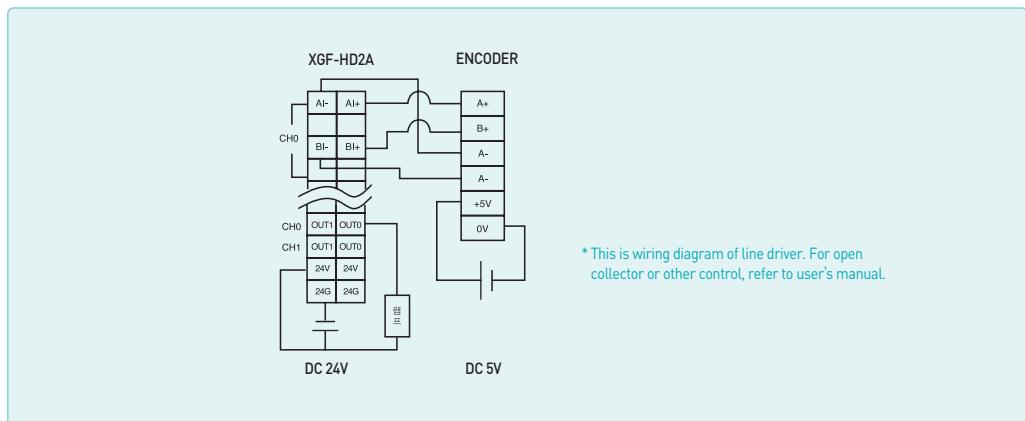


SPECIAL

## Control configuration

- Light a lamp of output when present value reaches 1000 of pulse input counted by encoder.
- Current value of pulse is saved in D100~D101 and is monitored.

## Module test (Online)

- Module test function of XGT enables to monitor operation status of high-speed counter module and to test-run.

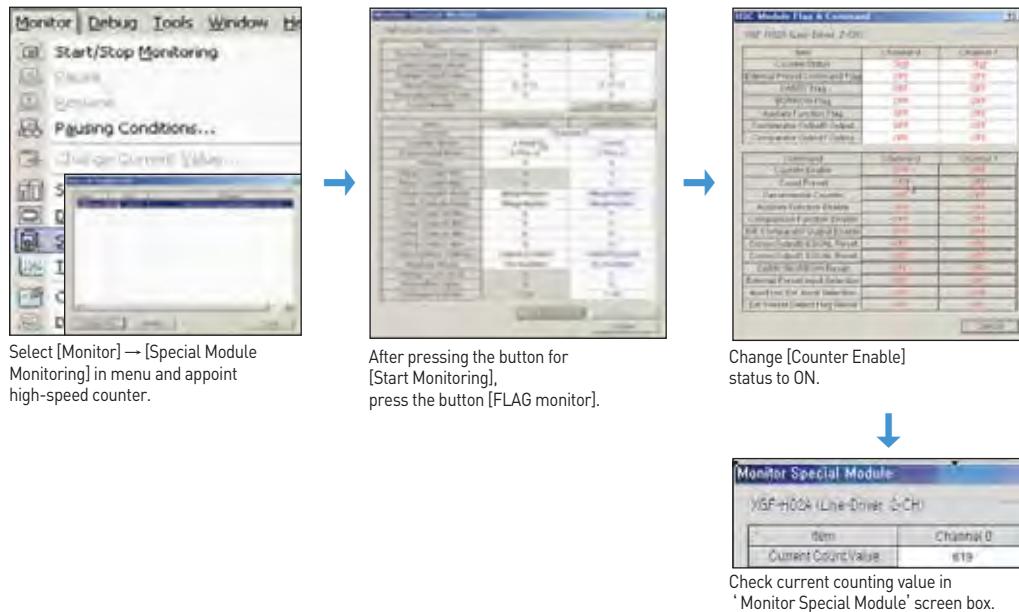


## Parameter setting

- In I/O parameter setting box, select slot and analog module that you want to use.  
(This example shows to select 2-channel line driver.)

Press the <Details> button at lower end of parameter setting box after selecting the module.

Input 1000 as Max. and Min. comparison output.

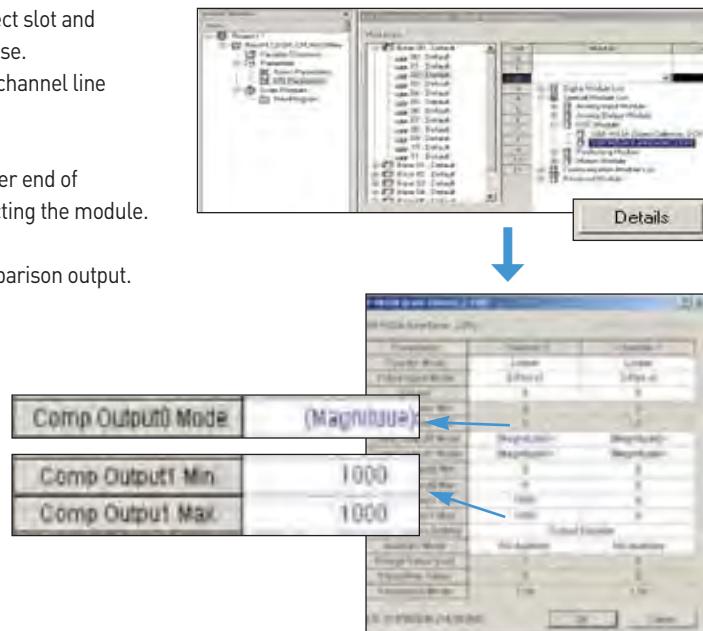

## programming

- After completing programming like following figure, download it to PLC and check operation status.

Special devices for programming

Refer to user's manual for more details.

U02.23.0: Count operation admission

U02.23.1: Count preset

U02.23.4: Consistent output admission

U02.23.5: Output external terminal admission


U02.23.6: OUT0 consistent signal reset

U02.00.6: Contact for checking external output


(Practically effective output is  
outputted through OUT0 terminal)

U02.02-U02.03: Counter present value


Uxy\_aa.bb  
x: Base number  
y: Slot number  
aa,bb: Refer to user's  
manual

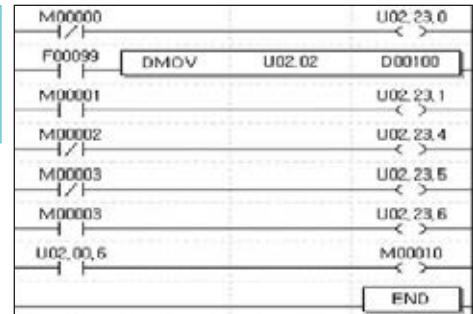

After downloading, monitor operation status.

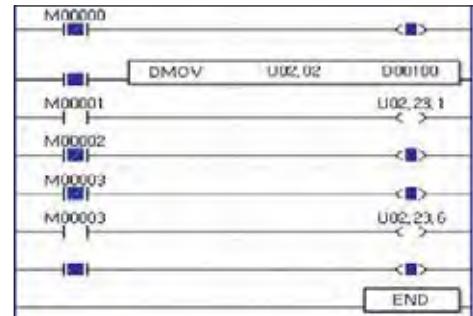

For monitoring just present value, follow the example.

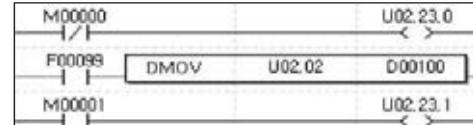

**Features**

- Highly reliable position control with LS ELECTRICASIC-embedded processor
- Enhanced control with fast control processing speed
- High-speed motor control (Max. pulse output: 1Mbps)
- Circular/linear interpolation, separate/synchronous operation
- Trapezoidal & S-curve acceleration/deceleration
- Easy and quick control through external input (JOG operation included)
- Encoder input support
- High-speed processing of command (4ms)
- Easy to set positioning parameters (Windows)
- Monitoring/Tracking/Simulation
- Available to edit operation parameter data in EXCEL
- Self-diagnosis
- Real-time information and solution for each error


**Specifications**

Item	Specifications				
	XGF-P01A, XGF-PD1A	XGF-P02A, XGF-PD2A	XGF-P03A, XGF-PD3A		
Number of axis	1	2	3		
Interpolation		2-axis linear interpolation, 2-axis circular interpolation	2/3-axis linear interpolation, 2-axis circular interpolation		
Control method	Position control, speed control, speed/position control, position/speed control				
Setting unit	Pulse, mm, inch, degree				
Positioning data	Each axis has 400 data items (Operation step number 1~400). It is available to set with software package or programming.				
Software package	Available (Connected with RS-232C Port of CPU module)				
Data backup	Flash memory (No battery)				
Positioning	Positioning method	Absolute / relative method			
	mm	-214748364.8 ~ 214748364.7 ( $\mu\text{m}$ )			
	Inch	-2147.83648 ~ 21474.83647			
	Degree	-2147.83648 ~ 21474.83647			
	Pulse	-2147483648 ~ 2147483647			
	Type	XGF-PO□A: Open collector, XGF-PD□A: Line Driver			
Position speed range	mm	0.01 ~ 20000000.00 (mm/min)			
	Inch	0.001 ~ 2000000.000 (inch/min)			
	Degree	0.001 ~ 2000000.000 (degree/min)			
	Pulse	XGF-PO□A: 1~200,000 (pulse/sec), XGF-PD□A: 1~1,000,000 (pulse/sec)			
Accel/Decel pattern	Trapezoidal & S-curve acceleration/deceleration				
	Accel/Decel time	1 ~ 65,535ms			
Max. output pulse	XGF-PO□A: 200Kpps / XGF-PD□A: 1Mpps				
Max. distance	XGF-PO□A: 2m / XGF-PD□A: 10m				
Max. encoder input	200 Kpps				
Error display	LED				
Operation display	LED				
Connection connector	40 Pin connector				
Size of cable	AWG #24				
Occupied points of I/O	64 points (Fixed type), 16 points (Variable type)				
Current consumption (mA)	XGF-P01A: 340	XGF-P02A: 360	XGF-P03A: 400		
	XGF-PD1A: 510	XGF-PD2A: 790	XGF-PD3A: 860		
Weight (kg)	0.12	0.13	0.135		

\* XGF-PO□O: Open Collector type, □: Number of axis  
XGF-PD□D: Line Drive type, □: Number of axis

## Terminal block configuration

## Pin layout



1 axis

41	42	1	2
43	44	3	4
45	46	5	6
47	48	7	8
49	50	9	10
51	52	11	12
53	54	13	14
55	56	15	16
57	58	17	18
59	60	19	20
61	62	21	22
63	64	23	24
65	66	25	26
67	68	27	28
69	70	29	30
71	72	31	32
73	74	33	34
75	76	35	36
77	78	37	38
79	80	39	40

2/3 axes

For	Pin number			Signal name			Signal direction APM - Ext. device	Condition
	X	Y	Z					
A x i s	21	41	61	FP+	Pulse output [Differential +]		→	
	22	42	62	FP-	Pulse output [Differential -]		→	
	23	43	63	RP+	Pulse sign [Differential +]		→	
	24	44	64	RP-	Pulse sign [Differential -]		→	
	25	45	65	OV+ *	High limit		←	
	26	46	66	OV- *	Low limit		←	
	27	47	67	STOP	External stop signal		←	
	28	48	68	DOG	Approximate origin		←	
	29	49	69	VTP	Speed/Position switching signal		←	
	30	50	70	ECMD	External command signal	Start	←	
						Skip	←	
						JOG+ [Forward]	←	
	31	51	71	JOG-	JOG reverse operation		←	
	32	52	72	COM	Common[OV+, OV-, STOP, DOG, VTP, ECMD, JOG-]		↔	
	33	53	73	DR/INP	Imposition/Driver Ready signal		←	
	34	54	74	DR/INP COM	Imposition/Driver Ready signal Common		↔	
	35	55	75	HOME +24V	Zero signal (+24V)		←	
	36	56	76	NC	Not used			
	37	57	77	HOME +5V	Zero signal (+5V)		←	
	38	58	78	HOME COM	Zero signal (+24V, +5V) Common		↔	
	39	59	79	24V	24V Power supply (Not used in case of line drive output)			
	40	60	80	P COM	External 24V GND (Not used in case of line drive output)			
C o m m o n	1	MPG A+	Manual pulse generator/Encoder A+ Input		←			
	2	MPG A-	Manual pulse generator/Encoder A- Input		←			
	3	MPG B+	Manual pulse generator/Encoder B+ Input		←			
	4	MPG B-	Manual pulse generator/Encoder B- Input		←			
	5	NC	Not used		←			
	6	NC	Not used		←			
	7	CON	External simultaneous start		←			
	8	EMG *	Emergency stop		←			
	9	NC	Not used					
	10	COM	[CON, EMG] Common				↔	
	11~20	NC	Not used					



**Features**

- Max 4Axis, Max pulse output 4Mpps
- Circular/linear/ellipse/helical interpolation
- Asymmetric acceleration and deceleration driving
- FRAM parameter
- XG5000 monitoring, simulation, trace
- CAM profile program

**Specifications**

Item	XGF-P01H XGF-PD1H	XGF-P02H XGF-PD2H	XGF-P03H XGF-PD3H	XGF-P04H XGF-PD4H
Number of axis	1 axis	2 axis	3 axis	4 axis
Interpolation	—	Circular, linear, ellipse	Circular, linear, helical, ellipse	
Control method		Position control, speed control, speed/position control, position/speed control, FEED		
Positioning data		Each axis has 400 data items (Operation step number 1~400). It is available to set with XG5000 or programming.		
Configuration Tool		XG5000 (Connected with USB or RS-232C Port of CPU module)		
Data backup		FRAM (Parameter, Operation data), Flash memory (CAM Data), No battery		
Pulse output		XGF-POxH: Open collector, XGF-PDxH: linedriver		
Positioning	Positioning method		Absolute / Incremental	
	Position address range	mm	-214,748,364.8 ~ 214,748,364.7(μm)	
	Position address range	inch	-21,474.83648 ~ 21,474.83647	
		degree	-21,474.83648 ~ 21,474.83647	
		pulse	-2,147,483,648 ~ 2,147,483,647	
	Position address speed	mm	0.01 ~ 20,000,000.00(mm/min)	
		inch	0.001 ~ 2,000,000.000(inch/min)	
		degree	0.001 ~ 2,000,000.000(degree/min)	
		pulse	1 ~ 500,000(pulse/sec): Open collector, 1 ~ 4,000,000(pulse/sec): line driver	
		RPM	0.1 ~ 100,000.0(RPM)	
Accel/Decel pattern			Trapezoidal & S-curve acceleration/deceleration	
Accel/Decel time			0~2,147,483,647ms	
Max. output pulse			Open collector: 500kpps, line driver: 4Mpps	
Max. distance			Open collector: 5m, line driver: 10m	
Max. encoder input			500kpps	
Error display			LED	
Size of cable			AWG #24	
Occupied points of I/O			64 points (Fixed type), 16 points (Variable type)	
Connection connector		40Pin	80Pin	
Current consumption (mA)	XGF-P01H:400mA	XGF-P02H:410mA	XGF-P03H:420mA	XGF-P04H:430mA
	XGF-PD1H:520mA	XGF-PD2H:600mA	XGF-PD3H:850mA	XGF-PD4H:890mA
Weight (kg)	120		130	

## Terminal block configuration

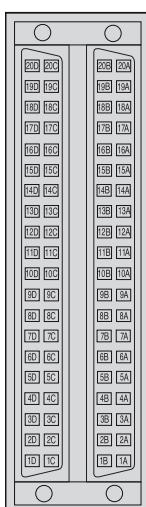

Pin number				Signal name		Remarks
AX1	AX2	AX3	AX4			
20A		MPG A+		Manual pulse generntor /Encoder A+ input		
20B		MPG A-		Manual pulse generntor /Encoder A- input		
19A		MPG B+		Manual pulse generntor /Encoder B+ input		
19B		MPG B-		Manual pulse generntor /Encoder B- input		
20C, 19C, 20D, 19D				NC	Not used	
18A	18B	18C	18D	FP+	Foward pulse (+)	
17A	17B	17C	17D	FP-	Foward COM (-)	
16A	16B	16C	16D	RP+	Backward pulse (+)	
15A	15B	15C	15D	RP-	Backward COM (-)	
14A	14B	14C	14D	OV+	Max. signal	
13A	13B	13C	13D	OV-	Min. signal	
12A	12B	12C	12D	DOG	Appoximate orgin signal	
11A	11B	11C	11D	EMG	Emergency stop	
		STOP		External stop signal		
10A	10B	10C	10D	VTP	Speed / Position switching signal	
9A	9B	9C	9D	COM	Common(OV+,OV-,DOG,EMG,STOP,VTP)	
8A	8B	8C	8D	DR	Drive ready signal	
7A	7B	7C	7D	INP	In-position	
6A	6B	6C	6D	DR/INP COM	Drive ready/ In-position Common	
5A	5B	5C	5D	CLR	Deviation counter clear signal	
4A	4B	4C	4D	CLR COM	Deviation counter clear signal Common	
3A	3B	3C	3D	HOME +5V	Zero signal (+5V)	
2A	2B	2C	2D	HOME COM	Zero signal (+5V) Common	
1A, 1C				+24V	+24V	
1B, 1D				+24V COM	+24V GND	

\*Open collector type module : +24V [1A/1C; 24V, 1B/1D: 0V]

**Features**

- XGF-PN8A : Dedicated LS ELECTRICEtherCAT Network Support (XGT Servo N series)
- XGF-PN8B : Standard EtherCAT Network Support(Standard EtherCAT Servo)
- Direct connect with servo driver Max 8
- 2~8 axis linear interpolation, 2axis circular interpolation, 3axis helical interpolation
- Position, speed, feed control is possible through the various operation
- Parameters, the operation data stored in the FRAM(without Battery)
- CAM for controlling up to eight different types of CAM data

**Specifications**


Item		XGF-PN8A/PN8B		XGF-PN4B		
Number of axis		8 axis		4 axis		
Interpolation		2~8 axis linear, 2axis circular, 3axis helical interpolation				
Control method		Position, speed, Speed/position, position/speed position/torque, Feed control				
Setting unit		pulse, mm, inch, degree				
Positioning data		Each axis has 400 data items (Operation step number 1~400). It is available to set with software package or programming.				
XG5000	Port	RS-232C, USB				
	Data	Basic, expansion, manual, servo parameter, operation data, cam data, command information				
	Monitor	Operation, trace, input sort, error information				
Back-up		FRAM(parameter, operation data) no battery				
Positioning	Positonig method	Absolute/lncremental				
	Position address range	Absolute	Incremental	Speed/position, position/speed conversion control		
		mm	-214748364.8 ~ 214748364.7(μm)	-214748364.8 ~ 214748364.7(μm)		
		inch	-21474.83648 ~ 21474.83647	-21474.83648 ~ 21474.83647		
		degree	-21474.83648 ~ 21474.83647	-21474.83648 ~ 21474.83647		
		pulse	-2147483648 ~ 2147483647	-2147483648 ~ 2147483647		
	Position speed range	mm	0.01 ~ 2000000.00(mm/Min)			
		inch	0.001 ~ 2000000.000(inch/Min)			
		degree	0.001 ~ 2000000.00(degree/Min)			
		pulse	1 ~ 20.000.000(pulse/Sec)			
		RPM	0.1 ~ 100000.0(RPM)			
Encoder input	Accel/Decel pattern	Trapezoidal & S-curve acceleration/deceleration				
	Accel/Decel time	1~2.147.483.647 ms				
	Manual	Jog/ MPG/ inching				
	Homing method	Max+Z[Forward], Min+Z[Backward], Near-point+Z[Forward, Backward], Max+near-point+Z[Forward], Min+near-point+Z[Backward], Z[Forward, Backward], near-point[Forward, Backward]				
	The ability to Change speed	Absolute/Percent				
	Torque	Rated torque %				
	Absolute position System	0 (Absolute encoder type servo)				
	Channel	2 Channel				
	Max. Input	Max. 200 Kpps				
	Input method	line-drive input(RS-422A IEC), open collector output type				
Communication	Type	CW/CCW, Pulse/Dir, Phase A/B				
	Connector	12 Pin connector				
	Communication Cycle	800 μs				
	Max. distance	100 m				
	Cable	STP(Shielded Twisted pair) cable				
	Error display	LED				
	Operation display	LED				
	Occupied points of I/O	64points (Fixed type), 16points (Variable type)				
	Current consumption (mA)	500 mA				
	Weight(kg)	115 g				

## Terminal block configuration


Pin layout	Pin Number	Signal name
ENC1A+	1	Encoder1 A+input
ENC1A-	2	Encoder1 A -input
ENC1B+	3	Encoder1 B +input
ENC1B-	4	Encoder1 B -input
ENC1Z+	5	Encoder1 Z +input
ENC1Z-	6	Encoder1 Z -input
ENC2A+	7	Encoder2 A+input
ENC2A-	8	Encoder2 A -input
ENC2B+	9	Encoder2 B +input
ENC2B-	10	Encoder2 B -input
ENC2Z+	11	Encoder2 Z +input
ENC2Z-	12	Encoder2 Z -input

## External encoder wiring

\* Open collector type



\* line-drive type




Pin Number	Signal
1	Encoder1 A+input
2	Encoder1 A -input
3	Encoder1 B +input
4	Encoder1 B -input
5	Encoder1 Z +input
6	Encoder1 Z -input
7	Encoder2 A+input
8	Encoder2 A -input
9	Encoder2 B +input
10	Encoder2 B -input
11	Encoder2 Z +input
12	Encoder2 Z -input

**Features**


- Configuration tool with updated APM software package
- All models can be used for XGT Positioning module(APM, XPM)
- Simultaneous communications can be accessed with XG5000
- Powerful simulation, trace, monitoring




System View

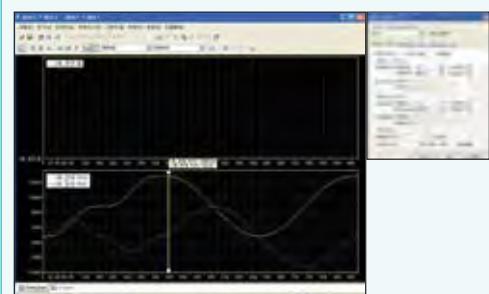

Data trace(trend graph)

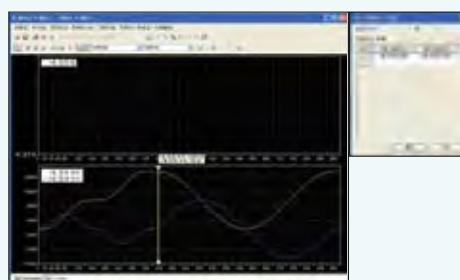

Data trace(XY graph)

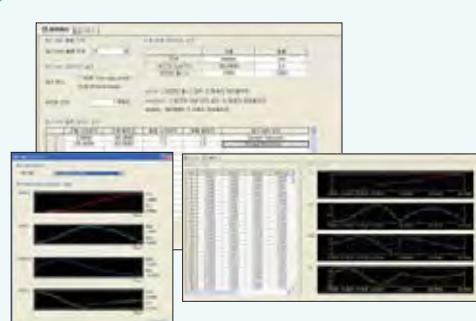XYZ trend  
(3D View)XYZ monitor  
(2D View)

CAM control profile



Simulation

# Motion Module[EtherCAT]

Programmable Logic Controller 116 / 117

## Features


- 32 axes (master) and 4 axes (virtual) control
- EtherCAT CoE supported servo drive
- Communication cycle : 1ms
- Built-in DI/DO 8 points each and EtherCAT I/O 512 points
- Program 2MB
- External encoder input 2ch (line drive)
- Max. transmission distance : 100m



## Specifications


Item		XGF-M32E
Communication		EtherCAT (CoE : CANopen over EtherCAT)
Number of axis	Real	32 axes
	Virtual	4axes
I/O		Input/output 8 points each (built-in) EtherCAT I/O connection available
Control period		1ms, 2ms, 4ms (same as main task period)
Control unit		Pulse, mm, inch, degree
I/O	Internal	Input 8 points, output 8 points
	External	EtherCAT I/O 4 ea [max. 256 points]
Motion Program	No. of program	Max. 256 ea
	Capacity	Max. 2Mbyte
	Language	LD(FB), ST
	Position data	6400 points/all axis
Control method		Position, Velocity, Torque(Servo drivers support) control, Synchronous control, Interpolation control
Range of position/velocity		± LREAL, 0
Acc. Dec. process		Trapezoid type, S-type (Setting to specify the Jerk at function block)
Acc. Dec. time		1 ~ 2, 147, 483, 647ms
Manual operation		JOG operation
Torque unit		Rated torque % designation
Encoder input	Channel	2 channels
	Max. input	Max. 500Kpps
	Input method	Line drive input (RS-422A IEC specification) Open collector output type encoder
	Input type	CW/CCW, Pulse/Dir, Phase A/B
Max. distance		100m
Communication cable		Over CAT.5 STP(Shielded Twisted-pair) cable
Error indication		Indicated by LED
Communication status indication		Indicated by LED
Occupied point I/O		Variable: 16 point, Fixed: 64 point
Communication physical layer		100BASE-TX
Consumable current[mA]		900mA
Weight		122g

## System Configuration

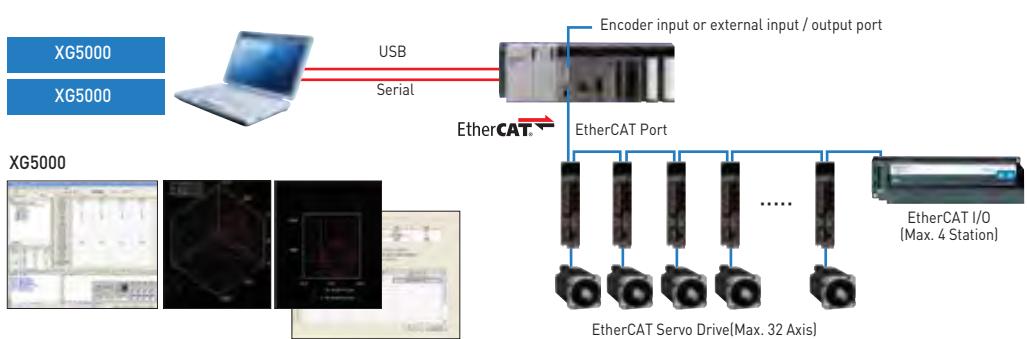

## Features



- Supports various additional functions (average, alarm, filter)
- Special module parameter setting and monitoring with XG5000
- Supports digital conversion, temperature display and user scaling
- Support Offset/Gain function (only RD8A)

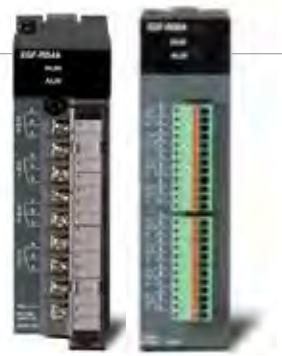


## Specifications

Item		XGF-RD4A	XGF-RD4S	XGF-RD8A
No. of input channel		4 channels	4 channels	8 channels
Input sensor type	Pt100	JIS C1604-1997	JIS C1604-1997	JIS C1604-1997
	JPt100	JIS C1604-1981, KS C1603-1991	JIS C1604-1981, KS C1603-1991	JIS C1604-1981, KS C1603-1991
	PT1000	-	JIS C1604-1997	-
	NI100	-	DIN 43760-1987	-
Temperature input range	Pt100	-200.0 ~ 850.0°C	-200.0 ~ 850.0°C	-200.0 ~ 850.0°C
	JPt100	-200.0 ~ 640.0°C	-200.0 ~ 640.0°C	-200.0 ~ 640.0°C
	PT1000	-	-200.0 ~ 850.0°C	-
	NI100	-	-60.0 ~ 180.0°C	-
Digital output	Temperature display (unit: 0.1)	Pt100: -2,000 ~ 8,500 JPt100: -2,000 ~ 6,400 PT1000: - NI100: -	Pt100: -2,000 ~ 8,500 JPt100: -2,000 ~ 6,400 PT1000: -2,000 ~ 8,500 NI100: -2,000 ~ 1,800	Pt100: -2,000 ~ 8,500 JPt100: -2,000 ~ 6,400 PT1000: - NI100: -
	Scaling display (Customize)	0 ~ 65535 -32768 ~ 32767	0 ~ 65535 -32768 ~ 32767	0 ~ 65535 -32768 ~ 32767
	Accuracy	Normal temp.(25°C): ±0.2% Full temp.(0~55°C): ±0.3%	±0.1% ±70ppm/°C	±0.2% ±0.3%
	Conversion speed	40ms / channel		
Insulation	Channel to Channel	Non-insulation	Insulation	Non-insulation
	Terminal to PLC Power	Photo-coupler		
Wiring method		3-wire	4-wire	3-wire
Function	Average	Time average (320~64000ms) Counting average(2~6400 count) Moving average(2~100 samples)		
		Process alarm Input changing rate alarm Disconnection detection		
		Offset / Gain Filtering		
	Filtering	0		
Terminal block		Digital filter (160~64000ms) 18-point terminal block		
Current consumption		5V: 450mA	5V: 720mA	5V: 450mA
Weight [g]		150g		

## Characteristics of temperature conversion

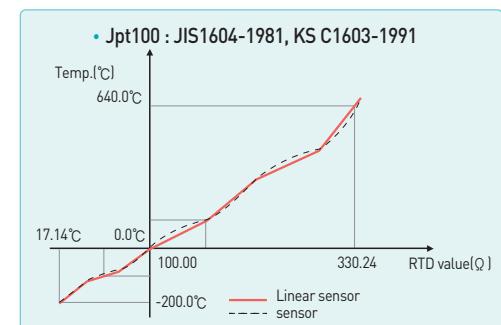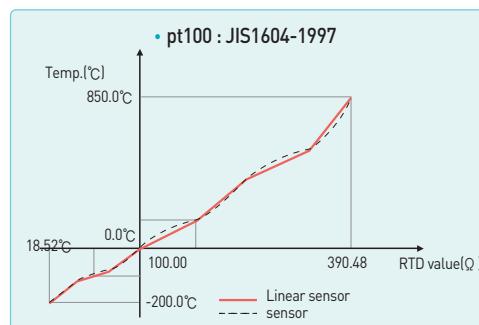

## Wiring

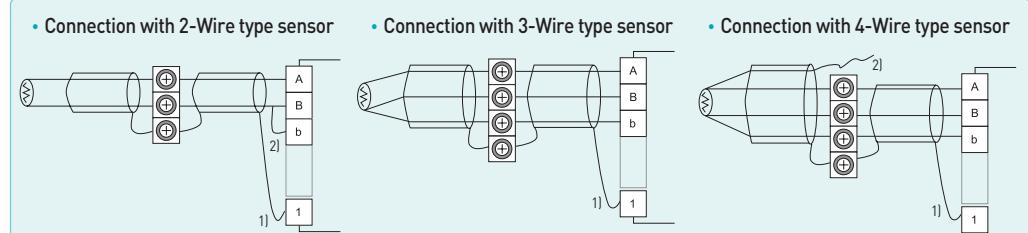

1) When sensor and compensating wire are shielded, shield-connection to FG terminal of the module is available.

2) The wiring of 4-wire type sensor is identical with the wiring of 3-wire type sensor. 3 wires is connected to the module.

But the other wire is not connected with the module.

# Thermocouple module

Programmable Logic Controller 118 / 119




## Features

- Insulation between channels
- $\pm 0.1\%$  ( $25^\circ\text{C}$ ) constant density
- Supports various input sensor (supporting C-type sensor)
- Various additional functions (average, filter, alarm, max/min value display)
- Special module parameter setting and monitoring with XG5000


## Specifications

Item	XGF-TC4S	
Input channels	4 channels	
Input sensor type	K, J, E, T, B, R, S, N, C	JIS C1602-1995ITS-90
	K	-250 ~ 1350°C
	J	-200 ~ 1200°C
	E	-250 ~ 1000°C
	T	-250 ~ 400°C
	B	400 ~ 1800°C
	R	-50 ~ 1750°C
	S	-50 ~ 1750°C
	N	-270 ~ 1300°C
	C	0 ~ 2300°C
Digital output	Temperature display [unit: 0.1]	Display down to the first decimal place [0.1°C]
	Scaling (User range setting)	0 ~ 65535 -32768 ~ 32767
Accuracy	Normal temp. ( $25^\circ\text{C}$ )	$\pm 0.1\%$ Some section can permit 0.5%
	Temperature coefficient (Operating temp. range)	$\pm 100\text{ppm}^\circ\text{C}$
Conversion speed	40ms/ channel	
Insulation	Between channels Insulation	
	Between terminals and power	Insulation(Photo-Coupler)
Compensation	Automatic compensation by RJC sensing (PT100)	
	Compensation degree	$\pm 1.0\%$
	Average	Average time (320 ~ 6400ms) Average number (2~ 64000) Average move (2 ~ 100)
Function	Alarm	Process Alarm Change rate alarm Burn-out detection
	Filter	Digital filter (160 ~ 64000ms)
	Max./Min. values display	Max./Min. values display
Terminal block	18-point terminal block	
Current consumption	5V : 610mA	
Weight (kg)	0.150	

## Input wiring

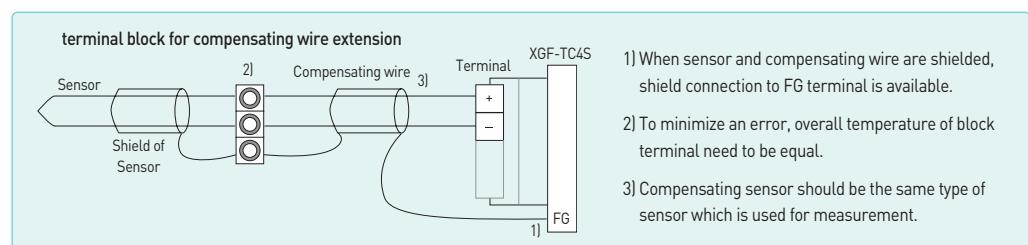

## Characteristics of I/O conversion

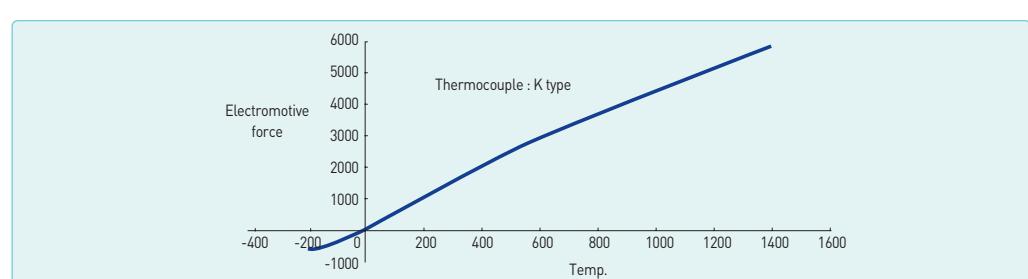

**Features****XGF-TC4UD**

- Optimum temperature control
- Universal input: TC, RTD, Voltage, Current
- Isolated input
- Output: Current/Transistor
- Parameter setting via dedicated software: TG-CON
- Variety of control types
  - PID control
  - Cascade control
  - On/ Off control
- Disconnection detection
- Various input functions: Bias, Filter, Square root
- Auto-tuning

**XGF-TC4RT**

- Input RTD : Pt100, JPt100, Pt1000
- Control Type : PID, On / Off Control


**Specifications**

Item	XGF-TC4UD			XGF-TC4RT
No. of loop	4 loops			4 loops
Input	Thermo couple	K	-200 ~ 1300 °C	
			0 ~ 500 °C	
		J	-200 ~ 1200 °C	
			0 ~ 500 °C	
		E	-200 ~ 1000 °C	
		T	-200 ~ 400 °C	
		B	400 ~ 1800 °C	
		R	0 ~ 1700 °C	
		S	0 ~ 1700 °C	
		N	-200 ~ 1300 °C	
	RTD	C(W5Re/W26Re)	0 ~ 2300 °C	
		PL II	0 ~ 1300 °C	
		L	-200 ~ 900 °C	
		U	-200 ~ 600 °C	
Output	Voltage	Pt100	-200 ~ 850 °C	-200 ~ 850 °C
		JPt100	-200 ~ 600 °C	-200 ~ 600 °C
		Pt1000	-200 ~ 800 °C	-200 ~ 800 °C
	DC V	DC mV	0 ~ 10mV	
			0 ~ 100mV	
			0 ~ 1V	
			1 ~ 5V	
			0 ~ 5V	
			0 ~ 10V	
			-5V ~ 5V	
	Current	DC mA	10V ~ 10V	
			4 ~ 20mA	
			0 ~ 20mA	
	Input channel	4 channels[Input type selection per channel]		

## Specifications

Item	XGF-TC4UD			XGF-TC4RT					
Resolution	Resolution Refer to the user's manual (Resolution for each input type)								
Cold junction compensation	Compensation	Automatic compensation by RJC sensor		—					
	Precision	$\pm 0.2^\circ\text{C}$		—					
Digital output	Temperature display	$0.1^\circ\text{C}/1^\circ\text{C}$ (Selection by software)		$0.1^\circ\text{C}$					
	Linear display	0-1000		—					
	Scale display	Only for voltage/current input Range : -3,000-3,000 Setting range: 0-3000		—					
Conversion speed	200ms / module			400ms / 4loops					
Control type	PID, On/Off control								
Parameter	Set value [SV]	Selection per input type							
	Gain	0 : ON/OFF control, Real type							
	Integrated time	0 : No Differential control, Real type							
	Differential time	0 : No Integrated control, Real type							
Output	No. of output channel	8 channels (PWM or analog output)		4 channels					
	PWM	Rated load voltage	DC 24V						
		Max. current point	0.1A points						
		On voltage drop	DC 0.3V or less						
		Off leakage current	0.1mA or less						
		Response time	ON→OFF	1ms or less					
			OFF→ON	1ms or less					
	Analog output	Periodic	0.5-120.0sec (resolution: 0.5sec)						
		Time resolution	High value between 10ms or 0.5% of full scale						
		Range	4-20mA						
		Resistance	600Ω or less						
Insulation	Resolution	$\pm 1.0\%$ , $25^\circ\text{C}$							
	Precision	8μA							
	Item	Insulation	Insulation withstand voltage	Insulation resistance					
	Channel - Channel	Trans	500V AC, 50/60Hz 1min,	500V DC, 10MΩ or more					
Terminal	Input terminal - PLC	Photocoupler	Leakage 10mA or less						
	Current output - Current output	Non insulation							
External power- Output									
Warm-up	20min or more								
Terminal	18 points terminal								
Power	5V, DC 24V (external)								
Current consumption	DC 5V : 900mA (Internal) DC 24V : 300mA (external)			DC 5V: 310mA DC 24V: 28mA					

## Example : Constant temperature

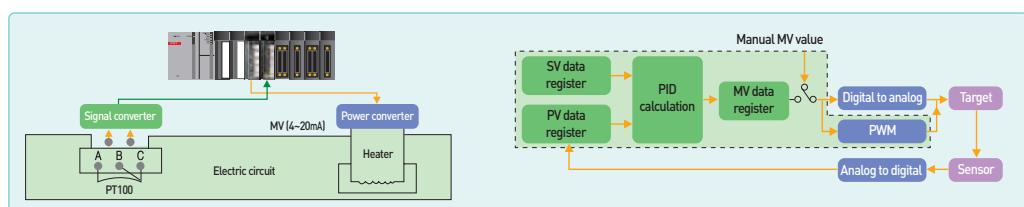


## XG-TCON


- The configuration tool for the temperature control module
- Easy parameter settings, data monitoring and trend-monitor support
- Auto-tuning operation command to speed up the system is set up and test operation



Data Monitor

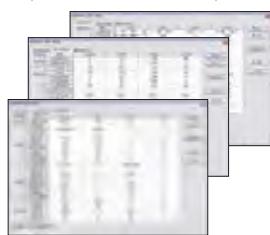

Parameter setting (input parameter)

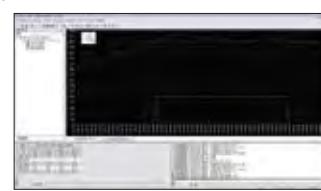


Trend monitor

**Features**


- SOE: Sequence Of Events Recorder
- I/O information collection to analyze the control system in Generation and Transformer
- Event collection in every 1ms
- Max. 300ea data available
- Data retain by built-in memory
- Max. installable module: 16ea
- Event monitoring of history through SOE Viewer

**Specifications**

Item	XGF-SOEA
No. of input point	32 points
Insulation method	Photo-Coupler Insulation
Memory size	1Mbit
The first event setting time	CPU RTC : 1 ms ( $\pm 2$ ms : delay between modules) RS-422 IRIG-B : 1 ms ( $\pm 0.5$ ms : delay between modules)
Rated input voltage	DC24V
Rated input current	Approx. 4mA / points
Voltage range	DC20.4 ~ 28.8V(5% and lower ripple rate)
On voltage/On current	DC19V and higher / 3 mA and higher
Off voltage/ Off current	DC11V and lower/ 1.7 mA and lower
Input resistance	Approx. 5.6 k $\Omega$
Response time (ms)	Off → On : 100us+Input filter time(User setting: 0~100ms) On → Off : 150us+Input filter time(User setting: 0~100ms)
Clock Synchronization	CPU RTC or RS-422 by IRIG-B format
Withstand voltage	AC560V rms / 3 Cycle (altitude 2000m)
Insulation resistance	10M $\Omega$ and higher (DC500V)
COMM method	32point / COM
Current consumption	0.4 A (MAX)
Operation display	LED On with Input On
External connection method	40point connector
Size(mm)	27x98x90
Weight	0.2 kg

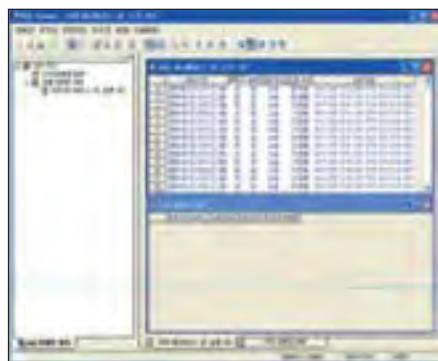**SOE Viewer**

Monitoring window

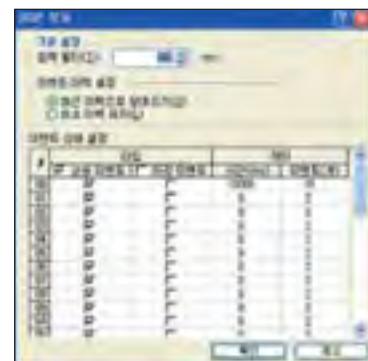

Parameter setup

# Datalog module

Programmable Logic Controller 122 / 123

## Features

- Capable to easily save PLC device data without PC
- Capable to save PLC control data without missing any change
  - Data can be saved whenever scanning is done or they can be saved at an interval of several ms(milliseconds).
- Capable to save a large volume of data file
  - Long-term data saving is available since CF card and USB memory with a large volume of up to 16GB can be used.




## Specifications

	Item	XGF-DL16A				
CF Card	Voltage of power supply	3.3V ± 5%				
	Card Type	CF200II(Transcend's Industrial CF card)				
	Compatibility Capacity	1, 2, 4, 8, 16Gbyte				
	Number of mountable cards	1				
	Caution	Use only industrial CF cards manufactured by Transcend				
USB Memory	Voltage of power supply	5.0V ± 5%				
	Memory Type	USB 2.0 (Host function)				
	Compatibility Capacity	1, 2, 4, 8, 16Gbyte (Please use USB capacity above CF card capacity)				
	Saving Method	Auto Saving through PnP function (Activation of PnP auto duplication: when USB is mounted, when power is supplied again)				
	Number of mountable memories	1(Unavailable to support USB extension cables)				
Data Type	BOOL	0 or 1				
	BYTE	00 ~ FF				
	WORD	0000 ~ FFFF				
	DWORD	00000000 ~ FFFFFFFF				
	LWORD	00000000 00000000 ~ FFFFFFFF FFFFFFFF				
	SINT	-128 ~ 127				
	INT	-32,768 ~ 32,767				
	DINT	-2,147,483,648 ~ 2,147,483,647				
	LINT	-576,460,752,303,423,488 ~ 576,460,752,303,423,487				
	USINT	0 ~ 255				
	UINT	0 ~ 65,535				
	UDINT	0 ~ 4,294,967,295				
	ULINT	0 ~ 1,152,921,504,606,846,975				
	REAL	-3.402823466e+038 ~ -1.175494351e-038 or 0 or 1.175494351e-038 ~ 3.402823466e+038				
	LREAL	-1.7976931348623157e+308 ~ -2.2250738585072014e-308 or 0 or 2.2250738585072014e-308 ~ 1.7976931348623157e+308				
	STRING	Fixed letters (Maximum 8 letters)				
Data Saving	Number of Settings	Maximum 8				
	Number of Data	Maximum 32				
	Saving Kind	Saved by the ladder program				
	File Type	CSV file(Extension: csv)				
SavingSpeed	Number of Saving Files	Total 800 (when using 16Gbyte CF memory)				
	Processing Score(word)	4	16	64	256	1024
Time to Initialize CF card	Processing Speed(ms)	1	4	10	30	120
	Capacity(Gbyte)	1	2	4	8	16
	Time(s)	10	20	40	60	120
Collection Interval						
In/output Occupation Score						
Clock						
DC5V Internal Consumption Current						
External Size						
Weight						

## System Configuration

The diagram illustrates the XG5000 system configuration. It shows a central computer monitor displaying a ladder logic program. A dashed arrow labeled "settings" points from the monitor to a small data logger module. Another dashed arrow labeled "Data Saving" points from the monitor to a CF card slot in the module. A third dashed arrow labeled "USB Memory Backup" points from the monitor to a USB drive connected to the module. The module itself is shown with its serial port and mounting holes.

	A	B	C	D
1	Time	Index	DWORD	WORD
2	2011/07/04/09.22.35.038	1807154	05701D3C	1D3C
3	2011/07/04/09.22.35.058	1807155	05701D3D	1D3D
4	2011/07/04/09.22.35.079	1807156	05701D3E	1D3E
5	2011/07/04/09.22.35.098	1807157	05701D3F	1D3F

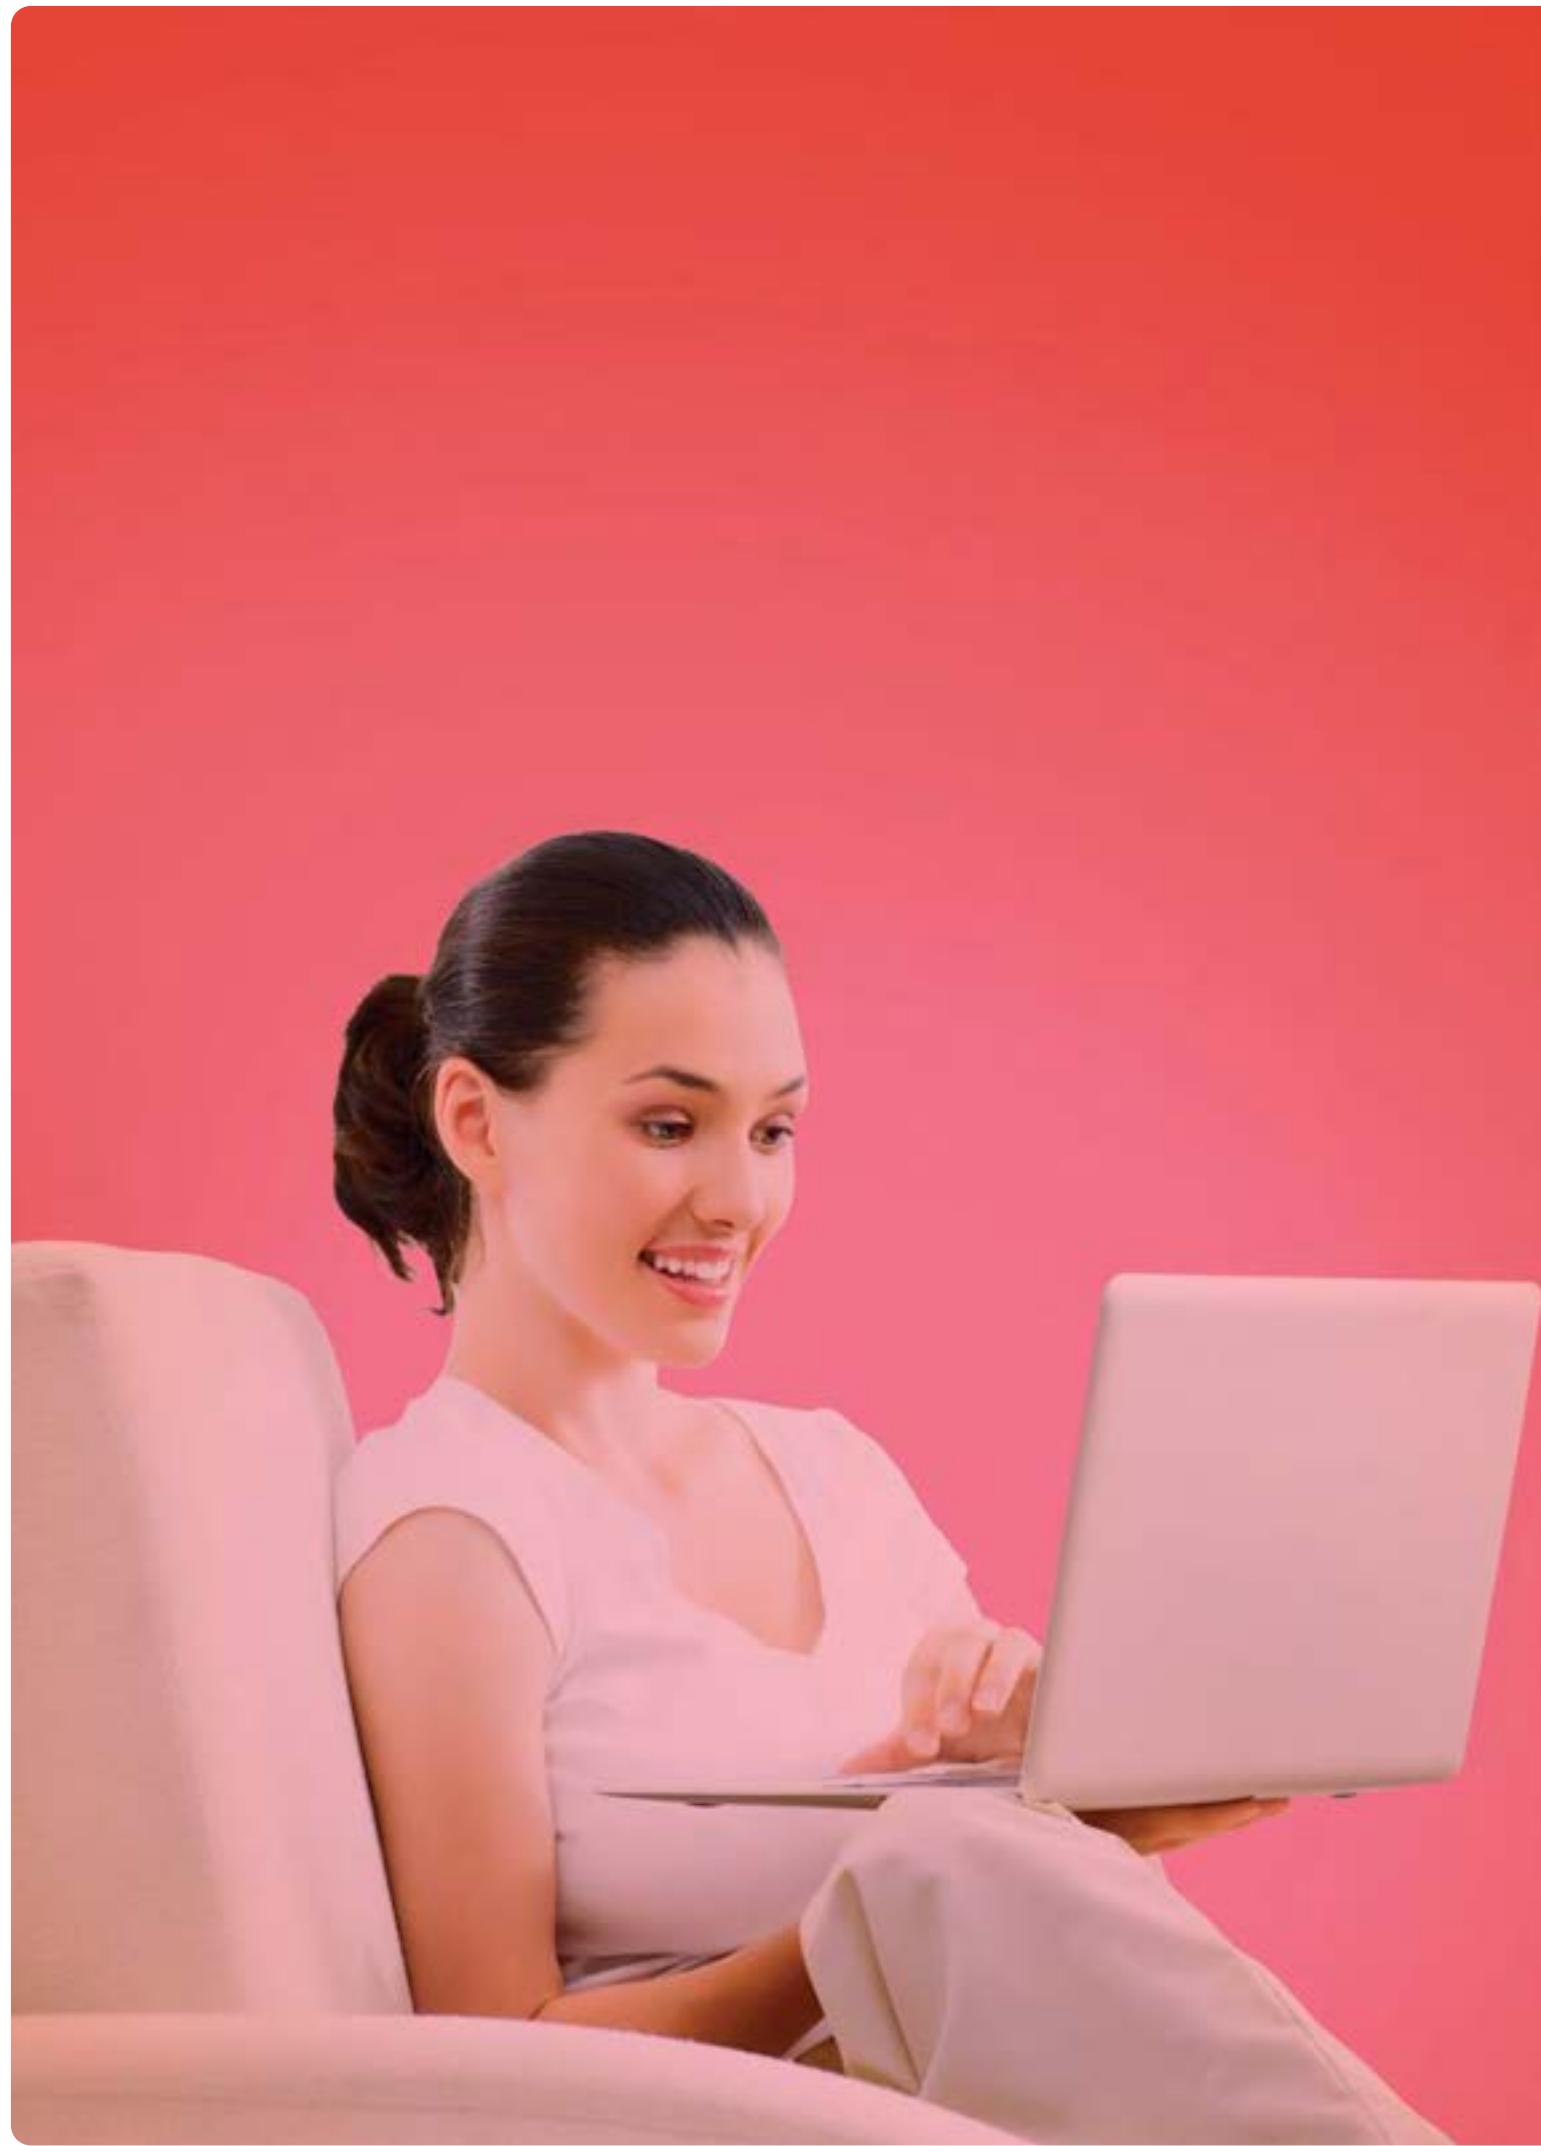



# Software

Software innovation for integrated solution.


**XG5000 is the optimum software which can cover various programming needs, debugging, and easy maintenance. Especially, XG5000 achieves customer satisfaction with useful maintenance tool by internet.**

## Contents

- 126 XG5000 programming
- 136 XG5000 Communication Parameters
- 138 XGT Panel iXP2 Series
- 139 XGT Panel iXP Series
- 140 XGT Panel XP Series
- 143 APM[Positioning module] Software Package
- 144 Product list
- 146 Dimensions

**Features**

- Program editing & Engineering software
- Windows-based easy operation
- Multi-PLC, Multi-program, Multi-task in one project
- Various monitoring and diagnosis functions
- Windows 2000, XP, VISTA, Win7, Win8(32/64bits)  
(Limited use in Windows 98, ME)

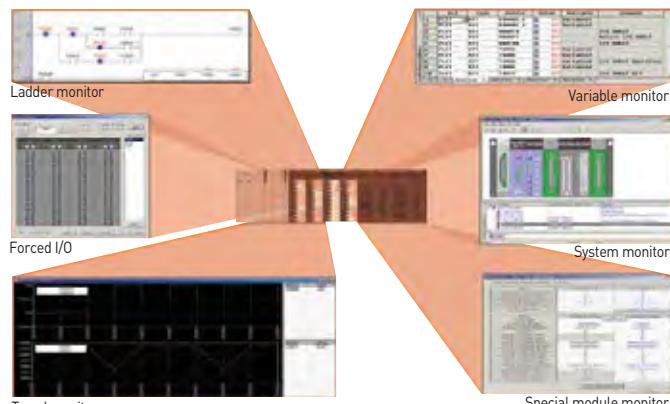**Programming tools****MPMP (Multi-PLC Multi-programming)**


Different PLC systems can be edited, monitored, and managed simultaneously in one project.

**Drag & Drop**


It is available in project, variable/comment, ladder diagram editing and monitoring.

**User-defined shortcut keys**



User-defined shortcut keys increase editing convenience.

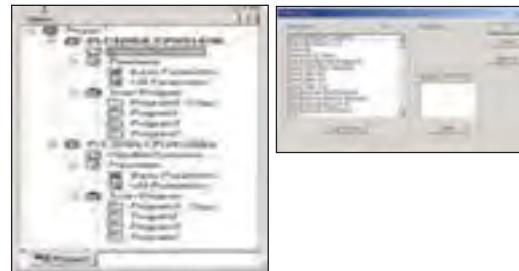**Monitoring****Special module monitoring**

Monitoring and test-run of various special modules are available.

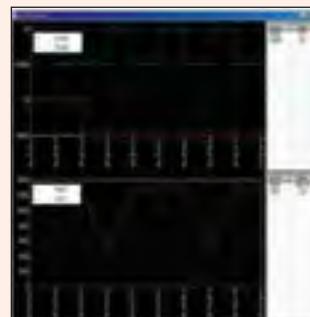**Trend monitoring**

The changing value of specific device can be monitored and saved as a file.

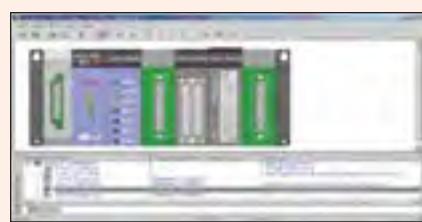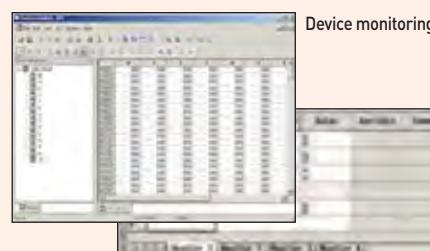
**System monitoring****Device monitoring****Variable monitoring**

## System requirement

Item	System requirement
O/S	Windows 2000, XP, VISTA, Win7, Win8[32/64bits] [Limited use in Windows 98, ME]
CPU	IBM compatible PC with Min. 200MHz Pentium processor
Memory	Min. 128M
HDD	100 MB [Free memory space]
Serial port	Communication port for program transmission [RS-232C, USB]
Printer	Compatible with Windows 98 or later
Mouse	Compatible with Windows 98 or later

## Variable and programming editing

- Data input like EXCEL
- Cell-unit edit
- Auto Fill function
- Compatible with Microsoft Excel
- Redo and Undo (Unlimited)
- Segment screen edit

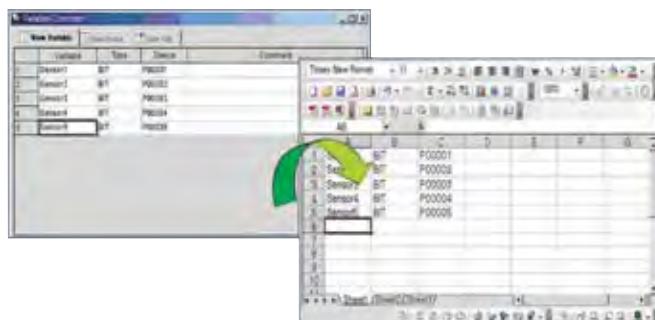

## Improved diagnosis and maintenance




**Module exchange wizard**

It supports safe module exchange during 'RUN' mode.




**User-defined event**

By registering user-defined event, users can read the record of specified event and use it for PLC operation and debugging

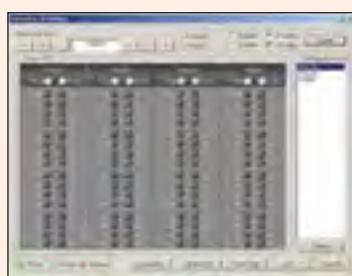

**Forced I/O**

The status of external output device can be checked without program. And when input device breaks down, forced input function specifies ON/OFF and can operate the system without interruption of equipment.

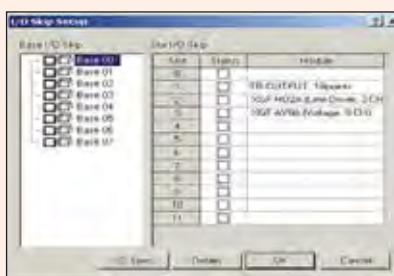


**I/O skip, Error Mask**

I/O inspection and renewal can be set for specific module and continuous operation is available when an error is occurred.


### Program editing

- Start XG5000
- Select [New Project]
- Write project name and select CPU type

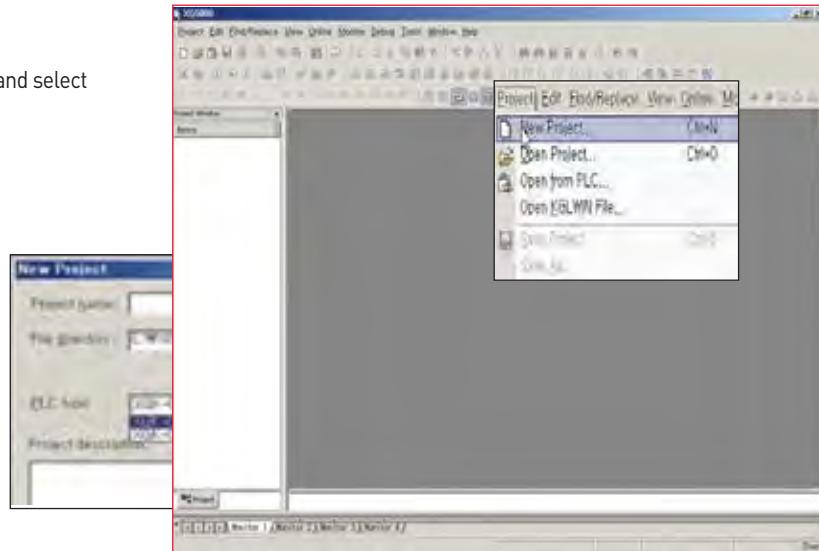

### Configure ladder lines as below with ladder input tool bar

- Select input point and command with ladder tool bar.

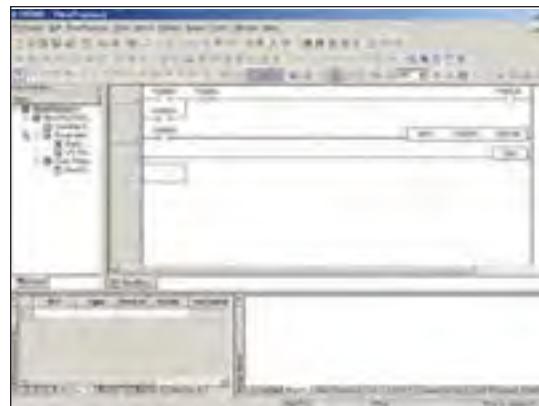

Icon	Description	Short key
[ ]	Arrow mode	ESC
[ ]	Normally open contact	F3
[ ]	Normally closed contact	F4
[ ]	Positive transition-sensing contact (On for 1 scan when Off → On)	Shift+F1
[ ]	Negative transition-sensing contact(On for 1 scan when On → Off)	Shift+F2
[ ]	Horizontal line	F5
[ ]	Vertical line	F6
[ ]	Fill horizontal line	Shift+F8
[ ]	Coil	F9
[ ]	NOT instruction contact	Shift+F9
[ ]	Negated coil	F11
[ ]	SET coil	Shift+F3
[ ]	RESET coil	Shift+F4
[ ]	Positive transition-sensing coil (On for 1 scan when Off → On)	Shift+F5
[ ]	Negative transition-sensing coil (On for 1 scan when On → Off)	Shift+F6
[ ]	Function	F10

### Note) Addition of 'EDGE' detection instructions

Develop user-friendly programming through adding D, D NOT instructions (Rising EDGE, dropping EDGE) to contact and output coil.




## Program download

### Connection setting

- Check a setting for connection between XGT and XG5000
- XGT supports USB and RS-232C


Set up communication port and download speed

\* using 'USB TO RS-232C' converter, 115,200bps connection may be unavailable depending on characteristics of converter. In this case, change the communication speed to 38,400bps.

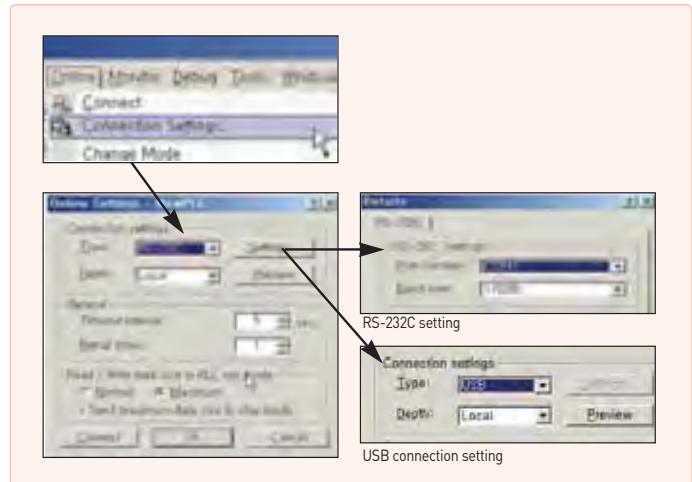


### Connection

Connect to PLC and download the program as below.

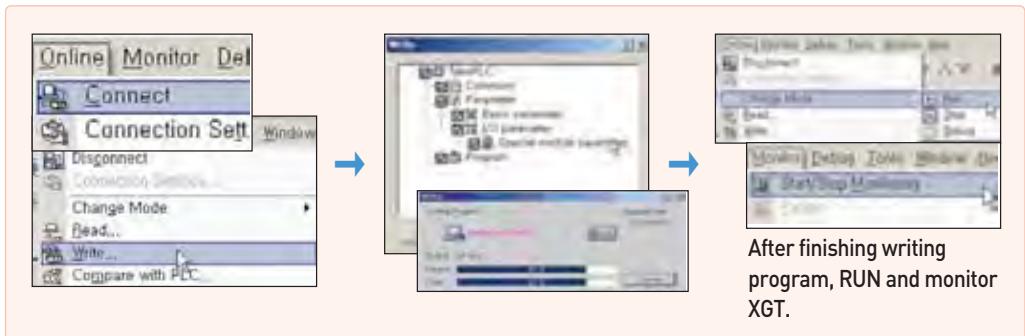


### Short icon

\* XGT doesn't support collective-writing monitoring for system safety.

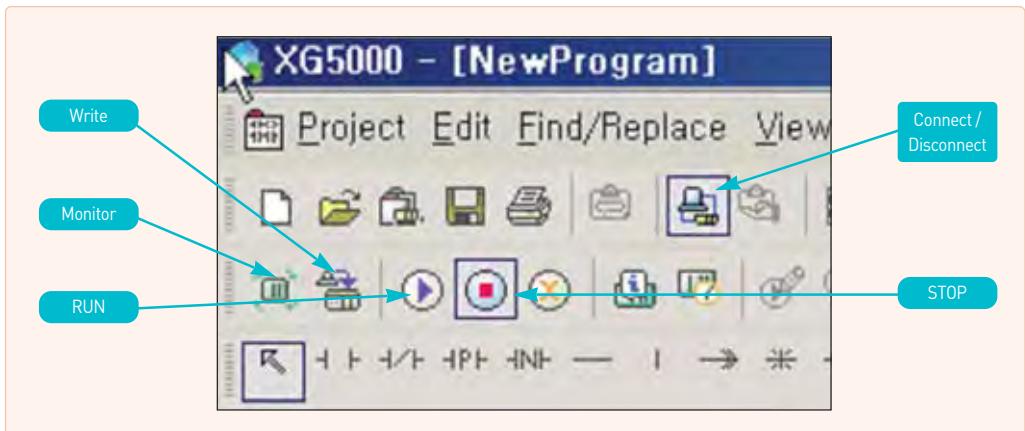


### Online Editing

Select [Start Online Editing] in Online menu.

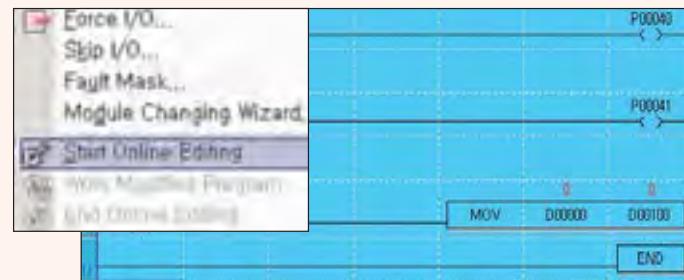


When starting Online Editing, the screen color becomes blue.

Modify the program.

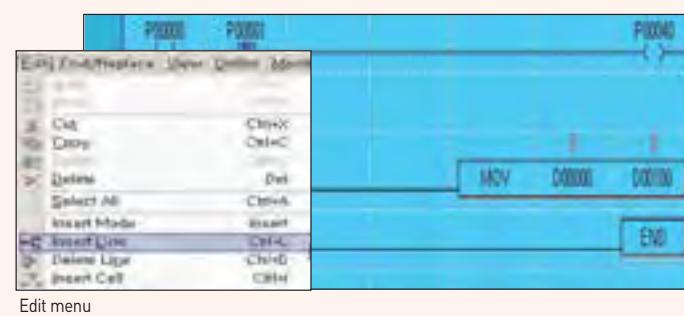


Edit menu

After finishing modifying the program, select [Write Modified Program] and [End Online Editing].

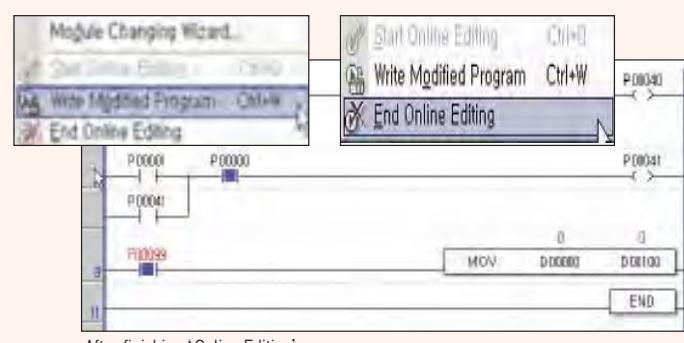

After finishing 'Online Editing'

## Open a project written in KGL-WIN

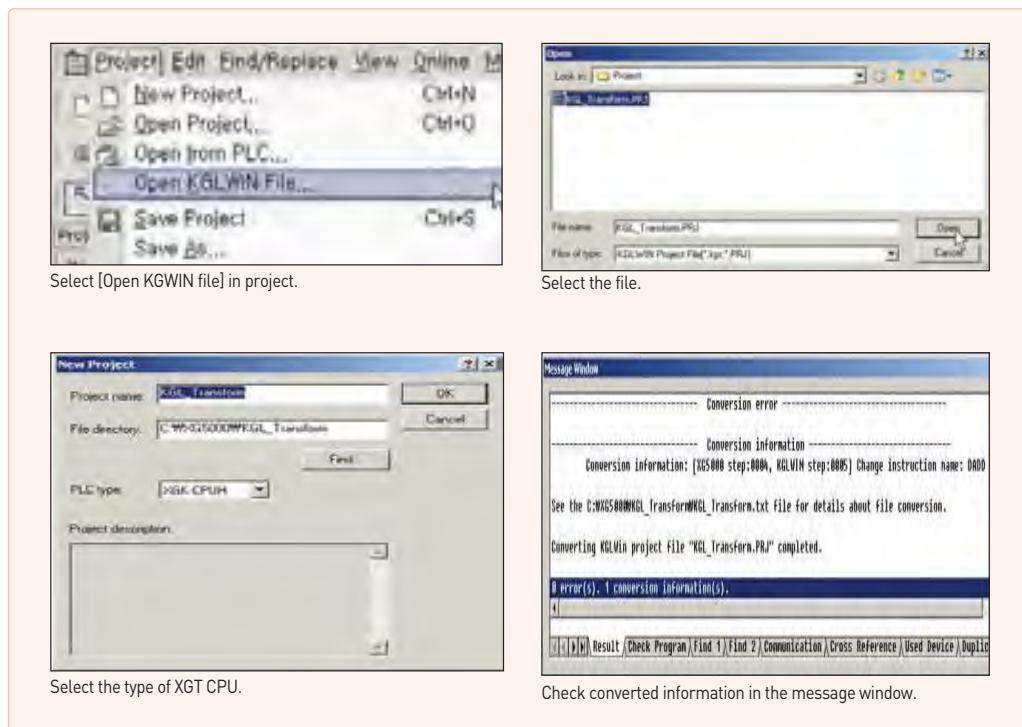

**Note** Dedicated instructions and special parameters for MASTER-K cannot be converted.  
Mostly General instructions and descriptions are converted.  
Information impossible to be converted is displayed as ERR.


ERR

- Content of main special flag (F) change

MASTER-K	XGT	Specifications
F10	F99	ON regularly
F11	F9A	OFF regularly
F12	F9B	ON during first one scan
F13	F9C	OFF during first one scan


For more detailed information, refer to user's manual.

## Data type

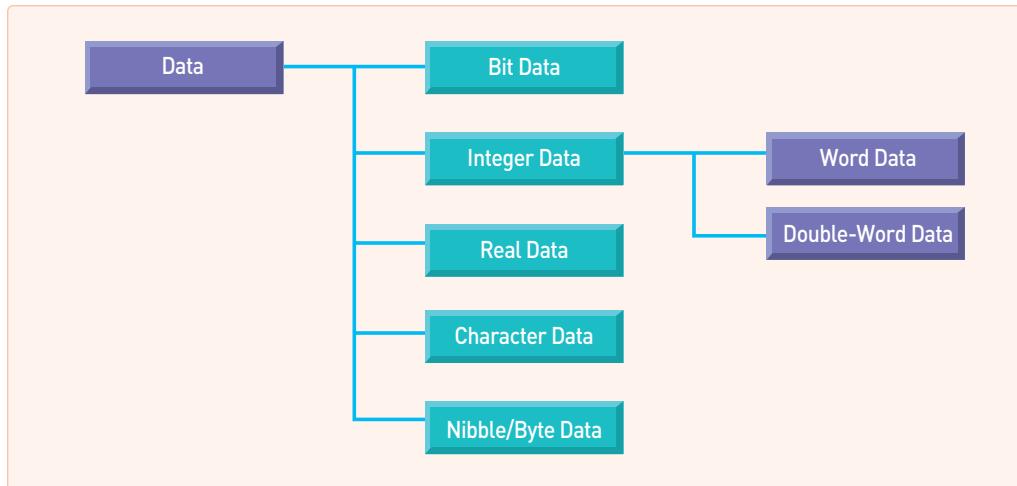


- Nibble: 4-bit unit data
- Byte: 8-bit unit data
- Real Data: 32-bit/64-bit floating point data



Real Number

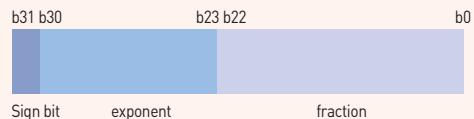

Long Real Number

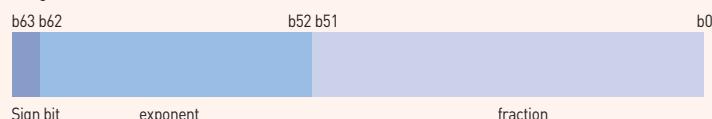

- Character Data: Saving numbers, alphabets, symbols as a type of ASCII code

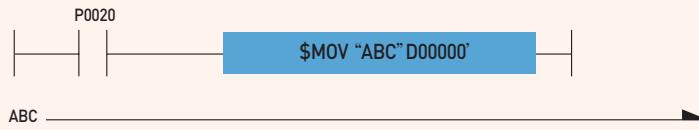

D100	0x31	0x32
D101	0x41	0x4A
D102	0x30	0x4E
D103	0x00	0x36
D104	0x00	0x36

## Device type

Device	Size	Bit Contact	Word Data	Name
P	32768 points	P0000 ~ P2047F	P0000 ~ P2047	I/O Relay
M	32768 points	M0000 ~ M2047F	M0000 ~ M2047	Assistant Relay
L	180224 points	L00000 ~ L11263F	L0000 ~ L11263	Link Relay
N <sup>*1]</sup>	21K words	N/A	N00000 ~ N21503	Comm. data register
K	32768 points	K00000 ~ K2047F	K0000 ~ K2047	Keep Relay
F	32768 points	F00000 ~ F2047F	F0000 ~ F2047	Special Relay
T <sup>*2]</sup>	2048 points	T0000 ~ T2047	T0000 ~ T2047	Timer
C <sup>*3]</sup>	2048 points	C0000 ~ C2047	C0000 ~ C2047	Counter
U	3072 words	U00.00 ~ U7F.31.F	U00.00 ~ U7F.31	Special Module Counter
Z	128 words	N/A	Z0 ~ Z127	Index Register
S	128 groups	S00.00 ~ S127.99	N/A	Step Control Relay
D	32K words	D00000.0 ~ D32767.F	D00000 ~ D32767	Data Register
R (Internal RAM) <sup>*4]</sup>	32K words	R00000.0 ~ R32767.F	R00000 ~ R32767	File Register
ZR (Internal RAM) <sup>*5]</sup>	32K words	N/A	ZR00000 ~ ZR65535	File Register
R (Expanded)	1M words	N/A	Available as much as extension size	File Register
ZR (Expanded)	1M words	N/A	Available as much as extension size	File Register

**Note** 1. When communication module is not used, it can be used as internal data area.

2. Word data in timer shows a current value of relevant bit contact.


3. Word data in counter shows a current value of relevant bit contact

4. Even when using more than 32K words internal RAM, bit contact available to display is R00000.0~R32767.F Also word data enable to be displayed in the range of R00000.0~R32767.F

5. When internal RAM is more than 32K words, bit contact can be in the range of ZR00000.0~ZR32767.F and word data can be displayed as much as the size of internal RAM

## Special module register U


Register for reading data from special module mounted in slot

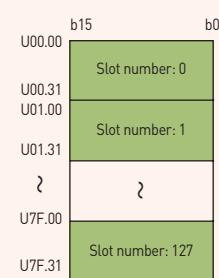

- Assigning 32 words per slot in U area
- Bit type display available  
Ex) U93.12.x (x: Bit location, Hexadecimal display)
- Available to read/write internal memory value of special module without using PUT (P), GET (P), PUTS (P), GETS (P)
- Basic display in U area  
Ex) Uxy.z  
x: Base number (0~7)  
y: Slot number (0~F)  
z: Word number of special module internal memory

## File register R, ZR

Register that a recorded value is not deleted when power failure is occurred. File register is used for data backup or data storage.

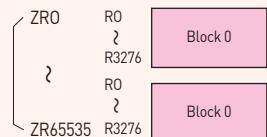

R: Block unit access

ZR: Entire file register access


Internal RAM (Temporary preservation): 32K words

FLASH (Permanent preservation): 1M words

## Index register

Index register sets up devices using index function.


The sum of index register value and directly specified device number is real device number.

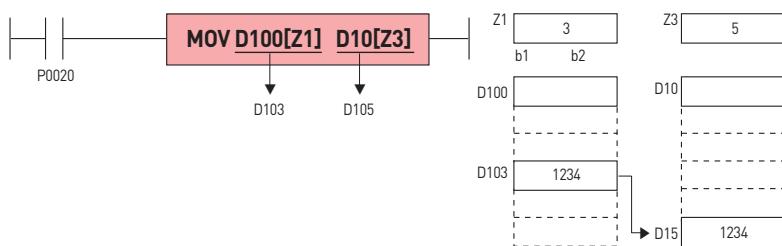

## Available Device

- Bit Device: P, M, L, K, F, T, C
  - Word Device: U, D, R, ZR, N, present value of T and present value of C
- Ex) MOV T1[Z1] D10 : If Z1 is 5, present value of T1+5=T6 is transmitted to D10.  
Ex) LOAD D10[Z1].5 : If Z1 is 5, LOAD(10+5).5 => LOAD D15.5 is set.

## Bit specifying method of word device

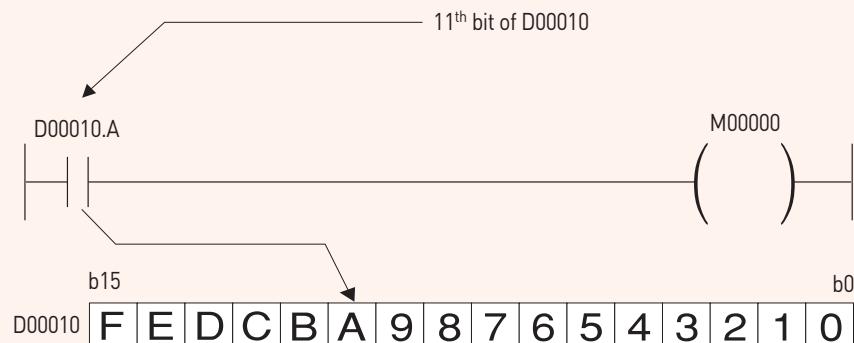

By assigning bit number to word device, bit data is available to use.

Word device number	•	Bit number
--------------------	---	------------

In this case, word device number should be addressed as decimal and bit number should be addressed as hexadecimal.

Relevant Device: U, D, R

## Instructions

Classification	Designations	Symbol	Description	No. of step
16 Bits transfer	MOV	MOV S   D	(S) → (D)	2
	MOVP	MOVP S   D		3
32 Bits	DMOV	DMOV S   D	(S+1, S) → (D+1, D)	2
	DMOVP	DMOVP S   D	(S+3, S+2, S+1, S) → (D+1, D)	5

① Classification: Classifies instructions into applications.

② Designations: Displays instruction names to be used in program.

- Display rules: Instructions shall be basically displayed in word unit. According to data size, operation characteristics, real number data process, text process, the rules are as follows;
- Based on Data Size & Type
  - D: Double Word related instruction.
  - R: Real Number related instruction.
  - L: Long Real Number related instruction.
  - However, LMOV is 64 Bits transfer instruction.
  - \$: String related instruction.
  - G: Group calculation.
  - 4: Nibble related instruction, used only at the back of instruction.
  - 8: Byte related instruction, used only at the back of instruction.
  - 3: Instruction that process 3 operands, used only at the back of instruction.
- Based on Operation Characteristics
  - P: Instruction that is executed for 1 scan when input signal is changed OFF → ON

③ Symbol: Displays symbols used in program, showing the number of used operands and the type of Source or Destination. Operand display rules are as follows;

- S: Source, with data value not changed after calculated.
- D: Destination, with data value changeable after calculated.
- N, n: The number to process.
- St, En: Start and End, used only in BSFT & WSFT.
- Sb: Source in case Bit position is specified, mostly used in Nibble/Byte instruction.
- Db: Destination in case Bit position is specified.
- Z: Control word, which means previously specified format as based on each instruction.

④ Description: Describes general functions of instruction.

⑤ No. of step: The number of basic steps of instruction, which means the number of steps in case indirect specification, index formula and direct variable input were not used.

**Features**


- Default settings of the network and easy of user program
- Network system and provides extensive monitoring and control of the communication module
- Efficient implementation of a fast interface with the CPU to the network management
- Easy access with XGT and Modbus
- Rich built-in diagnostic function (Condition of CPU, Link, Auto SCAN, Frame monitor)




Item	Industrial Ethernet network				Fieldbus network				
	RAPIEnet	EtherNet/IP	Modbus TCP/IP	XGT dedication	Cnet	Fnet	Rnet	DeviceNet	Profibus-DP
Network service	Smart extension	○	○	-	-	-	-	-	-
	High speed link	○	-	-	○	-	○	○	○
	P2P	○	○	○	○	-	-	-	○
	XGT server	-	-	-	○	○	-	-	-
	Modbus server	-	-	○	-	○	-	-	-
Smart extension	Max. station	63	63	-	-	-	-	-	-
	Network cycle time	2~1000ms	2~2,147,483,647ms	-	-	-	-	-	-
	No. of block	64	64	-	-	-	-	-	-
	Data per block	768 bytes	1400 bytes	-	-	-	-	-	-
High speed link	Max. station	64	-	-	64	-	64	63	123
	No. of block	128	-	-	128	-	64	64	123
	Send block	64	-	-	32	-	32	32	63
	Receive block	128-Send block	-	-	128-Send block	-	64-Send block	32	63
	Data per block	200 words	-	-	200 words	-	60 words	60 words	256 bytes
P2P	No. of block	64	64	64	64	-	-	-	64
	Data per block	1400 bytes	1400 bytes	125 bytes	1400 bytes	256 bytes	-	-	244 bytes
Transmission speed Media		100/1,000Mbps	100/1,000Mbps	100/1,000Mbps	100/1,000Mbps	900~115,200Mbps	1Mbps	1Mbps	125/250/500kbps
Topology		Ring, Line, Srat	Line, Srat	Line, Srat	Line, Srat	Bus	Bus	Bus, Srat	Bus, Srat
Configuration Tool		XG5000					XG5000 / N Configurator		

## Various network diagnosis and monitoring

- Auto Scan: Searching and displaying each node connected to network
- Ping Test : Indicates the port connection status of other stations connected to the network.
- View Communication Module Log : Communication module history view function of XG5000 program can check whether error occurred and measures
- Remote O/S download : Update OS of the remote module connected to the network.
- Loopback test : This function is to check for port anomalies and performs a loopback test for each port.
- System synchronization : Synchronize current PLC status to system diagnosis
- Frame Monitor: Collecting and displaying sending/receiving frame in real time

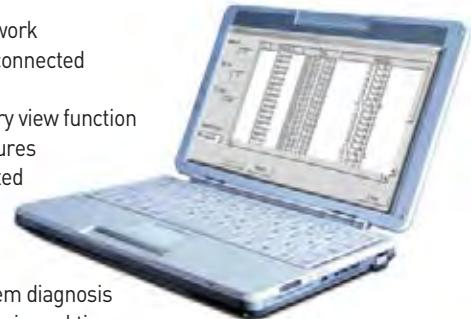

Item	Industrial Ethernet network				Fieldbus network				
	RAPIDnet	EtherNet/IP	Modbus TCP/IP	XGT dedication	Cnet	Fnet	Rnet	DeviceNet	Profibus-DP
Communication module status	○	○	○	○	○	○	○	○	○
Service status	○	○	○	○	○	○	○	○	○
Media information	○	○	○	○	○	-	-	-	-
Auto Scan	○	○	○	○	-	○	○	○	○
Ping Test	-	○	○	○	-	-	-	-	-
View Communication Module Log	○	○	○	○	○	○	○	-	○
Remote O/S download	○	-	-	-	-	-	-	-	-
Loopback test	○	○	○	○	○	-	-	-	-
System synchronization	○	○	○	○	○	○	○	○	○
Frame monitor	-	-	-	-	○	-	-	-	-

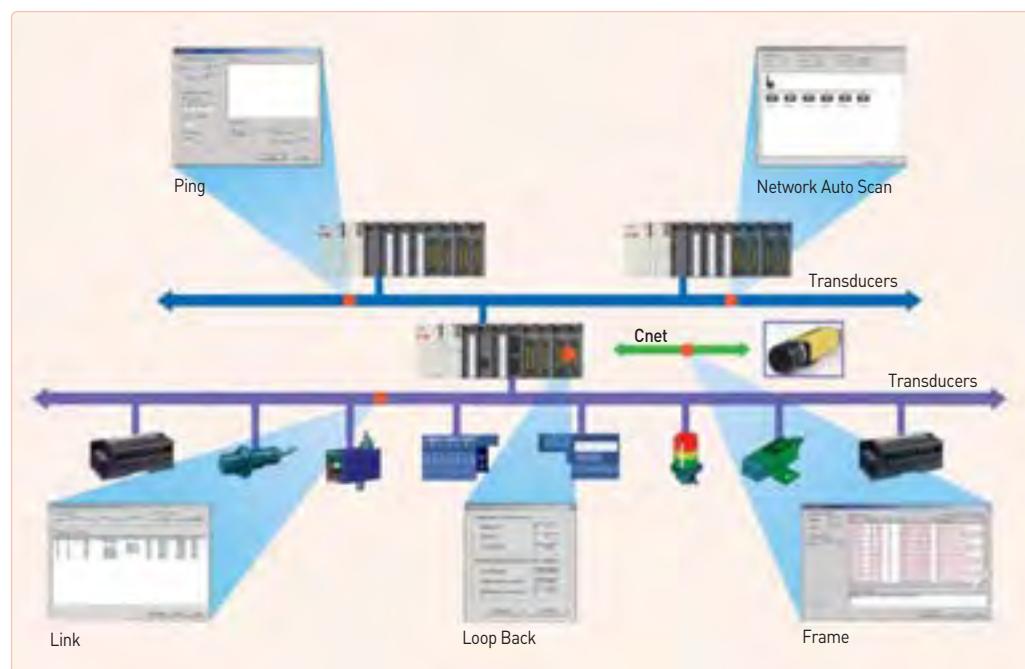

## Main Specification

- Aluminum body frame, responsive touch screen.
- Easy-to-use Multi-touch, gesture, dual screen, portrait mode.
- Multi connected with 1Gbits 2ch.
- Ethernet between PC to PLC.
- Various interfaces : USB host /device, SD card, HDMI.
- High resolution : 1024 X 768
- IP66, UL type 4x, NEMA 4x standards
- Explosion proof. IECEx, ATEX, KCs



**CE** **KC** **UL** US LISTED

Item	iXP2-0800A/D	iXP2-1000A/D	iXP2-1200A/D	iXP2-1500A/D
Display type	TFT color LCD			
Screen size	8.4"	10.4"	12.1"	15"
Display resolution	800×600		1,024×768	
Color indication		24-bit color [16.7M colors]		
Backlight		LED method, automatic On / Off support		
Backlight lifetime		50,000 hour		
Touch panel		Capacitive touch		
Audio output		Magnetic buzzer [85dB]		
Processor		1GHz, Dual core		
Memory	Flash Operating RAM Backup RAM	1GB 1GB 1 Mbyte		
Backup data		Date / Time data, Logging / Alarm / Recipe data, Non-volatile devices		
Battery		CR2032(3.0V/210mAh, About 3years/25°C )		
Video output		1 × HDMI		
Ethernet		1 × 10Base-T / 100Base-TX, 1 × 10Base-T / 100Base-TX / 1000Base-T		
USB host		3 x USB 2.0 (Front × 1, Rear × 2)		
USB device		1 × USB 2.0 (Send / Receive front, PC and project data etc.)		
RS-232C		1 × RS-232C (DSUB 9 / Male type)		
RS-422/485		1 × RS-422/485 (Terminal block)		
Multi-language		Can display 12 languages simultaneously		
Animation		GIF format support		
Recipe		Support		
Data logging		Support		
Script launcher		Support		
Standard certification		CE, KC, UL, IECEx, ATEX, KCs		
Protection standard		IP66, Conform to the UL type 4x, NEMA 4x standard		
Explosion proof		Ex nA IIC T5 Gc, Ex tc IIIC T100°C Dc IP64		
Dimensions (mm)	240 × 180 × 60	271 × 212 × 60	313 × 239 × 60	395 × 294 × 66
Panel cut (mm)	228.5 × 158.5	259.0 × 201.0	301.5 × 227.5	383.5 × 282.5
Power		iXP2-xxxxA : AC100 / 240V, iXP2-xxxxD : DC24V		
Power consumption (W)	25	25	30	30
Weight (Kg)	1.87	2.35	3.0	4.6

## Main Specification

- 1GHz 32bit RISC Embedded CPU
- 16,777,216 TFT color LCD
- 128MB display data and 1MB back-up memory
- Ethernet 1ch, RS-232C 2ch, RS-422/485 1ch
- USB host 3ch and device 1ch
- SD memory card interface

## Main Functions

- PLC ladder monitoring (XGK/XBC PLC only)
- Web Server/Data Server
- Path through
- XP-Remote : Remote controlling and monitoring



Item	iXP50-TTA/DC	iXP70-TTA/DC iXP70-TTA/AC	iXP80-TTA/DC iXP80-TTA/AC	iXP90-TTA/DC iXP90-TTA/AC									
Display type	TFT color LCD												
Screen size	21.3cm [8.4"]	26.4cm [10.4"]	30.7cm [12.1"]	38.1cm [15"]									
Display Resolution	800×600 pixel [SVGA]	800×600 pixel [SVGA]	800×600 pixel [SVGA]	1,024×768 pixel [SVGA]									
Color indication		16-bit and 24-bit Color (default: 16-bit Color)											
Indication degree	Left/Right: 80 deg, Up: 80 deg, Down: 60 deg.		Left/Right: 80 deg, Up: 60 deg, Down: 80 deg.										
Backlight		LED Type											
Backlight duration	70,000 hours		60,000 hours										
Brightness	500 cd/m <sup>2</sup>	700 cd/m <sup>2</sup>	550 cd/m <sup>2</sup>	800 cd/m <sup>2</sup>									
Touch panel		4-Line type, analog											
Sound Output		Magnetic buzzer [85dB]											
Process		ARM Cortex-A8 Core [32bit RISC], 1GHz											
Memory	<table border="1"> <tr> <td>Flash</td><td>512MB(display 128MB)</td><td>1GB(display 128MB)</td></tr> <tr> <td>Operating RAM</td><td>256MB</td><td>512MB</td></tr> <tr> <td>Backup RAM</td><td></td><td>1MB</td></tr> </table>	Flash	512MB(display 128MB)	1GB(display 128MB)	Operating RAM	256MB	512MB	Backup RAM		1MB			
Flash	512MB(display 128MB)	1GB(display 128MB)											
Operating RAM	256MB	512MB											
Backup RAM		1MB											
Backup data		Date/Hour data, Logging/Alarm/Recipe data and nonvolatile device											
Battery duration		Approx. 3 years (Operating ambient temperature of 25°C)											
Ethernet		1 channel, 10/100BASE-TX											
USB Host		3 channels, USB 2.0 host (mouse, keyboard, printer* and USB memory driver is available)	1 channel, USB 2.0 slave (for download and upload project file)										
RS-232C			1 channel										
RS-422/485			1 channel, RS-422/485 mode										
SD Card			1 Slot [SDHC]										
Human sensor	-	Detection range: side 1-1.5m, front 40-50cm Angle: high/low 100°, left/right 140° (detecting 5-20 micron infrared light)											
Audio output		LINE-OUT 1 channel											
Expansion module		For communication and I/O option module (available later)											
VM module	-	4 channels video input (available later)											
Multi-language		Up to 12 language simultaneously											
Animation		GIF format is available											
Recipe		available											
Data logging		available											
Script executor		available											
Certifications		CE, UL(cUL), KC											
Protection standard		IP65											
Dimension (mm)	240.5×180.0×54.4	270.5×212.5×60.0	313.0×239.0×56.0	395.0×294.0×60.0									
Panel cut (mm)	228.5×158.5	259.0×201.0	301.5×227.5	383.5×282.5									
Rated voltage	DC24V		DC12/24V(AC 100-240V)										
Power consumption (W)	30.8	42.3	42.3	42.3									
Weight(Kg)	1.9	2.2	2.4	3.9									

\* SEWOO printer only

## Main Specification

- TFT LCD-applied wide type
- LED Backlight adopted for enhanced contrast ratio and low-power
- PLC Ladder monitoring function: Only XGK/XBC supports\*
- Web Server\* / Data Server\* / Path-Through Function\*
- Remote Viewer Function\*
- Screen editor : XP-Builder

\* Functions that support only the TTA model



Item	eXP20-TTA/DC, CERTI	eXP20-TTA/DC	eXP30- TTA(B)/DC	eXP30-TTE/DC	eXP40-TTE/DC	eXP40- TTA(B)/DC	eXP40-TTA/DC, CERTI	eXP60- TTA(B)/DC	eXP60-TTA/DC, CERTI
Display type					TFT color LCD				
Screen size	10.9cm (4.3inch)	14.2cm(5.6inch)			17.8cm(7inch)			25.9cm(10.2inch)	
Display Resolution	480 x 272 pixel	640 x 480 pixel			800 x 600 pixel(WVGA)				
Color indication	24-bit Color(16.7M)	16-bit Color(65,536 Color)			24-bit Color(16.7M)			16-bit Color(65,536)	
Indication degree			Left/Right:60 deg. Upper:40 deg. Lower:60 deg.					Left/Right:55 deg. Upper:35 deg. Lower:55 deg.	
Backlight				LED Type (Supports backlight auto-off function)					
Backlight duration	30,000 hours				20,000 hours				
Touch panel					4-Wire Resistive, analog				
Audio output					Magnetic buzzer (85dB)				
Process					i.MX283(454MHz)				
Memory	Flash				128MB(Screen 64MB)				
	Operation RAM				128MB				
	Backup RAM				128KB				
Backup data				Date/Hour data, Logging/Alarm/Recipe data and nonvolatile device					
Battery duration				Approx. 3 years (Operating ambient temperature of 50°C)					
RTC				Time error Approx. 3 sec/1day(Operating ambient temperature of 25°C)					
Ethernet	1 channel, IEEE802.1a, 10Base-T/100Base-TX		-		1 channel, IEEE802.1a, 10Base-T/100Base-TX				
USB Host			1 channel, USB 2.0 Host (mouse, keyboard, printer and USB memory driver is available)						
USB Device	-			1 channel, USB 2.0 Device (for download and upload project)					
RS-485, RS-232C		1channel, RS-232C (DSUB 9/Male Type)			2channels, RS-485, RS-232C (DSUB 9/Male Type)				
RS-422/485		1channel, RS-422/485 (DSUB 9/Male Type)			1channel, RS-422/485 mode (Terminal Type)				
Multi-language			Up to 12 language simultaneously						
Animation			GIF format is available						
Recipe			available						
Data logging			available						
Script executor			available						
Certifications	CE, UL Type4X, KC		CE, UL(cUL), KC		CE, UL Type4X, KC	CE, UL(cUL), KC	CE, UL Type4X, KC		
Protection standard	IP66		IP65		IP66	IP65	IP66		
Dimension (mm)	128x102x32		300x200x68		208.0 x 154.0 x 44.4			276.0 x 218.0 x 44.4	
Panel cut (mm)	119x93		156.0 x 123.5		192.0 x 138.0			260.0 x 202.0	
Rated voltage			DC24V						
Power consumption (W)	4.6W		7.2W		6.5W			10W	
Weight(Kg)	0.3	0.42	0.39	0.62	0.63			1.08	

\* SEWOO printer only

## Graphic type XP30/XP40/XP50/XP70/XP80/XP90


- High and vivid distinction with 65,536 colors
- High quality raster and vector symbols
- Various BMP JPG GIF graphic file support: BMP, JPG, GIF, WMF, etc
- Simple animation effects: animated GIF
- 10/100BASE-T Ethernet interface
- Convenient and easy screen editing
- Strengthened data management: Logging, Recipe, and Alarm
- Read function of a controller's state information: Monitoring and maintenance
- Multi-lingual display: up to 8 languages
- Offline and concurrent simulation with XG5000
- Easy to change the address of the graphic objects: Tag function with XGT Panel
- USB host for peripheral devices: USB Drive, Mouse, keyboard, printer, etc
- Sufficient memory for screen data: 10MB



Model Type	XP30-BTE/DC	XP30-BTA/DC	XP30-TTE/DC	XP30-TTA/DC	XP40-TTE/DC	XP40-TTA/DC	XP50-TTA/DC	XP70-TTA/AC XP70-TTA/DC	XP80-TTA/AC XP80-TTA/DC	XP90-TTA/AC				
	Mono		Color											
Display Element	Mono Blue LCD			TFT Color LCD										
Screen Size	14cm (5.7")			17.7cm (7")		21cm [8.4"]	26cm [10.4"]	31cm [12.1"]	38cm [15"]					
Resolution	320×240			800×480		640×480	800×600	1024×768						
Color	8-column Gray Scale	256 colors	65,536 colors	65,536 colors										
Backlight	LED mode			CCFL[can be replaced], Auto On/Off										
	50,000 hours		60,000 hours	30,000 hours		50,000 hours	50,000 hours	60,000 hours						
Contrast	Adjustable		Fixed											
Brightness	230cd/m²		600cd/m²	280cd/m²		480cd/m²	430cd/m²	400cd/m²	450cd/m²					
Viewing Angle	Up/Down(Degree)	20/40	80/80	70/70	50/60	50/60	45/65	45/75	60/50					
	Left/Right(Degree)	45/45	80/80		65/65	65/65	65/65	65/65	75/75					
Touch Panel	4-wire system, analogue			Analog resistive		8-wire system, analogue								
Movement LED	Green: Normal RUN [Monitoring & drawing data download] Red: Error [Communication error & drawing data error]													
Memory	Screen Data	4MB	10MB	4MB	10MB	4MB	10MB	10MB	20MB					
	Backup Data	128KB	512KB	128KB	512KB	128KB	512KB							
Ethernet	-	1ch, 10/100Base-T	-	1ch, 10/100Base-T	-		1ch, 10/100Base-T							
USB Interface	USB Host X 1	USB Host X 2	USB Host X 1	USB Host X 2	USB Host X 1		USB Host X 2							
Serial	RS-232C	2ch(1 port for PC communication)												
	RS-422/485	1ch, 422/485 optional mode												
CF Card Interface	-	CF card (TAPE-1)×1	-	CF card (TAPE-1)×1	-		CF card (TAPE-1)×1							
AUX Interface	-	Optional	-	Optional	-		Optional							
Certification	CE, UL, KC													
Protection	IP65 [Front Water Proof Structure]													
Size(W×H×D)mm	181 × 140 × 56.5	181 × 140 × 66.5	181 × 140 × 56.5	181 × 140 × 66.5	203.5 × 153.5 × 41.5		240 × 174 × 73	317 × 243 × 73		395 × 294 × 73				
Panel Cut (W×H)mm	155.0 × 123.5				192 × 138		228.5 × 158.5	294.5 × 227.5		383.5 × 282.5				
Weight (kg)	0.62	0.75	0.62	0.75	2.2	2.4	1.4	2.2	2.4	3.9				
Power	Rated Voltage	DC 24V						AC100-220V, DC 24V		AC100-220V				
	Permitted Voltage	AC DC	-						MIN 85 VAC, MAX 264 VAC					
	Power Consumption (W)	AC DC	MIN 19.2 VDC, MAX 28.8 VDC						21.8	31.9				
			-						20.1	31.9				
			9.7	16.9	9.6	17.4	9.8	9.8	18.7	25.7				

**Text type XP10**

- Screen: 192×64 Graphic STN LCD
- System RAM: 1000 words
- Flash memory: Program/Parameter back up
- Communication: Half-duplex comm.
  - Baud rate: 1200~115200 bps
  - Master/slave setting available
  - RS-232C/RS-485 2 CH separate to use
- Power requirements - 24 V input or 5 V direct input by LS PLC
- Various function key - ESC, ALM, SET, ENT, F1~F4, Arrow keys
- Panel Editor - Easy programming and H/W setting

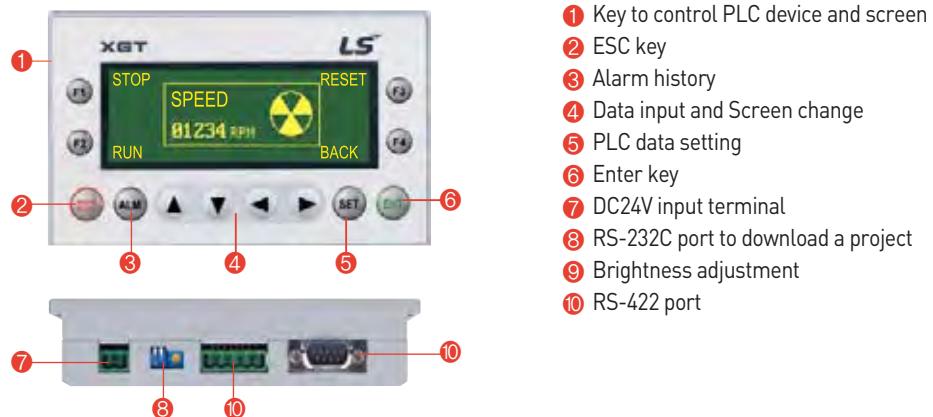


Item	Specifications	
	XP10BKA/DC	XP10BKB/DC
Input voltage	5VDC	DC 4.9 ~ 5.1 [RS-232C port]
	24VDC	DC 21.6 ~ 26.4 [DC Input connector]
	Consumption current	Less than 200mA
Display	LED back-light (192 x 64 Dots)	
Communication interface	RS-232C, RS-422/485	
Flash memory	256K bytes	
Language	Default: English, Can be switched to Korean/Chinese/Russian	
RTC	None	Supports
Download specification	115,200bps	
Keys	12 Keys {F1~F4, ESC, ALM, ▲, ▼, ◀, ▶, SET, ENT}	

# APM[Positioning module]Software Package

142 / 143

## Features

- Windows-based easy operation
- Supporting all types of LS APM module
- Improved parameter editing  
(Copy, Paste, Initialization, etc.)
- Various monitoring  
(Operation type of each axis, etc.)
- Profile trace and operation monitoring
- Profile graph and simulation of circular interpolation
- Available to edit operation parameter in EXCEL

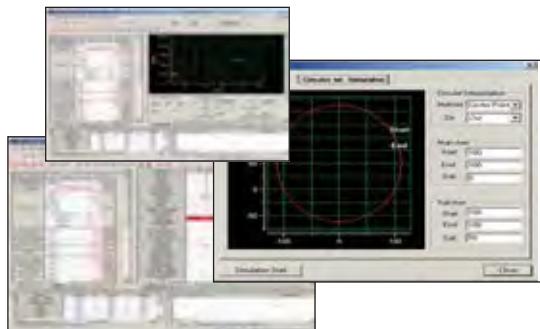

No.	Axis	Start	End	Move Type	Interpolation	Acceleration	Deceleration	Max Speed	Min Speed	Tool	Unit
1	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
2	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
3	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
4	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
5	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
6	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
7	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
8	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
9	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
10	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
11	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
12	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
13	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
14	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
15	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
16	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
17	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
18	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
19	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
20	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
21	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
22	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
23	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
24	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
25	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
26	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
27	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
28	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
29	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
30	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
31	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
32	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
33	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
34	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
35	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
36	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
37	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
38	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
39	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
40	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
41	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
42	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
43	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
44	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
45	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
46	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
47	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
48	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
49	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
50	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
51	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
52	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
53	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
54	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
55	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
56	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
57	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
58	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
59	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
60	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
61	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
62	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
63	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
64	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
65	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
66	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
67	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
68	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
69	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
70	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
71	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
72	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
73	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
74	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
75	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
76	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
77	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
78	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
79	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
80	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
81	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
82	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
83	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
84	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
85	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
86	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
87	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
88	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
89	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
90	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
91	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
92	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
93	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
94	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
95	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
96	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
97	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
98	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
99	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
100	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
101	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
102	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
103	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm
104	Ax1	0.0	0.0	Move	Circular	0.0000	0.0000	100.0	0.0	0.0	mm

**CPU / PWR / Base / I/O**

CPU	XGK-CPUH,* CPUU, CPUHN,CPUN	6,144pt, Program memory : 64Ksteps
	XGK-CPUS,* CPUA,CPUSN	3,072pt, Program memory : 32Ksteps
	XGK-CPUE*	1,536pt, Program memory : 16Ksteps
	XGI-CPUJN, CPUJ/D, CPUU,CPUH*	9,144pt (IEC type), Program memory:1Mbyte
	XGI-CPUS*	3,072pt (IEC type), Program memory:128kbyte
	XGI-CPUE*	1,536pt (IEC type), Program memory:64kbyte
Power	XGP-ACF1*	Free Voltage/DC5V 3A, DC24V 0.6A
	XGP-ACF2*	Free Voltage/DC5V 6A
	XGP-AC23*	220V/DC5V 8.5A
	XGP-DC42*	DC24V/DC5V 6A
Main base	XGB-M04A*	4 Slot
	XGB-M06A*	6 Slot
	XGB-M08A*	8 Slot
	XGB-M10A*	10 Slot
	XGB-M12A*	12 Slot
Expansion base	XGB-E04A*	4 Slot
	XGB-E06A*	6 Slot
	XGB-E08A*	8 Slot
	XGB-E12A*	12 Slot
Input	XGI-A12A	AC110V, 16pt
	XGI-A21A	AC220V, 8pt
	XGI-A21C	AC 220V Input, 8pt(1COM)
	XGI-D21A	DC24V, 8pt
	XGI-D22A*	DC24V, 16pt, Sink/Source
	XGI-D22B	DC24V, 16pt, Source
	XGI-D24A*	DC24V, 32pt, Sink/Source
	XGI-D24B	DC24V, 32pt, Source
	XGI-D28A*	DC24V, 64pt, Sink/Source
	XGI-D28B	DC24V, 64pt, Source
Output	XGQ-RY1A	Relay, 8pt
	XGQ-RY2A*	Relay, 16pt
	XGQ-RY2B	Relay, 16pt, Surge killer
	XGQ-SS2A	Triac, 16pt
	XGQ-TR1C	Transist, 8pt(2A, 1COM)
	XGQ-TR2A*	Transist, 16pt, Sink
	XGQ-TR2B	Transist, 16pt, Source
	XGQ-TR4A*	Transist, 32pt, Sink
	XGQ-TR4B	Transist, 32pt, Source
	XGQ-TR8A*	Transist, 64pt, Sink
Input/output	XGQ-TR8B	Transist, 64pt, Source
	XGH-DT4A*	DC24V 16pt, Transist, 16pt, Sink

\*: G3 Coating Products

**Special module**

Analog input	XGF-AV8A*	Voltage, 8ch
	XGF-AC8A*	Current, 8ch
	XGF-AD8A*	Voltage /Current, 8ch
	XGF-AD16A*	Insulation Voltage /Current, 16ch
	XGF-AD4S*	Voltage /Current, 4ch
	XGF-AW4S*	2-wire, Voltage/ Current input, 4Ch (Isolated)
Analog output	XGF-DV4A*	Voltage, 4ch
	XGF-DC4A*	Current, 4ch
	XGF-DV8A*	Voltage, 8ch
	XGF-DC8A*	Current, 8ch
	XGF-DV4S*	Voltage, 4ch, Insulation
	XGF-DC4S*	Current, 4ch, Insulation
Analog input/output	XGF-AH6A*	Input: 4ch, Voltage/ Current Output: 2Ch Voltage/ Current
HART I/F Analog input/output	XGF-AC4H	Input: 4ch
	XGF-DC4H	Output: 4Ch
High speed counter	XGF-HO2A*	Open collector, 2ch
	XGF-HD2A*	Line drive, 2ch
	XGF-HO8A*	8-channels high speed counter module, 8Ch
Positioning	XGF-P01A-P03A	Open collector, 1~3axis
	XGF-PD1A-PD3A	Line drive, 1~3axis
	XGF-P01H-P04H	Open collector, 1~4axis
	XGF-PD1H-PD4H	Line drive, 1~4axis
Positioning (Network type)	XGF-PN8A	LS ELECTRIC EtherCAT Network, 8axis
	XGF-PN8B	Standard EtherCAT Network, 8axis
	XGF-PN4B	Standard EtherCAT Network, 4axis
Motion control	XGF-M16M	MECHATROLINK-II, 4axis
	XGF-M32E	Standard EtherCAT, 32axes
Temperature input	XGF-RD8A	RTD, 8ch
	XGF-RD4A*	RTD, 4ch
	XGF-RD4S*	RTD, 4ch, Insulation
	XGF-TC4S*	Thermo couple, 4ch, Insulation
Temperature controller	XGF-TC4UD	Input: 4Ch(Voltage/Cuttent/RTD/TC) Output: 8Ch(TR/Current) 4loops
	XGF-TC4RT	Input:4Ch(RTD) Output: 4Ch(TR) 4loops
Event input	XGF-SOEA	DC24V, 32points
Datalog	XGF-DL16A	USB 2.0, CF2001, Max. 16Gbyte, 32points <input 10points="" 22points,="" output=""/>

\*: G3 Coating Products

## Communication module

RAPIEnet+ -RAPIEnet v2 -EtherNet/IP -Modbus TCP/IP -Dedicated XGT Network	XGL-EFMTB*	Master/Client, Twisted fair 2ch.
	XGL-EFMFB*	Master/Client, Fiber optic 2ch.
	XGL-EFMHB*	Master/Client, Twisted fair/fiber optic
	XGL-DBDT	Expansion driver-Twisted pair 2ch.
	XGL-DBDF	Expansion driver-Fiber optic 2ch.
	XGL-DBDH	Expansion driver-Fiber optic/Twisted pair
	XOL-ES4T	Stand alone switch twisted pair 4ch.
	XOL-ES4H	Stand alone switch twisted 2ch. fiber 2ch.
	XGL-EH5T	Open Ethernet switching hub
	XGL-CH2B*	RS-232C 1ch, RS-422/485 1ch
Computer Link (Cnet)	XGL-C22B*	RS-232C 2ch
	XGL-C42B*	RS-422/485 2ch
	XGL-DMEB*	DeviceNet, Master
Profibus-DP (Pnet)	XGL-PMEB*	Profibus-DP, Master
	XGL-PSRA	Profibus-DP Slave, Remote interface
	XGL-PSEA	Profibus-DP Slave
Rnet	XGL-RMEB*	Rnet, Master, TP
	GOL-RR8T	Rnet stand alone repeater hub
Fnet	XGL-FMEA	Fnet, Master
BACnet/IP	XGL-BIPT	BACnet client/server
RAPIEnet V1	XGL-EIMT	RAPIEnet, Twisted fair 2ch
	XGL-EIMF	RAPIEnet, Fiber optic 2ch
	XGL-EIMH	RAPIEnet, Twisted fair, Fiber optic
EtherNet/IP	XGL-EIPT	Industridl Ethernet, Twisted fair 2ch

\* : G3 Coating Products

## XGR module


CPU	XGR-CPUH/T*	Twisted pair
	XGR-CPUH/F	Fiber optic(2km)
	XGR-CPUH/S	Fiber optic(15km)
Power	XGR-AC12*	110V, 5.5A(Main base)
	XGR-AC13*	110V, 8.5A(Expansion base)
	XGR-AC22*	220V, 5.5A(Main base)
	XGR-AC23*	220V, 8.5A(Expansion base)
	XGR-DC42*	DC24V/DC5V 7A, Main(Expansion base)
Base	XGR-M06P*	6Slot(Main base)
	XGR-M02P*	2Slot(Main base)
	XGR-E08P	8Slot(Expansion base)
	XGR-E12P*	12Slot(Expansion base)
	XGR-E12H*	12Slot(Expansion base, Drive Redundancy)
Expansion drive	XGR-DBST*	Twisted pair - Twisted
	XGR-DBSF*	Pair Fiber optic - Fiber optic(2km)
	XGR-DBSH*	Twisted pair - Fiber optic(2km)
	XGR-DBSFS	Pair Fiber optic - Fiber optic(15km)
	XGR-DBSHS	Twisted pair - Fiber optic(15km)
Expansion drive redundancy	XGR-DBDT	Twisted pair - Twisted
	XGR-DBDF	Pair Fiber optic - Fiber optic(2km)
	XGR-DBDH	Twisted pair - Fiber optic(2km)

\* : G3 Coating Products


CPU	Product	Description
Expansion cable	XGC-E041	0.4m
	XGC-E061	0.6m
	XGC-E121	1.2m
	XGC-E301	3.0m
	XGC-E501	5.0m
	XGC-E102	10m
	XGC-E152	15m
Termination connector	XGT-TERA	Termination connector for expansion base download cable
USB cable	USB-301A	USB download cable
RS232C cable	K1C-050A	RS232C download cable
Sync & Expansion cable	XGC-F201	2m (Fiber optic)
	XGC-F501	5m (Fiber optic)
Dummy	XGT-DMMA	Dummy module
	XGR-DMMA	Dummy module

## Dimensions


## • Base

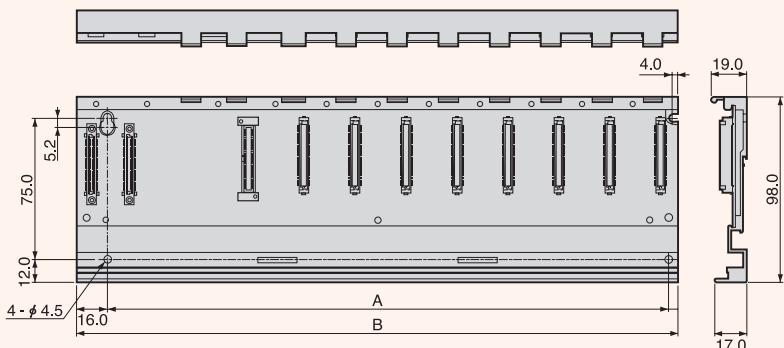

## • Power module

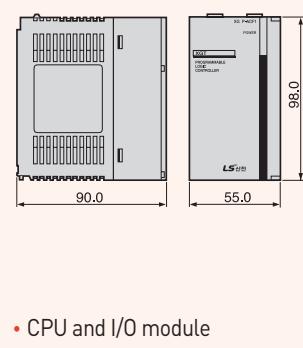


## • CPU and I/O module

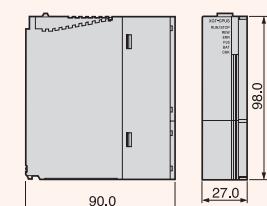


## Base Dimensions (W)

Item	XGB-M04A/E04A	XGB-M06A/E06A	XGB-M08A/E08A	XGB-M10A	XGB-M12A/E12A
A	190	244	298	355	406
B	210	264	318	375	426


## • Base base

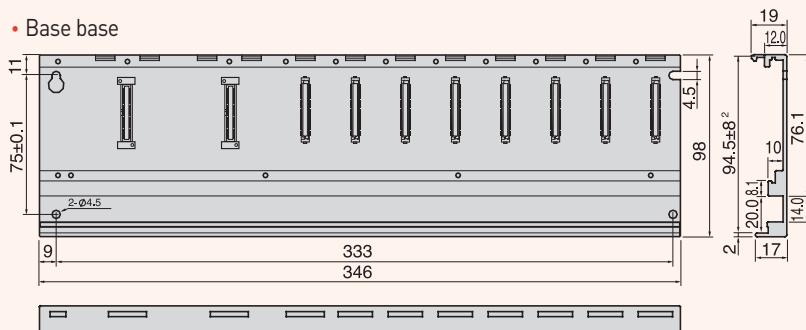


## • Expansion base

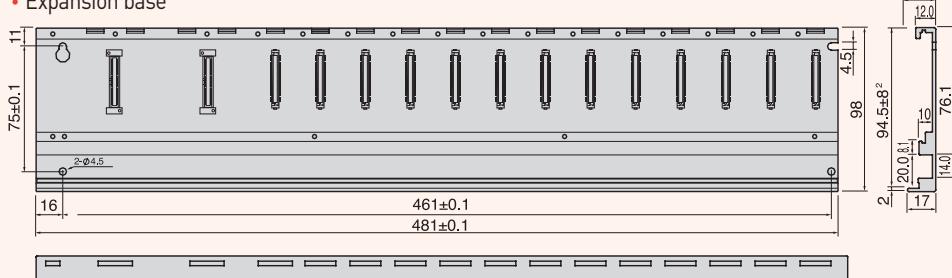

## • Power and CPU

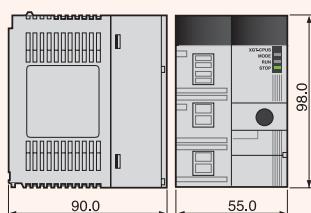

## • I/O

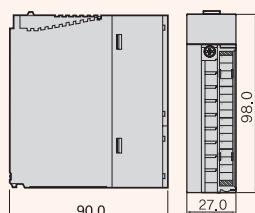


## Base Dimensions (W)

Item	XGR-M06P	XGR-E08P	XGR-E12P
A	333	353	461
B	346	373	481

# Memo

Programmable Logic Controller 146 / 147





#### Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance.  
Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.



- According to The WEEE Directive, please do not discard the device with your household waste.



#### ■ Headquarter

LS-ro 127(Hogye-dong) Dongan-gu, Anyang-si, Gyeonggi-Do, 14119, Korea

#### ■ Seoul Office

LS Yongsan Tower, 92, Hangang-daero, Yongsan-gu, Seoul, 04386, Korea  
Tel: 82-2-2034-4033, 4888, 4703 Fax: 82-2-2034-4588

E-mail: automation@lselectric.co.kr

#### ■ Overseas Subsidiaries

• LS ELECTRIC Japan Co., Ltd. (Tokyo, Japan)  
Tel: 81-3-6268-8241 E-Mail: jschuna@lselectric.biz

• LS ELECTRIC (Dalian) Co., Ltd. (Dalian, China)  
Tel: 86-411-8730-6495 E-Mail: jiheo@lselectric.com.cn

• LS ELECTRIC (Wuxi) Co., Ltd. (Wuxi, China)  
Tel: 86-510-6851-6666 E-Mail: sblee@lselectric.co.kr

• LS ELECTRIC Vietnam Co., Ltd.  
Tel: 84-93-631-4099 E-Mail: jhchoi4@lselectric.biz (Hanoi)  
Tel: 84-28-3823-7890 E-Mail: sjbaik@lselectric.biz (Hochiminh)

• LS ELECTRIC Middle East FZE (Dubai, U.A.E.)  
Tel: 971-4-886-5360 E-Mail: salesme@lselectric.biz

• LS ELECTRIC Europe B.V. (Hoofddorf, Netherlands)  
Tel: 31-20-654-1424 E-Mail: europartner@lselectric.biz

• LS ELECTRIC America Inc. (Chicago, USA)  
Tel: 1-800-891-2941 E-Mail: sales.us@lselectricamerica.com

[www.lselectric.co.kr](http://www.lselectric.co.kr)

#### ■ Overseas Branches

• LS ELECTRIC Tokyo Office (Japan)  
Tel: 81-3-6268-8241 E-Mail: jschuna@lselectric.biz

• LS ELECTRIC Beijing Office (China)  
Tel: 86-10-5095-1631 E-Mail: khpaek@lselectric.com.cn

• LS ELECTRIC Shanghai Office (China)  
Tel: 86-21-5237-9977 E-Mail: tsjun@lselectric.com.cn

• LS ELECTRIC Guangzhou Office (China)  
Tel: 86-20-3818-2883 E-Mail: chenxs@lselectric.com.cn

• LS ELECTRIC Chengdu Office (China)  
Tel: 86-28-8670-3201 E-Mail: yangcf@lselectric.com.cn

• LS ELECTRIC Qingdao Office (China)  
Tel: 86-532-8501-2065 E-Mail: wangzy@lselectric.com.cn

• LS ELECTRIC Nanjing Office (China)  
Tel: 86-25-8467-0005 E-Mail: ylong@lselectric.com.cn

• LS ELECTRIC Bangkok Office (Thailand)  
Tel: 66-90-950-9683 E-Mail: sjleet@lselectric.biz

• LS ELECTRIC Jakarta Office (Indonesia)  
Tel: 62-21-2933-7614 E-Mail: dioh@lselectric.biz

• LS ELECTRIC Moscow Office (Russia)  
Tel: 7-499-682-6130 E-Mail: jdpark1@lselectric.biz

• LS ELECTRIC America Western Office (Irvine, USA)  
Tel: 1-949-333-3140 E-Mail: ywyun@lselectricamerica.com