

Delivering trust and satisfaction

KHK® KHK CO., LTD.

13-15 Naka-cho, Kawaguchi-shi, Saitama-ken, 332-0022, Japan
TEL: 81-48-254-1744 FAX: 81-48-254-1765

URL <https://khkgears.net/new/> E-mail info@khkgears.net



JQA-QMA14416
JQA-EM6717

**KHK
2023**

KHK STOCK GEARS



2023

KHK ALL PRODUCT GUIDE



KOHARA GEAR INDUSTRY CO., LTD.

Renewed for greater ease of selection

Greetings

Thank you for using KHK gear products.

We appreciate your patronage.

We have issued the Stock Gear Master Catalog "KHK2023".

Most recently, we have introduced new products with fastening modification. The J Series, offering ground spiral miter gears and miters, is available for immediate use.

Make use of our new catalog for easy selection.

KHK's mission is to offer quality products that build Customer Trust and Satisfaction.

We look forward to serving you.

Kohara Gear Industry Co.,Ltd.

Toshiharu Kohara, President



MMSGQ J Series
Ground Spiral Miter Gears



SN H Series
Hardened Screw Gears



SN HJ Series
Hardened Screw Gears



MM J Series
Miter Gears



SM J Series
Miter Gears



SMS J Series
Spiral Miter Gears

Information	P1~40
Spur Gears	P41~188
Helical Gears	P189~204
Internal Ring Gears	P205~210
Racks	P211~264
CP Racks & Pinions	P265~300
Miter Gears	P301~334
Bevel Gears	P335~374
Screw Gears	P375~390
Worm Gears	P391~450
Gearboxes	P451~462
Other Products	P463~477
KHK Information	P478~485

How to use the catalog

Product Index (Pages 6 to 9)

You can search for your desired gears by looking at product photos for each gear type. It also includes an overview of product specifications such as gear accuracy and material and heat treatment.

Spur Gears

MSGA/MSGB Ground Spur Gears	KSG Ground Spur Gears	SSGG Ground Spur Pinion Shafts	SSG Ground Spur Gears	SSG F Series Ground Spur Gears	SSG E Series Ground Spur Gears	SSG R Series Ground Spur Gears
Material: SCM415 m1-4 Page 50	Material: SCM440 m1-3 Page 54	Material: S45C m1.5-3 Page 56	Material: S45C m1.5-5 Page 58	Material: S45C m1.5-6 Page 58	Material: S45C m1.5-6 Page 82	Material: S45C m1.5-6 Page 92
Pinion gear for Nabtesco GH Series	SSAG Ground Spur Gears	KS-H Hardened Spur Gears	KS Thermal Refined Spur Gears	SSS Spur Pinion Shafts	SS-H Hardened Spur Gears	SS Spur Gears
Material: S45C/SCM440 m1.5-3 Page 94	Material: S45C m1-6 Page 96	Material: SCM440 m1.5-5 Page 100	Material: SCM440 m1.5-5 Page 100	Material: S45C m1-6 Page 102	Material: S45C m1-6 Page 102	Material: S45C m1.5-10 Page 104
SS F Series Spur Gears	SSA-H Hardened Spur Gears	SSA Spur Gears	SSA F Series Spur Gears	SSY Spur Gears	SSAY Spur Gears	SUS/SUSA Stainless Steel Spur Gears
Material: S45C m1.5-3 Page 130	Material: S45C m1-6 Page 130	Material: S45C m1-5 Page 132	Material: S45C m1-5 Page 132	Material: S45C m1-5 Page 144	Material: S45C m1-5 Page 148	Material: SUS303 m1.5-3 Page 154
SUS F Series Spur Gears	DSF F-Loc Gears	NSU Plastic Spur Gears with Steel Core	PU Plastic Spur Gears with Steel Core	PS/PSA Plastic Spur Gears	PSA DUCT Stainless Steel Hubs	PS/UB Assembled PS Spur Gear
Material: SUS303 m1.5-1 Page 160	Material: Polyacetel (SUS303) m1.5-1 Page 162	Material: MCR01 (S45C) m1-3 Page 164	Material: MCR01 (SUS303) m1-3 Page 168	Material: MCR01 m1-3 Page 170	Material: SUS303 #30-100 Page 180	Material: MCR01/SUS303 m1.5-1 Page 182
Injection Moulded Spur Gears	Sintered Metal Bushings	Spur Gears	Steel Ring Gears (Spur Gears)			

Racks

MHG/MRGD Hardened Ground Racks	KRG/HKRGD-H Hardened Ground Racks	KRG/KRGD Thermal Refined Ground Racks	SRS/SRSD/SRSG Hardened Ground Racks	KRF-HKRFD-H Hardened Racks	SRF-HSRFD-H Hardened Racks	SRL-HLSRFD-HL Laser Hardened Racks
Material: SCM415 m1.5-3 Page 224	Material: SCM440 m1.5-3 Page 228	Material: SCM440 m1-3 Page 228	Material: S45C m1.5-6 Page 230	Material: SCM440 m1.5-6 Page 232	Material: S45C m1.5-6 Page 234	Material: S45C m1.5-6 Page 236
KRF/KRFD Thermal Refined Racks	SRAF/SRAFSD/SRAFK Square Racks	SR Racks	SRF Steel Racks with Machined Ends	SRFDR/SRFK Stainless Steel Racks	SRL/SRSL/SRSLD Stainless Steel Racks	DR/DRFD/DRFK Plastic Racks
Material: SCM440 m1.5-3 Page 238	Material: S45C m1.5-4 Page 240	Material: S45C m1.5-10 Page 242	Material: S45C m1.5-10 Page 243	Material: SUS303 m1-4 Page 244	Material: SUS303 m1-3 Page 246	Material: Polyacetel m1-3 Page 248
PPR/PF Plastic Racks	BSR Racks	SRO/SROS Round Racks	SURO Stainless Steel Round Racks	DR Molded Flexible Racks	SBR/SBR/SRS Rubber Gears for Press/Flex Shaft Hubs	KRG/KRGD/KRGFD Ground Helical Racks
Material: MCR01 m1-3 Page 250	Material: S45C m1.5-6 Page 250	Material: S45C m1.5-6 Page 252	Material: SUS303 m1-3 Page 253	Material: DR (PS/PA) m1.5-6 Page 254	Material: S45C, etc. m1-3 Page 254	Material: SCM440 m1-3 Page 256
SRR/SRR/SRFD Helical Racks	SRHF Helical Racks	SHE Helical Racks	ZST/ZSTD Hardened Ground Helical Racks	ZSTP Ground Helical Gears	ZST-GL Assembly Gauges	
Material: S45C m1.5-3 Page 258	Material: S45C m1.5-6 Page 258	Material: S45C m1.5-6 Page 260	Material: S45C m1.5-6 Page 262	Material: SCM440 m1.5-6 Page 262	Material: S45C m1.5-6 Page 264	

Dimensional Table Pages

Dimensional tables show the product specifications and performance for each gear type at a glance. Compare the accuracy and strength, and select the appropriate gears while looking at the product photographs.

PRODUCT GROUP ICON: Representative photographs of the series. Actual shape may be different with regards to a particular item. Please confirm the drawing and shape as specified in the table.

Series: Series Specifications.

PRODUCT NAME: PRODUCT NAME

MODULE: MODULE

Common Specifications: Series Specifications.

DRAWINGS, SHAPES: Similar to the data shown in the small table on the right, there are several types of configurations in series. Please be sure to check the required shape in the table.

J Series: Products having the letter "J" in their Catalog No. (F series and E series are also available.)

PRODUCT NAME: J Series dimensional table

INDEX: Indexed by type and sorted by colored tags.

TECHNICAL REFERENCES: Technical information will be introduced at various sections in the catalog.

STRENGTH CALCULATION: The allowable torques shown in the table are calculated values according to formulas such as JGMA. The calculations assume certain operating conditions. Therefore, the values should be used as a reference. The assumed conditions are shown on the first page of each product group (for example, Page 44 for spur gears).

NOTES: Contains additional information on precautions for product characteristics and technical hints for secondary operations. Technical hints for J Series are also provided in the J Series section. Please be sure to read first before selecting products.

Product Technical Information

Technical Information is available for each gear type. This documentation is essential for using the gears properly, including features of various products, examples of use and precautions on selection.

Features	Application Examples																																																																																																																								
<p>To meet your applications, KHK stock gears are made in a variety of types, materials, configurations, modules and numbers of teeth. We also provide finished gears that are ready to use. Secondary operations can be performed to many of the products, allowing for a wider range of designs. The following table lists the main features.</p> <table border="1"> <thead> <tr> <th>Catalog Number</th> <th>Module</th> <th>Material</th> <th>Heat Treatment</th> <th>Tooth Surface Treatment</th> <th>Precision</th> <th>Secondary Operations</th> <th>Features</th> </tr> </thead> <tbody> <tr> <td>MSGA/MSGB</td> <td>1-4</td> <td>SCM415</td> <td>Carburized</td> <td>Ground</td> <td>NS</td> <td>×</td> <td>Fully hardened, ground and keyway machined gears with excellent accuracy, strength and abrasion resistance. Gears that have been tempered, hardened and ground that have excellent accuracy, strength and abrasion resistance. Secondary operations can be performed except for the teeth. This product is best for the pinion of the KRGF rack.</td> </tr> <tr> <td>KSG</td> <td>1-3</td> <td>SCM440</td> <td>Thermal refined, gear tooth induction hardened</td> <td>Ground</td> <td>NG</td> <td>△</td> <td>Gears with shafts that have been tempered, hardened and ground. Secondary operations can be performed except for the teeth.</td> </tr> <tr> <td>SSGG</td> <td>1.5-3</td> <td>S45C</td> <td>Thermal refined, gear tooth induction hardened</td> <td>Ground</td> <td>N7</td> <td>△</td> <td>Gears that have been hardened and ground with a good balance of accuracy, wear resistance and cost. Secondary operations are possible except for the teeth.</td> </tr> <tr> <td>SSG</td> <td>0.5-10</td> <td>S45C</td> <td>Gear teeth induction hardened with</td> <td>Ground</td> <td>N7</td> <td>△</td> <td>Gears that have been hardened and ground with a good balance of accuracy, wear resistance and cost. Secondary operations are possible except for the teeth.</td> </tr> <tr> <td>SSAG</td> <td>1-6</td> <td>S45C</td> <td>Thermal refined</td> <td>Ground</td> <td>NS</td> <td>△</td> <td>Gears with a tempered shaft.</td> </tr> <tr> <td>KS</td> <td>1.5-5</td> <td>SCM440</td> <td>Thermal refined</td> <td>Cut</td> <td>NB</td> <td>○</td> <td>Tempered gears with excellent bending strength. The teeth can be additionally hardened. This product is best for the pinion of the KRF rack.</td> </tr> <tr> <td>SSS</td> <td>1, 1.5</td> <td>S45C</td> <td>Thermal refined</td> <td>Cut</td> <td>NB</td> <td>○</td> <td>Gears with a tempered shaft.</td> </tr> <tr> <td>SS</td> <td>0.5-10</td> <td>S45C</td> <td>-</td> <td>Cut</td> <td>NB</td> <td>○</td> <td>Many lineups are available at a low price. The teeth can be additionally hardened.</td> </tr> <tr> <td>SSA</td> <td>1-5</td> <td>S45C</td> <td>-</td> <td>Cut</td> <td>NB</td> <td>○</td> <td>Gears with narrow teeth. Suitable for light loads.</td> </tr> <tr> <td>SSY/SSAY</td> <td>0.8, 1</td> <td>S45C</td> <td>-</td> <td>Cut</td> <td>NB</td> <td>○</td> <td>Gears with narrow teeth. Suitable for light loads.</td> </tr> <tr> <td>SUS/SUSA</td> <td>1-4</td> <td>SUS303</td> <td>-</td> <td>Cut</td> <td>NB</td> <td>○</td> <td>Stainless steel gears with rust resistance.</td> </tr> <tr> <td>SUS F Series</td> <td>0.5, 1</td> <td>SUS303</td> <td>-</td> <td>Cut</td> <td>NB</td> <td>○</td> <td>Stainless steel gears with rust resistance. Locking Hub allows easy attachment.</td> </tr> <tr> <td>SUSF</td> <td>0.5, 1</td> <td>SUS303</td> <td>-</td> <td>Cut</td> <td>NB</td> <td>○</td> <td>Stainless steel gears with rust resistance. Locking Hub allows easy attachment.</td> </tr> <tr> <td>DSF</td> <td>0.5, 1</td> <td>Polyacetel</td> <td>-</td> <td>Cut</td> <td>NB</td> <td>○</td> <td>Gears made of polyacetel. Locking Hub allows easy attachment.</td> </tr> </tbody> </table>	Catalog Number	Module	Material	Heat Treatment	Tooth Surface Treatment	Precision	Secondary Operations	Features	MSGA/MSGB	1-4	SCM415	Carburized	Ground	NS	×	Fully hardened, ground and keyway machined gears with excellent accuracy, strength and abrasion resistance. Gears that have been tempered, hardened and ground that have excellent accuracy, strength and abrasion resistance. Secondary operations can be performed except for the teeth. This product is best for the pinion of the KRGF rack.	KSG	1-3	SCM440	Thermal refined, gear tooth induction hardened	Ground	NG	△	Gears with shafts that have been tempered, hardened and ground. Secondary operations can be performed except for the teeth.	SSGG	1.5-3	S45C	Thermal refined, gear tooth induction hardened	Ground	N7	△	Gears that have been hardened and ground with a good balance of accuracy, wear resistance and cost. Secondary operations are possible except for the teeth.	SSG	0.5-10	S45C	Gear teeth induction hardened with	Ground	N7	△	Gears that have been hardened and ground with a good balance of accuracy, wear resistance and cost. Secondary operations are possible except for the teeth.	SSAG	1-6	S45C	Thermal refined	Ground	NS	△	Gears with a tempered shaft.	KS	1.5-5	SCM440	Thermal refined	Cut	NB	○	Tempered gears with excellent bending strength. The teeth can be additionally hardened. This product is best for the pinion of the KRF rack.	SSS	1, 1.5	S45C	Thermal refined	Cut	NB	○	Gears with a tempered shaft.	SS	0.5-10	S45C	-	Cut	NB	○	Many lineups are available at a low price. The teeth can be additionally hardened.	SSA	1-5	S45C	-	Cut	NB	○	Gears with narrow teeth. Suitable for light loads.	SSY/SSAY	0.8, 1	S45C	-	Cut	NB	○	Gears with narrow teeth. Suitable for light loads.	SUS/SUSA	1-4	SUS303	-	Cut	NB	○	Stainless steel gears with rust resistance.	SUS F Series	0.5, 1	SUS303	-	Cut	NB	○	Stainless steel gears with rust resistance. Locking Hub allows easy attachment.	SUSF	0.5, 1	SUS303	-	Cut	NB	○	Stainless steel gears with rust resistance. Locking Hub allows easy attachment.	DSF	0.5, 1	Polyacetel	-	Cut	NB	○	Gears made of polyacetel. Locking Hub allows easy attachment.	<p>KHK stock spur gears are widely used in various industrial machines including food machinery.</p> <ul style="list-style-type: none"> Fish processing machine manufactured by TOYO SUIJIAN KIKAI CO., LTD. Carton former Food machinery by Jey Machine Co. High-speed automatic wire straightening/cutting machine manufactured by Takahisha Sangyo Co.
Catalog Number	Module	Material	Heat Treatment	Tooth Surface Treatment	Precision	Secondary Operations	Features																																																																																																																		
MSGA/MSGB	1-4	SCM415	Carburized	Ground	NS	×	Fully hardened, ground and keyway machined gears with excellent accuracy, strength and abrasion resistance. Gears that have been tempered, hardened and ground that have excellent accuracy, strength and abrasion resistance. Secondary operations can be performed except for the teeth. This product is best for the pinion of the KRGF rack.																																																																																																																		
KSG	1-3	SCM440	Thermal refined, gear tooth induction hardened	Ground	NG	△	Gears with shafts that have been tempered, hardened and ground. Secondary operations can be performed except for the teeth.																																																																																																																		
SSGG	1.5-3	S45C	Thermal refined, gear tooth induction hardened	Ground	N7	△	Gears that have been hardened and ground with a good balance of accuracy, wear resistance and cost. Secondary operations are possible except for the teeth.																																																																																																																		
SSG	0.5-10	S45C	Gear teeth induction hardened with	Ground	N7	△	Gears that have been hardened and ground with a good balance of accuracy, wear resistance and cost. Secondary operations are possible except for the teeth.																																																																																																																		
SSAG	1-6	S45C	Thermal refined	Ground	NS	△	Gears with a tempered shaft.																																																																																																																		
KS	1.5-5	SCM440	Thermal refined	Cut	NB	○	Tempered gears with excellent bending strength. The teeth can be additionally hardened. This product is best for the pinion of the KRF rack.																																																																																																																		
SSS	1, 1.5	S45C	Thermal refined	Cut	NB	○	Gears with a tempered shaft.																																																																																																																		
SS	0.5-10	S45C	-	Cut	NB	○	Many lineups are available at a low price. The teeth can be additionally hardened.																																																																																																																		
SSA	1-5	S45C	-	Cut	NB	○	Gears with narrow teeth. Suitable for light loads.																																																																																																																		
SSY/SSAY	0.8, 1	S45C	-	Cut	NB	○	Gears with narrow teeth. Suitable for light loads.																																																																																																																		
SUS/SUSA	1-4	SUS303	-	Cut	NB	○	Stainless steel gears with rust resistance.																																																																																																																		
SUS F Series	0.5, 1	SUS303	-	Cut	NB	○	Stainless steel gears with rust resistance. Locking Hub allows easy attachment.																																																																																																																		
SUSF	0.5, 1	SUS303	-	Cut	NB	○	Stainless steel gears with rust resistance. Locking Hub allows easy attachment.																																																																																																																		
DSF	0.5, 1	Polyacetel	-	Cut	NB	○	Gears made of polyacetel. Locking Hub allows easy attachment.																																																																																																																		

Selection Hints

Please select the most suitable products by carefully considering the characteristics of items and contents of the product tables. It is also important to read all applicable "CAUTION" notes shown below before the final selection.

- Caution in Selecting the Mating Gears**
 - Basically, all spur gears, internal gears and racks can be paired as long as the module and pressure angle match. Products with different materials, tooth widths or accuracy can be mated.
- Caution in Selecting Gears Based on Gear Strength**
 - The gear strength values shown in the product pages were computed by assuming the operating environment in the table below. Therefore, they should be used as reference only. We recommend that each user computes their own values by applying the actual usage conditions. Also, F-loc hub spur gears, F-loc hub spur gears and various F series that use the friction coupling method to fasten the gear shaft need additional consideration for starting torque.

Calculation of Bending Strength of Gears

Item	MSGA/MSGB	SSGG	SSG	SSS	SSA	SSY	SUS	SUS F Series	SUSF	KS	KS-H	SSG	ZSTP	PU	PS	PSA	DSF	DS
Formula used	Formula of spur and helical gears on bending strength (JGMA401-01)																	
No. of teeth of mating gears	Same number of teeth (Z) for SSGG, SSG, SSS																	
Rotational Speed	600rpm with 100rpm																	
Design Life (Durability)	Over 10 ⁷ cycles																	
Impact from motor	Uniform load																	
Impact from load	Uniform load																	
Direction of load	Biaxial load (subjected with allowable bending stress of 2/3)																	
Allowable bending stress at rot. speed (N/mm ²)	47	24.5	19.2	18.2	19.2	19.2	19.2	19.2	19.2	32	32	32	32	112	79	112	112	90
Safety factor S _t	1.2																	

Calculation of Surface Durability (Except where it is common with bending strength)

Item	MSGA/MSGB	SSGG	SSG	SSS	SSA	SSY	SUS	SUS F Series	SUSF	KS	KS-H	SSG	ZSTP	PU	PS	PSA	DSF	DS
Formula used	Formula of spur and helical gears on surface durability (JGMA402-01)																	
Kinematic viscosity of lubricant	100cSt (50°C)																	
Gear support	Symmetric support by bearings																	
Allowable Hertz stress σ _H (N/mm ²)	160	99	82.5	82.5	82.5	82.5	82.5	82.5	82.5	112	79	112	112	112	79	112	112	90
Safety factor S _H	1.15																	

NOTE 1) The gear strength formula is based on JGMA (Japanese Gear Manufacturers Association) specifications, "JGMA Technical Data" by Mitsubishi Chemical Advanced Materials and "Durability of Gear" by Polytechnic Co. The units for the rotational speed (rpm) and the stress (N/mm²) are indicated.

Selection Hints

When selecting KHK standard gears, glance over the Cautions on Product Characteristics and Cautions on Performing Secondary Operations in the product technical information and respective dimensional tables.

- Products not listed in this catalog or materials, modules, number of teeth and the like not listed in the dimensional tables can be manufactured as custom items. Please see Page 26 for more details about custom-made orders.
- The color and shape of the product images listed on the dimension table page of each product may differ from the actual product. Be sure to confirm the shape in the dimension table before selection.

- The details (specifications, dimensions, etc.) listed in the catalog may be changed without prior notice.
- All details recorded in this catalog are copyrighted. Replication without permission is strictly prohibited.
- Changes and corrections to the contents of the catalog are announced on the KHK website.

Website: Overseas Sales Department: URL: <https://khkgears.net/new/>
 Phone: +81-48-254-1744 Fax: +81-48-254-1765
 E-mail: info@khkgears.net

Expansion of Miter J Series

JIS Grade 0 *J Series* Ground Spiral Miter Gears MMSGQ-J

MMSGQ Highest-grade Ground Spiral Miter Gears are now part of the J Series

Please see Page 310 for more details.



Hardened Screw Gears *J Series* SN-H/SN-HJ



SN Screw Gears added to the Hardened Plus and Hardened Plus J Series

Please see Pages 380 to 383 for more details.

Spiral Miter Gears *J Series* SMS-J

SMS Hardened Spiral Miter Gears are now part of the J Series

Please see Page 320 for more details.



Miter Gears *J Series* MM-J

MM Hardened Miters are now part of the J Series

Please see Page 324 for more details.



Miter Gears *J Series* SM-J

SM Miters are now part of the J Series

Please see Page 326 for more details.



Worm Wheels PG

Smaller module type PG Nylon Worm Wheels added to the lineup

Please see Page 444 for more details.



CP Ground Spur Gears SSCPG *J Series*

Large CP size SSCPG Ground Spur Gears added to the lineup

Please see Page 282 for more details.



Spur Gears

MSGA/MSGB Ground Spur Gears	KSG Ground Spur Gears	SSGS Ground Spur Pinion Shafts	SSG Ground Spur Gears	SSG F Series Ground Spur Gears	SSG E Series Ground Spur Gears	SSG R Series Ground Spur Gears
Material: SCM415 m1-4 Page 50	Material: SCM440 m1-3 Page 54	Material: S45C m1.5-3 Page 56	Material: S45C m0.5-10 Page 58	Material: S45C m2-3 Page 76	Material: S45C m1.5-6 Page 82	Material: S45C m1.5-6 Page 92
Pinion gear for Nabtesco GH Series	SSAG Ground Spur Gears	KS-H Hardened Spur Gears	KS Thermal Refined Spur Gears	SSS Spur Pinion Shafts	SS-H Hardened Spur Gears	SS Spur Gears
Material: S45C/SCM440 m3-6 (CP10-20) Page 94	Material: S45C m1-6 Page 96	Material: SCM440 m1.5-5 Page 100	Material: SCM440 m1.5-5 Page 100	Material: S45C m1, 1.5 Page 102	Material: S45C m1-6 Page 106	Material: S45C m0.5-10 Page 104
SS F Series Spur Gears	SSA-H Hardened Spur Gears	SSA Spur Gears	SSA F Series Spur Gears	SSY Spur Gears	SSAY Spur Gears	SUS/SUSA Stainless Steel Spur Gears
Material: S45C m1.5-3 Page 130	Material: S45C m1-5 Page 138	Material: S45C m1-5 Page 138	Material: S45C m2-3 Page 144	Material: S45C m0.8, 1 Page 148	Material: S45C m1 Page 152	Material: SUS303 m1-4 Page 154
SUSF F-Loc Gears	DSF F-Loc Gears	NSU Plastic Spur Gears with Steel Core	PU Plastic Spur Gears with Steel Core	PS/PSA Plastic Spur Gears	SUKB Stainless Steel Hubs PSA Dedicated	PSUKB SUKB Assembled PSA Spur Gear
Material: SUS303 m0.5, 1 Page 160	Material: Polyacetal (SUS303) m0.5, 1 Page 162	Material: MC602ST (S45C) m1-3 Page 164	Material: MC901 (SUS303) m1-2 Page 168	Material: MC901 m1-3 Page 170	Material: SUS303 φ30-100 Page 180	Material: MC901/SUS303 m2-3 Page 181
DS Injection Molded Spur Gears	BB Sintered Metal Bushings	BSS Spur Gears	SSR Steel Ring Gears (Spur Gears)			
Material: Duracon (R) (M90-44) m0.5-1 Page 182	Material: Oil-free copper alloy φ5-8 Page 184	Material: Free cutting brass (C3604) m0.5-1 Page 186	Material: S45C m2-3 Page 188			

Helical Gears

KHG Ground Helical Gears	SH Helical Gears
Material: SCM440 m1-3 Page 194	Material: S45C m2, 3 Page 202

Internal Gears

SI Steel Internal Gears	SIR Steel Ring Gears (Spur Gears)
Material: S45C m0.5-3 Page 208	Material: S45C m2-3 Page 210

Index Information

Catalog Number
Product Name

Icon Mark

Product Photo

Material

Size

Page

SSG
Ground Spur Gears

Material: S45C
m0.5-10 Page 58

NEW New Products **Additional** Additional Products

M Includes Made to Order **H** Hardened Plus **S** Semi-Custom

J J Series **F** F Series **R** R Series **E** E Series

Racks

MRGF/MRGFD Hardened Ground Racks	KRGF-H/KRGFD-H Hardened Ground Racks	KRG/KRGF/KRGFD Thermal Refined Ground Racks	SRG/SRGF/SRGFD/SRGFK Hardened Ground Racks	KRF-H/KRFD-H Hardened Racks	SRF-H/SRFD-H Hardened Racks	SRF-HL/SRFD-HL Laser Hardened Racks
Material: SCM415 m1.5-3 Page 224	Material: SCM440 m1.5-3 Page 226	Material: SCM440 m1-3 Page 228	Material: S45C m0.5-6 Page 230	Material: SCM440 m1.5-5 Page 232	Material: S45C m1.5-6 Page 234	Material: S45C m1.5-6 Page 236
KRF/KRFD Thermal Refined Racks	SRAF/SRAF/D/SRAFK Square Racks	SR Racks	SRF Steel Racks with Machined Ends	SRFD/SRFK Steel Racks with Bolt Holes	SUR/SURF/SURFD Stainless Steel Racks	DRF/DRFD/DRFK Plastic Racks
Material: SCM440 m1.5-5 Page 238	Material: S45C m1.5-4 Page 240	Material: S45C m0.5-10 Page 242	Material: S45C m0.5-10 Page 243	Material: S45C m0.5-6 Page 244	Material: SUS304 m1-4 Page 246	Material: Polyacetal m1-3 Page 248
PR/PRF Plastic Racks	BSR Racks	SRO/SROS Round Racks	SURO Stainless Steel Round Racks	DR Molded Flexible Racks	SSDR/ARL/SRS Rack Clamps for Pinions/Rack Guide Rails	KRHG/KRHGF/KRHGFD Ground Helical Racks
Material: MC901 m1-3 Page 250	Material: Free cutting brass (C3604) m0.5-1 Page 251	Material: S45C m1-5 Page 252	Material: SUS303 m1-3 Page 253	Material: Duracon (R) (M25-44) m0.8-2 Page 254	Material: S45C, etc. Page 254	Material: SCM440 m1-3 Page 256
SRH/SRHF/SRHFH Helical Racks	SRHEF Helical Racks	SHE Helical Gears	ZST/ZSTD Hardened Ground Helical Racks	ZSTP Ground Helical Gears	ZST-GL Assembly Gauges	
Material: S45C m2, 3 Page 258	Material: S45C m1.5-6 Page 260	Material: S45C m1.5-6 Page 260	Material: DIN C45 (S45C equivalent) m2-6 Page 262	Material: SCM440 m2-6 Page 262	Material: S45C m1.5-6 Page 264	

CP Racks & Pinions

KTSCP [CP] Tapered Pinions	STRCPF/STRCPFD [CP] Tapered Racks	MSCPG [CP] Ground Spur Gears	MRGCPF/MRGCPFD [CP] Hardened Ground Racks	KSCPG [CP] Ground Spur Gears	KRGCPF-H/KRGCPFD-H [CP] Hardened Ground Racks	KRGCP/KRGCPF/KRGCPFD [CP] Thermal Refined Ground Racks
Material: SCM440 CP5, 10 Page 274	Material: S45C CP5, 10 Page 274	Material: SCM415 CP5, 10 Page 276	Material: SCM415 CP5, 10 Page 276	Material: SCM440 CP5, 10 Page 278	Material: SCM440 CP5, 10 Page 278	Material: SCM440 CP5, 10 Page 280
SSCPGS [CP] Ground Spur Pinion Shafts	SSCPG [CP] Ground Spur Gears	SRGCP/SRGCPF/SRGCPFD [CP] Hardened Ground Racks	KRCPF-H/KRCPFD-H [CP] Hardened Racks	KSSCP [CP] Thermal Refined Spur Gears	KRCPF/KRCPFD [CP] Thermal Refined Racks	SSCP [CP] Spur Gears
Material: S45C CP5, 10 Page 282	Material: S45C CP5-20 Page 282	Material: S45C CP5-20 Page 284	Material: SCM440 CP5, 10 Page 286	Material: SCM440 CP5, 10 Page 288	Material: SCM440 CP5, 10 Page 288	Material: S45C CP2.5-20 Page 290
SRCPF-H/SRCPFD-H [CP] Hardened Racks	SRCPF-HL/SRCPFD-HL [CP] Laser hardened	SRCP/SRCPF/SRCPFD/SRCPFK [CP] Racks	SUSCP [CP] Stainless Steel Spur Gears	SURCPF/SURCPFD [CP] Stainless Steel Racks	SROCP [CP] Round Racks	FRCP [CP] Metal Flexible Racks
Material: S45C CP5-20 Page 292	Material: S45C CP5-20 Page 294	Material: S45C CP2.5-20 Page 296	Material: SUS303 CP5, 10 Page 298	Material: SUS304 CP5, 10 Page 298	Material: S45C CP2.5-10 Page 300	Material: SS400 CP5 Page 300

Miter Gears

MMSGQ Ground Spiral Miter Gears <i>NEW</i>	MMSG Ground Spiral Miter Gears	SMSG Ground Spiral Miter Gears	MMSA/MMSB Finished Bore Spiral Miter Gears	MMS Spiral Miter Gears	SMS Spiral Miter Gears <i>NEW</i>	SMA/SMB/SMC Finished Bore Miter Gears
Material: SCM415 m2-4 Page 310	Material: SCM415 m2-4 Page 312	Material: S45C m1-5 Page 314	Material: SCM415 m1-10 Page 316	Material: SCM415 m2-5 Page 318	Material: S45C m1-8 Page 320	Material: S45C m1-8 Page 322
MM Miter Gears <i>NEW</i>	LM Sintered Metal Miter Gears	SM Miter Gears <i>NEW</i>	SAM Angular Miter Gears	SUM Stainless Steel Miter Gears	SUMA Finished Bore Stainless Steel Miter Gears	PM Plastic Miter Gears
Material: SCM415 m2-5 Page 324	Material: SMF5040 m0.8-1.5 Page 324	Material: S45C m1-8 Page 326	Material: S45C m1.5-3 Page 328	Material: SUS303 m1-4 Page 330	Material: SUS303 m1-4 Page 330	Material: MC901 m1-4 Page 332
DM Injection Molded Miter Gears	BB Sintered Metal Bushings	Nissei KSP Ground Spiral Miter				
Material: Duracon (R) (M90-44) m0.5-1.5 Page 332	Material: Oil-free copper alloy φ5-8 Page 334	Material: SCM415 m1.5-6 Page 370				

Bevel Gears

MHP High-Ratio Hypoid Gears Gear Ratio 15-60	MBSG Ground Spiral Bevel Gears Gear Ratio 2	SBSG Ground Spiral Bevel Gears Gear Ratio 1.5-3	MBSA/MBSB Finished Bore Spiral Bevel Gears Gear Ratio 1.5-3	SBS Spiral Bevel Gears Gear Ratio 1.5-4	SB Bevel Gears Gear Ratio 1.5-4	SBY Bevel Gears Gear Ratio 2-4
Material: SCM415 m1, 1.5 Page 342	Material: SCM415 m2-4 Page 346	Material: S45C m2-4 Page 348	Material: SCM415 m2-6 Page 350	Material: S45C m1-5 Page 354	Material: S45C m1-6 Page 358	Material: S45C m5-8 Page 358
SB Steel Bevel Gears & Pinion Shafts Gear Ratio 5	SUB Stainless Steel Bevel Gears Gear Ratio 1.5-3	PB Plastic Bevel Gears Gear Ratio 1.5-3	DB Injection Molded Bevel Gears Gear Ratio 2	BB Sintered Metal Bushings φ5-6	Nissei KSP Ground Spiral Bevel Gears Gear Ratio 1-2	
Material: S45C m1.5-3 Page 362	Material: SUS303 m1.5-3 Page 364	Material: MC901 m1-3 Page 366	Material: Duracon (R) (M90-44) m0.5-1 Page 368	Material: Oil-free copper alloy φ5-6 Page 368	Material: SCM415 m1.5-6 Page 370	

Screw Gears

SN-H Hardened Screw Gears <i>NEW</i>	SN Screw Gears	SUN Stainless Steel Screw Gears	AN Screw Gears	PN Plastic Screw Gears
Material: S45C m1-4 Page 380	Material: S45C m1-4 Page 372	Material: SUS303 m1-3 Page 384	Material: CAC702 (A/BC2) m1-3 Page 386	Material: MC901 m1-3 Page 388

Worm Gears

KWGD/KWGDLS Duplex Worms	AGDL Duplex Worm Wheels Reduction Ratio 20-60 <i>M</i>	KWG Ground Worm Shafts	AG Worm Wheels Reduction Ratio 10-60 <i>J</i>	AGF Worm Wheels Reduction Ratio 10-60	SWG Ground Worms <i>J</i>	AG Worm Wheels Reduction Ratio 10-60 <i>J</i>
Material: SCM440 m1.5-4 Page 402	Material: CAC702 (A/BC2) m1.5-4 Page 402	Material: SCM440 m0.5-6 Page 410	Material: CAC702 (A/BC2) m0.5-1.5 Page 410	Material: CAC702 (A/BC2) m2-6 Page 414	Material: S45C m1-6 Page 420	Material: CAC702 (A/BC2) m1-6 Page 420
SW Worms <i>J</i>	BG Worm Wheels Reduction Ratio 10-60 <i>J</i>	CG Worm Wheels Reduction Ratio 10-120 <i>J</i>	SUW Stainless Steel Worms	PG Worm Wheels Reduction Ratio 10-50 <i>Additional J</i>		
Material: S45C m0.5-6 Page 428	Material: CAC502 (PBC2) m0.5-6 Page 428	Material: FC200 m1-6 Page 430	Material: SUS303 m0.5-3 Page 444	Material: MC901 m1-3 Page 444		

Gearboxes

KBX Bevel Gearboxes	CBX Bevel Gearboxes
Material: - Model L/T Page 452	Material: - Model L/T Page 456

Other Products

SRT/SRT-C Ratchets & Pawls <i>J</i>	SRTB/SRT-C Ratchets & Pawls <i>M</i>	GC/GC-I Gear Couplings <i>J</i>	SV/SVI Involute Spine Shafts, Spine Bushings	GCU Gear Assembly Kit	DLS Rack & Pinion Lubrication System <i>M</i>	Racks & Pinions Aluminum Frame Transport Device
Material: S45C P2.09-12.57 Page 464	Material: S45C P2.09-12.57 Page 466	Material: S45C Page 468	Material: S45C Page 470	Material: - Page 472	Material: - Page 474	Material: - Page 30

Index Information

MMSGQ
Ground Spiral Miter Gears
NEW

Catalog Number
Product Name

Icon Mark

Product Photo

Material
Material: SCM415

Size/Page
m2-4 Page 310

NEW New Products **Additional** Additional Products **M** Includes Made to Order **H** Hardened Plus
S Semi-Custom **J** J Series **F** F Series **R** R Series **E** E Series

Product Series Index

NEW New Product

Additional Additional Products

M Includes Made to Order

H Hardened Plus

S Semi-Custom

J J Series

F F Series

R R Series

E E Series

	Series	Gear Type	Page	Features
A	AG	Worm Wheels	410-413, 420-427	J
	AGDL	Duplex Worm Wheels	404-409	M
	AGF	Worm Wheels	414-419	
	AN	Screw Gears	386-387	J, M
	ARL	DR Rack Guide Rails	255	
B	BB	Sintered Metal Bushings	184, 334, 368	
	BG	Worm Wheels	428-443	J
	BSR	Racks	251	
	BSS	Spur Gears	186-187	
C	CBX	Bevel Gearboxes	456-459	
	CG	Worm Wheels	430-443	J
D	DB	Injection Molded Bevel Gears	368-369	
	DLS	Racks & Pinions Lubricators	474-477	M
	DM	Injection Molded Miter Gears	332-333	
	DR	Molded Flexible Racks	254-255	
	DRF	Plastic Racks	248	
	DRFD	Plastic Racks	248-249	J
	DRFK	Plastic Racks	248-249	J
	DS	Injection Molded Spur Gears	182-185	
	DSF	F-Loc Gears	162-163	
	F	FRCF	[CP] Metal Flexible Racks	300
G	GC	Gear Couplings (Inner Hubs)	468-469	J
	GC-I	Gear Couplings (Outer Rings)	468	
	GCU	Gear Assembly Kit	472-473	
K	KBX	Bevel Gearboxes	452-455	
	KHG	Ground Helical Gears	194-201	J
	KRCPF	[CP] Thermal Refined Racks	288-289	
	KRCPF-H	[CP] Hardened Racks	286-287	
	KRCPFD	[CP] Thermal Refined Racks	288-289	J
	KRCPFD-H	[CP] Hardened Racks	286-287	J
	KRF	Thermal Refined Racks	238-239	
	KRF-H	Hardened Racks	232-233	
	KRFD	Thermal Refined Racks	238-239	J
	KRFD-H	Hardened Racks	232-233	J
	KRG	Thermal Refined Ground Racks	228-229	
	KRGCP	[CP] Thermal Refined Ground Racks	280-281	
	KRGCPF	[CP] Thermal Refined Ground Racks	280-281	
	KRGCPFD	[CP] Thermal Refined Ground Racks	280-281	J
	KRGCPF-H	[CP] Hardened Ground Racks	278	
	KRGCPFD-H	[CP] Hardened Ground Racks	278-279	J
	KRGF	Thermal Refined Ground Racks	228-229	
	KRGFD	Thermal Refined Ground Racks	228-229	J
	KRGF-H	Hardened Ground Racks	226-227	
	KRGFD-H	Hardened Ground Racks	226-227	J
KRHG	Ground Helical Racks	256-257	M	
KRHGF	Ground Helical Racks	256-257		

	Series	Gear Type	Page	Features	
K	KRHGFD	Ground Helical Racks	256-257	J	
	KS	Thermal Refined Spur Gears	100-101	J, H	
	KSCPG	Ground Spur Gears	278-279	J	
	KSG	Ground Spur Gears	54-55	J	
	KSP	Nissei Ground Spiral Bevel Gears	370-374		
	KSSCP	[CP] Thermal Refined Spur Gears	288-289	J, H	
	KTSCP	[CP] Tapered Pinions	274-275		
	KWG	Ground Worm Shafts	410-419		
	KWGD	Duplex Worms	402-409		
	KWGDLS	Duplex Worms	402-409		
	L	LM	Sintered Metal Miter Gears	324-325	
		M	MBSA	Finished Bore Spiral Bevel Gears	350-353
	MBSB		Finished Bore Spiral Bevel Gears	350-353	
MBSG	Ground Spiral Bevel Gears		346-347		
MHP	High-Ratio Hypoid Gears		342-345		
MM NEW	Miter Gears		324-325		
MMS	Spiral Miter Gears		318-319		
MMSA	Finished Bore Spiral Miter Gears		316-317		
MMSB	Finished Bore Spiral Miter Gears		316-317		
MMSG	Ground Spiral Miter Gears		312-313	J	
MMSGQ NEW	Ground Spiral Miter Gears		310-311	J	
MRGCPF	[CP] Hardened Ground Racks		276		
MRGCPFD	[CP] Hardened Ground Racks		276-277	J	
MRGF	Hardened Ground Racks		224-225	J	
MRGFD	Hardened Ground Racks	224-225			
MSCPG	[CP] Ground Spur Gears	276-277	M		
MSGA	Ground Spur Gears	50-53			
MSGB	Ground Spur Gears	50-53			
N	NSU	Plastic Spur Gears with Steel Core	164-167	J	
	P	PB	Plastic Bevel Gears	366-367	
PG Additional		Worm Wheels	444-449	J	
PM		Plastic Miter Gears	332-333		
PN		Plastic Screw Gears	388-389	J	
PR		Plastic Racks	250		
PRF		Plastic Racks	250		
PS		Plastic Spur Gears	170-179	J	
PSA		Plastic Spur Gears	174-179	J	
PSUKB		SUKB Assembled PSA Spur Gear	181	J	
PU		Plastic Spur Gears with Steel Core	168-169	J	
S		SAM	Angular Miter Gears	328-329	
		SB	Bevel Gears	358-363	
		SB	Steel Bevel Gears & Pinion Shafts	362-363	
	SBS	Spiral Bevel Gears	354-357		
	SBSG	Ground Spiral Bevel Gears	348-349		

	Series	Gear Type	Page	Features
S	SBY	Bevel Gears	358-363	
	SH	Helical Gears	202-203	
	SHE	Helical Gears	260-261	
	SI	Steel Internal Gears	208	
	SIR	Steel Ring Gears (Spur Gears)	210	
	SM NEW	Miter Gears	326-327	J
	SMA	Finished Bore Miter Gears	322-323	
	SMB	Finished Bore Miter Gears	322-323	
	SMC	Finished Bore Miter Gears	322-323	
	SMS NEW	Spiral Miter Gears	320-321	J
	SMSG	Ground Spiral Miter Gears	314-315	J
	SN NEW	Screw Gears	380-383	J, H
	SR	Racks	242	
	SRAF	Racks	240-241	
	SRAFD	Racks	240-241	J
	SRAFK	Racks	240-241	J
	SRCP	[CP] Racks	296	
	SRCPF	[CP] Racks	296	
	SRCPFD	[CP] Racks	296-297	J
	SRCPFK	[CP] Racks	296-297	J
	SRCPF-H	[CP] Hardened Racks	292-293	
	SRCPF-HL	[CP] Laser Hardened Racks	294-295	
	SRCPFD-H	[CP] Hardened Racks	292-293	J
	SRCPFD-HL	[CP] Laser Hardened Racks	294-295	J
	SRF	Steel Racks with Machined Ends	243	
	SRFD	Steel Racks with Bolt Holes	244-245	J
	SRFK	Steel Racks with Bolt Holes	244-245	J
	SRF-H	Hardened Racks	234-235	
	SRFD-H	Hardened Racks	234-235	J
	SRF-HL	Hardened Racks	236	
	SRFD-HL	Hardened Racks	236-237	J
	SRG	Hardened Ground Racks	230	M
	SRGCP	[CP] Hardened Ground Racks	284-285	
	SRGCPF	[CP] Hardened Ground Racks	284-285	
SRGCPFD	[CP] Hardened Ground Racks	284-285	J	
SRGF	Hardened Ground Racks	230	M	
SRGFD	Hardened Ground Racks	230-231	J	
SRGFK	Hardened Ground Racks	230-231	J	
SRH	Helical Racks	258-259		
SRHEF	Helical Racks	260-261		
SRHF	Helical Racks	258-259		
SRHFD	Helical Racks	258-259		
SRO	Round Racks	252		
SROCP	[CP] Round Racks	300		
SROS	Round Racks	252		
SRS	DR Rack Clamps	254		
SRT	Ratchets	464-465	J	
SRTB	Ratchets	466-467	M	

	Series	Gear Type	Page	Features
S	SRT-C	Ratchet Pawls	464-467	
	SS	Spur Gears	104-137	J, F, H, S
	SSA	Spur Gears	138-147	J, F, H
	SSAG	Ground Spur Gears	96-99	
	SSAY	Spur Gears	152-153	
	SSCP	[CP] Spur Gears	290-291	J, H
	SSCPG Additional	[CP] Ground Spur Gears	282-283	J
	SSCPGS	[CP] Ground Spur Pinion Shafts	282-283	
	SSDR	DR Pinions	254-255	
	SSG	Ground Spur Gears	58-95	J, F, R, S, E, M
	SSGS	Ground Spur Pinion Shafts	56-57	
	SSR	Steel Ring Gears (Spur Gears)	188	
	SSS	Spur Pinion Shafts	102-103	
	SSY	Spur Gears	148-151	
	STRCPF	[CP] Tapered Racks	274-275	
	STRCPFD	[CP] Tapered Racks	274-275	
	SUB	Stainless Steel Bevel Gears	364-365	
	SUKB	Stainless Steel Hubs	180	
	SUM	Stainless Steel Miter Gears	330-331	
	SUMA	Finished Bore Stainless Steel Miter Gears	330-331	
	SUN	Stainless Steel Screw Gears	384-385	J
	SUR	Stainless Steel Racks	246-247	
	SURCPF	[CP] Stainless Steel Racks	298-299	
SURCPFD	[CP] Stainless Steel Racks	298-299	J	
SURF	Stainless Steel Racks	246-247		
SURFD	Stainless Steel Racks	246-247		
SURO	Stainless Steel Round Racks	253		
SUS	Stainless Steel Spur Gears	154-159	J	
SUSA	Stainless Steel Spur Gears	156-159	J	
SUSF	F-Loc Gears	160-161		
SUSCP	[CP] Stainless Steel Spur Gears	298-299	J	
SUW	Stainless Steel Worms	444-449	J	
SV	Involute Spline Shafts	470-471		
SVI	Involute Spline Bushings	470		
SW	Worms	428-443	J	
SWG	Ground Worms	420-427	J	
Z	ZST	Hardened Ground Helical Racks	262	
	ZSTD	Hardened Ground Helical Racks	262-263	J
	ZSTP	Ground Helical Gears	262-263	J
	ZST-GL	Assembly Gauges	264	
Racks & Pinions Transport Device			30-31	

KHK Stock Gears

-Anytime, Anywhere, Ready to Use-

We respond immediately to customer needs with an abundant variety of 200 styles and 30,000 configurations. As these items are always in stock, they can be used anytime, anywhere, when needed.




Abundant variety of gears



Large variety of sizes and numbers of teeth

Lineup from m0.5 to m10 (spur gears)

m	Minimum No. of teeth	Maximum No. of teeth
0.5	12	120
0.8	12	56
1	10	200
1.5	10	200
2	10	200
2.5	10	200
3	10	160
4	12	120
5	12	120
6	12	100
8	12	60
10	15	50

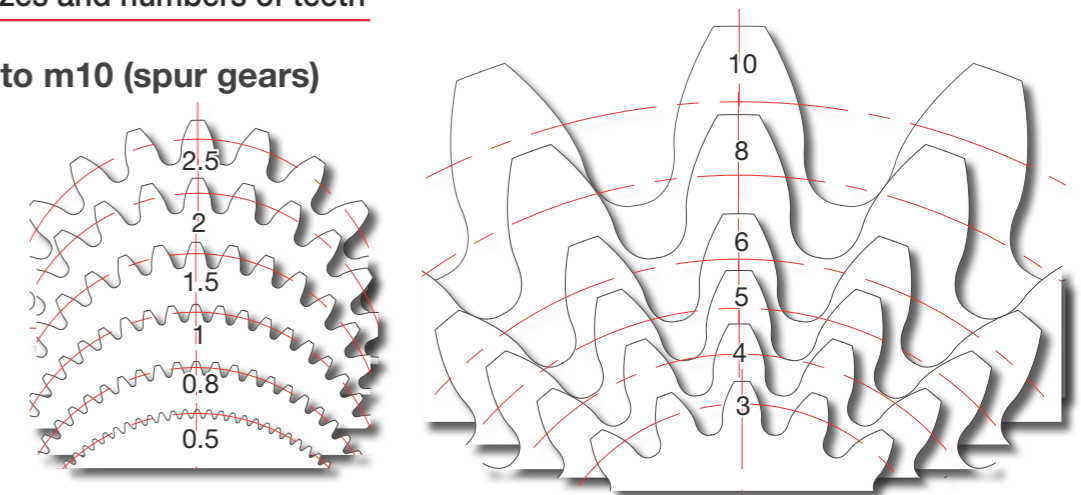

Full-scale drawing of teeth (spur gear)

Available in many materials

Choose based on your application.

We have a wide variety of standardized stainless steel and plastic products that can be used in places where rust and oil must be avoided, as well as metal products with increased gear strength.



Abundant inventory

We stock 5,000 configurations of product at all times in order to deliver them to you quickly.



KHK STOCK GEARS Stock Gear Fastening Series

Key and screw fastening have been standardized.




If you require finished bore gears with keyways and tapped holes, please order the J Series products. Product bore size, keyway dimensions and tap sizes have all been standardized.



Gears can be installed in flexible positions. Gear teeth can be easily aligned.



To install using locking hub parts, select from the F and E series to place your order. Locking Hub and bore sizes have been standardized.

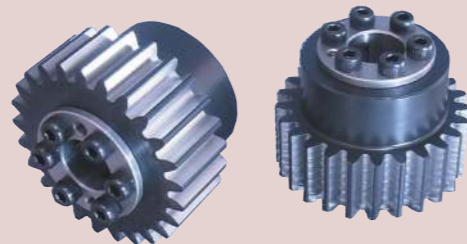

Fits perfectly as the speed reducer pinion for servomotor.



If you require a flange type reducer pinion, please order R Series. These products have standardized mounting hole specifications for flange.



Can be easily installed in 19 seconds using a single bolt



To install using locking hub parts, select from the F and E series to place your order. These products are standardized high-precision ground spur gears with hydro-fastening.



The J Series have keyways, the F & E Series have locking hubs, and the R Series have holes for Speed reducers. These 81 styles contain 19,000 configurations of gears that can be used immediately due to their standardized bore and keyway sizes.

Fastening Series / Semi-custom Lineup

Series	Type	Catalog Number	m0.5 (CP2.5)	m0.8	m1 (m1.25)	m1.5 (CP5)	m2	m2.5	m3 (CP10)	m4 (m3.5)	m5 (CP15)	m6 (CP20)	m8	m10		
J Series	Spur Gears	KSG														
		SSG														
		SSAG														
		KS														
		SS														
		SSA														
		SUS														
		SUSA														
		NSU														
		PU														
		PS														
		PSA														
	SUKB															
	Helical Gears	KHG														
		MRGFD														
		KRGFD-H														
		KRGFD														
		SRGFD(K)														
		KRFD-H														
		SRFD-H														
		SRFD-HL														
		KRFD														
		SRAF(D)(K)														
		SRFD(K)														
		DRFD(K)														
	KRHGFD															
	ZSTP															
	ZSTD															
	CP Racks & Pinions	MRGCPFD														
		KSCPG														
		KRGCPFD-H														
		KRGCPFD														
		SSCPG														
		SRGCPFD														
		KRCFPD-H														
		KSSCP														
		KRCFPD														
		SSCP														
		SRCFPD-H														
		SRCFPD-HL														
	SRCFPD(K)															
	SUSCP															
	SURCPFD															
	Miter Gears	MMSGQ														
		MMSG														
SMSG																
SMS																
MM																
SM																
Screw Gears	SN															
	SUN															
	AN															
	PN															
Worm Gears	SWG															
	SW															
	SUW															
	AG															
	BG															
	CG															
	PG															
Other Products	SRT															
	GC															
F Series	Spur Gears	SSG														
		SS														
		SSA														
R Series	Spur Gears	SSG														
	Helical Gears	SSCPG														
E Series	Spur Gears	ZSTP														
		SSG														
Semi-Custom	Spur Gears	SSG														
		SS														

Definitively shortens the installation time

Bushing Fastening.
E Series

The lead time is **2** business days

Can be easily installed in 19 seconds using a single bolt

Time to mount a gear is reduced to 1/15



**Concentricity:
0.02 mm**




Solves the problems of gear fastening.

- Desire to reduce the time to mount gears.
When using the conventional wedge method, mounting a gear takes about 5 minutes (according to research by KHK), whereas these products can be easily mounted using one bolt in 19 seconds.
- Desire to reduce the assembly runout of the gears.
- Desire to reduce the backlash between the gear and shaft.
- Desire to lower the decrease in shaft strength due to fretting wear (worn or seized shaft).
- Desire to simplify the phase matching and positioning.

How the ETP-E Plus works

The pressure medium in the chamber is compressed as a result of tightening the screw.
The resulting pressure causes the hub side to expand into the hub and the bore side to expand onto the shaft. Thus allowing the shaft and the hub to be securely fastened.

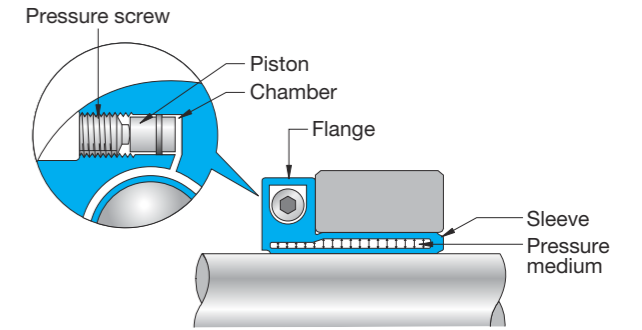

Effects of ETP-E Plus

Easy and accurate positioning	Helps save space	High concentricity	Secure and speedy installation

KHK Lineup

See Page 82

6 styles, 2,400 configurations

Limited release on the Japanese website

SSG Ground Spur Gears Series

Precision: N7
Material: S45C
Heat Treatment: Gear teeth induction hardened
1000 configurations



m1.5 to 6

KHG Ground Helical Series

Precision: N6
Material: SCM440
Heat Treatment: Thermal refined / gear teeth induction hardened
500 configurations



m1.5 to 3

AGF Worms & Wheels Series

Precision: KHK 2
Material: CAC702 (A & BC2)
230 configurations



m2 to 6

- ZSTP 2 to 6, 110 configurations
- AGDL 1.5 to 4, 180 configurations
- AG 1.5 to 6, 330 configurations

- **Allowable Order Sizes**
1 to 20 units. For quantities over 20, please request price and delivery quotes.
- **Ordering Method**
Catalog Number + E + Bore Size (Example: SSG2-25E + BORE)
- **Production is completed in 2 working days** excluding the day ordered.
As available-on-request products, these require a lead-time for shipping of 2 working days (excludes the day ordered), after placing an order.
Products with module 4 (CP15) or higher require a lead-time for shipping within 7 working days from the order (excludes the day ordered).




Positive lock is also available at KHK Quick-Mod Gears.

Superior compatibility with servos for speed reducers



Perfect for Nabtesco Corporation's GH Series **Nabtesco + R**

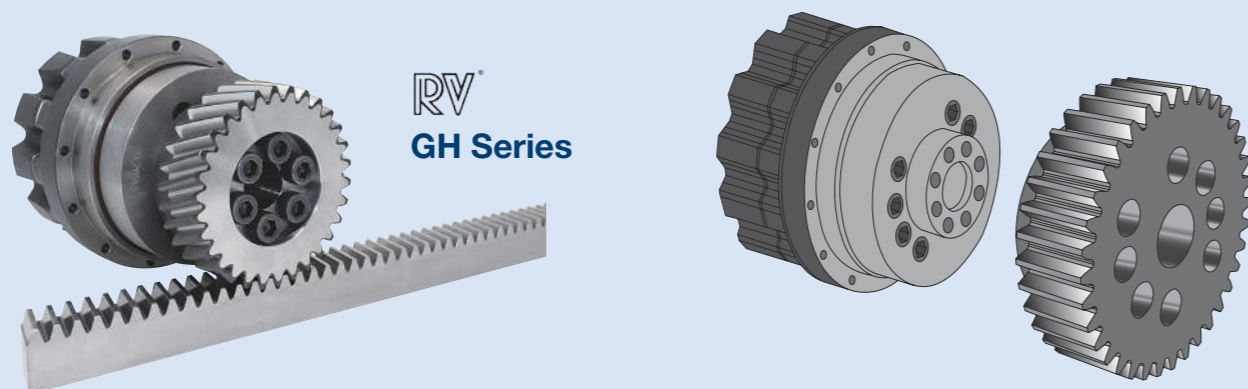

Flange attaching speed reducer pinions **R Series**

Nidec Shimpo Corporation

Sumitomo Heavy Industries, Ltd.



VRG Series



IB Series



HPG Series

Also perfect for shaft type speed reducers **J Series**

Nissei
株式会社 ニッセイ

Inline

APG Series

Right Angle

AFC Series



Pinion gear applicability table for Nabtesco GH Series **Nabtesco + R**

Corresponding speed reducer size and pinion gears

See Page 94 for more details

Nabtesco GH Series	KHK target products		
	Module Type	CP Type	Helical Type
7	SSG3-30RGH7	SSCPG10-30RGH7	ZSTP3-30LRGH7
17	SSG3-40RGH17	SSCPG10-40RGH17	ZSTP3-30LRGH17
24	SSG4-30RGH24	SSCPG15-30RGH24	ZSTP4-30LRGH24
40	SSG5-30RGH40	SSCPG15-30RGH40	ZSTP5-24LRGH40
100	SSG6-30RGH100	SSCPG20-30RGH100	

Series for flange output speed reducers **R Series**

Rack and pinion for corresponding flange output speed reducers

See Page 92 for more details

Mounting hub dia. H (Common to all speed reducers)	Nidec Shimpo VRG Series	Sumitomo Heavy Industries IB Series	Harmonic Drive Systems HPG Series	R Series Catalog Numbers	KHK recommended mating rack
24	C90	P120	20	SSG Module - No. of teeth	R24
32	D120	P130	32		R32
47	E170	—	50		R47
60	—	—	65		R60
					KRGFSeries SRGFSeries SRFSeries See Page 211

R series catalog numbers are composed as follows :

(Base SSG ground spur gear catalog number) + R + (mounting hub diameter)

Series for shaft output speed reducers (with key) **J Series**

Pinion gears corresponding to speed reducer sizes

See Page 64 for more details

See Page 54 for more details

Nissei APG · AFC Series		KHK target products	Nissei APG · AFC Series		KHK target products
Capacity	Frame No.	Catalog Number	Capacity	Frame No.	Catalog Number
100W	12	SSG2-19J12	750W	18	KSG2-32J18
	15	SSG2.5-19J15		22	KSG3-25J22
	18	SSG2.5-24J18		28	KSG3-32J28
200W	12	SSG2-19J12	1000W	22	KSG3-25J22
	15	SSG2.5-19J15		28	KSG3-32J28
	18	KSG2-32J18	1500W	22	KSG3-25J22
	22	KSG3-25J22		28	KSG3-32J28
400W	12	SSG2-19J12	2000W	22	KSG3-25J22
	15	SSG2.5-19J15		28	KSG3-32J28
	18	KSG2-32J18	3000W	28	KSG3-32J28
	22	KSG3-25J22			
	28	KSG3-32J28			


When a key is not needed, try the locking hub series!




Be sure to calculate the strength under actual usage conditions before use.

Application examples

• Robot transport device



• Gantry robot

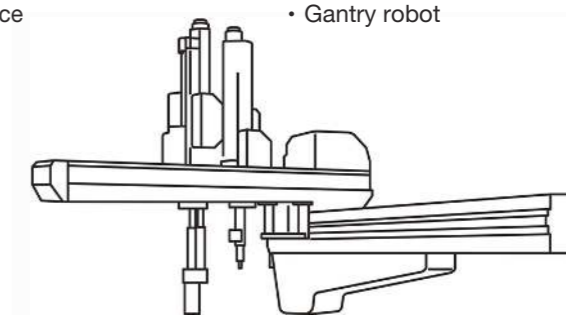


Fastening Series Comparison

[Comparison of Features]


Series	<i>J</i> Series	<i>F</i> Series	<i>E</i> Series
Fastening Method	Key	Friction	Friction
Price*	◎	○	△
Work Time	○	△	◎
Concentricity	○	○	◎
Phase Matching	×	◎	◎
Allowable torque	◎	○	△
Installation Freedom	○	◎	△
Type	◎	△	○
Hardening + available	○	×	×

*Note on price issues: Prices change according to processes (work time).
Find details here ↓

F series and E series comparison video

 For details, see here

https://www.khkgears.co.jp/movie/movie_conclusion_e_f.mp4

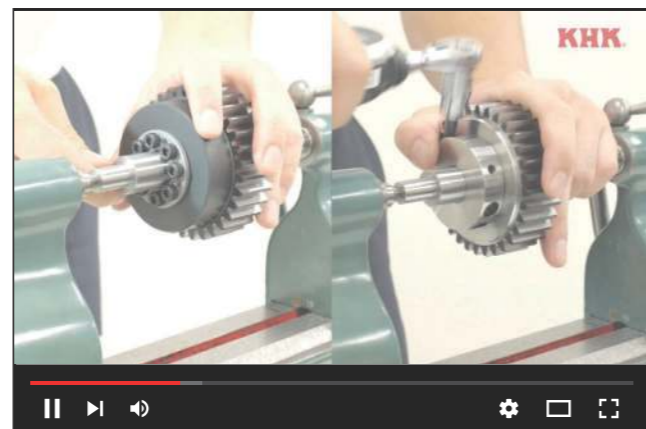

Mounting image of Fastening Series



Induction Hardening Service

SN Hardened Screw Gears added to the lineup



Hardened Plus

Hardening is provided as an additional service to standard products when ordered. Products with **H** at the end of the Catalog No. support Hardened Plus.

Induction hardening specification

Area: Tooth surface hardened
Hardness: HRC50 to 60

● Hardness and depth of gear-teeth induction hardening

The hardening method and the state of the hardened teeth area vary depending on the size of gears.

Note that hardening specifications of Hardening Plus above will be near the standard pitch diameter of the gear.

Note: The gear precision decreases after hardening.
The bore dimension tolerance H7 will also be degraded.

Quick delivery, hardening completed in 4 working days



For Hardened Plus, the hardening unit price below is added to the product unit price.

■ Hardening unit price of SS, SSA and SSCP spur gears (S45C products)

No. of teeth	Module (Circular Pitch)							
	1 (CP2.5)	1.5 (CP5)	2 -	2.5 -	3 (CP10)	4 -	5 (CP15)	6 (CP20)
20 or less								
21 to 30								
31 to 40								
41 to 50								
51 to 60	For prices, contact your dealer.							
61 to 80								
81 to 100								
101 to 120								
121 to 160								
161 to 200								

■ Hardening unit price of KS and KSSCP thermal refined spur gears (SCM440 products)

No. of teeth	Module (Circular Pitch)					
	1.5 (CP5)	2 -	2.5 -	3 (CP10)	4 -	5 (CP15)
20 or less						
21 to 30	For prices, contact your dealer.					
31 to 40						

■ **NEW** Hardening unit price of SN screw gears (S45C products)

No. of teeth	Module (Circular Pitch)					
	1	1.5	2	2.5	3	4
15 or less						
16 to 20	For prices, contact your dealer.					
21 to 30						



Target Products

Various Standard Product / J Series
SS/SSA/SSCP Spur Gears
KS/KSSCP Thermal Refined Spur Gears
NEW SN Screw Gears

- Standard Product
- J Series

Ordering Method and Delivery Date

Please specify: **Catalog No. + H.**
Example: Catalog No.: SS3-30, when hardening is added ⇒ SS3-30H
Production is completed by the manufacturer in **4 working days** excluding the day ordered

Please specify: **Catalog No. + H + J + BORE.**
Example: Catalog No.: SS4-15, when hardening is added ⇒ SS4-15HJ25

m1 to 3 Production is completed by the manufacturer in **6 working days** excluding the day ordered

m4 up Production is completed by the manufacturer in **11 working days** excluding the day ordered

Precautions

- ① Because machining starts immediately, we cannot accept cancellations.
- ② The bore diameter distorts due to hardening.
- ③ Black oxide treatment cannot be performed after hardening.
- ④ The surface durability values shown in the table are calculated values according to the assumed usage conditions. Please calculate the actual surface durability in the KHK website.

KHK Quick-Mod Gears

KHK
齒車工房

信頼の追加工

↑ Delivered with this marking




Trusted secondary operations guaranteed by KHK

KHK Quick-Mod Gears is a KHK original custom system which modifies standard gears according to customers' requirements and delivers them as finished products.

Three benefits of using the KHK Quick-Mod Gears

Wide range of secondary operations

We accept various machining including bore and mounting hole machining, Helisert machining, stepped hole machining and hub removal.



Helisert Processing



Stepped Hole Machining



Holes, Hubs, Keyway Machining



Various Mounting Hole Machining

Fast delivery available

We use high-precision machines to quickly machine in-stock "stock gears" on the JIT production line and deliver them with a short turnaround.



Warehouse of KHK Stock Gears



JIT Production Line



Inspection and Packaging



Shipping

Surface Treatments Offered

We accept requests for various types of plating. We offer platings that are suitable for rust prevention, solid lubrication for wear resistance and various other surface treatments.

■ Electro-galvanizing



A typical plating method for the purpose of preventing rust on iron, with plating thickness of about 2 to 25 μm .

■ Black chromate



Black or slightly reddish plating. Black trivalent chromate is RoHS compliant.

■ Black oxide




Chemical change due to a strongly alkaline treatment liquid forms a ferrosferric oxide film (3 μm or less).

■ Phosphate treatment



An iron phosphate chemical conversion treatment that forms a thin iron amorphous film.

■ Unichromate



A bluish silver-white plating. Trivalent chromate is RoHS compliant.

■ Electroless nickel plating



Plating with thickness of 3 to 10 μm with uniform film thickness.

■ Low-temperature black chrome plating



A black chromium film (1 to 2 μm) unlikely to peel away.

Note: Keep in mind that the product size of surface treatment with thick plating is the size before plating.

When Placing Orders


For quotation of secondary operations on standard products (KHK Quick-Mod Gears), please prepare a drawing with desired specifications. We will manufacture to the drawing after discussing prices and lead times.

<Cautions regarding Manufacturing>

- Please note that we do not perform black oxide processing after additional machining.
- Gear precision may be reduced, depending on the additional machining specifications. Please contact us when requesting a quote for information about post-machining gear precision.

Please include a drawing with your request.


Use the Drawing Creation Tool from the Website to create drawings for your quotation.

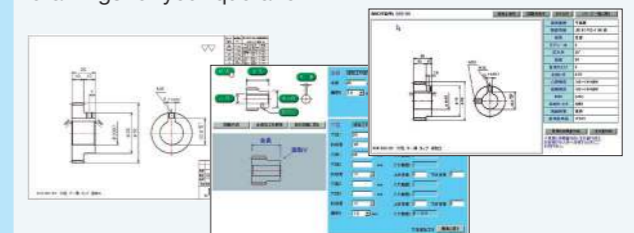

URL <https://khkgears.net/new/>

Custom Gears

KHK has perfected its reception system for made-to-order gears, through unique know-how developed over many years regarding non-standard gear products, modifying technology, and the latest production system.


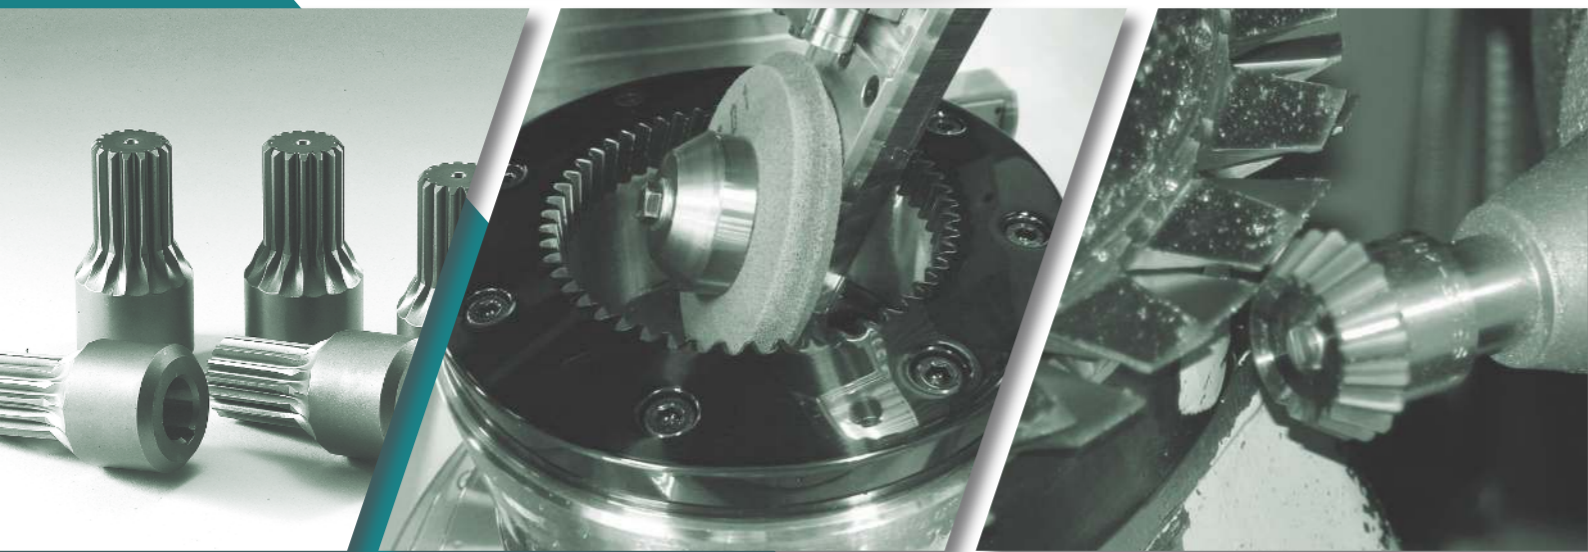


Machining Range

Spur/Helical Gears	Racks	Internal Gears	Screw Gears	Miter/Bevel Gears	Worm Gears
					
Module 0.5~10 Outer diameter ϕ 500 mm or less Weight 200 kg or less	Module 0.5~16 Total length 2,000mm or less Weight 60kg or less	Module 0.5~4 Tooth diameter ϕ 150mm or more Outer diameter ϕ 500 mm or less Weight 40kg or less	Module 1~4 Outer diameter ϕ 600 mm or less Weight 200 kg or less	Module 1~10 Outer diameter ϕ 250 mm or less Mounting distance 170 mm or less Weight 50kg or less	Module 0.5~10 Worm outer diameter: ϕ 100 mm or less Wheel outer diameter: ϕ 600 mm or less Mounting distance 350mm or less

Machining Example

Crowning



Chamfering



Wire Cutting



Gear Specifications	
Shape	Spur Gears
Pitch	m2
No. of teeth	59
Material	S45C
Outside dia.	ϕ 122
Remarks	Teeth Wire Cut

When Placing Orders

Please prepare your own drawings.

Quotations for made-to-print gears are limited to the "production range" above. When ordering, please prepare a drawing with the details of the "Items described in the product specifications" clearly stated. We will manufacture to the drawing after quoting cost and lead time.

<Cautions regarding Manufacturing>

- Even if an order is within the manufacturing range, it may not be manufacturable depending on the specifications such as accuracy, shape and heat treatment.
- Gears for which we have the technological capacity may be unavailable due to the circumstances of our production processes and capabilities.
- We may provide a quotation with the customer's accuracy requirements changed according to our manufacturing capacity. Please check your quotation before placing an order.
- Designs with no product specifications listed on the drawing, or details of quality requirements, will be manufactured based on the ISO9001 quality system.
- We do not conduct any design work for custom ordered gears. We manufacture only to customer drawings.

■ Items described in the product specifications ● Requirement ○ As required △ Contact us - Not required

Listed Details	Gear Type								
	Spur Gears	Helical Gears / Screw Gears	Internal Gears	Helical Inner Gears	Racks	Helical Racks	Bevel Gears	Spiral Bevel Gears	Worm Gears
Gear Accuracy	●	●	●	●	●	●	●	●	●
Pitch (m, CP, DP)	●	●	●	●	●	●	●	●	●
Pressure angle	●	●	●	●	●	●	●	●	●
Material	●	●	●	●	●	●	●	●	●
Shape dimensions / dimensional tolerance	●	●	●	●	●	●	●	●	●
Number of teeth / number of rows	●	●	●	●	●	●	●	●	●
Spiral angle / spiral direction	-	●	-	●	-	●	-	●	●
Teeth depth / backlash	○	○	○	○	○	○	○	○	○
Heat treatment / surface treatment	○	○	○	○	○	○	○	○	○
Surface roughness	△	△	△	△	△	△	△	△	△
Geometric tolerance	△	△	△	△	△	△	△	△	△
Number of teeth/rows of the partner, mounting distance	-	-	-	-	-	-	●	●	●

Note: Tooth thickness or backlash that is not specified will be produced in accordance with KHK stock gears.
If prior discussion is not possible, they will be detailed in the quotation.

J Series supported

Semi-Custom Stock Gears



**Standardized Coarse Pitch gears
now in the Catalog
Streamlining design and selection
to shorten lead times**

S Semi-custom standard products

- **No effort spent on design**
Simply select the gears you need from the catalog, eliminating design costs.
- **Fast delivery available**
Products are delivered with short lead times via our consistent production system.
- **Reliable quality**
The mark of trust "KHK" guarantees the quality of products listed in the catalog.

◆ Supported Products ◆

SSG Ground Spur Gears **J**

m4/5/6/8/10 / No. of Teeth 20 to 120

SS Spur Gears **J**

m4/5/6/8/10 / No. of Teeth 26 to 120



◆ Ordering Method ◆

- Semi-Custom Standard Product
Example: SS5-80S
- Semi-Custom Standard Product J Series:
Catalog No. + J + BORE
Example: SS5-80SJ40

◆ Delivery Date ◆

- Semi-Custom Standard Product
SS Spur Gears:
About 15 business days after the order is received
SSG Ground Spur Gears:
About 30 business days after the order is received
- Semi-Custom Standard Product J Series
SS Spur Gears:
About 25 business days after the order is received
SSG Ground Spur Gears:
About 40 business days after the order is received

- **Non-standard secondary operations are available at "KHK Quick-Mod Gears"**
If there are no standards for the semi-custom J Series, the order will be machined separately according to the specifications.

*Semi-custom standard products are made to order based on catalog products. The price and delivery date will be discussed separately.

Racks & Pinions Aluminum Frame Transport Device

SUS × KHK[®]

With design support. Easy installation. Labor-saving.


High-speed transfer up to the maximum stroke of 3800 mm.

Transport Device Example


RU-800-H

Maximum Payload (Horizontal)	60 kg (reduction ratio: 1/5*)
Stroke	800mm
Repeated Positioning Accuracy	±0.3mm
Max. Speed	1,000 mm/sec
Total Length	1218mm

* Mitsubishi HG-KR43 (400W), acceleration of 0.3G, during operation




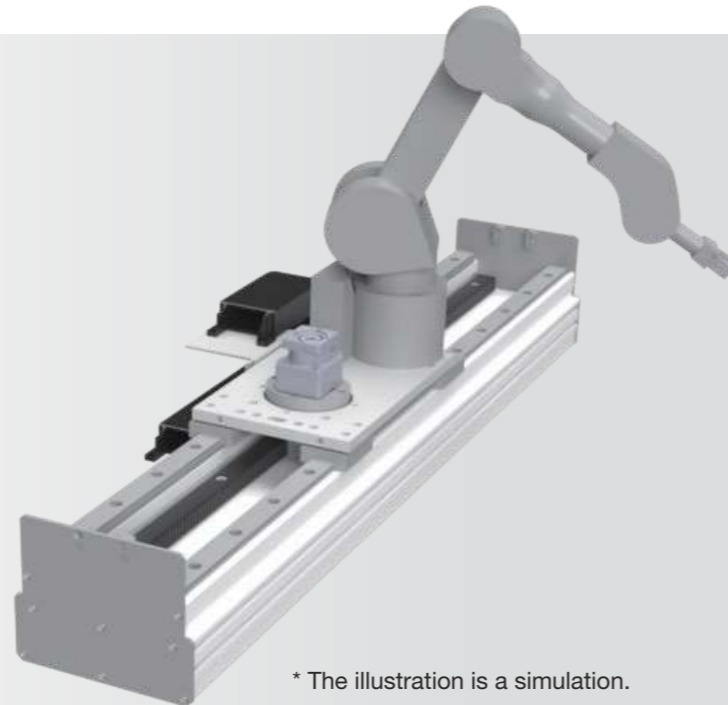


Static Allowable Moment Ma	2107Nm
Static Allowable Moment Mb	2107Nm
Static Allowable Moment Mc	2340Nm
Total Length	1218mm
Frame Length	1200mm



Reduction ratio	Max. Speed (mm/sec)	Max. Payload (kg)
1/3	1666	15
1/5	1000	60

* Robots, motors, controllers, etc. are not included.

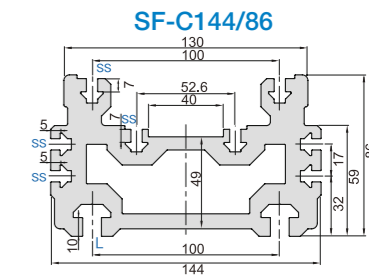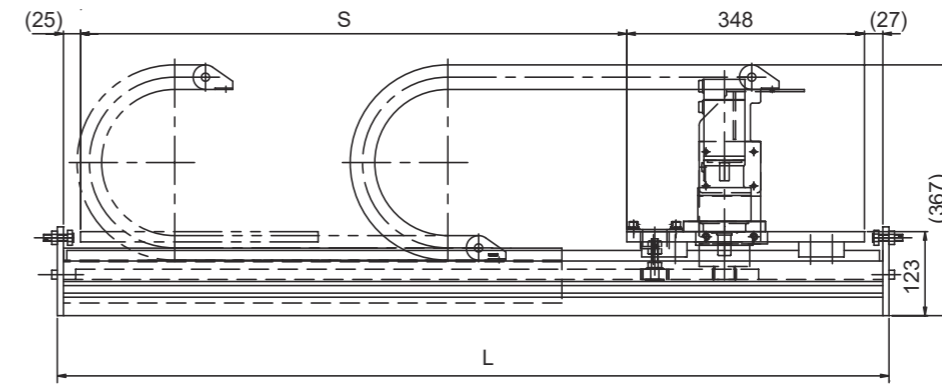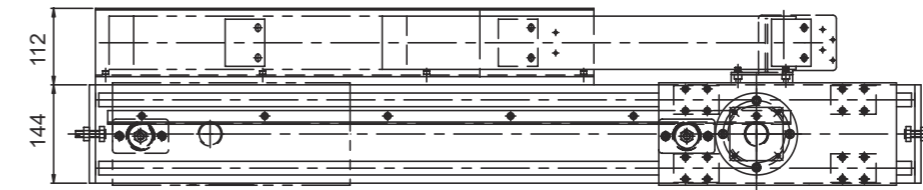


Standard specifications

Model	Stroke: S (mm)	Total length: L (mm)
RU-800-□	800	1218
RU-1300-□	1300	1718
RU-1800-□	1800	2218
RU-3800-□	3800	4218

* Can be manufactured within the stroke range of 500 mm to 3,800 mm. The length is adjusted in 100 mm increments.

* □ contains "S" for reduction ratio of 1/3, and "H" for reduction ratio of 1/5.

Set Contents

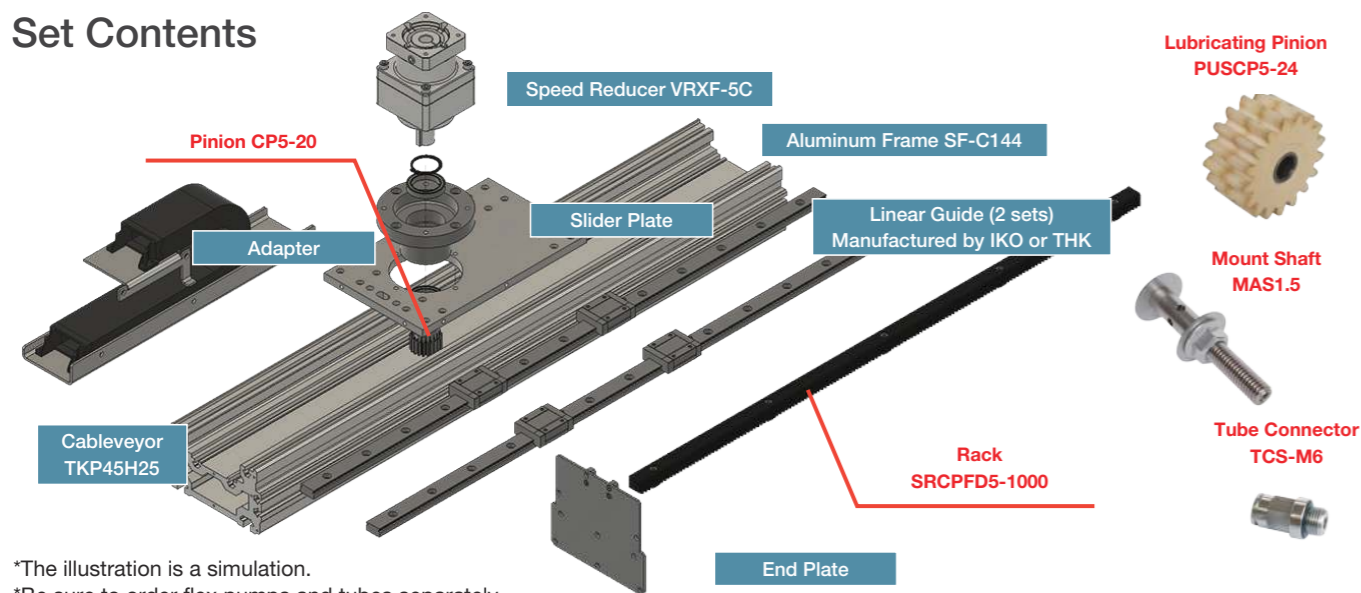

*The illustration is a simulation.

*Be sure to order flex pumps and tubes separately.

Product Features


- ① The maximum stroke can be freely set within 3800 mm.
- ② Capable of transporting a wide range of light to heavy objects
- ③ Delivery time for the transport device in the example is 30 business days (discussion required when changing specifications)

Application Examples



* Image courtesy of Hasegawa Machine Works, Ltd.


Standard equipment includes lubricating pinion

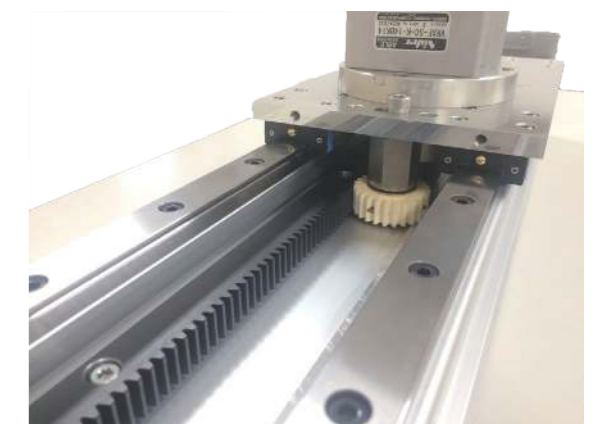

Case Study 1

FUKAGAWA 株式会社深川製作所様

Automatic Size Cutting Device **NAHC-F10**

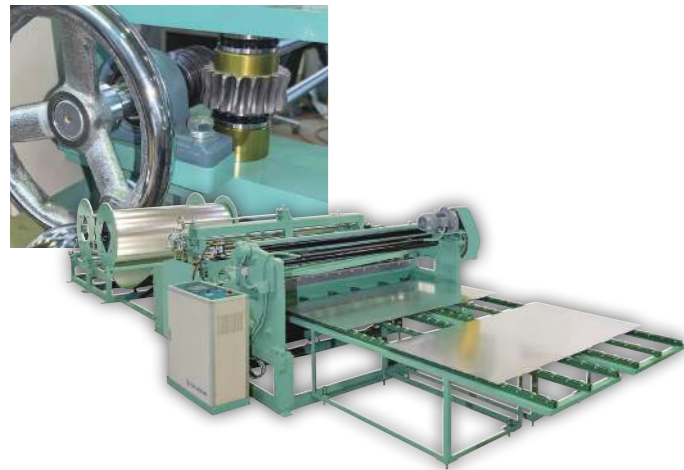

Gears Used
Uses SW worms and CG worm wheels for rib roll feeding

Machine Application
This device provides materials while correcting the bending of coiled material.

Features
Can automatically perform standard-length straight pipes cutting, stain removal and ribbing simply by entering the duct size

3-Roll for Square Elbow **FBR-2000M**



Gears Used
Uses SMA miter gears for bending moving steel plates

Machine Application
A square elbow forming machine that rolls and bends three iron plates

Features
It has a repeat function that sets the forming roll in the same position

SAILOR セーラー万年筆株式会社様


Injection Molded Product Automatic Extractor **sigma5**



Gears Used
Used for the traveling shaft when extracting the ordered (custom-made) racks and pinions

Machine Application
A device used in plastic injection molding that extracts molded products from the molding machine and delivers them to a post-process such as a conveyor or machining machine installed next to the molding machine

Features
A rack and pinion mechanism is adopted that extracts and delivers at high speed and high accuracy, enabling modifications such as changing the direction of extraction.

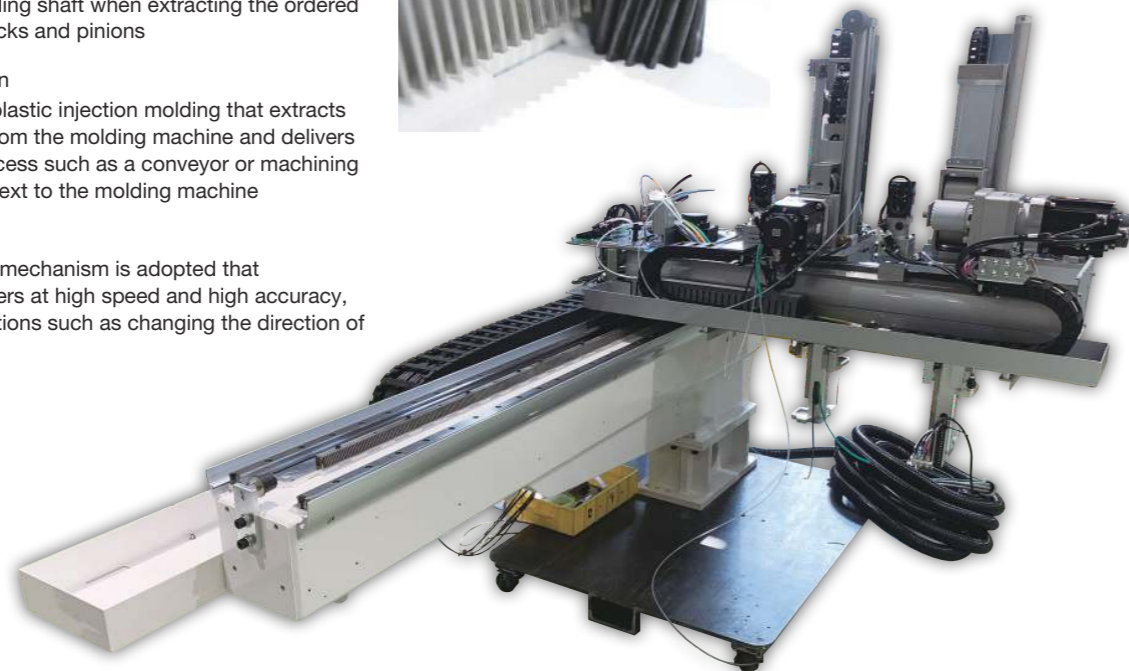

株式会社 トパック 様

Ultra-high-speed Three-way Seal Bag Filling and Packaging Machine **R**



Gears Used
MM, SM and SMB miters change the motion from the horizontal-shaft drive to the vertical-shaft drive, which is then transmitted to the filling device, and combined with SW worms and CG worm wheels to be used for adjusting the timing of filling while operating the filling device

Machine Application
Makes and fills bags at ultra-high speeds of 300 to 800 bags per minute
· A top-level automatic filling and packaging machine

Features
Ultra-high-speed filling and packaging is achieved by the use of rotary methods that make, fill and seal bags in the horizontal direction. In addition, the filling time can be extended to reduce the occurrence of biting into the seal, and the sealing time can be extended to achieving stable seal strength. Also, by combining with an integration device, the unit can be connected to carton making machines, horizontal pillow machines, banding machines, bag-feeding packaging machines, etc.

MARUHIDE 株式会社丸秀工機様

Pipe Coaster **HID-400MA,600MA, 1000MA,1500MA**



Gears Used
Uses custom made-to-order racks and pinions made in the KHK Quick-Mod Gears (standard product given secondary operations) for the running shaft when cutting

Machine Application
Dimensional cutting, shape cutting (branch cutting / hole cutting), groove cutting and marking of pipes and steel pipe members used in industries such as shipbuilding, pressure vessels, water supply and sewage, steel structures, construction machinery and heavy electric machinery

Features
· Supports small-diameter pipes down to 25A to large-diameter pipes up to 1500A. · Supports various cut shapes and has a groove which enables speedy and highly accurate cutting.
· Can be used to cut not only steel pipes but also square steel pipes and other materials. · Facilitates data creation with the adoption of an interactive data input system.

Case Study 2

Hataly 株式会社 ハタリー 様

Short Column Groove Machining Machine SCB-1000II



- Gears Used**
Uses SS Series within machining drive
- Machine Application**
Short column material, groove machining on both ends
- Features**
- Machining speed is the fastest in the industry
 - Significantly simplifies the setup
 - Supports corners of 250 to 1000 mm and a maximum plate thickness of 50 mm

H-section Steel Groove Machining Machine HQB-1055NL



- Gears Used**
Uses SWG worms and AG worm wheels in machining drive gearboxes
- Machine Application**
Secondary operations of H-section steel grooves, scallops and driving
- Features**
- Supports non-scallop machining
 - Automated 3 shafts
 - High-rigidity frame
 - Reliable long-run model

 株式会社 トーキョー 様 (広島県呉市)

Robot Slider RS1S




- Gears Used**
SRCPF racks and custom-order CP spur gears are used for the traveling shaft
- Machine Application**
As a traveling device for various robots
- Features**
- Can be extended by 1.2m by combining 3 types of frames
 - Allows additional extension to be made to existing devices
 - Achieved the maximum track record of 40.8 m



 不二産業株式会社様

Lifter for switchboard

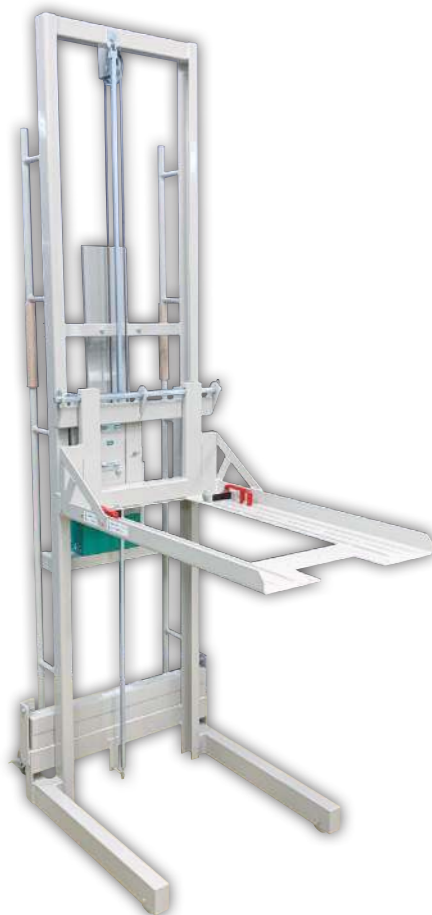

- Gears Used**
Use custom-made spur gears to raise and lower the lifter
- Machine Application**
Pulls out and stores devices such as circuit breakers and lightning arresters from the switchboard.
- Features**
Allows raising and lowering heavy luggage with human power.

MASUKO 増幸産業株式会社様

Super Mass-Colloider MKZA10-15JV




- Gears Used**
Use custom-made spline shafts and spline hubs for the attrition shaft, and SB bevel gears for the manual grinding shaft
- Machine Application**
Food, spices, industrial raw materials, pharmaceuticals, cosmetics, etc.
- Features**
Ultra-fine grain grinder. A stone mill type grinder that's capable of ultra-fine granulation that feels like melting.

Gear calculation software **GCSW** Free & Gear drawing software **GDSW** for Web

Powerful support for onsite design.

Gear calculation and drawing software that can be used by those who are experienced in gear calculation, those who are considering improving the efficiency and simplification in designing gears, and those who are studying about gears.

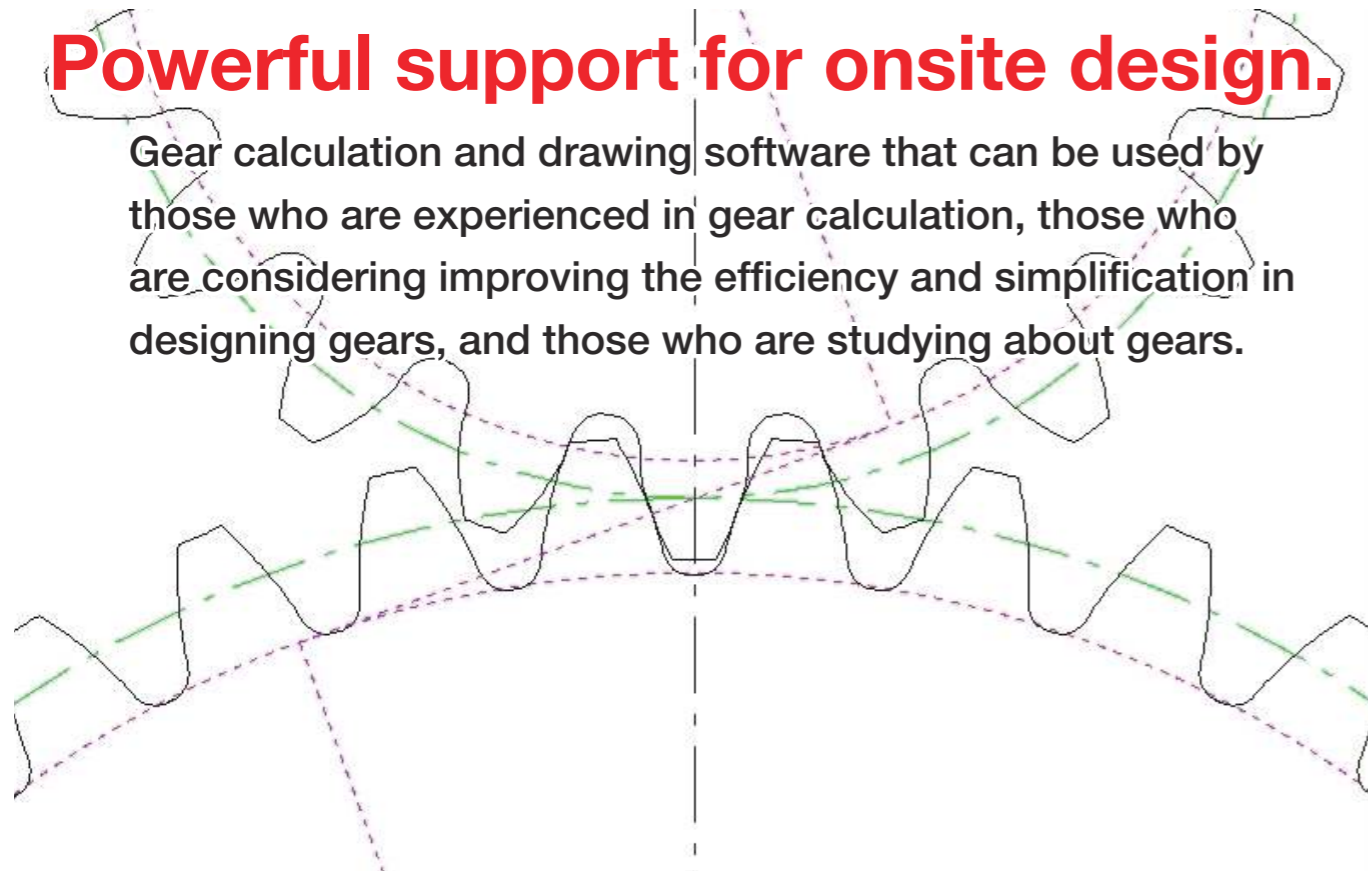

Calculation Example

Calculation of dimensions and strength

Calculation of gear force

Calculation of gear array

Backlash conversion

Drawing Example

Spur gears, ground helical gears

Racks

Bevel Gears

Gear calculation software GCSW

Reduce the cost of designing gears with GCSW.



Calculation functions of GCSW	
Gear Type	Parallel axes: Spur/helical gears, internal gears, racks & pinions Intersecting axes: Mitters, bevel gears Skewed axes: Screw gears, worms & wheels
Calculation details	Various dimensional calculations (profile shift, tooth thickness, center distance) Strength calculation (bending strength, surface strength) Calculation of gear force (radial direction, thrust direction, radial direction) Gear tooth profile calculation (tooth profile drawing, creation drawing, meshing drawing) Backlash conversion, constraint meshing gear array calculation
Output Details	Printing various calculation results Printing tooth profile drawing, creation drawing and meshing drawing CAD data output of tooth profile drawing

Difficult calculations for gears such as gear shape, strength and tooth profile can be instantly made. In addition, it can simulate the dimensions and strength of desired gears, allowing the designing cost to be drastically reduced.

Gear drawing software GDSW

Basic gear drawings can be easily made using GDSW.



GDSW drawing functions	
Gear Type	Parallel axes: Spur/helical gears, internal gears, racks & pinions Intersecting axes: Mitters, bevel gears Skewed axes: Screw gears, worms & wheels
Drawing contents	Gear specifications (pitch, pressure angle, number of teeth, gear accuracy, material, heat treatment, etc.) Basic shape of various gears Shapes with/without hubs (2-step hub supported) Hole shape (3-step hole supported) Key groove shape (JIS key, optional key supported) Mounting hole shape (tap, drilled hole, counterbored hole)
Output Details	Printing gear drawings CAD data output of drawn gears (ZIP supported)

It can be used to make drawings with basic gear shapes without needing CAD software. Drawings of spur gears, bevel gears, worm gears and the like can be printed and CAD data can be created.

Usage

Please register as a user.

KHK software can be used for free, but registration is required. When user registration is completed, "KHK My Page" is created and GCSW and GDSW become available. For details, please see our web site.

* We carefully manage customer data based on our personal information protection policy



<Cautions regarding Manufacturing>

- Software contents and terms of use are subject to change without notice.
- No compensation will be provided for any loss which might be caused by bugs in the software.
- The gear strength formula of GCSW is based on JGMA (Japanese Gear Manufacturers Association) specifications.
- Drawings drawn by GDSW may not be manufacturable due to our production capacity.

Product Delivery

Delivery Date Guide

Shipping Date	4 days later	6 days later	9 days later	17 days later	30 days later	40 days later
J Series	Order Date → 2 Business Days → Product complete → Shipping Date	Number of products: 20 units				
J Series Modules Over 4 (CP15) (except for racks) *Note 1	Order Date → 7 Business Days → Product complete → Shipping Date	Number of products: 5 units				
J Series (MMSGQ)	Order Date → 7 Business Days → Product complete → Shipping Date	Number of products: 20 units				
F Series	Order Date → 2 Business Days → Product complete → Shipping Date	Number of products: 20 units				
E Series Module Over 4	Order Date → 7 Business Days → Product complete → Shipping Date	Number of products: 5 units				
F Series	Order Date → 2 Business Days → Product complete → Shipping Date	Number of products: 20 units				
焼入+ フラス	Order Date → 4 Business Days → Product complete → Shipping Date	Number of products: -				
焼入+ フラス	Order Date → 6 Business Days → Product complete → Shipping Date	Number of products: 20 units				
J Series 焼入+ フラス	Order Date → 11 Business Days → Product complete → Shipping Date	Number of products: 5 units				
Semi-Custom Standard Product SS	Order Date → About 15 Business Days → Product complete → Shipping Date	Number of products: 5 units				
Semi-Custom Standard Product SSG	Order Date → About 30 Business Days → Product complete → Shipping Date	Number of products: 5 units				
Semi-Custom J Series SS	Order Date → About 25 Business Days → Product complete → Shipping Date	Number of products: 5 units				
Semi-Custom J Series SSG	Order Date → About 40 Business Days → Product complete → Shipping Date	Number of products: 5 units				

*The delivery date excludes the day ordered, and shipping takes place on the next business day. Because machining starts immediately, we cannot accept cancellations for the products above.

*Note 1 Allowable order sizes for module 4 (CP15) or higher are up to 5 units; for racks, SUS, SN, MMSG, SMSG, and MMSGQ products of module 4 or higher, up to 20 units.

Series Common

- (1) For allowable order sizes, see the Delivery Date Guide on the lefthand page. Cancellation is not possible for made-to-order products. Please allow additional shipping time to get to your local distributor.

J Series

[J Series lead time]

- (1) As available-on-request products, these require a lead-time for shipping of 2 working days (excludes the day ordered), after placing an order.
- (2) Products with module 4 (CP15) or higher require a lead-time for shipping within 7 working days (excludes the day ordered).
- (3) Racks, regardless of module, require a lead-time for shipping within 2 working days (excludes the day ordered).
- (4) MMSGQ J Series, regardless of module, require a lead-time for shipping within 7 working days (excludes the day ordered).

F Series

[F Series lead time]

- (1) As available-on-request products, these require a lead-time for shipping of 2 working days (excludes the day ordered), after placing an order.

E Series

[E Series lead time]

- (1) As available-on-request products, these require a lead-time for shipping of 2 working days (excludes the day ordered), after placing an order.
- (2) Products with module 4 or higher require a lead-time for shipping within 7 working days (excludes the day ordered).

R Series

[R Series lead time]

- (1) As available-on-request products, these require a lead-time for shipping of 2 working days (excludes the day ordered), after placing an order.

Hardened Plus (H Series)/Hardened Plus J Series (HJ Series)

[Hardened Plus (H Series) lead time]

- (1) As available-on-request products, these require a lead-time for shipping of 4 working days (excludes the day ordered), after placing an order.

[Hardened Plus J Series (HJ Series) lead time]

- (1) As available-on-request products, these require a lead-time for shipping of 6 working days (excludes the day ordered), after placing an order.
- (2) Products with module 4 (CP15) or higher require a lead-time for shipping within 11 working days (excludes the day ordered).

Semi-custom order / Semi-custom order J series

[Semi-custom lead time]

- (1) In the SS Series, products with S at the end of the Catalog No. are semi-custom stock products. The delivery will take about 15 business days after the order is received.
- (2) In the SSG Series, products with S at the end of the Catalog No. are semi-custom stock products. The delivery will take about 30 business days after the order is received.

[Semi-custom J Series lead time]

- (1) SS type semi-custom J series products take about 25 working days after the order is received.
- (2) SSG type semi-custom J series products take about 40 working days after the order is received.



Spur Gears

Prices

- ① Made-to-order products, semi-custom orders, and semi-custom order J Series products are estimated separately. Contact your dealer.
- ② In addition, since the prices are per unit (excluding SRS), the total unit price of miters and the like is the set price.
- ③ Product prices may be changed without prior notice.

Changes and Cancellations

[Standard Machined Products *Note 1, Made to Order Products, Semi-custom Products, Semi-custom J Series Products]
Because production begins upon ordering, cancellations and changes cannot be made.

[KHK Quick-Mod Products, Custom Gears]

Because production begins upon ordering, cancellations and changes are difficult.
Changes may be possible in some cases, depending on modification status, but a further estimate will be required. Contact your dealer for details.
As the product is manufactured to customer-specified dimensions, it cannot be used elsewhere; therefore, returns are not possible.

Out of Stock

[Standard Gears (gears in stock), Standard Machined Products *Note 1, KHK Quick-Mod Gears]
Production takes place according to stock status, so there may not be sufficient quantities available as ordered.
Some time may be required for production after orders.
Lead times may be longer depending on material acquisition status and modification processes.

*Note 1 Standard machined products: J Series, F Series, R Series, E Series, Hardened Plus, Hardened Plus J Series


MSGA/MSGB Ground Spur Gears Material: SCM415 m1-4 Page 50	KSG Ground Spur Gears Material: SCM440 m1-3 Page 54	SSGS Ground Spur Pinion Shafts Material: S45C m1.5-3 Page 56	SSG Ground Spur Gears Material: S45C m0.5-10 Page 58	SSG F Series Ground Spur Gears Material: S45C m2-3 Page 76	SSG E Series Ground Spur Gears Material: S45C m1.5-6 Page 82	SSG R Series Ground Spur Gears Material: S45C m1.5-6 Page 92
Pinion Gears for Nabtesco GH Series Material: S45C/SCM440 m3-6 (CP10-20) Page 94	SSAG Ground Spur Gears Material: S45C m1-6 Page 96	KS-H Hardened Spur Gears Material: SCM440 m1.5-5 Page 100	KS Thermal Refined Spur Gears Material: SCM440 m1.5-5 Page 100	SSS Spur Pinion Shafts Material: S45C m1, 1.5 Page 102	SS-H Hardened Spur Gears Material: S45C m1-6 Page 106	SS Spur Gears Material: S45C m0.5-10 Page 104
SS F Series Spur Gears Material: S45C m1.5-3 Page 130	SSA-H Hardened Spur Gears Material: S45C m1-5 Page 138	SSA Spur Gears Material: S45C m1-5 Page 138	SSA F Series Spur Gears Material: S45C m2-3 Page 144	SSY Spur Gears Material: S45C m0.8, 1 Page 148	SSAY Spur Gears Material: S45C m1 Page 152	SUS/SUSA Stainless Steel Spur Gears Material: SUS303 m1-4 Page 154
SUSF F-Loc Gears Material: SUS303 m0.5, 1 Page 160	DSF F-Loc Gears Material: Polyacetal (SUS303) m0.5, 1 Page 162	NSU Plastic Spur Gears with Steel Core Material: MC602ST (S45C) m1-3 Page 164	PJ Plastic Spur Gears with Steel Core Material: MC901 (SUS303) m1-2 Page 168	PS/PSA Plastic Spur Gears Material: MC901 m1-3 Page 170	SUKB Stainless Steel Hubs Material: SUS303 φ 30-100 Page 180	PSUKB SUKB Assembled PSA Spur Gear Material: MC901/SUS303 m2-3 Page 181
DS Injection Molded Spur Gears Material: Duracon (R) (M90-44) m0.5-1 Page 182	BB Sintered Metal Bushings Material: Oil-free copper alloy φ 5-8 Page 184	BSS Spur Gears Material: Free cutting brass (C3604) m0.5-1 Page 186	SSR Steel Ring Gears (Spur Gears) Material: S45C m2-3 Page 188			

M Includes Made to Order

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Spur Gears

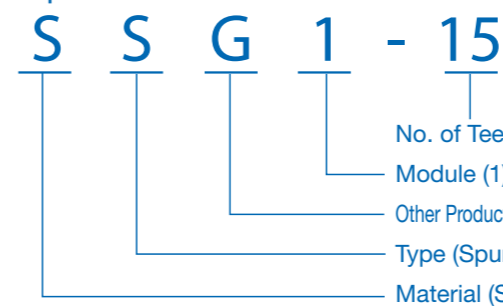

Material	Type
M	SCM415
K	SCM440
S	S45C
SU	Stainless Steel
P	MC901
N	MC602ST
D	Polyacetal
BS	Brass
L	Sintered Metal Alloy

Other Information	Type
A	Without Hub
G	Ground Gears
F	F-loc Hub Gears
R	Ring Gears
S	Pinion Shafts
U	Plastic Gears with Steel Core
Y	Thin Face Gears
H	Gear Teeth Induction Hardened

Spur Gears

Helical Gears

Internal Gears

Racks

CP Racks & Pinions

Miter Gears

Bevel Gears

Screw Gears

Worm Gears

Gearboxes

Other Products

Other Products

Other Products

Features



To meet your applications, KHK stock gears are made in a variety of types, materials, configurations, modules and numbers of teeth. We also provide finished gears that are ready to use. Secondary operations can be performed to many of the products, allowing for a wider range of designs. The following table lists the main features.

Catalog Number	Module	Material	Heat Treatment	Tooth Surface Finish	Precision JIS B 1702-1:1998	Secondary Operations	Features
MSGA/MSGB	1~4	SCM415	Carburized	Ground	N5	×	Fully hardened, ground and keyway machined gears with excellent accuracy, strength and abrasion resistance.
KSG	1~3	SCM440	Thermal refined, gear teeth induction hardened	Ground	N6	△	Gears that have been tempered, hardened and ground that have excellent accuracy, strength and abrasion resistance. Secondary operations can be performed except for the teeth. This product is ideal for the pinion of the KRGF rack.
SSGS	1.5~3	S45C	Thermal refined, gear teeth induction hardened	Ground	N7	△	Gears with shafts that have been tempered, hardened and ground. Secondary operations can be performed except for the teeth.
SSG	0.5~10	S45C	Gear teeth induction hardened NOTE 1	Ground	N7	△	Gears that have been hardened and ground with a good balance of accuracy, wear resistance and cost. Secondary operations are possible except for the teeth.
SSAG	1~6						
KS	1.5~5	SCM440	Thermal refined	Cut	N8	○	Tempered gears with excellent bending strength. The teeth can be additionally hardened. This product is ideal for the pinion of the KRF rack.
SSS	1, 1.5	S45C	Thermal refined NOTE 2	Cut	N8 NOTE 3	○	Gears with a tempered shaft.
SS	0.5~10	S45C	—	Cut	N8 NOTE 3	○	Many lineups are available at a low price. The teeth can be additionally hardened.
SSA	1~5						
SSY/SSAY	0.8, 1	S45C	—	Cut	N8 NOTE 3	○	Gears with narrow teeth. Suitable for light loads.
SUS/SUSA	1~4	SUS303	—	Cut	N8	○	Stainless steel gears with rust resistance.
SUSF	0.5, 1	SUS303	—	Cut	N8 NOTE 3	×	Stainless steel gears with rust resistance. Locking Hub allows easy attachment.
DSF	0.5, 1	Polyacetal (SUS303)	—	Cut	N10 NOTE 3	×	Gears made of polyacetal. Locking Hub allows easy attachment.
NSU	1~3	MC602ST (S45C)	—	Cut	N9	○	Steel hubs are fused and fixed to reinforced nylon gears for secure fastening.
PU	1~2	MC901 (SUS303)	—	Cut	N9	○	Stainless steel hubs are fused and fixed to nylon gears for secure fastening.
PS/PSA	1~3	MC901	—	Cut	N9	○	Nylon gears can be used with no lubrication.
DS	0.5~1	Duracon (R) (M90-44) NOTE 4	—	Injection Molded	N12 equivalent	△	Low-priced gears made through injection molding. Suitable for light loads.
BSS	0.5~1	Free-cutting Brass (C3604)	—	Cut	N8 NOTE 3	○	Brass gears with excellent machinability.
SSR	2~3	S45C	—	Cut	N9	○	They have a ring shape with a large number of teeth.

[NOTE 1] Products with module under 1 are thermal refined. Gear teeth are not hardened. ○ Possible △ Partly possible × Not possible
 [NOTE 2] SA-shaped products with module 1 have no material thermal refinement treatment.
 [NOTE 3] The product accuracy class having a module under 1 corresponds to 'equivalent' as shown in the table.
 [NOTE 4] "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.

- KHK stock spur gears (m1.5 and higher) have semi-topping on the tooth tips.
- Black products are KHK stock gears that have an applied black oxide coating for rust resistance.

Application Examples



KHK stock spur gears are widely used in various industrial machines including food machinery.

■ Fish processing machine manufactured by TOYO SUISAN KIKAI CO.,LTD.



SS spur gears used for filleting fish

■ Carton former



SS spur gears used in automatic carton formers



■ Food machinery by Jey Machine Co.



SSA/SS spur gears used in stirrers



PS/PSA spur gears used in fully-automatic food forming machines

■ High-speed automatic wire straightening/cutting machine manufactured by Takashima Sangyo Co.



SS spur gears used for wire feeder




■ Packing machine by New Max



SS Spur Gears, segment shaped by secondary operation

■ Electric wire winder by Sakuma Tekko KK.

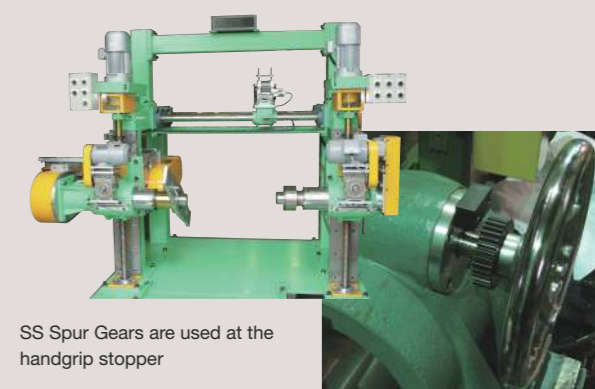

SS Spur Gears are used at the handgrip stopper

Selection Hints



Please select the most suitable products by carefully considering the characteristics of items and contents of the product tables. It is also important to read all applicable "CAUTION" notes shown below before the final selection.

1. Caution in Selecting the Mating Gears

- ① Basically, all spur gears, internal gears and racks can be paired as long as the module and pressure angle match. Products with different materials, tooth widths or accuracy can be mated.

2. Caution in Selecting Gears Based on Gear Strength

The gear strength values shown in the product pages were computed by assuming the application environment in the table below. Therefore, they should be used as reference only. We recommend that each user computes their own values by applying the actual usage conditions. Also, F-load hub spur gears and various F series that use the friction coupling method to fasten the gear shaft need additional consideration for starting torque.

Calculation of Bending Strength of Gears

Item	Catalog Number											NSU	PU PS PSA	DSF DS
	MSGB MSGB	SSGS	SSG SSAG	SSS,SS SSA,SSY SSAY,SSR	SS-H	SUS SUSA SUSF	BSS	KSG	KS	KS-H	SSG SSCPG Note 6			
Formula NOTE 1	Formula of spur and helical gears on bending strength (JGMA401-01)											The Lewis formula		
No. of teeth of mating gears	Same number of teeth (30 for SSGS, SSS, SSR)						Racks					—		
Rotational Speed	600rpm NOTE 2			100rpm				400rpm				100rpm		
Design Life (Durability)	Over 10 ⁷ cycles													
Impact from motor	Uniform load											Allowable bending stress (kgf/mm ²)		
Impact from load	Uniform load											1.38 (40°C with no lubrication)		
Direction of load	Bidirectional load (calculated with allowable bending stress of 2/3)													
Allowable bending stress at root σ_{Hlim} (kgf/mm ²)	47	24.5	19 (24.5) Note 3	19 (24.5) Note 4	19	10.5	4	30	32	32	30	19	1.15 (40°C with no lubrication)	m 0.5 4.0 m 0.8 4.0 m 1.0 3.5 (40°C with grease lubrication)
Safety factor S_F	1.2													

Calculation of Surface Durability (Except where it is common with bending strength)

Formula NOTE 1	Formula of spur and helical gears on surface durability (JGMA402-01)										
Kinematic viscosity of lubricant	100cSt (50°C)										
Gear support	Symmetric support by bearings Note 5					Supported on one end.					
Allowable Hertz stress σ_{Hlim} (kgf/mm ²)	166	99	90 (62.5) Note 3	49 (62.5) Note 4	90	41.3	—	112	79	112	90
Safety factor S_H	1.15										

- [NOTE 1] The gear strength formula is based on JGMA (Japanese Gear Manufacturers Association) specifications, "MC Nylon Technical Data" by Mitsubishi Chemical Advanced Materials and "Duracon (R) Gear" by Polyplastics Co. The units for the rotational speed (rpm) and the stress (kgf/mm²) are adjusted to the units needed in the formula.
- [NOTE 2] For semi-custom gears, the rotation speed is based on 300rpm.
- [NOTE 3] For SSG Ground Spur Gears, with module under 1, thermal refining is applied. Allowable bending stress and allowable hertz stress values are shown in parentheses.
- [NOTE 4] For SSS Spur Pinion Shafts, with module over 1.5, tooth induction hardening is not applied. Allowable bending stress and allowable hertz stress values are shown in parentheses.
- [NOTE 5] SSS Spur Pinion Shafts with module 1 or less (SA configuration) are set to cantilever support as they are single shaft types.
- [NOTE 6] For Nabtesco GH Series.

When selecting KHK standard gears, glance over the Cautions on Product Characteristics and Cautions on Performing Secondary Operations on Page 46.

- ① Products not listed in this catalog or materials, modules, number of teeth and the like not listed in the dimensional tables can be manufactured as custom items. Please see Page 24 for more details.
- ② The color and shape of the product images listed on the dimension table page of each product may differ from the actual product. Be sure to confirm the shape in the dimension table before selection.
- ③ The details (specifications, dimensions, etc.) listed in the catalog may be changed without prior notice. Changes are announced on the KHK website.

Website URL: <https://khkgears.net/new/>
 Overseas Sales Department: Phone: +81-48-254-1744 Fax: +81-48-254-1765
 E-mail: info@khkgears.net

Selecting the Gears


Step 1

Determine the calculated load torque applied to the gear and the gear type suitable for the purpose.

Step 2

Select provisionally from the allowable torque table in this catalog based on the load torque.

For provisional selection from this catalog

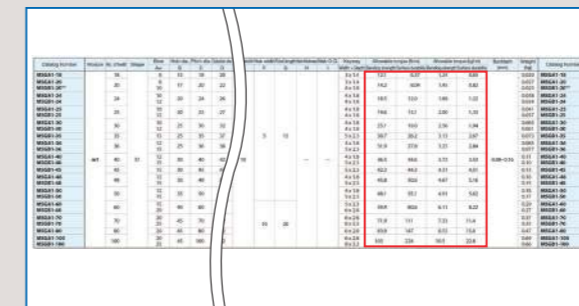


Step 3

Calculate the strength under the actual usage conditions.


Calculate the strength formally using the various gear strength formulas. We recommend using the simple strength calculation available on our website.

Use the strength calculation function on our website.

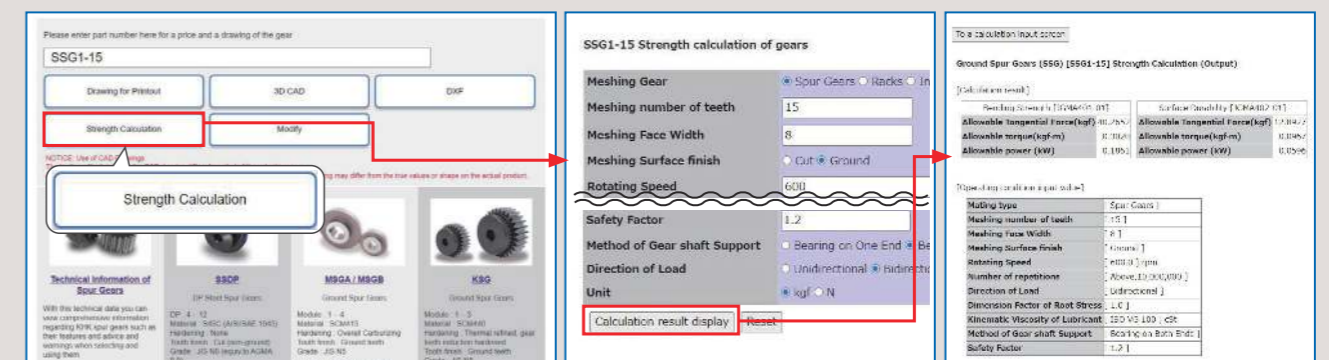

Bending strength

Calculated values of the strength at which the gear teeth do not break due to fatigue.



Example of failure due to insufficient bending strength

Surface durability

Calculated values of the strength at which the gear teeth do not wear due to surface fatigue damage.



Example of wear due to insufficient surface durability

Product Precautions

Common Notes
[Caution on Product Characteristics]

- (1) The allowable torque shown in the table are calculated values according to the assumed usage conditions. Please see Page 44 for more details.
- (2) The backlash values shown in the table are the theoretical values for the backlash in the normal direction of a pair of identical gears in mesh.
- (3) Significant variations in temperature or humidity can cause dimensional changes in plastic gears, including tooth diameter, bore, and backlash. The accuracy and tolerances shown in the catalog are values obtained when machining is performed.
- (4) For hole lengths 3.5x the bore or more, the hole center is out of H7 tolerance.
- (5) For bores of ϕ 4 or below, the bore tolerance is H8. As well, the tolerance is H8 for ϕ 5 or ϕ 6 bores with hole length (total length) 3x the bore or more.
- (6) Keyways are made according to JIS B1301 standards, Js9 tolerance. Also note that keyway tooth position alignment is not performed.
- (7) For products having a tapped hole, a set screw is included.
- (8) Products with S at the end of the Catalog No. are semi-custom stock products. For lead time details, see Page 38.
- (9) For S semi-custom standard products weighing 15 kg or more, eyebolt mounting screws (2-M12 depth 25 mm) are machined around the periphery of the boss side surface. Confirm the PCD of the screw on the website.

[Caution on Secondary Operations]

- (1) Please read "Cautions on Performing Secondary Operations" on Page 48 when performing modifications and/or secondary operations for safety concerns.
- (2) Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).
- (3) See Page 22 for more details on Hardened Plus (H Series and HJ Series).

[J Series]

- (1) Cancellation is not possible for made-to-order products. For lead time details, see Page 38.
- (2) Certain products which would otherwise have a very long tapped hole are counterbored. For details, please see the KHK website.
- (3) Black oxide is not re-applied to parts undergoing secondary operations.
- (4) For bores over ϕ 50, the bore tolerance is H8.

MSGA/MSGB Ground Spur Gears
[Caution on Product Characteristics]

- (1) The keyway tolerance is the value before hardening.
- (2) Products marked with "****" have a small amount of material between the corner of the keyway and the tooth root. This mode of failure must be considered when selecting these gears. For details, please see the KHK website.

[Caution on Secondary Operations]

- (1) No secondary operations can be performed on these finished gears due to the applied carburizing process.

SSGS Ground Spur Pinion Shafts
[Caution on Product Characteristics]

- (1) For the center distance of the profile shifted gear, please refer to "Center distance of stock spur gear meshing with profile shifted gear" on Page 56.
- (2) The backlash values shown in the table are the theoretical values for the normal direction for the internal ring in mesh with an SSG spur gear.

SSAG Ground Spur Gears
[Caution on Secondary Operations]

- (1) A reference surface is set for gear grinding. Use the surface opposite from the markings as the reference surface for secondary operation.

SSS Spur Pinion Shafts
[Caution on Product Characteristics]

- (1) For the center distance of the profile shifted gear, please refer to "Center distance of stock spur gear meshing with profile shifted gear" on Page 102.
- (2) The backlash values shown in the table are the theoretical values for the normal direction for the internal ring in mesh with an SS spur gear.

SUSF/DSF F-loc Gears
[Caution on Product Characteristics]

- (1) F-loc gears are attached to the shaft by a friction coupling. Recommended shaft tolerances are g6, h6, or h7. Torque slippage should be considered when making a selection.
- (2) Do not tighten the clamping screw without inserting a shaft, or the bore will be permanently deformed and will not accept a shaft.
- (3) The tooth and hub mating section has a rotation-stop pin inserted.
- (4) To reduce heat generation, it is recommended to mate DSF with steel gears.

[Caution on Secondary Operations]

- (1) Secondary operations cannot be performed, as this is a complete product.

NSU/PU Plastic Spur Gears with Steel Core
[Caution on Product Characteristics]

- (1) When the core O.D is the same as the hub diameter, you may see some serration on the hub. There is no effect on the strength of the gear.
- (2) To reduce heat generation, it is recommended to mate them with steel gears.

[Caution on Secondary Operations]

- (1) Because it affects the welded portion, there is no additional modification other than to the boss part.

PS/PSA Plastic Spur Gears
[Caution on Product Characteristics]

- (1) To reduce heat generation, it is recommended to mate them with steel gears.

[J Series]

- (1) Since tapped holes of plastic products are easily broken, avoid too much tightening when fastening screws. For some products which have a short tapped hole (products marked with "****" tap size), fasten with torques less than 0.12N · m for M4, and 0.38N · m for M5.

SUKB Stainless Steel Hubs
[Caution on Product Characteristics]

- (1) The area where PSA Plastic Spur Gears are attached, with hub tolerance h7.
- (2) The friction coupling torques shown in the table are reference values calculated according to these set values; friction factors and fastening torques of the tapping screw.
- (3) Please refer to the assembly example below, and then attach the hub to the gear with the accessories, plain washers, spring washers and hexagon socket head cap screws.
- (4) In accordance with the fastening torque values shown in the dimension table, use a torque wrench and fasten hexagon socket head cap screws firmly, to attach the hub.
- (5) If a fastened hexagon socket head cap screw comes loose, the friction tightening torque values shown in the table can not be maintained. It is recommended to check the fasteners regularly and retighten when required.
- (6) For secure positioning, it is recommended to use dowel pins.

[Caution on Secondary Operations]

- (1) Datum plane for machining hubs is the outer circumference of the hub, where PSA Plastic Spur Gears are attached, and the flank of the flange is facing the hub.
- (2) For modifying tapped holes at the outer circumference of the hub, apply machining at positions which will not interfere with the mounting bolt head, using the S1KBK figure as reference.

DS Injection Molded Spur Gears
[Caution on Product Characteristics]

- (1) The bore tolerance is -0.05 to -0.30, but it may be slightly higher at the center of the hole.
- (2) For the dimensional accuracy of each part, see the dimensional tolerance of molded items on Page 185.
- (3) To reduce heat generation, it is recommended to mate them with steel gears.

[Caution on Secondary Operations]

- (1) As it is a molded item, bubbles may form inside the material. Avoid performing secondary operations.

SSR Steel Ring Gears (Spur Gears)
[Caution on Product Characteristics]

- (1) The backlash values shown in the table are the theoretical values for the normal direction for the internal ring in mesh with an SS spur gear.
- (2) The bore tolerance is modified at H8, but there may be some errors as the ring shape deforms easily.

Application Hints



In order to use KHK stock gears safely, carefully read the Application Hints before proceeding. If there are questions or you require clarifications, please contact your nearest distributor.


E-mail: info@khkgears.net

1. Cautions on Handling

- ① KHK products are packaged one by one to prevent scratches and dents, but if you find issues such as rust, scratches, or dents when the product is removed from the box after purchase, please contact the supplier.
- ② Depending on the handling method, the product may become deformed or damaged. Plastic gears and ring gears deform particularly easily, so please handle with care.

2. Caution on Performing Secondary Operations


- ① If re boring, it is important to pay special attention to locating the center in order to avoid runout.
- ② The reference datum for gear machining is the bore. Therefore, use the bore for locating the center. If it is too difficult to do for small bores, the alternative is to use one spot on the bore and the runout of the side surface.
- ③ If reworking using scroll chucks, we recommend the use of new or rebored jaws for improved precision. Please exercise caution not to crush the teeth.

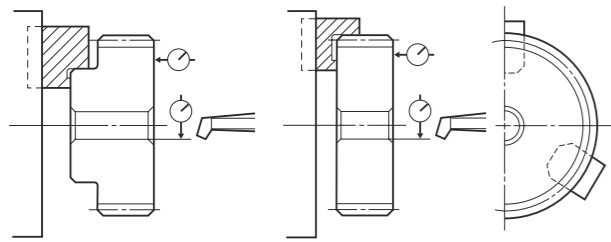

Lathe Operations

- ④ The maximum bore size is dictated by the requirement that the strength of the hub is to be higher than that of the gear teeth. The maximum bore size should be 60% to 70% of the hub diameter (or tooth root diameter), and 50% to 60% for keyway applied modifications.
- ⑤ In order to avoid stress concentration, round the keyway corners.

Tapping & Keyway Slotting

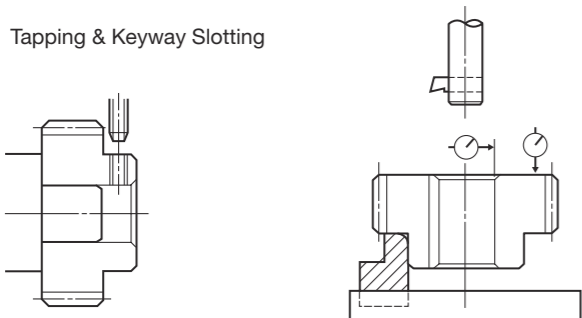

- ⑥ To avoid problems of reduced gear precision and other manufacturing difficulties, do not attempt to machine the gears to reduce face widths.
- ⑦ When induction-hardening S45C products, thermal stress cracks may appear. Also, note that the precision grade of the product declines by 1 or 2 grades, as deformation on material may occur. If you require tolerance for bore or other parts, machining is necessary after heat treatment.

Induction Hardening


If you apply induction hardening to the gear teeth of S45C products, you need to designate the hardness and where to apply the heat treatment. Below is an example of common specifications and KHK's specifications for hardening:

- Common Specifications for Heat Treatment
Hardened location: Tooth surface, or Tooth surface and Tooth root
Hardness: Within 10 HRC in the range from 45 to 60 HRC
(Example: 48 to 58 HRC)
- KHK's Specifications for Heat Treatment
Hardened location: Tooth surface, or Tooth surface and Tooth root
Hardness: 50 to 60 HRC

* Hardness and Depth of Gear-teeth Induction Hardening
The hardening method and the state of the hardened teeth area vary depending on the size of gears. Since different hardening treatment is applied in accordance with the module and number of teeth, the hardness level you designate is referred to as the hardness of the reference diameter. For some of our products, the hardness at tooth tip / root may not be equal to the hardness you designated. As to the effective case depth for S45C, it is specified by JIS, as "The distance from the surface of the case to the area with hardness HV450." The case depth differs from area to area of a tooth, so the depth cannot be specified.

3. Points of Caution during Assembly

- ① The recommended center distance tolerance of KHK stock spur gears is H7 for ground gears and H8 for cut gears. Backlash may be adjusted by changing the center distance of mating gears. For the connection between center distance change amount and peripheral direction backlash amount, use the gear calculation software.

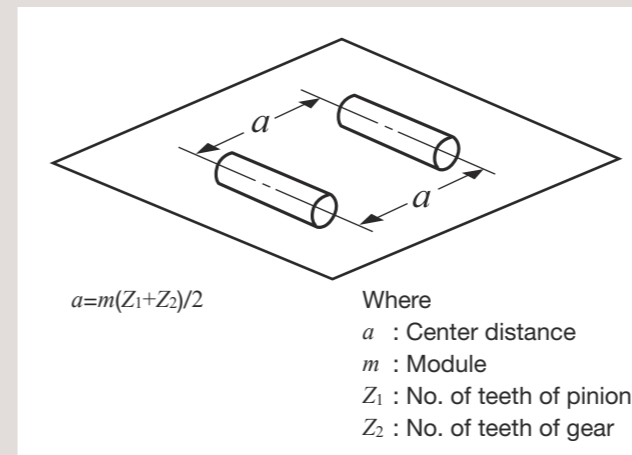

- ② The table below indicates the tolerance on the total length of KHK stock spur gears. Please refer to this data when designing gearboxes or other components.

■ Total Length Tolerance for Spur and Helical Gears

Total Length (mm)	Tolerance
30 or less	0 -0.10
31 to 100	0 -0.15
Over 100	0 -0.20


[Note] The following products are excluded from this table: Spur pinion shafts, Injection molded spur gears, F-loc hub spur gears, and MC nylon products.

- ③ Spur gears produce no thrust forces; however, be sure to fasten them firmly with stepped shafts, or collars, to prevent shifting toward the shaft. Keyways are generally used in fastening gears to a shaft, and they should be fastened by applying drilled

holes for set screws, or applying flats to the shaft, in case of fastening only with set screws. There are also methods of secure settings using parts for engaging the hole and the axis.

- ④ Verify that the two shafts are parallel. Incorrect assembly will lead to uneven teeth contact which will cause noise and wear. (After assembly, check the tooth contact by painting a thin layer of red lead primer or the like on the gear teeth, meshing them together and rotating them.)

■ Test example: Abrasion occurred on SSG3-30 due to poor edge contact (only 30% with proper contact).



Poor tooth contact and pitting

In this example, the gear oil used is equivalent to the JIS gear oil category 2, No. 3. The design conditions were load torque at 278 rpm, 42.5 kg/m (12 kW), 1.5 times the allowable bending strength, and 3 times the allowable surface durability torque. The pitting occurred on the poor tooth contact area after 60 hours of continuous operation.

4. Cautions on Starting

- ① Check the following items before starting.
 - Are the gears fastened securely?
 - Is there uneven tooth contact?
 - Is there adequate backlash?
 - (Be sure to avoid zero-backlash.)
 - Has proper lubrication been supplied?
- ② If gears are exposed, be sure to attach a safety cover to ensure safety. Also, be careful not to touch rotating gears.
- ③ If there is any abnormality such as noise or vibration during startup, stop the operation immediately and check the assembly condition such as tooth contact, eccentricity and looseness.

KHK considers safety a priority in the use of our products.

When handling, adding secondary operations, assembling, and operating KHK products, please be aware of the following issues in order to prevent accidents.

Warning: Precautions for preventing physical and property damage


1. When using KHK products, follow relevant safety regulations (Occupational Safety and Health Regulations, etc.).
2. Pay attention to the following items when installing, removing, or performing maintenance and inspection of the product.
 - ① Turn off the power switch.
 - ② Do not reach or crawl under the product.
 - ③ Wear appropriate clothing and protective equipment for the work.

Caution: Cautions in preventing accidents

1. Before using a KHK product, read the precautions in the catalog carefully in order to use it correctly.
2. Avoid use in environments that may adversely affect the product.
3. Our products are manufactured under a superior quality control system based on the ISO9000 quality management system; if you notice any malfunctions upon purchasing a product, please contact the supplier.



Specifications	
Precision grade	JIS grade N5 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM415
Heat treatment	Carburized
Tooth hardness	55 to 60HRC



S1

Catalog Number	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Web thickness	Web O.D.	
				A _{H7}	B	C	D	E	F	G	H	I	
MSGA1-18	m1	18	S1	8	15	18	20	10	5	15	—	—	
MSGA1-20		20		8	17	20	22						
MSGB1-20**		10		20	24	26							
MSGB1-24		24		12	20	24	26						
MSGA1-25		25		25	10	20	25						27
MSGB1-25					12	25	30						32
MSGA1-30		30		30	10	25	30						32
MSGB1-30					12	30	40						42
MSGB1-40		40		15	30	40	42						
MSGA1-48		48		48	12	30	48						50
MSGB1-48					15	35	50						52
MSGA1-50		50		12	35	50	52						
MSGB1-60		60		20	40	60	62						
MSGA1-70		70		20	45	70	72						
MSGA1-80	80	20	45	80	82								
MSGA1-100	100	20	45	100	102								
MSGA1.5-15**	m1.5	15	S1	10	18	22.5	25.5	15	10	25	—	—	
MSGA1.5-18		18		10	22	27	30						
MSGB1.5-18		12		25	30	33							
MSGA1.5-20		20		20	12	25	30						33
MSGB1.5-20					15	28	36						39
MSGB1.5-24		24		15	28	36	39						
MSGB1.5-25		25		16	30	37.5	40.5						
MSGB1.5-30		30		18	30	45	48						
MSGB1.5-36		36		18	32	54	57						
MSGA1.5-40		40		40	16	35	60						63
MSGA1.5-50					18	40	75						78
MSGB1.5-50		50		22	40	75	78						
MSGB1.5-60		60		25	45	90	93						
MSGA1.5-70		70		70	20	45	105						108
MSGB1.5-70	25		45		105	108							
MSGA1.5-80	80	80	20	45	120	123							
MSGB1.5-80			25	45	120	123							
MSGA1.5-100	100	25	50	150	153								
MSGB2-15**	m2	15	S1	15	24	30	34	20	10	30	—	—	
MSGA2-18		18		12	30	36	40						
MSGB2-18		15		32	40	44							
MSGA2-20		20		20	15	32	40						44
MSGB2-20					18	35	48						52
MSGB2-24		24		18	35	48	52						
MSGA2-25		25		25	16	35	50						54
MSGB2-25					20	40	60						64
MSGB2-30		30		22	40	60	64						
MSGA2-35		35		35	18	40	70						74
MSGB2-35					20	45	80						84
MSGA2-40		40		40	20	45	80						84
MSGB2-40					25	45	90						94
MSGB2-45		45		25	45	90	94						
MSGA2-48	48	48	22	50	96	100							
MSGB2-48			25	55	120	124							
MSGA2-60	60	25	55	120	124								
MSGB2-80	80	35	60	160	164								


Keyway Width x Depth	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
	Bending strength	Surface durability	Bending strength	Surface durability			
3 x 1.4	12.1	6.37	1.24	0.65	0.08~0.16	0.020	MSGA1-18
3 x 1.4	14.2	8.04	1.45	0.82		0.027	MSGA1-20
4 x 1.8						0.023	MSGB1-20**
4 x 1.8	18.5	12.0	1.88	1.22		0.034	MSGB1-24
4 x 1.8	19.6	13.1	2.00	1.33		0.041	MSGA1-25
4 x 1.8						0.037	MSGB1-25
4 x 1.8	25.1	19.0	2.56	1.94		0.065	MSGA1-30
4 x 1.8						0.061	MSGB1-30
5 x 2.3	36.5	34.6	3.72	3.53		0.10	MSGB1-40
4 x 1.8	45.8	50.6	4.67	5.16		0.16	MSGA1-48
5 x 2.3						0.15	MSGB1-48
4 x 1.8	48.1	55.1	4.91	5.62		0.18	MSGA1-50
6 x 2.8	59.9	80.6	6.11	8.22		0.27	MSGB1-60
6 x 2.8	71.9	111	7.33	11.4		0.37	MSGA1-70
6 x 2.8	83.9	147	8.55	15.0	0.47	MSGA1-80	
6 x 2.8	103	224	10.5	22.8	0.69	MSGA1-100	
4 x 1.8	30.8	14.8	3.15	1.51	0.050	MSGA1.5-15**	
4 x 1.8	41.0	22.1	4.18	2.26	0.080	MSGA1.5-18	
4 x 1.8					0.074	MSGB1.5-18	
4 x 1.8	48.0	27.9	4.89	2.84	0.098	MSGA1.5-20	
5 x 2.3					0.085	MSGB1.5-20	
5 x 2.3	62.4	41.5	6.36	4.24	0.13	MSGB1.5-24	
5 x 2.3	66.0	45.4	6.73	4.63	0.14	MSGB1.5-25	
6 x 2.8	84.7	66.4	8.63	6.77	0.19	MSGB1.5-30	
6 x 2.8	108	97.1	11.0	9.90	0.28	MSGB1.5-36	
5 x 2.3	123	121	12.6	12.3	0.37	MSGA1.5-40	
6 x 2.8	162	193	16.6	19.7	0.57	MSGA1.5-50	
6 x 2.8					0.54	MSGB1.5-50	
8 x 3.3	202	283	20.6	28.8	0.77	MSGB1.5-60	
6 x 2.8	231	372	23.6	38.0	1.08	MSGA1.5-70	
8 x 3.3					1.04	MSGB1.5-70	
6 x 2.8	270	494	27.5	50.3	1.39	MSGA1.5-80	
8 x 3.3					1.36	MSGB1.5-80	
8 x 3.3	347	787	35.4	80.2	2.13	MSGA1.5-100	
5 x 2.3	73.1	35.7	7.46	3.64	0.10	MSGB2-15**	
4 x 1.8	97.2	53.5	9.91	5.46	0.19	MSGA2-18	
5 x 2.3					0.17	MSGB2-18	
5 x 2.3	114	67.6	11.6	6.89	0.22	MSGA2-20	
6 x 2.8					0.20	MSGB2-20	
6 x 2.8	148	101	15.1	10.3	0.30	MSGB2-24	
5 x 2.3	157	110	16.0	11.2	0.33	MSGA2-25	
6 x 2.8					0.31	MSGB2-25	
6 x 2.8	201	161	20.5	16.5	0.45	MSGB2-30	
6 x 2.8	246	223	25.1	22.7	0.64	MSGA2-35	
6 x 2.8	292	294	29.7	30.0	0.84	MSGA2-40	
8 x 3.3					0.79	MSGB2-40	
8 x 3.3	338	377	34.5	38.4	1.00	MSGB2-45	
6 x 2.8	349	411	35.6	41.9	1.20	MSGA2-48	
8 x 3.3	457	658	46.6	67.1	1.84	MSGA2-60	
10 x 3.3	610	1150	62.2	117	2.49	MSGB2-80	






Specifications	
Precision grade	JIS grade N6 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.




S1

J Series



S1T



S1K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Module	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)
				A _{H7}	B						Bending strength	Surface durability	Bending strength	Surface durability		
KSG1-20	m1	20	S1	6	15	20	22				10.3	5.48	1.05	0.56	0.08~0.16	0.034
KSG1-25		25		8	20	25	27				13.9	9.16	1.42	0.93		0.055
KSG1-30		30		8	25	30	32	10	10	20	17.6	14.0	1.80	1.43		0.086
KSG1-32		32		10	25	32	34				19.1	16.2	1.95	1.66		0.089
KSG1-36		36		10	30	36	38				22.1	21.3	2.25	2.17		0.12
KSG1-40	40	10	35	40	42				25.1	27.0	2.56	2.75	0.16			
KSG1.5-20	m1.5	20	S1	10	24	30	33				34.8	18.5	3.55	1.89	0.08~0.16	0.12
KSG1.5-25		25		10	30	37.5	40.5				47.0	31.0	4.80	3.16		0.19
KSG1.5-30		30		15	35	45	48	15	14	29	59.5	47.4	6.06	4.83		0.25
KSG1.5-32		32		15	40	48	51				64.5	55.0	6.57	5.60		0.31
KSG1.5-36		36		15	45	54	57				74.6	71.9	7.60	7.34		0.40
KSG1.5-40	40	15	50	60	63				84.7	91.3	8.64	9.31	0.51			
KSG2-20	m2	20	S1	15	30	40	44				82.6	44.0	8.42	4.48	0.10~0.20	0.24
KSG2-25		25		15	40	50	54				111	73.5	11.4	7.50		0.42
KSG2-30		30		15	50	60	64	20	16	36	141	112	14.4	11.5		0.64
KSG2-32		32		18	55	64	68				153	131	15.6	13.3		0.73
KSG2-36		36		18	65	72	76				177	171	18.0	17.4		0.98
KSG2-40	40	18	70	80	84				201	217	20.5	22.1	1.20			
KSG2.5-20	m2.5	20	S1	15	40	50	55				161	86.0	16.5	8.77	0.10~0.20	0.50
KSG2.5-25		25		20	50	62.5	67.5				218	144	22.2	14.7		0.77
KSG2.5-30		30		20	65	75	80	25	18	43	275	220	28.1	22.4		1.23
KSG2.5-32		32		20	70	80	85				298	255	30.4	26.0		1.42
KSG2.5-36		36		20	80	90	95				345	335	35.2	34.1		1.85
KSG2.5-40	40	20	90	100	105				392	425	40.0	43.3	2.33			
KSG3-20	m3	20	S1	15	50	60	66				279	149	28.4	15.2	0.10~0.20	0.90
KSG3-25		25		20	65	75	81				376	249	38.4	25.4		1.44
KSG3-30		30		20	80	90	96	30	20	50	476	381	48.5	38.9		2.16
KSG3-32		32		25	85	96	102				516	442	52.6	45.1		2.40
KSG3-36		36		25	90	108	114				597	579	60.8	59.1		2.96
KSG3-40	40	25	110	120	126				678	736	69.1	75.0	3.96			

Bore H7	* The product shapes of J Series items are identified by background color.																			
	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50
Keyway J _{s9}	-		4x1.8			5x2.3			6x2.8			8x3.3			10x3.3		12x3.3		14x3.8	
Screw size	-		M4			M5			M6			M8			M10					
Catalog Number	M4	M5	M4			M5			M6			M8			M10					
KSG1-20J BORE	S1T																			
KSG1-25J BORE		S1T																		
KSG1-30J BORE		S1T	S1K	S1K																
KSG1-32J BORE			S1K	S1K																
KSG1-36J BORE			S1K	S1K	S1K	S1K	S1K	S1K												
KSG1-40J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
KSG1.5-20J BORE			S1K	S1K																
KSG1.5-25J BORE			S1K	S1K	S1K	S1K	S1K	S1K												
KSG1.5-30J BORE					S1K	S1K	S1K	S1K	S1K	S1K										
KSG1.5-32J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K									
KSG1.5-36J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
KSG1.5-40J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
KSG2-20J BORE					S1K	S1K	S1K													
KSG2-25J BORE					S1K	S1K	S1K	S1K	S1K	S1K										
KSG2-30J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
KSG2-32J BORE								S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
KSG2-36J BORE									S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
KSG2-40J BORE									S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
KSG2.5-20J BORE									S1K	S1K	S1K									
KSG2.5-25J BORE											S1K	S1K	S1K	S1K	S1K	S1K				
KSG2.5-30J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
KSG2.5-32J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
KSG2.5-36J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
KSG2.5-40J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
KSG3-20J BORE											S1K	S1K	S1K	S1K	S1K	S1K				
KSG3-25J BORE												S1K	S1K	S1K	S1K	S1K	S1K	S1K		
KSG3-30J BORE												S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
KSG3-32J BORE													S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
KSG3-36J BORE														S1K	S1K	S1K	S1K	S1K	S1K	S1K
KSG3-40J BORE															S1K	S1K	S1K	S1K	S1K	S1K

Recommended mating rack




KRGF-H/KRGFD-H
Hardened Ground Racks

Please see Page 226 for more details.



Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part

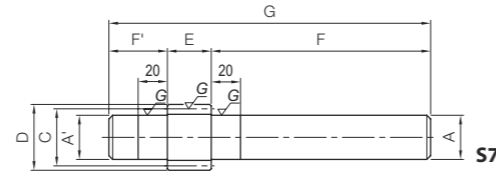

Catalog Number	Module	No. of teeth	Profile shift coefficient	Shape	Shaft diameter (L)		Pitch dia.	Outside dia.		Face width	Shaft diameter (R)		Total Length
					A'	F'		C	D		A	F	
SSGS1.5-10 SSGS1.5-11 SSGS1.5-12 SSGS1.5-13	m1.5	10	+0.5	S7	12.2	25	15	19.35	15	12.2	100	140	
		11	+0.5		13.7		20.85	13.7					
		12	0		13.7		21	13.7					
		13	0		15.2		22.5	15.2					
SSGS2-10 SSGS2-11 SSGS2-12 SSGS2-13	m2	10	+0.5	S7	16.2	30	20	25.8	20	16.2	120	170	
		11	+0.5		18.2		27.8	18.2					
		12	0		18.2		28	18.2					
		13	0		20.2		30	20.2					
SSGS2.5-10 SSGS2.5-11 SSGS2.5-12 SSGS2.5-13	m2.5	10	+0.5	S7	20.2	35	25	32.25	25	20.2	135	195	
		11	+0.5		22.7		34.75	22.7					
		12	0		22.7		35	22.7					
		13	0		25.2		37.5	25.2					
SSGS3-10 SSGS3-11 SSGS3-12 SSGS3-13	m3	10	+0.5	S7	24.2	40	30	38.7	30	24.2	150	220	
		11	+0.5		27.2		41.7	27.2					
		12	0		27.2		42	27.2					
		13	0		30.2		45	30.2					

Allowable torque (N-m)		Allowable torque (kgf-m)		Backlash (mm)	Weight (kg)	Catalog Number
Bending strength	Surface durability	Bending strength	Surface durability			
12.7	3.76	1.30	0.38	0.08~0.16	0.14	SSGS1.5-10
14.5	4.61	1.48	0.47			
9.97	4.70	1.02	0.48			
12.1	5.51	1.23	0.56			
30.2	9.07	3.08	0.93	0.10~0.20	0.30	SSGS2-10
34.3	11.0	3.50	1.12			
23.6	11.3	2.41	1.15			
28.6	13.3	2.92	1.35			
58.9	17.9	6.01	1.83	0.10~0.20	0.54	SSGS2.5-10
67.1	22.0	6.84	2.24			
46.2	22.4	4.71	2.28			
46.6	21.9	4.75	2.23			
102	31.3	10.4	3.19	0.10~0.20	0.89	SSGS3-10
96.6	31.9	9.85	3.26			
66.5	32.6	6.78	3.32			
80.4	38.3	8.20	3.91			

Center distance of stock spur gear meshing with profile shifted gear

The center distance of the stock gear ($x = 0$) that meshes with profile shifted gear ($x = +0.5$) of $m = 1$ is shown in the table at right. Please multiply by the module of the gear to be used.

Center distance where number of teeth is 12 to 30 (unit: mm)

Number of teeth ($x = 0$)	Number of teeth ($x = +0.5$)	
	10	11
12	11.4410	11.9428
13	11.9428	12.4446
14	12.4446	12.9462
15	12.9462	13.4477
16	13.4477	13.9492
17	13.9492	14.4505
18	14.4505	14.9518
19	14.9518	15.4530
20	15.4530	15.9542
21	15.9542	16.4553
22	16.4553	16.9564
23	16.9564	17.4574
24	17.4574	17.9583
25	17.9583	18.4592
26	18.4592	18.9601
27	18.9601	19.4610
28	19.4610	19.9618
29	19.9618	20.4625
30	20.4625	20.9633


Center distance where number of teeth is 32 to 62 (unit: mm)

Number of teeth ($x = 0$)	Number of teeth ($x = +0.5$)	
	10	11
32	21.4640	21.9647
34	22.4653	22.9660
35	22.9660	23.4666
36	23.4666	23.9671
38	24.4677	24.9683
40	25.4688	25.9693
42	26.4698	26.9703
44	27.4707	27.9712
45	27.9712	28.4716
46	28.4716	28.9721
48	29.4725	29.9729
50	30.4733	30.9736
52	31.4740	31.9744
54	32.4747	32.9750
55	32.9750	33.4754
56	33.4754	33.9757
58	34.4760	34.9763
60	35.4766	35.9769
62	36.4772	36.9774

Center distance where number of teeth is 64 to 200 (unit: mm)

Number of teeth ($x = 0$)	Number of teeth ($x = +0.5$)	
	10	11
64	37.4777	37.9780
65	37.9780	38.4782
66	38.4782	38.9785
68	39.4787	39.9790
70	40.4792	40.9794
72	41.4796	41.9799
75	42.9803	43.4805
76	43.4805	43.9807
80	45.4813	45.9814
84	47.4820	47.9822
85	47.9822	48.4823
88	49.4826	49.9828
90	50.4830	50.9831
95	52.9837	53.4838
100	55.4844	55.9845
120	65.4866	65.9867
150	80.4890	80.9890
200	105.4915	105.9915

Mounting distance of a profile shifted gear and the meshing rack

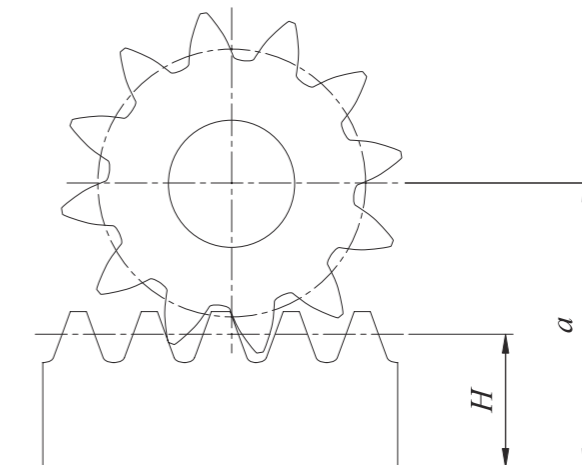


$$a = \frac{zm}{2} + H + xm$$

Where
 a : Mounting distance
 H : Pitch line height
 m : Module
 z : No. of teeth
 x : Profile shift coefficient



Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C*
Heat treatment	—*
Tooth hardness	200 to 270HB
Surface treatment	Black oxide coated except for teeth

* Products with modules of 0.8 or under use S45C thermal refined equivalent materials and are not hardened.

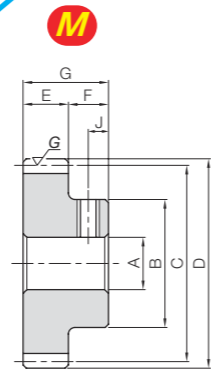

S1T

Catalog Number	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Keyway	
				A _{H7}	B	C	D	E	F	G	Width × Depth	
SSG0.5-30A (Made to Order)	m0.5	30	S1T	5	13	15	16	5	7	12	—	
SSG0.5-30B (Made to Order)				6	13	15	16					
SSG0.5-32A (Made to Order)				5	14	16	17					
SSG0.5-40B (Made to Order)		40		6	18	20	21					
SSG0.5-50B (Made to Order)		50		6	22	25	26					
SSG0.5-60A (Made to Order)		60		6	28	30	31					
SSG0.5-60B (Made to Order)				8	28	35	36					
SSG0.5-70B (Made to Order)				70	8	28	35					36
SSG0.5-80A (Made to Order)				80	8	28	40					41
SSG0.8-20A (Made to Order)	m0.8	20	S1T	5	13	16	17.6	8	8	16	—	
SSG0.8-20B (Made to Order)				6	13	16	17.6					
SSG0.8-25A (Made to Order)		25		6	16	20	21.6					
SSG0.8-30A (Made to Order)		30		5	20	24	25.6					
SSG0.8-34A (Made to Order)		34		6	22	27.2	28.8					
SSG0.8-40B (Made to Order)		40		8	28	32	33.6					
SSG0.8-50A (Made to Order)				6	28	40	41.6					
SSG0.8-60A (Made to Order)		60		6	28	48	49.6					
SSG0.8-60B (Made to Order)				8	28	48	49.6					
SSG0.8-70A (Made to Order)		70		6	28	56	57.6					
SSG0.8-80A (Made to Order)	80	6	28	64	65.6							

[Precautions for Made to Order Products] Prices and lead times for Made to Order products require separate estimates. Contact your dealer.


Socket head screw	Size	J	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
M4	3.5	3.5	1.63	0.29	0.17	0.030	0~0.08	0.012	SSG0.5-30A (Made to Order)
			0.011	SSG0.5-30B (Made to Order)					
			0.014	SSG0.5-32A (Made to Order)					
			0.023	SSG0.5-40B (Made to Order)					
			0.037	SSG0.5-50B (Made to Order)					
			0.058	SSG0.5-60A (Made to Order)					
M4	4	4	3.91	1.32	0.40	0.13	0.056	SSG0.5-60B (Made to Order)	
M5			3.90	1.53	0.40	0.16	0.066	SSG0.5-70B (Made to Order)	
M4			4.55	2.04	0.46	0.21	0.080	SSG0.5-80A (Made to Order)	
M4	4	4	3.79	0.53	0.39	0.054	0~0.08	0.018	SSG0.8-20A (Made to Order)
			0.017	SSG0.8-20B (Made to Order)					
			0.029	SSG0.8-25A (Made to Order)					
			0.045	SSG0.8-30A (Made to Order)					
			0.056	SSG0.8-34A (Made to Order)					
			0.082	SSG0.8-40B (Made to Order)					
			0.11	SSG0.8-50A (Made to Order)					
			0.15	SSG0.8-60A (Made to Order)					
			0.14	SSG0.8-60B (Made to Order)					
			0.19	SSG0.8-70A (Made to Order)					
0.24	SSG0.8-80A (Made to Order)								






Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.




S1

J Series



S1T



S1K



To order J Series products, please specify: **Catalog No. + J + BORE.**


Catalog Number	No. of teeth	Shape	Bore A _{H7}	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)		
										Bending strength	Surface durability	Bending strength	Surface durability				
SSG1-15	15	S1	6	12	15	17	8	10	18	2.96	1.03	0.30	0.11	0.08~0.16	0.016		
SSG1-16	16			13	16	18				3.28	1.19	0.33	0.12		0.019		
SSG1-17	17			14	17	19				3.60	1.36	0.37	0.14		0.022		
SSG1-18	18			15	18	20				3.93	1.54	0.40	0.16		0.026		
SSG1-19	19			16	19	21				4.26	1.73	0.43	0.18		0.030		
SSG1-20	20			8	10	17				20	22	4.60	1.94		0.47	0.20	0.034
SSG1-21	21					18				21	23	4.94	2.14		0.50	0.22	0.035
SSG1-22	22					18				22	24	5.28	2.36		0.54	0.24	0.037
SSG1-23	23					20				23	25	5.63	2.59		0.57	0.26	0.044
SSG1-24	24					20				24	26	5.98	2.83		0.61	0.29	0.046
SSG1-25	25					20				25	27	6.33	3.07		0.65	0.31	0.048
SSG1-26	26					20				26	28	6.68	3.33		0.68	0.34	0.051
SSG1-27	27					20				27	29	7.04	3.60		0.72	0.37	0.054
SSG1-28	28			20	28	30				7.39	3.89	0.75	0.40		0.056		
SSG1-29	29			25	29	31				7.75	4.18	0.79	0.43		0.073		
SSG1-30	30			10	12	25				30	32	8.11	4.48		0.83	0.46	0.072
SSG1-32	32					25				32	34	7.37	4.27		0.75	0.43	0.078
SSG1-34	34					25				34	36	7.98	4.84		0.81	0.49	0.084
SSG1-35	35					25				35	37	8.28	5.14		0.84	0.52	0.088
SSG1-36	36	25	36			38	8.59	5.45	0.88	0.56	0.091						
SSG1-38	38	30	38			40	9.21	6.10	0.94	0.62	0.12						
SSG1-40	40	30	40			42	9.83	6.79	1.00	0.69	0.12						
SSG1-42	42	30	42			44	10.5	7.51	1.07	0.77	0.13						
SSG1-44	44	30	44			46	11.1	8.28	1.13	0.84	0.14						
SSG1-45	45	30	45			47	11.4	8.67	1.16	0.88	0.14						
SSG1-48	48	30	48			50	12.3	9.92	1.26	1.01	0.16						
SSG1-50	50	35	50			52	13.0	10.8	1.32	1.10	0.18						
SSG1-55	55	35	55	57	14.6	13.2	1.48	1.34	0.21								
SSG1-56	56	35	56	58	14.9	13.7	1.52	1.40	0.21								
SSG1-60	60	40	60	62	16.2	15.8	1.65	1.61	0.26								
SSG1-64	64	12	15	40	64	66	17.4	18.1	1.78	1.84	0.28						
SSG1-70	70			40	70	72	19.4	21.8	1.97	2.22	0.32						
SSG1-75	75			40	75	77	21.0	25.2	2.14	2.57	0.36						
SSG1-80	80			50	80	82	22.6	28.8	2.30	2.94	0.44						
SSG1-90	90			50	90	92	25.8	36.9	2.64	3.77	0.53						
SSG1-100	100			50	100	102	26.9	42.5	2.74	4.34	0.62						
SSG1-120	120	50	120	122	32.9	62.5	3.36	6.37	0.84								

Bore H7	* The product shapes of J Series items are identified by background color.															
	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30	
Keyway J _{S9}	—		4x1.8		5x2.3				6x2.8				8x3.3			
Screw size	—		M4		M4				M5				M6			
Catalog Number	M4	M5	M4		M4				M5				M6			
SSG1-15 J BORE	S1T															
SSG1-16 J BORE	S1T															
SSG1-17 J BORE	S1T	S1T														
SSG1-18 J BORE	S1T	S1T														
SSG1-19 J BORE	S1T	S1T														
SSG1-20 J BORE	S1T	S1T														
SSG1-21 J BORE		S1T	S1K													
SSG1-22 J BORE		S1T	S1K													
SSG1-23 J BORE		S1T	S1K	S1K												
SSG1-24 J BORE		S1T	S1K	S1K												
SSG1-25 J BORE		S1T	S1K	S1K												
SSG1-26 J BORE		S1T	S1K	S1K												
SSG1-27 J BORE		S1T	S1K	S1K												
SSG1-28 J BORE		S1T	S1K	S1K												
SSG1-29 J BORE		S1T	S1K	S1K	S1K	S1K										
SSG1-30 J BORE			S1K	S1K	S1K	S1K										
SSG1-32 J BORE			S1K	S1K	S1K	S1K										
SSG1-34 J BORE			S1K	S1K	S1K	S1K										
SSG1-35 J BORE			S1K	S1K	S1K	S1K										
SSG1-36 J BORE			S1K	S1K	S1K	S1K										
SSG1-38 J BORE			S1K	S1K	S1K	S1K	S1K	S1K								
SSG1-40 J BORE			S1K	S1K	S1K	S1K	S1K	S1K								
SSG1-42 J BORE			S1K	S1K	S1K	S1K	S1K	S1K								
SSG1-44 J BORE			S1K	S1K	S1K	S1K	S1K	S1K								
SSG1-45 J BORE			S1K	S1K	S1K	S1K	S1K	S1K								
SSG1-48 J BORE			S1K	S1K	S1K	S1K	S1K	S1K								
SSG1-50 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SSG1-55 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SSG1-56 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SSG1-60 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SSG1-64 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SSG1-70 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG1-75 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG1-80 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG1-90 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG1-100 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG1-120 J BORE								S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	





Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.



S1

J Series



S1T2

S1K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	No. of teeth	Shape	Bore A _{H7}	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)		
										Bending strength	Surface durability	Bending strength	Surface durability				
SSG1.5-14	14	S1	10	17	21	24	15	14	29	11.1	3.73	1.13	0.38	0.08~0.16	0.048		
SSG1.5-15	15			18	22.5	25.5				12.5	4.35	1.27	0.44		0.057		
SSG1.5-16	16			20	24	27				13.8	5.02	1.41	0.51		0.070		
SSG1.5-17	17			21	25.5	28.5				15.2	5.74	1.55	0.58		0.080		
SSG1.5-18	18			22	27	30				16.6	6.51	1.69	0.66		0.091		
SSG1.5-19	19			12	15	23				28.5	31.5	18.0	7.33		1.83	0.75	0.10
SSG1.5-20	20					24				30	33	19.4	8.20		1.98	0.84	0.12
SSG1.5-21	21					25				31.5	34.5	20.8	9.12		2.12	0.93	0.13
SSG1.5-22	22					26				33	36	18.6	8.41		1.89	0.86	0.13
SSG1.5-23	23					27				34.5	37.5	19.8	9.27		2.02	0.95	0.15
SSG1.5-24	24	15	18			28	36	39	21.0	10.2	2.14	1.04	0.16				
SSG1.5-25	25					30	37.5	40.5	22.2	11.1	2.27	1.13	0.18				
SSG1.5-26	26					32	39	42	23.5	12.1	2.39	1.23	0.20				
SSG1.5-27	27			34	40.5	43.5	24.7	13.1	2.52	1.33	0.21						
SSG1.5-28	28			36	42	45	26.0	14.1	2.65	1.44	0.23						
SSG1.5-29	29			20	15	37	43.5	46.5	27.3	15.2	2.78	1.55	0.25				
SSG1.5-30	30	38	45			48	28.5	16.3	2.91	1.66	0.27						
SSG1.5-32	32	40	48			51	31.1	18.6	3.17	1.90	0.31						
SSG1.5-34	34	42	51			54	33.6	21.1	3.43	2.15	0.35						
SSG1.5-35	35	42	52.5			55.5	34.9	22.4	3.56	2.29	0.37						
SSG1.5-36	36	18	20			45	54	57	36.2	23.8	3.70	2.43	0.40				
SSG1.5-38	38					45	57	60	38.8	26.6	3.96	2.71	0.44				
SSG1.5-40	40					50	60	63	41.5	29.6	4.23	3.02	0.51				
SSG1.5-42	42					50	63	66	44.1	32.8	4.50	3.35	0.54				
SSG1.5-44	44					50	66	69	46.7	36.2	4.77	3.69	0.58				
SSG1.5-45	45			15	18	50	67.5	70.5	48.1	37.9	4.90	3.86	0.58				
SSG1.5-48	48					50	72	75	52.0	43.4	5.31	4.42	0.64				
SSG1.5-50	50					60	75	78	54.7	47.2	5.58	4.82	0.77				
SSG1.5-55	55	60	82.5			85.5	61.4	57.7	6.26	5.88	0.88						
SSG1.5-56	56	60	84			87	62.8	59.9	6.40	6.11	0.91						
SSG1.5-60	60	15	20			60	90	93	68.1	69.2	6.95	7.06	0.99				
SSG1.5-64	64			60	96	99	67.9	73.2	6.92	7.46	1.09						
SSG1.5-70	70			60	105	108	75.4	88.4	7.69	9.01	1.26						
SSG1.5-75	75			60	112.5	115.5	81.7	102	8.33	10.4	1.41						
SSG1.5-80	80			70	120	123	88.0	117	8.97	12.0	1.68						
SSG1.5-90	90			15	20	70	135	138	101	150	10.3	15.3	2.04				
SSG1.5-100	100					70	150	153	113	187	11.6	19.1	2.43				


Bore H7	* The product shapes of J Series items are identified by background color.																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
Keyway J _{S9}	4x1.8		5x2.3				6x2.8				8x3.3				10x3.3		12x3.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
Screw size	M4				M5				M6				M8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
Catalog Number	<table border="1"> <tr><td>SSG1.5-14 J BORE</td><td>S1T2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-15 J BORE</td><td>S1T2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-16 J BORE</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-17 J BORE</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-18 J BORE</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-19 J BORE</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-20 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-21 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-22 J BORE</td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-23 J BORE</td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-24 J BORE</td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-25 J BORE</td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-26 J BORE</td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-27 J BORE</td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-28 J BORE</td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-29 J BORE</td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-30 J BORE</td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-32 J BORE</td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-34 J BORE</td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-35 J BORE</td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-36 J BORE</td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-38 J BORE</td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td></tr> <tr><td>SSG1.5-40 J BORE</td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td></tr> <tr><td>SSG1.5-42 J BORE</td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td></tr> <tr><td>SSG1.5-44 J BORE</td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td></tr> <tr><td>SSG1.5-45 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td></tr> <tr><td>SSG1.5-48 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td></tr> <tr><td>SSG1.5-50 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr><td>SSG1.5-55 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr><td>SSG1.5-56 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr><td>SSG1.5-60 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr><td>SSG1.5-64 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr><td>SSG1.5-70 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr><td>SSG1.5-75 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr><td>SSG1.5-80 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr><td>SSG1.5-90 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr><td>SSG1.5-100 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> </table>																SSG1.5-14 J BORE	S1T2																SSG1.5-15 J BORE	S1T2																SSG1.5-16 J BORE	S1K																SSG1.5-17 J BORE	S1K	S1K															SSG1.5-18 J BORE	S1K	S1K															SSG1.5-19 J BORE	S1K	S1K															SSG1.5-20 J BORE	S1K	S1K	S1K														SSG1.5-21 J BORE	S1K	S1K	S1K	S1K													SSG1.5-22 J BORE		S1K	S1K	S1K	S1K												SSG1.5-23 J BORE		S1K	S1K	S1K	S1K	S1K											SSG1.5-24 J BORE		S1K	S1K	S1K	S1K												SSG1.5-25 J BORE		S1K	S1K	S1K	S1K	S1K	S1K										SSG1.5-26 J BORE		S1K	S1K	S1K	S1K	S1K	S1K										SSG1.5-27 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K								SSG1.5-28 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K								SSG1.5-29 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							SSG1.5-30 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							SSG1.5-32 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							SSG1.5-34 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					SSG1.5-35 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				SSG1.5-36 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				SSG1.5-38 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				SSG1.5-40 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			SSG1.5-42 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		SSG1.5-44 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		SSG1.5-45 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		SSG1.5-48 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		SSG1.5-50 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	SSG1.5-55 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	SSG1.5-56 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	SSG1.5-60 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K	SSG1.5-64 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K	SSG1.5-70 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K	SSG1.5-75 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K	SSG1.5-80 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K	SSG1.5-90 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K	SSG1.5-100 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG1.5-14 J BORE	S1T2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
SSG1.5-15 J BORE	S1T2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
SSG1.5-16 J BORE	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
SSG1.5-17 J BORE	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
SSG1.5-18 J BORE	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
SSG1.5-19 J BORE	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
SSG1.5-20 J BORE	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
SSG1.5-21 J BORE	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SSG1.5-22 J BORE		S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
SSG1.5-23 J BORE		S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
SSG1.5-24 J BORE		S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
SSG1.5-25 J BORE		S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
SSG1.5-26 J BORE		S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
SSG1.5-27 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
SSG1.5-28 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
SSG1.5-29 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
SSG1.5-30 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
SSG1.5-32 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
SSG1.5-34 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
SSG1.5-35 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
SSG1.5-36 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
SSG1.5-38 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
SSG1.5-40 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
SSG1.5-42 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
SSG1.5-44 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
SSG1.5-45 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
SSG1.5-48 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
SSG1.5-50 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
SSG1.5-55 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
SSG1.5-56 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
SSG1.5-60 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
SSG1.5-64 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
SSG1.5-70 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
SSG1.5-75 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
SSG1.5-80 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
SSG1.5-90 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
SSG1.5-100 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					






Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.



S1

J Series

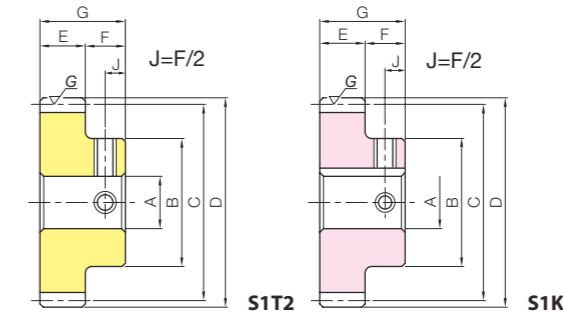

S1T2

S1K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	No. of teeth	Shape	Bore		Hub dia.		Pitch dia.		Outside dia.		Face width		Hub width		Total length	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)															
			A _{H7}	B	C	D	E	F	G	Bending strength	Surface durability	Bending strength	Surface durability																							
SSG2-14	14	S1	A _{H7}	22	28	32	20	16	36	0.10~0.20	26.3	9.01	2.69	0.92	0.11	29.6	10.5	3.01	1.07	0.14																
SSG2-15	15			24	30	34															0.16															
SSG2-16	16			26	32	36																0.19														
SSG2-17	17			28	34	38																	0.22													
SSG2-18	18			30	36	40																		0.24												
SSG2-19	19			31	38	42																			0.25											
SSG2-20	20			32	40	44																				0.28										
SSG2-21	21			34	42	46																					0.32									
SSG2-22	22			36	44	48																						0.35								
SSG2-23	23			37	46	50																							0.38							
SSG2-24	24			38	48	52																								0.42						
SSG2-25	25			40	50	54																									0.46					
SSG2-26	26			42	52	56																										0.50				
SSG2-27	27			44	54	58																											0.54			
SSG2-28	28			45	56	60																												0.59		
SSG2-29	29			48	58	62																													0.62	
SSG2-30	30			50	60	64																														0.68
SSG2-32	32			50	64	68																														
SSG2-34	34	50	68	72	0.78																															
SSG2-35	35	50	70	74		0.81																														
SSG2-36	36	50	72	76			0.89																													
SSG2-38	38	50	76	80				1.06																												
SSG2-40	40	60	80	84					1.14																											
SSG2-42	42	60	84	88						1.22																										
SSG2-44	44	60	88	92							1.27																									
SSG2-45	45	60	90	94								1.40																								
SSG2-48	48	60	96	100									1.45																							
SSG2-50	50	60	100	104										1.71																						
SSG2-55	55	60	110	114											1.76																					
SSG2-56	56	60	112	116												2.05																				
SSG2-60	60	65	120	124													2.30																			
SSG2-64	64	65	128	132														2.76																		
SSG2-70	70	70	140	144															3.12																	
SSG2-75	75	70	150	154																3.65																
SSG2-80	80	80	160	164																	4.49															
SSG2-90	90	80	180	184																		5.42														
SSG2-100	100	80	200	204																																



Bore H7	* The product shapes of J Series items are identified by background color.																
	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	
Keyway J _{S9}	4x1.8			5x2.3			6x2.8			8x3.3			10x3.3		12x3.3		14x3.8
Screw size	M4						M5			M6			M8		M10		
Catalog Number	M4																
SSG2-14 J BORE	S1T2																
SSG2-15 J BORE	S1K																
SSG2-16 J BORE	S1K	S1K															
SSG2-17 J BORE	S1K	S1K	S1K	S1K													
SSG2-18 J BORE	S1K	S1K	S1K	S1K	S1K												
SSG2-19 J BORE	S1K	S1K	S1K	S1K	S1K	S1K											
SSG2-20 J BORE			S1K	S1K	S1K	S1K											
SSG2-21 J BORE			S1K	S1K	S1K	S1K	S1K	S1K									
SSG2-22 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SSG2-23 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SSG2-24 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SSG2-25 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SSG2-26 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SSG2-27 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SSG2-28 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SSG2-29 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SSG2-30 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SSG2-32 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SSG2-34 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SSG2-35 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SSG2-36 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SSG2-38 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SSG2-40 J BORE								S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG2-42 J BORE								S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG2-44 J BORE								S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG2-45 J BORE									S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2-48 J BORE									S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2-50 J BORE										S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2-55 J BORE											S1K	S1K	S1K	S1K	S1K	S1K	
SSG2-56 J BORE											S1K	S1K	S1K	S1K	S1K	S1K	
SSG2-60 J BORE												S1K	S1K	S1K	S1K	S1K	
SSG2-64 J BORE													S1K	S1K	S1K	S1K	
SSG2-70 J BORE														S1K	S1K	S1K	S1K
SSG2-75 J BORE														S1K	S1K	S1K	S1K
SSG2-80 J BORE														S1K	S1K	S1K	S1K
SSG2-90 J BORE														S1K	S1K	S1K	S1K
SSG2-100 J BORE														S1K	S1K	S1K	S1K





Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.

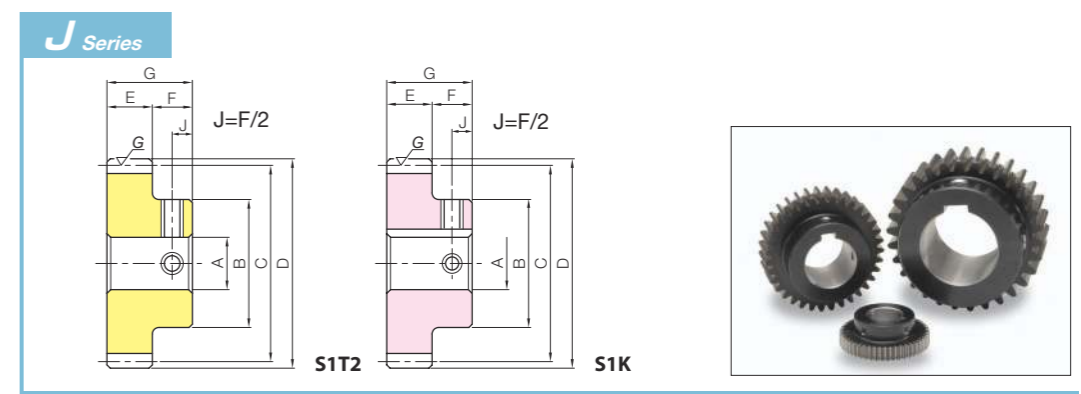

Catalog Number	No. of teeth	Shape	Bore A _{H7}	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)
										Bending strength	Surface durability	Bending strength	Surface durability		
SSG2.5-14	14	S1	15	28	35	40	25	18	43	42.9	14.9	4.37	1.52	0.10~0.20	0.22
SSG2.5-15	15			30	37.5	42.5				48.1	17.4	4.91	1.77		0.26
SSG2.5-16	16			32	40	45				53.3	20.1	5.44	2.05		0.30
SSG2.5-17	17			35	42.5	47.5				58.6	23.0	5.97	2.34		0.35
SSG2.5-18	18			38	45	50				63.9	26.1	6.52	2.66		0.41
SSG2.5-19	19			39	47.5	52.5				69.4	29.4	7.07	3.00		0.46
SSG2.5-20	20			40	50	55				74.8	32.9	7.63	3.36		0.48
SSG2.5-21	21			42	52.5	57.5				80.4	36.7	8.20	3.74		0.53
SSG2.5-22	22			44	55	60				86.0	40.6	8.77	4.14		0.60
SSG2.5-23	23			46	57.5	62.5				91.6	44.8	9.34	4.57		0.66
SSG2.5-24	24			48	60	65				97.3	49.2	9.92	5.02		0.72
SSG2.5-25	25			50	62.5	67.5				103	53.8	10.5	5.48		0.77
SSG2.5-26	26			54	65	70				109	58.4	11.1	5.95		0.87
SSG2.5-27	27			56	67.5	72.5				115	63.2	11.7	6.44		0.94
SSG2.5-28	28			60	70	75				120	68.2	12.3	6.95		1.05
SSG2.5-29	29			60	72.5	77.5				126	73.3	12.9	7.48		1.10
SSG2.5-30	30			65	75	80				132	78.7	13.5	8.03		1.23
SSG2.5-32	32			70	80	85				144	90.1	14.7	9.19		1.42
SSG2.5-34	34	70	85	90	156	102	15.9	10.4	1.55						
SSG2.5-35	35	70	87.5	92.5	162	109	16.5	11.1	1.62						
SSG2.5-36	36	70	90	95	168	115	17.1	11.8	1.69						
SSG2.5-38	38	70	95	100	180	129	18.3	13.2	1.83						
SSG2.5-40	40	70	100	105	177	133	18.1	13.6	1.92						
SSG2.5-42	42	75	105	110	188	147	19.2	15.0	2.16						
SSG2.5-44	44	75	110	115	200	163	20.4	16.6	2.32						
SSG2.5-45	45	75	112.5	117.5	205	170	20.9	17.4	2.41						
SSG2.5-48	48	75	120	125	222	195	22.7	19.9	2.68						
SSG2.5-50	50	80	125	130	234	213	23.8	21.7	2.95						
SSG2.5-55	55	80	137.5	142.5	262	260	26.8	26.5	3.46						
SSG2.5-56	56	80	140	145	268	270	27.3	27.5	3.57						
SSG2.5-60	60	80	150	155	291	311	29.7	31.8	4.01						
SSG2.5-70	70	80	175	180	324	399	33.1	40.7	5.26						
SSG2.5-75	75	90	187.5	192.5	351	461	35.8	47.0	6.15						
SSG2.5-80	80	90	200	205	378	527	38.6	53.7	6.90						


To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore H7	* The product shapes of J Series items are identified by background color.															
	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	
Keyway J _{S9}	5x2.3			6x2.8				8x3.3			10x3.3		12x3.3		14x3.8	
Screw size	M4			M5				M6			M8		M10			
Catalog Number	S1T2	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2.5-14 J BORE	S1T2															
SSG2.5-15 J BORE	S1K	S1K														
SSG2.5-16 J BORE	S1K	S1K	S1K	S1K												
SSG2.5-17 J BORE	S1K	S1K	S1K	S1K	S1K	S1K										
SSG2.5-18 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SSG2.5-19 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SSG2.5-20 J BORE				S1K	S1K	S1K	S1K									
SSG2.5-21 J BORE				S1K	S1K	S1K	S1K	S1K								
SSG2.5-22 J BORE				S1K	S1K	S1K	S1K	S1K								
SSG2.5-23 J BORE				S1K	S1K	S1K	S1K	S1K								
SSG2.5-24 J BORE				S1K	S1K	S1K	S1K	S1K	S1K							
SSG2.5-25 J BORE						S1K	S1K	S1K	S1K	S1K						
SSG2.5-26 J BORE						S1K	S1K	S1K	S1K	S1K	S1K					
SSG2.5-27 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SSG2.5-28 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SSG2.5-29 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SSG2.5-30 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SSG2.5-32 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG2.5-34 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG2.5-35 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG2.5-36 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG2.5-38 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG2.5-40 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG2.5-42 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2.5-44 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2.5-45 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2.5-48 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2.5-50 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2.5-55 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2.5-56 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2.5-60 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2.5-70 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2.5-75 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG2.5-80 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	




Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.



S1

J Series




S1K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	No. of teeth	Shape	Bore A _{H7}	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)		
										Bending strength	Surface durability	Bending strength	Surface durability				
SSG3-14	14	S1	16	34	42	48	30	20	50	74.1	26.1	7.55	2.66	0.10~0.20	0.39		
SSG3-15	15			36	45	51				83.1	30.5	8.48	3.11				
SSG3-16	16			38	48	54				92.1	35.2	9.39	3.59				
SSG3-17	17			37	51	57				101	40.3	10.3	4.11				
SSG3-18	18			40	54	60				110	45.8	11.3	4.67				
SSG3-19	19			45	57	63				120	51.6	12.2	5.26				
SSG3-20	20			50	60	66				129	57.8	13.2	5.90				
SSG3-21	21			52	63	69				139	64.4	14.2	6.57				
SSG3-22	22			54	66	72				149	71.3	15.1	7.28				
SSG3-23	23			56	69	75				158	78.7	16.1	8.02				
SSG3-24	24			20	58	72				78	168	86.4	17.1			8.81	1.25
SSG3-25	25				60	75				81	178	94.5	18.1			9.64	1.36
SSG3-26	26				62	78				84	188	103	19.2			10.5	1.48
SSG3-27	27				65	81				87	198	111	20.2			11.3	1.61
SSG3-28	28				70	84				90	208	120	21.2			12.2	1.79
SSG3-29	29				70	87				93	218	129	22.2			13.2	1.88
SSG3-30	30				75	90				96	228	138	23.3			14.1	2.00
SSG3-32	32				75	96				102	229	146	23.4			14.9	2.21
SSG3-34	34	75	102		108	248	166	25.3	17.0	2.43							
SSG3-35	35	80	105		111	258	177	26.3	18.0	2.64							
SSG3-36	36	25	80		108	114	268	188	27.3	19.1	2.75						
SSG3-38	38		80		114	120	287	210	29.2	21.4	3.00						
SSG3-40	40		80	120	126	306	234	31.2	23.9	3.26							
SSG3-42	42		80	126	132	326	260	33.2	26.5	3.53							
SSG3-44	44		80	132	138	345	286	35.2	29.2	3.82							
SSG3-45	45		80	135	141	355	300	36.2	30.6	3.97							
SSG3-48	48		85	144	150	384	343	39.2	35.0	4.53							
SSG3-50	50		85	150	156	404	374	41.2	38.1	4.78							
SSG3-55	55	30	90	165	171	421	423	42.9	43.2	5.76							
SSG3-56	56		90	168	174	430	439	43.9	44.8	5.94							
SSG3-60	60		100	180	186	467	508	47.6	51.8	6.95							
SSG3-70	70		100	210	216	560	699	57.1	71.3	9.11							
SSG3-75	75	100	225	231	607	806	61.9	82.2	10.3								
SSG3-80	80	100	240	246	654	921	66.7	93.9	11.6								

Bore H7	* The product shapes of J Series items are identified by background color.														
	16	17	18	19	20	22	25	28	30	32	35	40	45	50	
Keyway J _{S9}	5x2.3		6x2.8				8x3.3			10x3.3		12x3.3		14x3.8	
Screw size	M4		M5				M6			M8		M10			
Catalog Number	M4		M5				M6			M8		M10			
SSG3-14 J BORE	S1K	S1K													
SSG3-15 J BORE	S1K	S1K	S1K	S1K											
SSG3-16 J BORE	S1K	S1K	S1K	S1K	S1K	S1K									
SSG3-17 J BORE	S1K	S1K	S1K	S1K	S1K	S1K									
SSG3-18 J BORE	S1K	S1K	S1K	S1K	S1K	S1K									
SSG3-19 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SSG3-20 J BORE					S1K	S1K	S1K	S1K	S1K						
SSG3-21 J BORE					S1K	S1K	S1K	S1K	S1K						
SSG3-22 J BORE					S1K	S1K	S1K	S1K	S1K	S1K					
SSG3-23 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SSG3-24 J BORE					S1K	S1K	S1K	S1K	S1K	S1K					
SSG3-25 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SSG3-26 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SSG3-27 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SSG3-28 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG3-29 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG3-30 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG3-32 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG3-34 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG3-35 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG3-36 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG3-38 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG3-40 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG3-42 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG3-44 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG3-45 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG3-48 J BORE							S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG3-50 J BORE									S1K	S1K	S1K	S1K	S1K	S1K	
SSG3-55 J BORE									S1K	S1K	S1K	S1K	S1K	S1K	
SSG3-56 J BORE									S1K	S1K	S1K	S1K	S1K	S1K	
SSG3-60 J BORE									S1K	S1K	S1K	S1K	S1K	S1K	
SSG3-70 J BORE									S1K	S1K	S1K	S1K	S1K	S1K	
SSG3-75 J BORE									S1K	S1K	S1K	S1K	S1K	S1K	
SSG3-80 J BORE									S1K	S1K	S1K	S1K	S1K	S1K	





Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth (excludes semi-custom products)

* The precision grade of J Series products is equivalent to the value shown in the table.



J Series



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	No. of teeth	Shape	Bore AH7	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)
										Bending strength	Surface durability	Bending strength	Surface durability		
SSG4-14	14	20	S1	40	56	64	40	25	65	176	63.4	17.9	6.47	0.10~0.20	0.86
SSG4-15	15			45	60	68				197	74.1	20.1	7.55		1.04
SSG4-16	16			50	64	72				218	85.6	22.3	8.73		1.24
SSG4-18	18			60	72	80				262	111	26.7	11.4		1.67
SSG4-20	20			65	80	88				307	141	31.3	14.3		2.07
SSG4-22	22			70	88	96				352	174	35.9	17.7		2.50
SSG4-24	24			75	96	104				368	194	37.5	19.8		2.98
SSG4-25	25			80	100	108				389	213	39.7	21.7		3.29
SSG4-28	28			85	112	120				455	270	46.4	27.5		4.05
SSG4-30	30			90	120	128				499	313	50.9	31.9		4.64
SSG4-32	32	25	S1	90	128	136	40	25	65	544	358	55.5	36.5	0.10~0.20	5.04
SSG4-35	35			90	140	148				612	432	62.4	44.0		5.83
SSG4-36	36			90	144	152				634	458	64.7	46.7		6.11
SSG4-40	40			90	160	168				674	529	68.7	54.0		7.31
SSG4-42	42			90	168	176				717	586	73.1	59.7		7.96
SSG4-44	44			90	176	184				760	646	77.5	65.8		8.53
SSG4-45	45			90	180	188				781	677	79.6	69.0		8.88
SSG4-48	48			100	192	200				846	774	86.3	79.0		10.3
SSG4-50	50			100	200	208				889	842	90.7	85.9		11.0
SSG4-55	55			100	220	228				998	1030	102	105		13.1
SSG4-56	56	110	224	232	1020	1060	104	109	13.9						
SSG4-60	60	110	240	248	1110	1230	113	125	15.7						
SSG4-62S	62	30	S1	120	248	256	40	25	65	1240	1360	127	138	0.10~0.20	16.8
SSG4-64S	64			130	256	264				1290	1450	131	148		18.1
SSG4-65S	65			130	260	268				1310	1500	134	153		18.6
SSG4-66S	66			130	264	272				1340	1550	136	158		19.2
SSG4-68S	68			140	272	280				1380	1650	141	168		20.6
SSG4-70S	70			140	280	288				1430	1750	146	178		21.7
SSG4-80S	80			160	320	328				1550	2150	158	219		28.6
SSG4-90S	90			180	360	368				1770	2750	181	281		36.3
SSG4-100S	100			200	400	408				2000	3440	204	351		45.0
SSG4-110S	110			220	440	448				2220	4190	226	427		54.6
SSG4-120S	120	240	480	488	2450	5010	249	511	65.1						



[Precautions for Semi-custom Products] Please see Pages 38~40 for more details.

Bore H7	* The product shapes of J Series items are identified by background color.																					
	20	22	25	28	30	32	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110
Keyway Js9	20	22	25	28	30	32	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110
Screw size	6x2.8	8x3.3	10x3.3	12x3.3	14x3.8	16x4.3	18x4.4	20x4.9	22x5.4	25x5.4	28x6.4											
Catalog Number	M5	M6	M8	M10	M12	M16																
SSG4-14 J BORE	S1K	S1K																				
SSG4-15 J BORE	S1K	S1K	S1K																			
SSG4-16 J BORE	S1K	S1K	S1K	S1K	S1K																	
SSG4-18 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K															
SSG4-20 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K														
SSG4-22 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K													
SSG4-24 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K												
SSG4-25 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K											
SSG4-28 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K											
SSG4-30 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
SSG4-32 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SSG4-35 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SSG4-36 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SSG4-40 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SSG4-42 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SSG4-44 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SSG4-45 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SSG4-48 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SSG4-50 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SSG4-55 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSG4-56 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG4-60 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG4-62SJ BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG4-64SJ BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG4-65SJ BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG4-66SJ BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG4-68SJ BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG4-70SJ BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG4-80SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG4-90SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG4-100SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG4-110SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG4-120SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK



Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	—

* The precision grade of J Series products is equivalent to the value shown in the table.

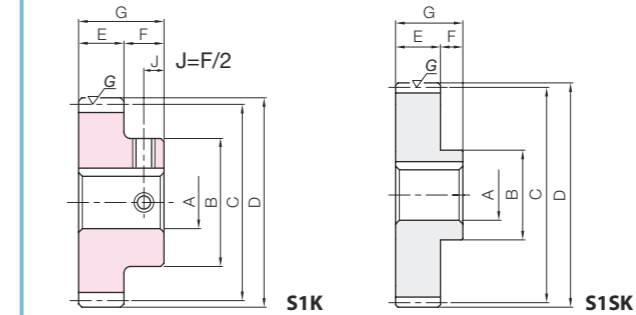


Catalog Number	No. of teeth	Shape	Bore A _{H7}	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)
										Bending strength	Surface durability	Bending strength	Surface durability		
SSG8-20S	20	S1	30	130	160	176	75	35	110	2300	1080	235	110	0.10~0.22	14.9
SSG8-25S	25			160	200	216				2920	1620	298	165		23.4
SSG8-30S	30			190	240	256				3750	2370	382	242		33.8
SSG8-32S	32			200	256	272				4080	2720	416	277		37.9
SSG8-35S	35			210	280	296				4590	3280	468	335		44.7
SSG8-36S	36		210	288	304	4760				3480	486	355	46.8		
SSG8-40S	40		220	320	336	5060				4030	516	411	56.7		
SSG8-42S	42		230	336	352	5380				4470	548	456	62.5		
SSG8-44S	44		230	352	368	5700				4930	581	502	67.6		
SSG8-45S	45		230	360	376	5860				5170	598	527	70.3		
SSG8-48S	48	240	384	400	6350	5920	647	603	79.5						
SSG8-50S	50	240	400	416	6670	6450	680	657	85.3						
SSG8-55S	55	240	440	456	7490	7850	764	801	101						
SSG8-56S	56	240	448	464	7650	8150	780	831	104						
SSG8-60S	60	240	480	496	8310	9390	848	958	118						
SSG10-20S	20	S1	40	160	200	220	90	40	130	3980	1920	406	196	0.10~0.22	27.2
SSG10-25S	25			200	250	270				5480	3100	559	317		43.3
SSG10-30S	30			240	300	320				7030	4550	717	464		62.1
SSG10-32S	32			250	320	340				7110	4840	725	493		70.2
SSG10-35S	35		260	350	370	7990				5840	815	596	82.6		
SSG10-36S	36		270	360	380	8290				6200	845	632	87.9		
SSG10-40S	40		280	400	420	9480				7740	967	789	106		

[Precautions for Semi-custom Products] Please see Pages 38~40 for more details.

To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore H7	* The product shapes of J Series items are identified by background color.																								
	30	32	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	120	130	140	150	160	170	180
Keyway J _{S9}	30	32	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	120	130	140	150	160	170	180
Screw size	8x3.3	10x3.3	12x3.3	14x3.8	16x4.3	18x4.4	20x4.9	22x5.4	25x5.4	28x6.4	32x7.4	36x8.4	40x9.4	45x10.4											
Catalog Number	M6	M8	M10	M12	M16	M20																			
SSG8-20 SJ BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG8-25 SJ BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG8-30 SJ BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG8-32 SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG8-35 SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG8-36 SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG8-40SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG8-42 SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG8-44 SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG8-45 SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG8-48 SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG8-50 SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG8-55 SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG8-56 SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG8-60 SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG10-20 SJ BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG10-25 SJ BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SSG10-30 SJ BORE				S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG10-32 SJ BORE				S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG10-35 SJ BORE				S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG10-36 SJ BORE				S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SSG10-40 SJ BORE				S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK

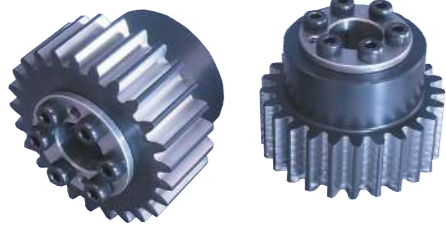

Specifications	
Precision grade	JIS grade N7 (JIS B1702-1:1999)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth and portions given secondary operation

* The precision grade of F Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435


Features of F Series

- No rattling of shaft and gear when fastening
- Freely positionable mounting for easy meshing of teeth
- Easily mounted and removed for repeated use
- The bushing slips when overloaded to reduce damage to the gears.

Structure and Engagement Principles

The structure consists of an outer ring and inner ring with split grooves in the tapered part, and hexagon socket head cap screws that convert the force into tightening strength.

In principle, the tightening strength of hexagon socket head cap screws spreads the outer and inner rings by taper engagement, and the gear and shaft become fastened by surface pressure.


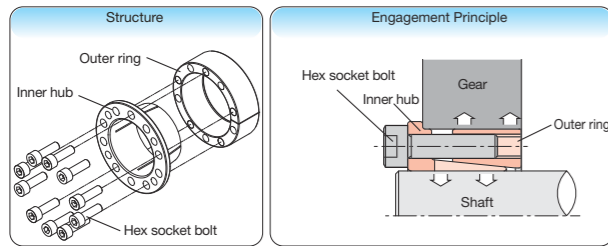


Catalog Number	No. of teeth	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Allowable torque (N-m)	
		B	C	D	E	F	Bending strength	Surface durability
SSG2-25	25	40	50	54			52.7	27.0
SSG2-26	26	42	52	56			55.7	29.3
SSG2-27	27	44	54	58			58.6	31.7
SSG2-28	28	45	56	60			61.6	34.2
SSG2-29	29	48	58	62			64.6	36.8
SSG2-30	30	50	60	64			67.6	39.5
SSG2-32	32	50	64	68			73.7	45.2
SSG2-34	34	50	68	72			79.8	51.3
SSG2-35	35	50	70	74			82.8	54.5
SSG2-36	36	50	72	76			85.9	57.8
SSG2-38	38	50	76	80			92.1	64.8
SSG2-40	40	60	80	84	20	16	98.3	72.1
SSG2-42	42	60	84	88			105	79.9
SSG2-44	44	60	88	92			111	88.1
SSG2-45	45	60	90	94			114	92.3
SSG2-48	48	60	96	100			114	97.6
SSG2-50	50	60	100	104			120	106
SSG2-55	55	60	110	114			134	130
SSG2-56	56	60	112	116			137	135
SSG2-60	60	65	120	124			149	156
SSG2-64	64	65	128	132			161	179
SSG2-70	70	70	140	144			179	216
SSG2-75	75	70	150	154			194	249
SSG2-80	80	80	160	164			194	265
SSG2-90	90	80	180	184			222	338
SSG2-100	100	80	200	204			250	421

* For the backlash of each product, please refer to the dimension table of the original product.

Mounting Method and Precautions


- Shaft diameter recommended tolerance is h7. The limit is h8, but we recommend h6 when minimizing runout. Use 1.6a as reference for the surface roughness of the shaft diameter.
- Wipe away any debris, dirt or oil on the shaft surface and hole of the fastened section with thinner or the like, and lightly apply hydraulic oil #68. Do not apply molybdenum-based oil or oil with additives, as this may cause reduced fastening torque or slippage.
- Pass completely through the shaft while pressing the bushing flange against the gear before tightening. Removal will not be possible, so be sure to leave a clearance of 1mm or more on the gear rear surface side. (Fig.1)
- Use a torque wrench to fasten bolts on opposite sides when tightening. First tighten at 1/4 of the regulated torque, then at 1/2 of the regulated torque, before finally tightening up to the regulated torque. Do not tighten without passing through the shaft, or fasten the bolts after insertion on the draft tap side. (Fig.2)
- If the shaft has a keyway, the fastened section contact area is reduced and the transmission rate is decreased by 15 to 20%.

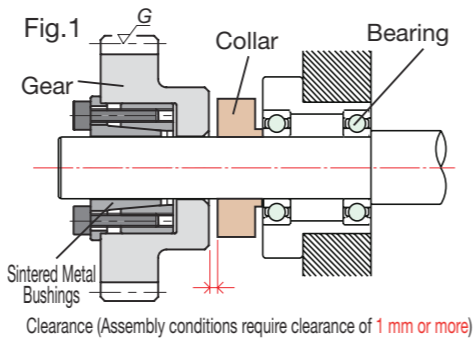

Removal Method and Precautions

- Turn off the power source (supply), check that no load is applied to the gear, and confirm that there is no danger due to falling, etc.
- Insert removed bolts into all draft taps, and gradually and evenly tighten each bolt in diagonal order until removal is complete.
- The washer and thread surfaces will be roughened, compromising tightening strength, if the bolts are reused. Consequently, we recommend using new bolts of the same size.


F Series

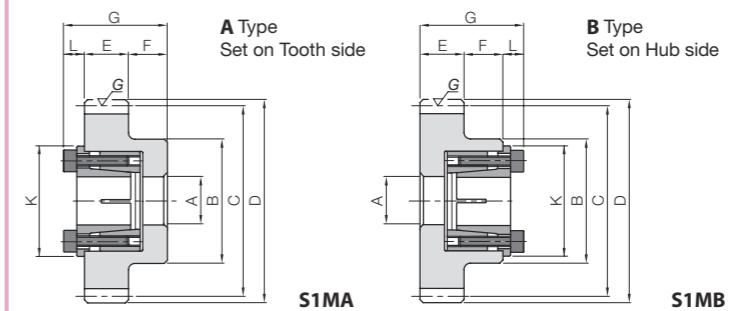

To order F Series products, please specify: **Catalog Number + F + BORE + Type.**

A Type Only
A/B Types

Bore A		* The product shapes of F Series items are identified by background color.														
Catalog Number		15	16	17	18	19	20	22	25	28	30	32	35	40	45	50
SSG2-25 F Bore Type	S1MA/S1MB	S1MA	S1MA													
SSG2-26 F Bore Type	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA											
SSG2-27 F Bore Type	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA											
SSG2-28 F Bore Type	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA											
SSG2-29 F Bore Type	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB											
SSG2-30 F Bore Type				S1MA/S1MB	S1MA/S1MB											
SSG2-32 F Bore Type				S1MA/S1MB	S1MA/S1MB	S1MA										
SSG2-34 F Bore Type				S1MA/S1MB	S1MA/S1MB	S1MA										
SSG2-35 F Bore Type				S1MA/S1MB	S1MA/S1MB	S1MA										
SSG2-36 F Bore Type				S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA								
SSG2-38 F Bore Type				S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA								
SSG2-40 F Bore Type						S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	S1MA					
SSG2-42 F Bore Type						S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	S1MA					
SSG2-44 F Bore Type						S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	S1MA					
SSG2-45 F Bore Type						S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	S1MA					
SSG2-48 F Bore Type						S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	S1MA					
SSG2-50 F Bore Type								S1MA	S1MA	S1MA	S1MA					
SSG2-55 F Bore Type								S1MA	S1MA	S1MA	S1MA					
SSG2-56 F Bore Type								S1MA	S1MA	S1MA	S1MA					
SSG2-60 F Bore Type								S1MA	S1MA	S1MA	S1MA	S1MA				
SSG2-64 F Bore Type								S1MA	S1MA	S1MA	S1MA	S1MA				
SSG2-70 F Bore Type									S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA		
SSG2-75 F Bore Type									S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA		
SSG2-80 F Bore Type									S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA	S1MA
SSG2-90 F Bore Type									S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA	S1MA
SSG2-100 F Bore Type									S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA	S1MA
Bore A		15	16	17	18	19	20	22	25	28	30	32	35	40	45	50
Ref. slipping torque N·m		70	75	110	115	120	220	290	350	380	410	440	720	810	1200	1500
Ref. thrust load kN		9.46	9.46	12.6	12.6	12.6	21.6	26	27.2	27	27	27	41.1	40.2	52.9	56.3
Sintered Metal Bushings	L			6.5				8			8.5		10			10.5
	K	31.5	33	33.5	34.5	35.5	42	44	47	50	52	54	62	67	72	77
Total Length	G			42.5				44			44.5		46			46.5
Hex socket bolt	Qty	6					8				10		8	10		14
	Size				M4×15					M5×18				M6×20		
	Tightening torque N·m				3.9					8.8				15.7		
Bushing weight (g)		66	75	75	80	81	144	165	188	195	208	219	325	380	435	485

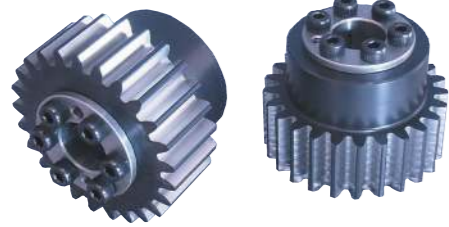

Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1999)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth and portions given secondary operation

* The precision grade of F Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435


Features of F Series

- No rattling of shaft and gear when fastening
- Freely positionable mounting for easy meshing of teeth
- Easily mounted and removed for repeated use
- The bushing slips when overloaded to reduce damage to the gears.

Structure and Engagement Principles

The structure consists of an outer ring and inner ring with split grooves in the tapered part, and hexagon socket head cap screws that convert the force into tightening strength.

In principle, the tightening strength of hexagon socket head cap screws spreads the outer and inner rings by taper engagement, and the gear and shaft become fastened by surface pressure.


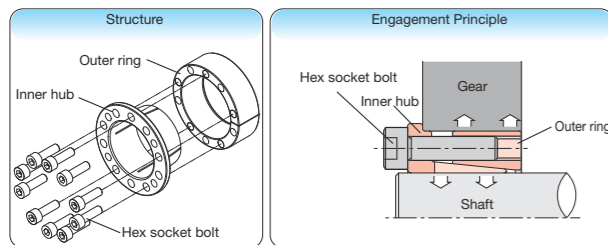


Catalog Number	No. of teeth	Hub dia.		Pitch dia.	Outside dia.	Face width	Hub width	Allowable torque (N-m)	
		B	C	D	E	F	Bending strength	Surface durability	
SSG2.5-30	30	65	75	80	25	18		132	78.7
SSG2.5-32	32	70	80	85				144	90.1
SSG2.5-34	34	70	85	90				156	102
SSG2.5-35	35	70	87.5	92.5				162	109
SSG2.5-36	36	70	90	95				168	115
SSG2.5-38	38	70	95	100				180	129
SSG2.5-40	40	70	100	105				177	133
SSG2.5-42	42	75	105	110				188	147
SSG2.5-44	44	75	110	115				200	163
SSG2.5-45	45	75	112.5	117.5				205	170
SSG2.5-48	48	75	120	125				222	195
SSG2.5-50	50	80	125	130				234	213
SSG2.5-55	55	80	137.5	142.5				262	260
SSG2.5-56	56	80	140	145				268	270
SSG2.5-60	60	80	150	155				291	311
SSG2.5-70	70	80	175	180				324	399
SSG2.5-75	75	90	187.5	192.5	351	461			
SSG2.5-80	80	90	200	205	378	527			

* For the backlash of each product, please refer to the dimension table of the original product.


Mounting Method and Precautions

- Shaft diameter recommended tolerance is h7. The limit is h8, but we recommend h6 when minimizing runout. Use 1.6a as reference for the surface roughness of the shaft diameter.
- Wipe away any debris, dirt or oil on the shaft surface and hole of the fastened section with thinner or the like, and lightly apply hydraulic oil #68. Do not apply molybdenum-based oil or oil with additives, as this may cause reduced fastening torque or slippage.
- Pass completely through the shaft while pressing the bushing flange against the gear before tightening. Removal will not be possible, so be sure to leave a clearance of 1mm or more on the gear rear surface side. (Fig.1)
- Use a torque wrench to fasten bolts on opposite sides when tightening. First tighten at 1/4 of the regulated torque, then at 1/2 of the regulated torque, before finally tightening up to the regulated torque. Do not tighten without passing through the shaft, or fasten the bolts after insertion on the draft tap side. (Fig.2)
- If the shaft has a keyway, the fastened section contact area is reduced and the transmission rate is decreased by 15 to 20%.

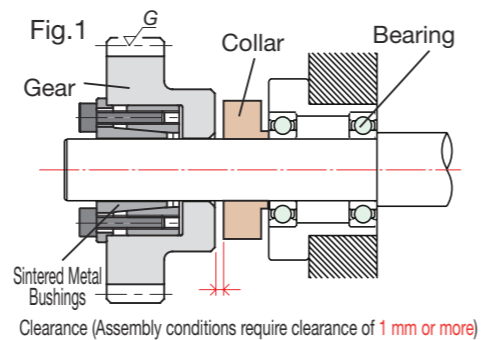

Removal Method and Precautions


- Turn off the power source (supply), check that no load is applied to the gear, and confirm that there is no danger due to falling, etc.
- Insert removed bolts into all draft taps, and gradually and evenly tighten each bolt in diagonal order until removal is complete.
- The washer and thread surfaces will be roughened, compromising tightening strength, if the bolts are reused. Consequently, we recommend using new bolts of the same size.

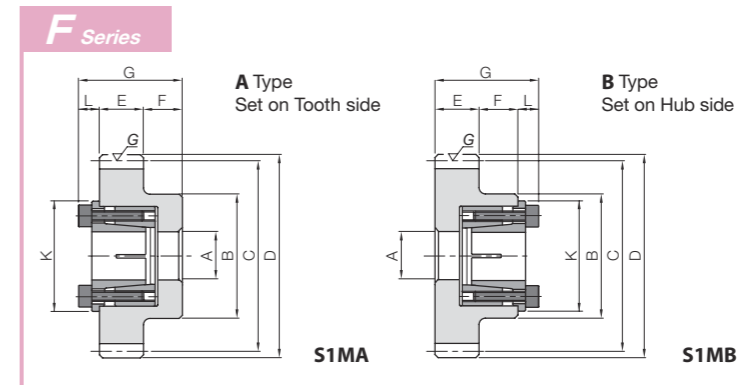

To order F Series products, please specify: **Catalog Number + F + BORE + Type.**

A Type Only
A/B Types

Bore A	* The product shapes of F Series items are identified by background color.										
	20	22	25	28	30	32	35	40	45	50	
Ref. slipping torque N-m	220	290	350	380	410	440	720	810	1200	1500	
Ref. thrust load kN	21.6	26	27.2	27	27	27	41.1	40.2	52.9	56.3	
Sintered Metal	L	8			8.5		10		10.5		
Bushings	K	42	44	47	50	52	54	62	67	72	
Total Length	G	51			51.5		53		53.5		
Hex socket bolt	Qty	8			10		8	10	14		
	Size	M5x18					M6x20				
	Tightening torque N-m	8.8					15.7				
Bushing weight (g)		144	165	188	195	208	219	325	380	435	485

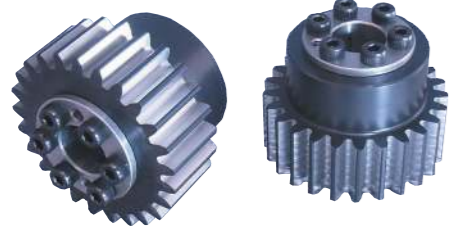

Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth and portions given secondary operation


* The precision grade of F Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435

Features of F Series

- No rattling of shaft and gear when fastening
- Freely positionable mounting for easy meshing of teeth
- Easily mounted and removed for repeated use
- The bushing slips when overloaded to reduce damage to the gears.

Structure and Engagement Principles

The structure consists of an outer ring and inner ring with split grooves in the tapered part, and hexagon socket head cap screws that convert the force into tightening strength. In principle, the tightening strength of hexagon socket head cap screws spreads the outer and inner rings by taper engagement, and the gear and shaft become fastened by surface pressure.


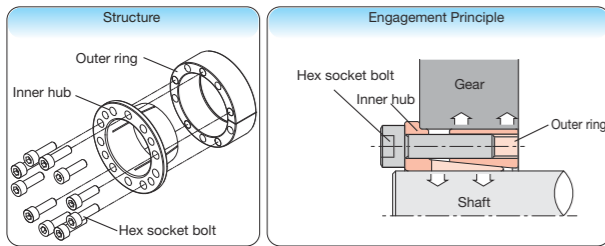


Catalog Number	No. of teeth	Hub dia.		Pitch dia.		Outside dia.		Face width		Hub width		Allowable torque (N-m)	
		B	C	D	E	F	Bending strength	Surface durability					
SSG3-25	25	60	75	81								178	94.5
SSG3-26	26	62	78	84								188	103
SSG3-27	27	65	81	87								198	111
SSG3-28	28	70	84	90								208	120
SSG3-29	29	70	87	93								218	129
SSG3-30	30	75	90	96								228	138
SSG3-32	32	75	96	102								229	146
SSG3-34	34	75	102	108								248	166
SSG3-35	35	80	105	111								258	177
SSG3-36	36	80	108	114								268	188
SSG3-38	38	80	114	120								287	210
SSG3-40	40	80	120	126	30	20						306	234
SSG3-42	42	80	126	132								326	260
SSG3-44	44	80	132	138								345	286
SSG3-45	45	80	135	141								355	300
SSG3-48	48	85	144	150								384	343
SSG3-50	50	85	150	156								404	374
SSG3-55	55	90	165	171								421	423
SSG3-56	56	90	168	174								430	439
SSG3-60	60	100	180	186								467	508
SSG3-70	70	100	210	216								560	699
SSG3-75	75	100	225	231								607	806
SSG3-80	80	100	240	246								654	921

* For the backlash of each product, please refer to the dimension table of the original product.


Mounting Method and Precautions

- Shaft diameter recommended tolerance is h7. The limit is h8, but we recommend h6 when minimizing runout. Use 1.6a as reference for the surface roughness of the shaft diameter.
- Wipe away any debris, dirt or oil on the shaft surface and hole of the fastened section with thinner or the like, and lightly apply hydraulic oil #68. Do not apply molybdenum-based oil or oil with additives, as this may cause reduced fastening torque or slippage.
- Pass completely through the shaft while pressing the bushing flange against the gear before tightening. Removal will not be possible, so be sure to leave a clearance of 1mm or more on the gear rear surface side. (Fig.1)
- Use a torque wrench to fasten bolts on opposite sides when tightening. First tighten at 1/4 of the regulated torque, then at 1/2 of the regulated torque, before finally tightening up to the regulated torque. Do not tighten without passing through the shaft, or fasten the bolts after insertion on the draft tap side. (Fig.2)
- If the shaft has a keyway, the fastened section contact area is reduced and the transmission rate is decreased by 15 to 20%.

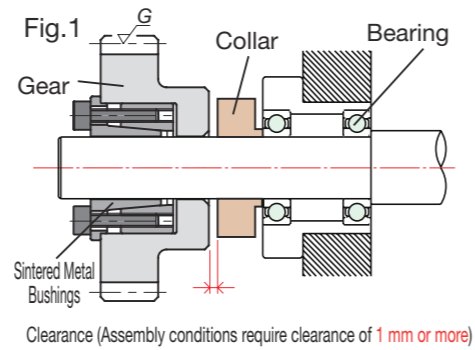

Removal Method and Precautions

- Turn off the power source (supply), check that no load is applied to the gear, and confirm that there is no danger due to falling, etc.
- Insert removed bolts into all draft taps, and gradually and evenly tighten each bolt in diagonal order until removal is complete.
- The washer and thread surfaces will be roughened, compromising tightening strength, if the bolts are reused. Consequently, we recommend using new bolts of the same size.

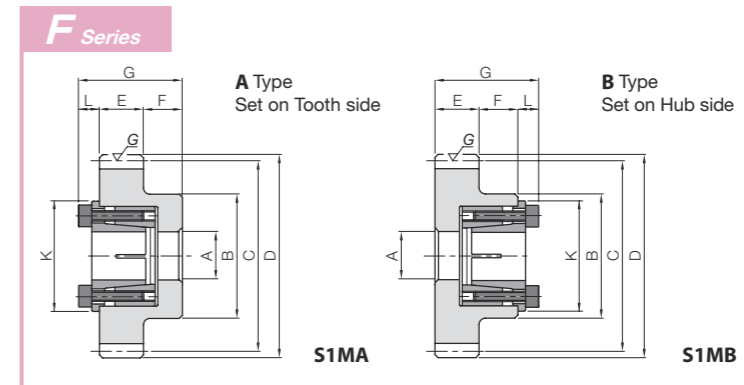

To order F Series products, please specify: **Catalog Number + F + BORE + Type.**

A Type Only
A/B Types

Bore A Catalog Number	* The product shapes of F Series items are identified by background color.										
	20	22	25	28	30	32	35	40	45	50	
SSG3-25 F Bore Type	S1MA/S1MB	S1MA	S1MA								
SSG3-26 F Bore Type	S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	S1MA					
SSG3-27 F Bore Type	S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	S1MA					
SSG3-28 F Bore Type	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB					
SSG3-29 F Bore Type	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB					
SSG3-30 F Bore Type			S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB					
SSG3-32 F Bore Type			S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA				
SSG3-34 F Bore Type			S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA			
SSG3-35 F Bore Type			S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA			
SSG3-36 F Bore Type			S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA			
SSG3-38 F Bore Type			S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA		
SSG3-40 F Bore Type			S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	
SSG3-42 F Bore Type			S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	
SSG3-44 F Bore Type			S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	
SSG3-45 F Bore Type			S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	
SSG3-48 F Bore Type			S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	
SSG3-50 F Bore Type					S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	S1MA	S1MA	
SSG3-55 F Bore Type					S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	
SSG3-56 F Bore Type					S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	
SSG3-60 F Bore Type					S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	
SSG3-70 F Bore Type					S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	
SSG3-75 F Bore Type					S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	
SSG3-80 F Bore Type					S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA/S1MB	S1MA	S1MA	
Bore A	20	22	25	28	30	32	35	40	45	50	
Ref. slipping torque N·m	220	290	350	380	410	440	720	810	1200	1500	
Ref. thrust load kN	21.6	26	27.2	27	27	27	41.1	40.2	52.9	56.3	
Sintered Metal Bushings	L	8			8.5		10		10.5		
Total Length	K	42	44	47	50	52	54	62	67	72	
Hex socket bolt	Qty	8			10		8	10	14		
	Size	M5×18					M6×20				
	Tightening torque N·m	8.8					15.7				
Bushing weight (g)		144	165	188	195	208	219	325	380	435	485



Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1999)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth and portions given secondary operation

* The precision grade of E Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435

Delivered with this marking.


Please see Page 16 for more details.

Features of E Series

- Can be easily installed with one bolt (shortens work time)
- Concentricity 0.02mm
- Zero backlash between the gear and shaft
- No decrease in shaft strength due to fretting wear (worn or seized shaft)
- No need to machine keyways on the shaft, reducing the number of parts such as keyway materials and set screws
- Does not take up mounting space and easy to position and match the phase
- Finished by the manufacturer in 2 working days (excluding the day ordered)

Operation principle of ETP-E Plus

The pressure medium enclosed in the chamber is pressurized due to the tightening of the pressure screw and moves into the sleeve. The pressure of this pressure medium causes the sleeve to receive pressure from the inside, which causes the shaft side sleeve to contract, the hub side sleeve to expand, allowing the shaft and hub to be fastened via the sleeve.

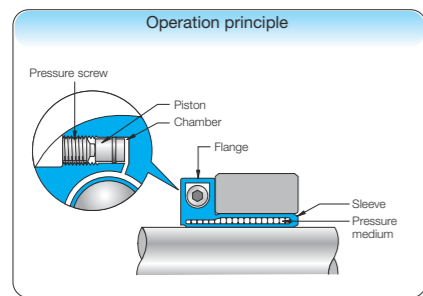

Catalog Number	No. of teeth	Hub dia.		Pitch dia.		Outside dia.		Face width E	Allowable torque (N·m)	
		B	C	D	E	Bending strength	Surface durability			
SSG1.5-22	22	26	33	36				15	18.6	8.41
SSG1.5-23	23	27	34.5	37.5				15	19.8	9.27
SSG1.5-24	24	28	36	39				15	21.0	10.2
SSG1.5-25	25	30	37.5	40.5				15	22.2	11.1
SSG1.5-26	26	32	39	42				15	23.5	12.1
SSG1.5-27	27	34	40.5	43.5				15	24.7	13.1
SSG1.5-28	28	36	42	45				15	26.0	14.1
SSG1.5-29	29	37	43.5	46.5				15	27.3	15.2
SSG1.5-30	30	38	45	48				15	28.5	16.3
SSG1.5-32	32	40	48	51				15	31.1	18.6
SSG1.5-34	34	42	51	54				15	33.6	21.1
SSG1.5-35	35	42	52.5	55.5				15	34.9	22.4
SSG1.5-36	36	45	54	57				15	36.2	23.8
SSG1.5-38	38	45	57	60				15	38.8	26.6
SSG1.5-40	40	50	60	63				15	41.5	29.6
SSG1.5-42	42	50	63	66				15	44.1	32.8
SSG1.5-44	44	50	66	69				15	46.7	36.2
SSG1.5-45	45	50	67.5	70.5				15	48.1	37.9
SSG1.5-48	48	50	72	75				15	52.0	43.4
SSG1.5-50	50	60	75	78				15	54.7	47.2
SSG1.5-55	55	60	82.5	85.5				15	61.4	57.7
SSG1.5-56	56	60	84	87				15	62.8	59.9
SSG1.5-60	60	60	90	93				15	68.1	69.2
SSG1.5-64	64	60	96	99				15	67.9	73.2
SSG1.5-70	70	60	105	108				15	75.4	88.4
SSG1.5-75	75	60	112.5	115.5				15	81.7	102
SSG1.5-80	80	70	120	123				15	88.0	117
SSG1.5-90	90	70	135	138				15	101	150
SSG1.5-100	100	70	150	153				15	113	187

* For the backlash of each product, please refer to the dimension table of the original product.





Effects of ETP-E Plus

Easy and accurate positioning



Helps save space

High concentricity

Secure and speedy installation



E Series



To order E Series products, please specify: **Catalog Number + E + BORE.**

Bore A	* The product shapes of E Series items are identified by background color.			
Catalog Number	15	19	20	22
SSG1.5-22 E Bore	S1EA/S1EB			
SSG1.5-23 E Bore	S1EA/S1EB			
SSG1.5-24 E Bore	S1EA/S1EB			
SSG1.5-25 E Bore	S1EA/S1EB			
SSG1.5-26 E Bore	S1EA/S1EB	S1EA/S1EB		
SSG1.5-27 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	
SSG1.5-28 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	
SSG1.5-29 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-30 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-32 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-34 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-35 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-36 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-38 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-40 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-42 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-44 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-45 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-48 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-50 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-55 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-56 E Bore	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-60 E Bore		S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-64 E Bore		S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-70 E Bore		S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-75 E Bore		S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-80 E Bore		S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-90 E Bore		S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG1.5-100 E Bore		S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
Bore A	15	19	20	22
K	50	55	56	61
G	37	39	41	43
R	15.1	17.4	18	19.3
L	14			
Screw M	1-M10			
Recommended fastening torque of screw M (N·m)	7			
ETP allowable fastening torque (N·m)	46	85	110	130
ETP allowable thrust force N	5100	7300	9100	9600
ETP allowable radial load N	500	1000	1000	1200
Bushing weight (kg)	0.16	0.2	0.21	0.25

* Allowable torque is the value when the thrust force is 0, and allowable thrust force is when the torque is 0.

* Allowable torque and allowable thrust force are the values at 20°C.

* Tolerance of the target shaft diameter is h7 (g6, h6).




Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth and portions given secondary operation

* The precision grade of E Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435




Delivered with this marking.

Please see Page 16 for more details.



S1EA



S1EB




Features of E Series

- Can be easily installed with one bolt (shortens work time)
- Concentricity 0.02mm
- Zero backlash between the gear and shaft
- No decrease in shaft strength due to fretting wear (worn or seized shaft)
- No need to machine keyways on the shaft, reducing the number of parts such as keyway materials and set screws
- Does not take up mounting space and easy to position and match the phase
- Finished by the manufacturer in 2 working days (excluding the day ordered)

Operation principle of ETP-E Plus

The pressure medium enclosed in the chamber is pressurized due to the tightening of the pressure screw and moves into the sleeve. The pressure of this pressure medium causes the sleeve to receive pressure from the inside, which causes the shaft side sleeve to contract, the hub side sleeve to expand, allowing the shaft and hub to be fastened via the sleeve.

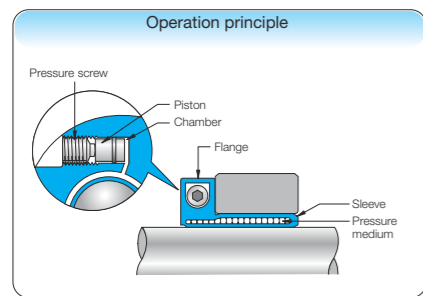





Effects of ETP-E Plus

Easy and accurate positioning

Helps save space

High concentricity

Secure and speedy installation



Catalog Number	No. of teeth	Hub dia.		Pitch dia.		Outside dia.		Face width		Allowable torque (N·m)	
		B	C	D	E	Bending strength	Surface durability				
SSG2-18	18	30	36	40	20	32.7	13.1				
SSG2-19	19	31	38	42		35.5	14.8				
SSG2-20	20	32	40	44		38.3	16.6				
SSG2-21	21	34	42	46		41.1	18.4				
SSG2-22	22	36	44	48		44.0	20.4				
SSG2-23	23	37	46	50		46.9	22.5				
SSG2-24	24	38	48	52		49.8	24.7				
SSG2-25	25	40	50	54		52.7	27.0				
SSG2-26	26	42	52	56		55.7	29.3				
SSG2-27	27	44	54	58		58.6	31.7				
SSG2-28	28	45	56	60	61.6	34.2					
SSG2-29	29	48	58	62	64.6	36.8					
SSG2-30	30	50	60	64	67.6	39.5					
SSG2-32	32	50	64	68	73.7	45.2					
SSG2-34	34	50	68	72	79.8	51.3					
SSG2-35	35	50	70	74	82.8	54.5					
SSG2-36	36	50	72	76	85.9	57.8					
SSG2-38	38	50	76	80	92.1	64.8					
SSG2-40	40	60	80	84	98.3	72.1					
SSG2-42	42	60	84	88	105	79.9					
SSG2-44	44	60	88	92	111	88.1					
SSG2-45	45	60	90	94	114	92.3					
SSG2-48	48	60	96	100	114	97.6					
SSG2-50	50	60	100	104	120	106					
SSG2-55	55	60	110	114	134	130					
SSG2-56	56	60	112	116	137	135					
SSG2-60	60	65	120	124	149	156					
SSG2-64	64	65	128	132	161	179					
SSG2-70	70	70	140	144	179	216					
SSG2-75	75	70	150	154	194	249					
SSG2-80	80	80	160	164	194	265					
SSG2-90	90	80	180	184	222	338					
SSG2-100	100	80	200	204	250	421					

* For the backlash of each product, please refer to the dimension table of the original product.

To order E Series products, please specify: **Catalog Number + E + BORE.**

Bore A	* The product shapes of E Series items are identified by background color.							
	15	19	20	22	24	25	28	30
SSG2-18 E BORE	S1EA/S1EB							
SSG2-19 E BORE	S1EA/S1EB							
SSG2-20 E BORE	S1EA/S1EB							
SSG2-21 E BORE	S1EA/S1EB	S1EA/S1EB						
SSG2-22 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB					
SSG2-23 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB					
SSG2-24 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB				
SSG2-25 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB			
SSG2-26 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB		
SSG2-27 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB		
SSG2-28 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	
SSG2-29 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	
SSG2-30 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-32 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-34 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-35 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-36 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-38 E BORE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-40 E BORE		S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-42 E BORE		S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-44 E BORE		S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-45 E BORE		S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-48 E BORE		S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-50 E BORE			S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-55 E BORE				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-56 E BORE				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-60 E BORE				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-64 E BORE				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-70 E BORE				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-75 E BORE				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-80 E BORE				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-90 E BORE				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2-100 E BORE				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
Bore A	15	19	20	22	24	25	28	30
K	50	55	56	61	63	63	70	71
G	37	39	41	43	44	46	48	50
R	15.1	17.4	18	19.3	20.3	20.8	22.6	23.6
L	14							
Screw M	1-M10							
Recommended fastening torque of screw M (N·m)	7							
ETP allowable fastening torque (N·m)	46	85	110	130	190	230	280	380
ETP allowable thrust force N	5100	7300	9100	9600	13000	15000	16000	21000
ETP allowable radial load N	500	1000	1000	1200	1400	1500	1800	2000
Bushing weight (kg)	0.16	0.2	0.21	0.25	0.26	0.27	0.33	0.35

* Allowable torque is the value when the thrust force is 0, and allowable thrust force is when the torque is 0.

* Allowable torque and allowable thrust force are the values at 20°C.

* Tolerance of the target shaft diameter is h7 (g6, h6).



Specifications	
Precision grade	JIS grade N7 (JIS B1702-1:1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth and portions given secondary operation

* The precision grade of E Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435



Delivered with this marking.


Please see Page 16 for more details.

Features of E Series

- Can be easily installed with one bolt (shortens work time)
- Concentricity 0.02mm
- Zero backlash between the gear and shaft
- No decrease in shaft strength due to fretting wear (worn or seized shaft)
- No need to machine keyways on the shaft, reducing the number of parts such as keyway materials and set screws
- Does not take up mounting space and easy to position and match the phase
- Finished by the manufacturer in 2 working days (excluding the day ordered)

Operation principle of ETP-E Plus

The pressure medium enclosed in the chamber is pressurized due to the tightening of the pressure screw and moves into the sleeve. The pressure of this pressure medium causes the sleeve to receive pressure from the inside, which causes the shaft side sleeve to contract, the hub side sleeve to expand, allowing the shaft and hub to be fastened via the sleeve.

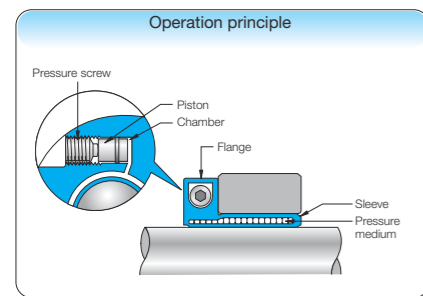





Effects of ETP-E Plus

Easy and accurate positioning

Helps save space

High concentricity


Secure and speedy installation



Catalog Number	No. of teeth	Hub dia.		Pitch dia.	Outside dia.	Face width	Allowable torque (N·m)	
		B	C				Bending strength	Surface durability
SSG2.5-16	16	32	40	45	25	53.3	20.1	
SSG2.5-17	17	35	42.5	47.5		58.6	23.0	
SSG2.5-18	18	38	45	50		63.9	26.1	
SSG2.5-19	19	39	47.5	52.5		69.4	29.4	
SSG2.5-20	20	40	50	55		74.8	32.9	
SSG2.5-21	21	42	52.5	57.5		80.4	36.7	
SSG2.5-22	22	44	55	60		86.0	40.6	
SSG2.5-23	23	46	57.5	62.5		91.6	44.8	
SSG2.5-24	24	48	60	65		97.3	49.2	
SSG2.5-25	25	50	62.5	67.5		103	53.8	
SSG2.5-26	26	54	65	70		109	58.4	
SSG2.5-27	27	56	67.5	72.5		115	63.2	
SSG2.5-28	28	60	70	75		120	68.2	
SSG2.5-29	29	60	72.5	77.5		126	73.3	
SSG2.5-30	30	65	75	80		132	78.7	
SSG2.5-32	32	70	80	85		144	90.1	
SSG2.5-34	34	70	85	90		156	102	
SSG2.5-35	35	70	87.5	92.5		162	109	
SSG2.5-36	36	70	90	95		168	115	
SSG2.5-38	38	70	95	100		180	129	
SSG2.5-40	40	70	100	105		177	133	
SSG2.5-42	42	75	105	110		188	147	
SSG2.5-44	44	75	110	115		200	163	
SSG2.5-45	45	75	112.5	117.5		205	170	
SSG2.5-48	48	75	120	125		222	195	
SSG2.5-50	50	80	125	130	234	213		
SSG2.5-55	55	80	137.5	142.5	262	260		
SSG2.5-56	56	80	140	145	268	270		
SSG2.5-60	60	80	150	155	291	311		
SSG2.5-70	70	80	175	180	324	399		
SSG2.5-75	75	90	187.5	192.5	351	461		
SSG2.5-80	80	90	200	205	378	527		

* For the backlash of each product, please refer to the dimension table of the original product.

E Series

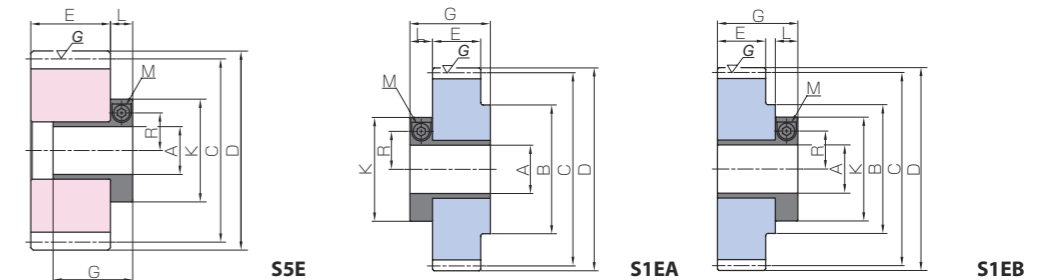

To order E Series products, please specify: **Catalog Number + E + BORE.**

Bore A	* The product shapes of E Series items are identified by background color.										
	Catalog Number	15	19	20	22	24	25	28	30	32	35
SSG2.5-16 E Bore	* S5E										
SSG2.5-17 E Bore	S5E										
SSG2.5-18 E Bore	* S5E										
SSG2.5-19 E Bore	S5E	S5E	S1EA/S1EB								
SSG2.5-20 E Bore	* S5E	* S5E	S1EA/S1EB								
SSG2.5-21 E Bore	S5E	S5E	S1EA/S1EB	S1EA/S1EB							
SSG2.5-22 E Bore	S5E	S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB					
SSG2.5-23 E Bore	S5E	S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB				
SSG2.5-24 E Bore	S5E	S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB			
SSG2.5-25 E Bore		* S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB		
SSG2.5-26 E Bore		S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB		
SSG2.5-27 E Bore		S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	
SSG2.5-28 E Bore		S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-29 E Bore		S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-30 E Bore		* S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-32 E Bore		* S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-34 E Bore		S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-35 E Bore		S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-36 E Bore		* S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-38 E Bore		S5E	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-40 E Bore				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-42 E Bore				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-44 E Bore				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-45 E Bore				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-48 E Bore				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-50 E Bore				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-55 E Bore				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-56 E Bore				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-60 E Bore				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-70 E Bore				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-75 E Bore				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG2.5-80 E Bore				S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
Bore A	15	19	20	22	24	25	28	30	32	35	
K	50	55	56	61	63	63	70	71	78	86	
G	37	39	41	43	44	46	48	50	52	55	
R	15.1	17.4	18	19.3	20.3	20.8	22.6	23.6	24.8	26.4	
L	14										
Screw M	1-M10										
Recommended fastening torque of screw M (N·m)	7										
ETP allowable fastening torque (N·m)	46	85	110	130	190	230	280	380	440	640	
ETP allowable thrust force N	5100	7300	9100	9600	13000	15000	16000	21000	22000	30000	
ETP allowable radial load N	500	1000	1000	1200	1400	1500	1800	2000	2200	2500	
Bushing weight (kg)	0.16	0.2	0.21	0.25	0.26	0.27	0.33	0.35	0.41	0.47	

* Allowable torque is the value when the thrust force is 0, and allowable thrust force is when the torque is 0.

* Allowable torque and allowable thrust force are the values at 20°C.

* Tolerance of the target shaft diameter is h7 (g6, h6).

** is an SSAG product that's given secondary operations.



Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth and portions given secondary operation

* The precision grade of E Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435



Delivered with this marking.


Please see Page 16 for more details.

Features of E Series

- Can be easily installed with one bolt (shortens work time)
- Concentricity 0.02mm
- Zero backlash between the gear and shaft
- No decrease in shaft strength due to fretting wear (worn or seized shaft)
- No need to machine keyways on the shaft, reducing the number of parts such as keyway materials and set screws
- Does not take up mounting space and easy to position and match the phase
- Finished by the manufacturer in 2 working days (excluding the day ordered)


Operation principle of ETP-E Plus

The pressure medium enclosed in the chamber is pressurized due to the tightening of the pressure screw and moves into the sleeve. The pressure of this pressure medium causes the sleeve to receive pressure from the inside, which causes the shaft side sleeve to contract, the hub side sleeve to expand, allowing the shaft and hub to be fastened via the sleeve.

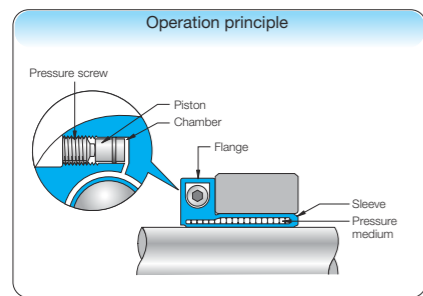


Effects of ETP-E Plus

- Easy and accurate positioning
- Helps save space
- High concentricity
- Secure and speedy installation

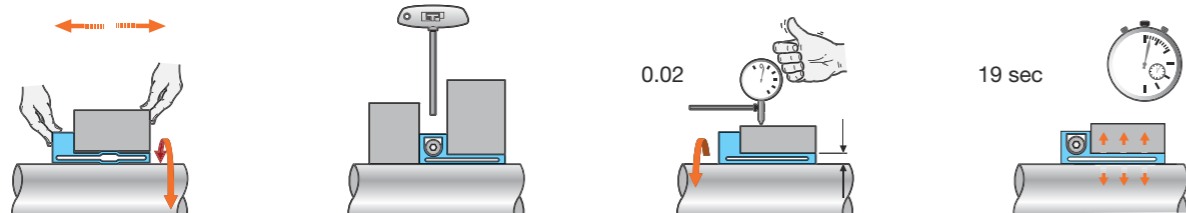

Catalog Number	No. of teeth	Hub dia.		Pitch dia.		Outside dia.		Face width E	Allowable torque (N·m)	
		B	C	D	E	Bending strength	Surface durability			
SSG3-15	15	36	45	51				30	83.1	30.5
SSG3-16	16	38	48	54				30	92.1	35.2
SSG3-17	17	37	51	57				30	101	40.3
SSG3-18	18	40	54	60				30	110	45.8
SSG3-19	19	45	57	63				30	120	51.6
SSG3-20	20	50	60	66				30	129	57.8
SSG3-21	21	52	63	69				30	139	64.4
SSG3-22	22	54	66	72				30	149	71.3
SSG3-23	23	56	69	75				30	158	78.7
SSG3-24	24	58	72	78				30	168	86.4
SSG3-25	25	60	75	81				30	178	94.5
SSG3-26	26	62	78	84				30	188	103
SSG3-27	27	65	81	87				30	198	111
SSG3-28	28	70	84	90				30	208	120
SSG3-29	29	70	87	93				30	218	129
SSG3-30	30	75	90	96				30	228	138
SSG3-32	32	75	96	102				30	229	146
SSG3-34	34	75	102	108				30	248	166
SSG3-35	35	80	105	111				30	258	177
SSG3-36	36	80	108	114				30	268	188
SSG3-38	38	80	114	120				30	287	210
SSG3-40	40	80	120	126				30	306	234
SSG3-42	42	80	126	132				30	326	260
SSG3-44	44	80	132	138				30	345	286
SSG3-45	45	80	135	141				30	355	300
SSG3-48	48	85	144	150				30	384	343
SSG3-50	50	85	150	156				30	404	374
SSG3-55	55	90	165	171				30	421	423
SSG3-56	56	90	168	174				30	430	439
SSG3-60	60	100	180	186				30	467	508
SSG3-70	70	100	210	216				30	560	699
SSG3-75	75	100	225	231				30	607	806
SSG3-80	80	100	240	246				30	654	921

* For the backlash of each product, please refer to the dimension table of the original product.

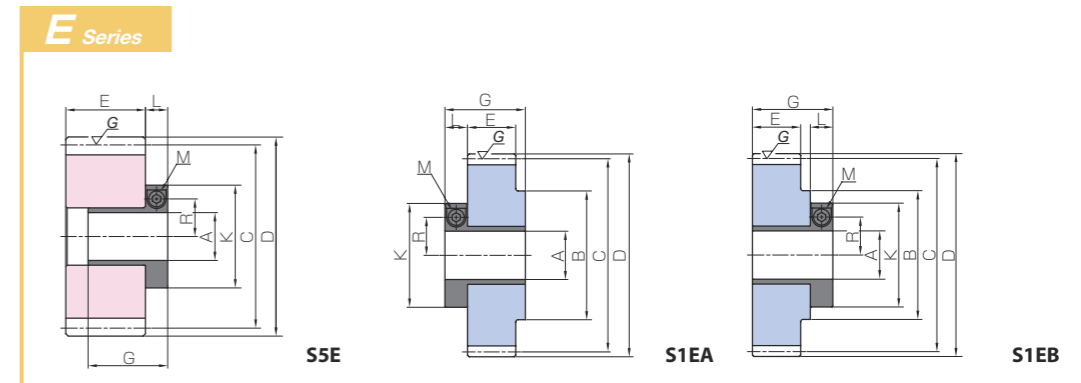

To order E Series products, please specify: **Catalog Number + E + BORE.**

Bore A	* The product shapes of E Series items are identified by background color.													
	Catalog Number	15	19	20	22	24	25	28	30	32	35	38	40	42
SSG3-15 E BORE	* SSE													
SSG3-16 E BORE	* SSE													
SSG3-17 E BORE	SSE	SSE	SSE											
SSG3-18 E BORE	* SSE	* SSE	* SSE	* SSE										
SSG3-19 E BORE	SSE	SSE	SSE	SSE	SSE									
SSG3-20 E BORE		* SSE	* SSE	* SSE	* SSE	S1EA/S1EB								
SSG3-21 E BORE		SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB							
SSG3-22 E BORE		SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB						
SSG3-23 E BORE		SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB					
SSG3-24 E BORE		SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB					
SSG3-25 E BORE		* SSE	* SSE	* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB				
SSG3-26 E BORE		SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB			
SSG3-27 E BORE		SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB		
SSG3-28 E BORE		SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	
SSG3-29 E BORE		SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-30 E BORE					* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-32 E BORE					* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-34 E BORE					SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-35 E BORE					SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-36 E BORE					* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-38 E BORE					SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-40 E BORE					* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-42 E BORE					SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-44 E BORE					SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-45 E BORE					SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-48 E BORE					SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-50 E BORE							S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-55 E BORE							S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-56 E BORE							S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-60 E BORE							S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-70 E BORE							S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-75 E BORE							S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG3-80 E BORE							S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
Bore A	15	19	20	22	24	25	28	30	32	35	38	40	42	
K	50	55	56	61	63	63	70	71	78	86	92.5	94	96.5	
G	37	39	41	43	44	46	48	50	52	55	67	70	70	
R	15.1	17.4	18	19.3	20.3	20.8	22.6	23.6	24.8	26.4	31	32	33.2	
L							14						20	
Screw M							1-M10						1-M16	
Recommended fastening torque of screw M (N·m)							7						24	
ETP allowable fastening torque (N·m)	46	85	110	130	190	230	280	380	440	640	890	1100	1100	
ETP allowable thrust force N	5100	7300	9100	9600	13000	15000	16000	21000	22000	30000	38000	45000	43000	
ETP allowable radial load N	500	1000	1000	1200	1400	1500	1800	2000	2200	2500	2800	3000	3200	
Bushing weight (kg)	0.16	0.2	0.21	0.25	0.26	0.27	0.33	0.35	0.41	0.47	0.83	0.88	0.95	

* Allowable torque is the value when the thrust force is 0, and allowable thrust force is when the torque is 0.
* Allowable torque and allowable thrust force are the values at 20°C.
* Tolerance of the target shaft diameter is h7 (g6, h6).
*** is an SSAG product that's given secondary operations.



Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth and portions given secondary operation

* The precision grade of E Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435



Delivered with this marking.


Please see Page 16 for more details.

Features of E Series

- Can be easily installed with one bolt (shortens work time)
- Concentricity 0.02mm
- Zero backlash between the gear and shaft
- No decrease in shaft strength due to fretting wear (worn or seized shaft)
- No need to machine keyways on the shaft, reducing the number of parts such as keyway materials and set screws
- Does not take up mounting space and easy to position and match the phase
- Finished by the manufacturer in 2 working days (excluding the day ordered)


Operation principle of ETP-E Plus

The pressure medium enclosed in the chamber is pressurized due to the tightening of the pressure screw and moves into the sleeve. The pressure of this pressure medium causes the sleeve to receive pressure from the inside, which causes the shaft side sleeve to contract, the hub side sleeve to expand, allowing the shaft and hub to be fastened via the sleeve.

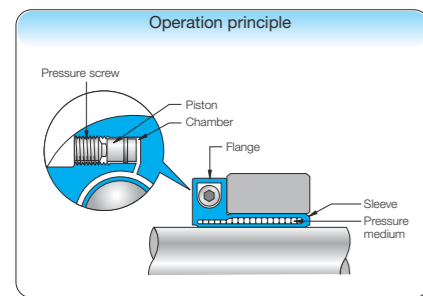


Effects of ETP-E Plus

- Easy and accurate positioning
- Helps save space
- High concentricity
- Secure and speedy installation

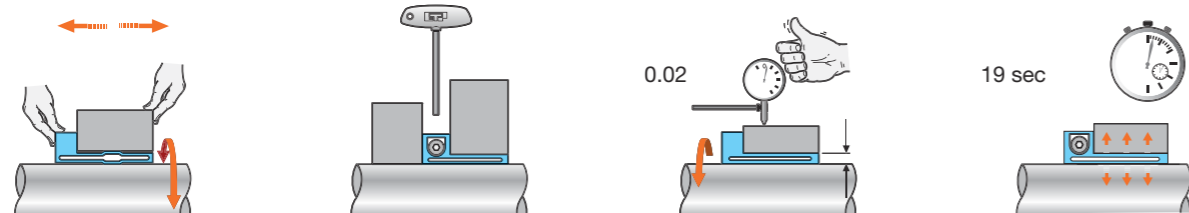

Catalog Number	No. of teeth	Hub dia.		Pitch dia.		Outside dia.		Face width E	Allowable torque (N·m)	
		B	C	D	E	Bending strength	Surface durability			
SSG4-15	15	45	60	68				40	197	74.1
SSG4-16	16	50	64	72				40	218	85.6
SSG4-18	18	60	72	80				40	262	111
SSG4-20	20	65	80	88				40	307	141
SSG4-22	22	70	88	96				40	352	174
SSG4-24	24	75	96	104				40	368	194
SSG4-25	25	80	100	108				40	389	213
SSG4-28	28	85	112	120				40	455	270
SSG4-30	30	90	120	128				40	499	313
SSG4-32	32	90	128	136				40	544	358
SSG4-35	35	90	140	148				40	612	432
SSG4-36	36	90	144	152				40	634	458
SSG4-40	40	90	160	168				40	674	529
SSG4-42	42	90	168	176				40	717	586
SSG4-44	44	90	176	184				40	760	646
SSG4-45	45	90	180	188				40	781	677
SSG4-48	48	100	192	200				40	846	774
SSG4-50	50	100	200	208				40	889	842
SSG4-55	55	100	220	228				40	998	1030
SSG4-56	56	110	224	232				40	1020	1060
SSG4-60	60	110	240	248				40	1110	1230
SSG5-20	20	82	100	110				50	553	259
SSG5-25	25	105	125	135				50	760	426
SSG5-30	30	120	150	160				50	975	623
SSG6-20	20	100	120	132				60	955	457
SSG6-25	25	125	150	162				60	1310	747
SSG6-30	30	150	180	192				60	1560	1020

* For the backlash of each product, please refer to the dimension table of the original product.

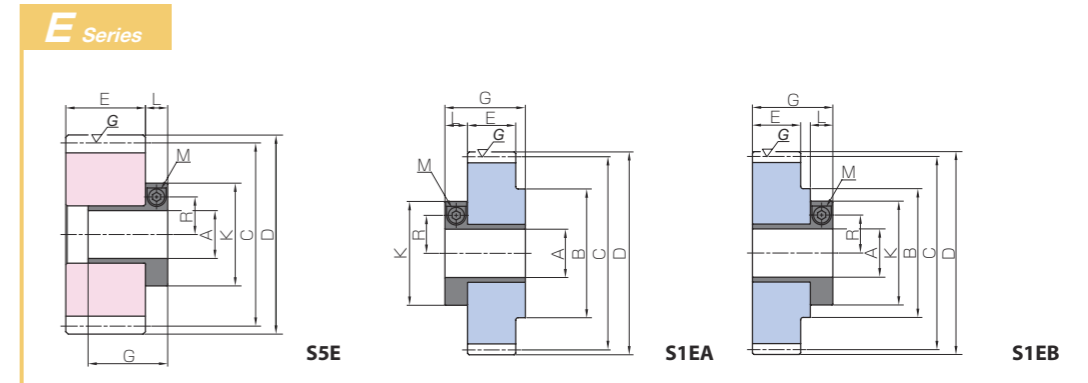

To order E Series products, please specify: **Catalog Number + E + BORE.**

Bore A	* The product shapes of E Series items are identified by background color.																			
	Catalog Number	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55	60	70	80	
SSG4-15 E BORE	* SSE	* SSE																		
SSG4-16 E BORE	* SSE	* SSE	* SSE	* SSE																
SSG4-18 E BORE	* SSE	* SSE	* SSE	* SSE	* SSE	* SSE														
SSG4-20 E BORE	* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	* SSE													
SSG4-22 E BORE	SSE	SSE	SSE	SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB										
SSG4-24 E BORE	SSE	SSE	SSE	SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB								
SSG4-25 E BORE	* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB					
SSG4-28 E BORE	SSE	SSE	SSE	SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-30 E BORE	* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-32 E BORE		* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-35 E BORE		SSE	SSE	SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-36 E BORE		* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-40 E BORE		* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-42 E BORE		SSE	SSE	SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-44 E BORE				SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-45 E BORE				SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-48 E BORE				SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-50 E BORE					* SSE	* SSE	* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-55 E BORE					SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-56 E BORE					SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG4-60 E BORE					SSE	SSE	SSE	SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG5-20 E BORE						* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	* SSE								
SSG5-25 E BORE						* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG5-30 E BORE						* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG6-20 E BORE										* SSE	* SSE	* SSE	* SSE	* SSE	* SSE					
SSG6-25 E BORE										* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
SSG6-30 E BORE													* SSE	* SSE	* SSE	* SSE	* SSE	S1EA/S1EB	S1EA/S1EB	S1EA/S1EB
Bore A	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55	60	70	80		
K	56	61	63	63	70	71	78	86	92.5	94	96.5	101	104	106	116	123.5	150	160		
G	41	43	44	46	48	50	52	55	67	70	70	72	73	74	79	83	101	110		
R	18	19.3	20.3	20.8	22.6	23.6	24.8	26.4	31	32	33.2	34.8	36.8	37.5	40.5	43.3	50.8	56.3		
L				14								20								
Screw M				1-M10								1-M16								
Recommended fastening torque of screw M (N·m)				7								24								
ETP allowable fastening torque (N·m)	110	130	190	230	280	380	440	640	890	1100	1100	1400	1700	1900	2400	3300	5600	8700		
ETP allowable thrust force N	9100	9600	13000	15000	16000	21000	22000	30000	38000	45000	43000	51000	57000	63000	71000	90000	130000	180000		
ETP allowable radial load N	1000	1200	1400	1500	1800	2000	2200	2500	2800	3000	3200	3500	4000	4500	5000	5300	6400	7500		
Bushing weight (kg)	0.21	0.25	0.26	0.27	0.33	0.35	0.41	0.47	0.83	0.88	0.95	1.03	1.09	1.18	1.46	1.79	2.93	3.58		

* Allowable torque is the value when the thrust force is 0, and allowable thrust force is when the torque is 0.

* Allowable torque and allowable thrust force are the values at 20°C.



* Tolerance of the target shaft diameter is h7 (g6, h6).

** is an SSAG product that's given secondary operations.



Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth and portions given secondary operation

* The R Series is given secondary operations and has accuracy grades "equivalent" to the original products.

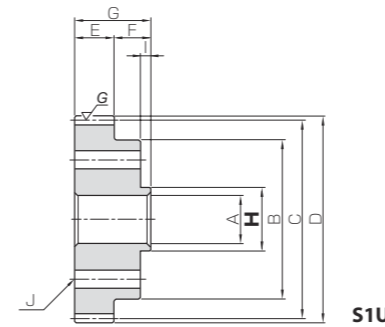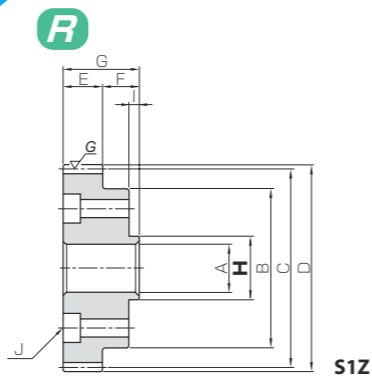

Recommended mating rack

SRGF/SRGFD
Hardened Ground Racks

Please see Page 230 for more details.

Catalog Number	Module	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Mounting hub dia.	Mounting hub width
				A	B							
SSG1.5-50R24	m1.5	50	S1Z	18	60	75	78	15	14	29	24	4
SSG2-40R24	m2	40	S1Z	20	60	80	84	20	16	36	24	4
SSG2.5-27R24	m2.5	27	S1U	20	56	67.5	72.5	25	18	43	24	4
SSG2.5-28R24		28	60		70	75						
SSG2.5-29R24		29	60		72.5	77.5						
SSG2.5-30R24		30	65		75	80						
SSG2.5-42R32		42	75		105	110						
SSG3-23R24	m3	23	S1U	20	56	69	75	30	20	50	24	4
SSG3-24R24		24	58		72	78						
SSG3-25R24		25	60		75	81						
SSG3-26R24		26	62		78	84						
SSG3-30R32		30	75		90	96						
SSG3-32R32		32	75		96	102						
SSG3-34R32		34	75		102	108						
SSG3-35R32		35	80		105	111						
SSG3-36R32	36	80	108	114								
SSG4-24R32	m4	24	S1Z	20	75	96	104	40	25	65	32	4
SSG4-25R32		25		80	100	108						
SSG5-20R32	m5	20	S1Z	25	82	100	110	50	25	75	32	4
SSG5-30R47		30		120	150	160	47				6	
SSG6-25R47	m6	25	S1Z	30	125	150	162	60	28	88	47	6
SSG6-30R60		30		150	180	192	60				6	

Mounting hole specification							Allowable torque (N·m)				Allowable torque (kgf·m)				Backlash (mm)	Weight (kg)	Catalog Number
J							Bending strength		Surface durability		Bending strength		Surface durability				
Drilled hole dia.	Counterbore dia.	Counterbore depth	Quantity	P.C.D.	Included screws												
6.6	11	9	6	45	M6×20	54.7	47.2	5.58	4.82	0.08~0.16	0.63	SSG1.5-50R24					
6.6	11	14	6	45	M6×25	98.3	72.1	10.0	7.35	0.10~0.20	0.89	SSG2-40R24					
6.6	11	19	6	45	M6×45	115	63.2	11.7	6.44	0.10~0.20	0.82	SSG2.5-27R24					
					M6×25	120	68.2	12.3	6.95		0.86	SSG2.5-28R24					
					M6×25	126	73.3	12.9	7.48		0.91	SSG2.5-29R24					
9	14	17	6	60	M8×30	132	78.7	13.5	8.03	0.10~0.20	1.02	SSG2.5-30R24					
					M8×30	188	147	19.2	15.0		1.86	SSG2.5-42R32					
6.6	11	24	6	45	M6×50	158	78.7	16.1	8.02	0.10~0.20	1.01	SSG3-23R24					
					M6×30	168	86.4	17.1	8.81		1.04	SSG3-24R24					
					M6×30	178	94.5	18.1	9.64		1.14	SSG3-25R24					
9	14	22	6	60	M8×35	188	103	19.2	10.5	0.10~0.20	1.25	SSG3-26R24					
						228	138	23.3	14.1		1.65	SSG3-30R32					
						229	146	23.4	14.9		1.86	SSG3-32R32					
						248	166	25.3	17.0		2.08	SSG3-34R32					
						258	177	26.3	18.0		2.27	SSG3-35R32					
9	14	32	6	60	M8×40	268	188	27.3	19.1	0.10~0.20	2.39	SSG3-36R32					
						368	194	37.5	19.8		2.55	SSG4-24R32					
9	14	42	6	60	M8×40	389	213	39.7	21.7	0.10~0.20	2.84	SSG4-25R32					
						553	259	56.4	26.5		3.30	SSG5-20R32					
						975	623	99.4	63.5		7.52	SSG5-30R47					
9	14	52	14	100	M8×40	1310	747	134	76.2	0.10~0.22	8.95	SSG6-25R47					
						1560	1020	160	104		13.1	SSG6-30R60					

Features of R Series

- Products matching the mounting holes of the corresponding speed reducer series.
- They come with set bolts and can be used immediately.
- As flange mounting types, they have high rigidity and the gear does not bend.
- Ideal for the mating pinion of racks.



Rack and pinion for corresponding flange output speed reducers

Mounting hub dia. H (Common to all speed reducers)	Nidec Shimo VRG Series	Sumitomo Heavy Industries IB Series	Harmonic Drive Systems HPG Series	R Series Catalog Numbers	KHK recommended mating rack
24	C90	P120	20	R24	KRGF Series SRGF Series SRF Series See Page 211
32	D120	P130	32	R32	
47	E170	-	50	R47	
60	-	-	65	R60	


(R Series Catalog Numbers)

R series catalog numbers are composed as follows:

(Base SSG ground spur gear catalog number) + R + (mounting hub diameter)


Mounting Method and Precautions

- ① Clean the gear mounting surface and flange surface of the speed reducer and make sure that there are no scratches or dents.
- ② Set the mounting hub of the gear in the hole at the rotational center of the flange, and temporarily tighten the hexagon socket head cap screws.
- ③ Tighten the hexagon socket head cap screws on the diagonals while checking the runout of the gear reference face (Fig. 1). (Fig.2)

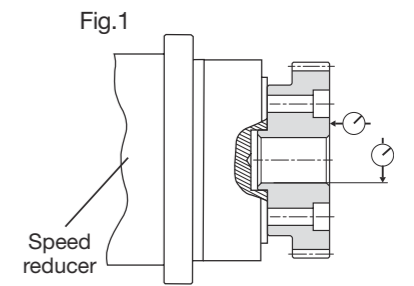

Removal Method and Precautions

- ① Turn off the power source (supply) and check that no load is applied to the gear.
- ② Loosen the hexagon socket head cap screws and make sure that the gear moves freely.
- ③ Remove the hexagon socket head cap screws while making sure that there is no danger of falling, etc.




We recommend ideal pinions for speed reducers

- ① CP type and helical type stock gears can be given secondary operations according to the customer's specifications at "KHK Quick-Mod Gears". See Page 24 for more details
- ② High-precision gears for reduction gears are also available with a short delivery time. Estimates are available upon the submission of production drawings.
- ③ Feel free to contact us about selecting racks and pinions.




Speed reducer model number GH7 pinion

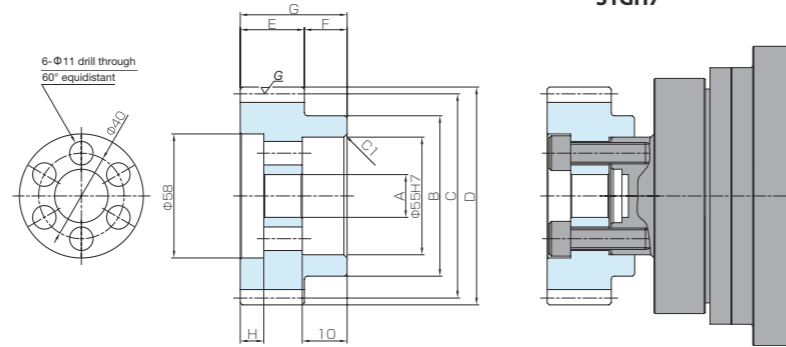


S1GH7

Speed reducer model number GH17 pinion

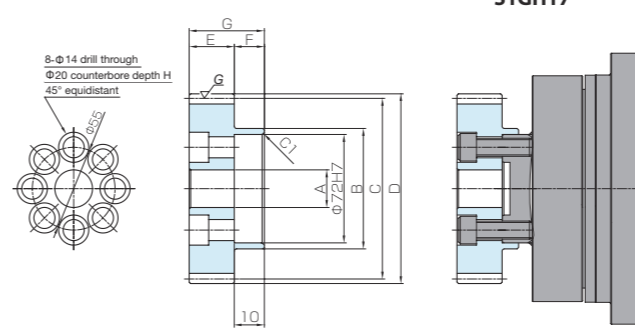

S1GH17

Speed reducer model number GH24 pinion

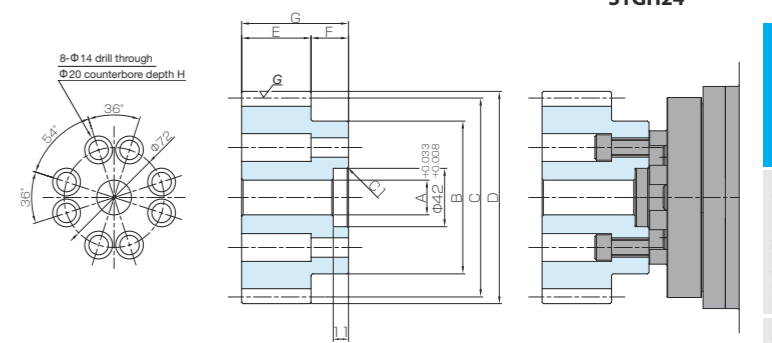

S1GH24

SSG Series

Common Specifications	
Precision grade	JIS N7 grade (JIS B 1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth and portions given secondary operation

SSCPG Series

Common Specifications	
Precision grade	JIS N7 grade (JIS B 1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth and portions given secondary operation

ZSTP Series

Common Specifications	
Precision grade	JIS B 1702-1:1998 N6 grade
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Pressure angle	20°
Helix angle/direction	19° 31' 41" left helix
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	HRC50 to 60
Surface treatment	Black oxide coated except for teeth and portions given secondary operation

Speed reducer model number	Catalog Number	Module/pitch	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length
					AH7	B	C	D	E	F	G
GH7	SSG3-30RGH7	m3	30	S1GH7	25	75	90	96	30	20	50
	SSCPG10-30RGH7	CP10 (m3.1831)	30	S1GH7	20	75	95.49	101.86	30	20	50
	ZSTP3-30LRGH7	m3(CP10)	30	S1GH7	25	85	95.49	104	30	20	50


Speed reducer model number	Catalog Number	Module/pitch	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length
					AH7	B	C	D	E	F	G
GH17	SSG3-40RGH17	m3	40	S1GH17	25	80	120	126	30	20	50
	SSCPG10-40RGH17	CP10 (m3.1831)	40	S1GH17	25	80	127.32	133.69	30	20	50
	ZSTP3-30LRGH17	m3(CP10)	30	S1GH17	25	85	95.49	104	30	20	50

Speed reducer model number	Catalog Number	Module/pitch	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length
					AH7	B	C	D	E	F	G
GH24	SSG4-30RGH24	m4	30	S1GH24	20	90	120	128	40	25	65
	SSCPG15-30RGH24	CP15 (m4.7746)	30	S1GH24	25	110	143.24	152.79	50	27	77
	ZSTP4-30LRGH24	m4(CP13.333)	30	S1GH24	25	110	127.32	138	40	25	65

Speed reducer model number	Catalog Number	Module/pitch	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length
					AH7	B	C	D	E	F	G
GH40	SSG5-30RGH40	m5	30	S1GH40	25	120	150	160	50	25	75
	SSCPG15-30RGH40	CP15 (m4.7746)	30	S1GH40	25	110	143.24	152.79	50	27	77
	ZSTP5-24LRGH40	m5(CP16.667)	24	S1GH40	25	110	127.32	142	50	25	75


Speed reducer model number	Catalog Number	Module/pitch	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length
					AH7	B	C	D	E	F	G
GH100	SSG6-30RGH100	m6	30	S1GH100	30	150	180	192	60	28	88
	SSCPG20-30RGH100	CP20 (m6.3662)	30	S1GH100	30	150	190.99	203.72	60	30	90

Speed reducer model number GH40 pinion

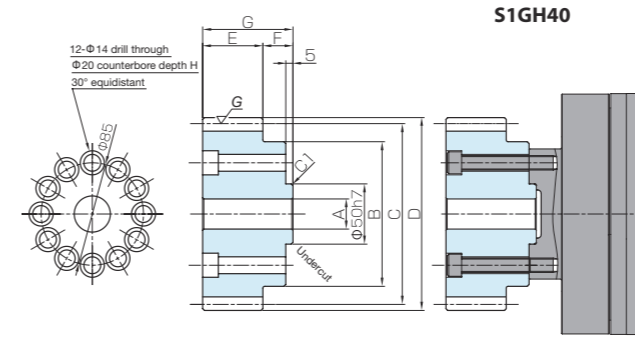

S1GH40

Speed reducer model number GH100 pinion

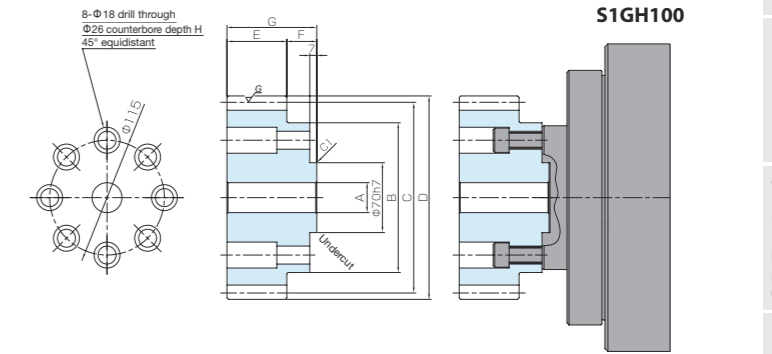

S1GH100

Counterbore depth H	Included screws	Allowable torque (N·m)		Weight (kg)	Mating rack	Catalog Number	Speed reducer model number
		Bending strength	Surface durability				
11	M10×45	251	209	1.422	SRGF3-1000	SSG3-30RGH7	GH7
11	M10×45	283	240	1.635	SRGCPF10-1000	SSCPG10-30RGH7	
11	M10×45	551	676	1.808	ZST3-1000R	ZSTP3-30LRGH7	

Counterbore depth H	Included screws	Allowable torque (N·m)		Weight (kg)	Mating rack	Catalog Number	Speed reducer model number
		Bending strength	Surface durability				
13	M12×45	358	407	2.281	SRGF3-1000	SSG3-40RGH17	GH17
13	M12×45	403	466	2.616	SRGCPF10-1000	SSCPG10-40RGH17	
13	M12×45	551	676	1.406	ZST3-1000R	ZSTP3-30LRGH17	

Counterbore depth H	Included screws	Allowable torque (N·m)		Weight (kg)	Mating rack	Catalog Number	Speed reducer model number
		Bending strength	Surface durability				
29	M12×55	595	501	3.627	SRGF4-1000	SSG4-30RGH24	GH24
41	M12×55	978	821	6.808	SRGCPF15-1000	SSCPG15-30RGH24	
29	M12×55	986	972	4.615	ZST4-1000R	ZSTP4-30LRGH24	


Counterbore depth H	Included screws	Allowable torque (N·m)		Weight (kg)	Mating rack	Catalog Number	Speed reducer model number
		Bending strength	Surface durability				
13	M12×75	1070	916	7.230	SRGF5-1000	SSG5-30RGH40	GH40
15	M12×75	978	821	6.431	SRGCPF15-1000	SSCPG15-30RGH40	
13	M12×75	1980	1850	5.022	ZST5-1000R	ZSTP5-24LRGH40	

Counterbore depth H	Included screws	Allowable torque (N·m)		Weight (kg)	Mating rack	Catalog Number	Speed reducer model number
		Bending strength	Surface durability				
33	M16×75	1850	1600	12.754	SRGF6-1000	SSG6-30RGH100	GH100
35	M16×75	2090	1850	14.462	SRGCPF20-1000	SSCPG20-30RGH100	




Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.



S5



S5K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Module	No. of teeth	Shape	Bore AH7	Pitch dia. C	Outside dia. D	Face width E	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)					
								Bending strength	Surface durability	Bending strength	Surface durability							
SSAG1-25	m1	25	S5	8	25	27	10	7.92	3.82	0.81	0.39	0.08~0.16	0.035					
SSAG1-30		30			32	10.2		5.57	1.04	0.57								
SSAG1-32		32			34	9.22		5.30	0.94	0.54								
SSAG1-36		36			38	10.7		6.77	1.10	0.69								
SSAG1-40		40			42	12.3		8.42	1.25	0.86								
SSAG1-50		50			52	16.2		13.4	1.65	1.36								
SSAG1.5-16	m1.5	16	S5	10	24	27	15	13.8	5.02	1.41	0.51	0.08~0.16	0.044					
SSAG1.5-18		18			30	16.6		6.51	1.69	0.66								
SSAG1.5-20		20			33	19.4		8.20	1.98	0.84								
SSAG1.5-25		25			37.5	22.2		11.1	2.27	1.13								
SSAG1.5-30		30			45	28.5		16.3	2.91	1.66								
SSAG1.5-32		32			48	31.1		18.6	3.17	1.90								
SSAG1.5-36		36			54	36.2		23.8	3.70	2.43								
SSAG1.5-40		40			60	41.5		29.6	4.23	3.02								
SSAG1.5-50		50			75	54.7		47.2	5.58	4.82								
SSAG2-15		m2			15	S5		10	30	34	20			29.6	10.5	3.01	1.07	0.10~0.20
SSAG2-16	16		36	27.3	10.1		2.78		1.03									
SSAG2-18	18		40	32.7	13.1		3.34		1.34									
SSAG2-20	20		44	38.3	16.6		3.91		1.69									
SSAG2-25	25		50	52.7	27.0		5.38		2.75									
SSAG2-30	30		60	67.6	39.5		6.89		4.03									
SSAG2-32	32		64	73.7	45.2		7.51	4.61										
SSAG2-36	36		72	85.9	57.8		8.76	5.90										
SSAG2-40	40		80	98.3	72.1		10.0	7.35										
SSAG2-50	50		100	120	106		12.2	10.8										
SSAG2.5-15	m2.5		15	S5	15		37.5	42.5	25	48.1		17.4	4.91	1.77	0.10~0.20	0.18		
SSAG2.5-16			16				45	53.3		20.1		5.44	2.05					
SSAG2.5-18			18				50	63.9		26.1		6.52	2.66					
SSAG2.5-20			20				55	74.8		32.9		7.63	3.36					
SSAG2.5-25		25	62.5			103	53.8	10.5		5.48								
SSAG2.5-30		30	75		132	78.7	13.5	8.03										
SSAG2.5-32		32	80		144	90.1	14.7	9.19										
SSAG2.5-36		36	90		168	115	17.1	11.8										
SSAG2.5-40		40	100		177	133	18.1	13.6										
SSAG2.5-50		50	125		234	213	23.8	21.7										


Bore H7	* The product shapes of J Series items are identified by background color.																					
	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50			
Keyway J _{s9}	3x1.4		4x1.8		5x2.3				6x2.8				8x3.3				10x3.3		12x3.3		14x3.8	
Screw size	3x1.4		4x1.8		5x2.3				6x2.8				8x3.3				10x3.3		12x3.3		14x3.8	
Catalog Number	-																					
SSAG1-25J BORE	S5K	S5K																				
SSAG1-30J BORE	S5K	S5K	S5K																			
SSAG1-32J BORE	S5K	S5K	S5K	S5K																		
SSAG1-36J BORE		S5K	S5K	S5K	S5K	S5K																
SSAG1-40J BORE		S5K	S5K	S5K	S5K	S5K	S5K	S5K														
SSAG1-50J BORE		S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K												
SSAG1.5-16J BORE		S5K																				
SSAG1.5-18J BORE		S5K																				
SSAG1.5-20J BORE		S5K	S5K																			
SSAG1.5-25J BORE		S5K	S5K	S5K	S5K	S5K																
SSAG1.5-30J BORE				S5K	S5K	S5K	S5K	S5K	S5K													
SSAG1.5-32J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K												
SSAG1.5-36J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K											
SSAG1.5-40J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K										
SSAG1.5-50J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K							
SSAG2-15J BORE		S5K	S5K																			
SSAG2-16J BORE		S5K	S5K																			
SSAG2-18J BORE		S5K	S5K	S5K	S5K																	
SSAG2-20J BORE				S5K	S5K	S5K																
SSAG2-25J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K												
SSAG2-30J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K											
SSAG2-32J BORE							S5K	S5K	S5K	S5K	S5K	S5K										
SSAG2-36J BORE							S5K	S5K	S5K	S5K	S5K	S5K	S5K									
SSAG2-40J BORE							S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K								
SSAG2-50J BORE							S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K			
SSAG2.5-15J BORE				S5K																		
SSAG2.5-16J BORE				S5K	S5K																	
SSAG2.5-18J BORE				S5K	S5K	S5K	S5K	S5K														
SSAG2.5-20J BORE				S5K	S5K	S5K	S5K	S5K	S5K													
SSAG2.5-25J BORE										S5K	S5K	S5K	S5K									
SSAG2.5-30J BORE										S5K	S5K	S5K	S5K	S5K	S5K							
SSAG2.5-32J BORE										S5K	S5K	S5K	S5K	S5K	S5K	S5K						
SSAG2.5-36J BORE										S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K					
SSAG2.5-40J BORE										S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K				
SSAG2.5-50J BORE										S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K			






Specifications	
Precision grade	JIS grade N7 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.



S5



S5K



To order J Series products, please specify: **Catalog No. + J + BORE.**


Catalog Number	Module	No. of teeth	Shape	Bore				Allowable torque (N·m)				Backlash (mm)	Weight (kg)
				A _{H7}	C	D	E	Bending strength	Surface durability	Bending strength	Surface durability		
SSAG3-15	m3	15	S5	15	45	51	30	83.1	30.5	8.48	3.11	0.10~0.20	0.33
SSAG3-16		48			54	92.1		35.2	9.39	3.59			
SSAG3-18		54			60	110		45.8	11.3	4.67			
SSAG3-20		60			66	129		57.8	13.2	5.90			
SSAG3-25		75			81	178		94.5	18.1	9.64			
SSAG3-30		30		90	96	228		138	23.3	14.1			
SSAG3-32		32		96	102	229		146	23.4	14.9			
SSAG3-36		36		108	114	268		188	27.3	19.1			
SSAG3-40		40		120	126	306		234	31.2	23.9			
SSAG3-50		50		150	156	404		374	41.2	38.1			

Bore H7	* The product shapes of J Series items are identified by background color.																
	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50		
Keyway J _{s9}	5×2.3			6×2.8				8×3.3				10×3.3		12×3.3		14×3.8	
Screw size	5×2.3			6×2.8				8×3.3				10×3.3		12×3.3		14×3.8	
Catalog Number	-																
SSAG3-15J BORE	S5K	S5K	S5K	S5K													
SSAG3-16J BORE	S5K	S5K	S5K	S5K	S5K	S5K											
SSAG3-18J BORE	S5K	S5K	S5K	S5K	S5K	S5K	S5K										
SSAG3-20J BORE	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K									
SSAG3-25J BORE						S5K	S5K	S5K	S5K	S5K	S5K						
SSAG3-30J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K				
SSAG3-32J BORE								S5K	S5K	S5K	S5K	S5K	S5K	S5K			
SSAG3-36J BORE									S5K	S5K	S5K	S5K	S5K	S5K	S5K		
SSAG3-40J BORE										S5K	S5K	S5K	S5K	S5K	S5K		
SSAG3-50J BORE											S5K	S5K	S5K	S5K	S5K		

Catalog Number	Module	No. of teeth	Shape	Bore				Allowable torque (N·m)				Backlash (mm)	Weight (kg)
				A _{H7}	C	D	E	Bending strength	Surface durability	Bending strength	Surface durability		
SSAG4-15	m4	15	S5	20	60	68	40	197	74.1	20.1	7.55	0.10~0.20	0.79
SSAG4-16		64			72	218		85.6	22.3	8.73			
SSAG4-18		72			80	262		111	26.7	11.4			
SSAG4-20		80			88	307		141	31.3	14.3			
SSAG4-25		100			108	389		213	39.7	21.7			
SSAG4-30		30		120	128	499		313	50.9	31.9			
SSAG4-32		32		128	136	544		358	55.5	36.5			
SSAG4-36		36		144	152	634		458	64.7	46.7			
SSAG4-40		40		160	168	674		529	68.7	54.0			
SSAG4-50		50		200	208	889		842	90.7	85.9			
SSAG5-20	m5	20	S5	25	100	110	50	553	259	56.4	26.5	0.10~0.22	2.89
SSAG5-25		125			135	760		426	77.5	43.4			
SSAG5-30		150			160	975		623	99.4	63.5			
SSAG6-20	m6	20	S5	25	120	132	60	955	457	97.4	46.6	0.10~0.22	5.10
SSAG6-25		150			162	1310		747	134	76.2			
SSAG6-30		180			192	1560		1020	160	104			

To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore H7	* The product shapes of J Series items are identified by background color.																						
	20	22	25	28	30	32	35	40	45	50	55	60	65	70	75	80							
Keyway J _{s9}	6×2.8			8×3.3				10×3.3				12×3.3		14×3.8		16×4.3		18×4.4		20×4.9		22×5.4	
Screw size	6×2.8			8×3.3				10×3.3				12×3.3		14×3.8		16×4.3		18×4.4		20×4.9		22×5.4	
Catalog Number	-																						
SSAG4-15J BORE	S5K	S5K	S5K																				
SSAG4-16J BORE	S5K	S5K	S5K																				
SSAG4-18J BORE	S5K	S5K	S5K	S5K	S5K																		
SSAG4-20J BORE	S5K	S5K	S5K	S5K	S5K	S5K	S5K																
SSAG4-25J BORE	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K														
SSAG4-30J BORE	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K												
SSAG4-32J BORE			S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K												
SSAG4-36J BORE			S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K										
SSAG4-40J BORE			S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K								
SSAG4-50J BORE			S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K								
SSAG5-20J BORE			S5K	S5K	S5K	S5K	S5K	S5K															
SSAG5-25J BORE			S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K													
SSAG5-30J BORE			S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K												
SSAG6-20J BORE			S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K													
SSAG6-25J BORE			S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K										
SSAG6-30J BORE			S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K								



S1




Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refining only
Tooth hardness	225 to 352HB
Surface treatment	Black oxide coating
Shape	S1

* The precision grade of J Series products is equivalent to the value shown in the table.

H To order Hardened Plus, please specify **Catalog No. + H**. Example: **KS1.5-20H**

Catalog Number	Module	No. of teeth	Bore dia. A _{H7}	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Allowable torque						Backlash (mm)	Weight (kg)	
										Bending strength		Surface durability		Surface durability H				
										N·m	kgf·m	N·m	kgf·m	N·m	kgf·m			
KS1.5-20	m1.5	20	8	24	30	33					37.2	3.79	7.38	0.75	14.8	1.51	0.10~0.22	0.12
KS1.5-25		25	30	37.5	40.5	15	14	29	50.2	5.12	12.6	1.29	25.0	2.55				
KS1.5-30		30	10	38	45	48				63.4	6.47	19.7	2.01	38.5	3.93			
KS2-20	m2	20	12	32	40	44					88.1	8.98	18.1	1.84	35.6	3.63	0.12~0.26	0.27
KS2-25		25	12	40	50	54	20	16	36	119	12.1	30.9	3.15	60.1	6.13			
KS2-30		30	12	50	60	64				150	15.3	48.3	4.92	92.7	9.45			
KS2.5-20	m2.5	20	15	40	50	55					172	17.5	36.2	3.69	70.3	7.17	0.14~0.28	0.82
KS2.5-25		25	15	50	62.5	67.5	25	18	43	232	23.7	62.0	6.32	119	12.1			
KS2.5-30		30	15	65	75	80				294	29.9	96.7	9.86	183	18.7			
KS3-20	m3	20	15	50	60	66					297	30.3	63.8	6.51	123	12.5	0.14~0.32	1.36
KS3-25		25	15	60	75	81	30	20	50	401	40.9	109	11.2	207	21.1			
KS3-30		30	15	75	90	96				507	51.7	171	17.4	320	32.6			
KS4-20	m4	20	20	65	80	88					705	71.9	156	16.0	295	30.1	0.18~0.38	4.64
KS4-25		25	20	80	100	108	40	25	65	951	97.0	268	27.4	500	51.0			
KS4-30		30	20	90	120	128				1203	123	419	42.7	772	78.7			
KS5-20	m5	20	22	82	100	110					1377	140	314	32.0	584	59.6	0.20~0.44	6.23
KS5-25		25	25	105	125	135	50	25	75	1858	189	538	54.9	989	101			
KS5-30		30	25	120	150	160				2349	240	841	85.8	1530	156			

J Series

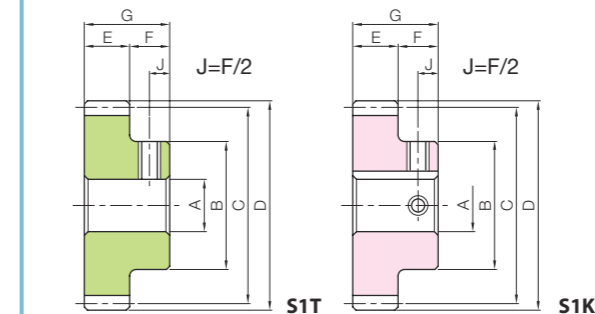

To order J Series products, please specify: **Catalog No. + J + BORE**. Example: **KS1.5-20J8**

Bore H7	* The product shapes of J Series items are identified by background color.																							
	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	55	60	65	70	75
Keyway J _{S9}	-		4x1.8		5x2.3				6x2.8				8x3.3				10x3.3		12x3.3	14x3.8	16x4.3	18x4.4	20x4.9	
Screw size	-		M5		M4				M5				M6				M8		M10		M12		M16	
Catalog Number	M5		M4				M5				M6				M8		M10		M12		M16			
KS1.5-20J BORE	*S1T	S1K	S1K																					
KS1.5-25J BORE	*S1T	S1K	S1K	S1K	S1K	S1K	S1K																	
KS1.5-30J BORE		*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K													
KS2-20J BORE			*S1K	S1K	S1K	S1K	S1K																	
KS2-25J BORE				*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K													
KS2-30J BORE					*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
KS2.5-20J BORE						*S1K	S1K	S1K	S1K	S1K	S1K													
KS2.5-25J BORE							*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
KS2.5-30J BORE								*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
KS3-20J BORE									*S1K	S1K	S1K	S1K	S1K											
KS3-25J BORE										*S1K	S1K	S1K	S1K	S1K	S1K	S1K								
KS3-30J BORE											*S1K	S1K	S1K	S1K	S1K	S1K	S1K							
KS4-20J BORE												*S1K	S1K	S1K	S1K	S1K	S1K	S1K						
KS4-25J BORE													*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
KS4-30J BORE														*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
KS5-20J BORE															*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
KS5-25J BORE																*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
KS5-30J BORE																	*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K

To order J Series Hardened Plus, please specify: **Catalog No. + H + J + BORE**. Example: **KS1.5-20HJ10**

*** is a product with the original bore diameter, so Hardened Plus is not available. See Page 22 for more details on Hardened Plus.

KS-H Hardened Spur Gear

recommended mating racks



KRF-H/KRFD-H Hardened Racks

Please see Page 232 for more details.

KS Thermal Refined Spur Gear

recommended mating racks




KRF/KRFD Thermal Refined Racks

Please see Page 238 for more details.




Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—*
Tooth hardness	less than 194HB*
Surface treatment	Black oxide coating

* Products with modules of 1.5 use S45C thermal refined equivalent materials, so the surface hardness is 200~270 HB.

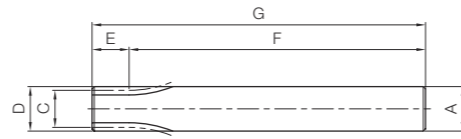

SA

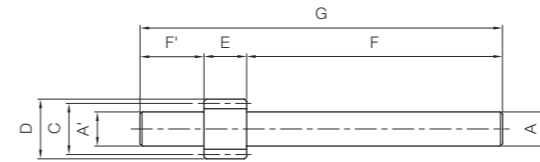

SB

Catalog Number	Module	No. of teeth	Profile shift coefficient	Shape	Shaft diameter (L)		Pitch dia.	Outside dia.	Face width	Shaft diameter (R)		Total Length								
					A'	F'				A	F									
SSS1-10 SSS1-11 SSS1-12 SSS1-13	m1	10 11 12 13	0	SA	—	—	10 11 12 13	12 13 14 15	12	12 13 14 15	78	90								
SSS1.5-10 SSS1.5-11 SSS1.5-12 SSS1.5-13		m1.5					10 11 12 13	+0.5 +0.5 0 0		SB			12.2 13.7 13.7 15.2	25	15 16.5 18 19.5	19.35 20.85 21 22.5	15	12.2 13.7 13.7 15.2	100	140

Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number			
Bending strength	Surface durability	Bending strength	Surface durability						
1.62 2.04 2.52 3.05	0.063 0.077 0.092 0.11	0.16 0.21 0.26 0.31	0.0064 0.0078 0.0094 0.011	0.08~0.18	0.077 0.090 0.10 0.12	SSS1-10 SSS1-11 SSS1-12 SSS1-13			
12.7 14.5 9.97 12.1	0.71 0.88 0.89 1.05	1.30 1.48 1.02 1.23	0.073 0.089 0.091 0.11				0.10~0.22	0.14 0.17 0.17 0.21	SSS1.5-10 SSS1.5-11 SSS1.5-12 SSS1.5-13

Center distance of stock spur gear meshing with profile shifted gear

The center distance of the stock gear ($x = 0$) that meshes with profile shifted gear ($x = +0.5$) of $m = 1$ is shown in the table at right. Please multiply by the module of the gear to be used.

Center distance where number of teeth is 12 to 30 (unit: mm)

Number of teeth ($x = 0$)	Number of teeth ($x = +0.5$)	
	10	11
12	11.4410	11.9428
13	11.9428	12.4446
14	12.4446	12.9462
15	12.9462	13.4477
16	13.4477	13.9492
17	13.9492	14.4505
18	14.4505	14.9518
19	14.9518	15.4530
20	15.4530	15.9542
21	15.9542	16.4553
22	16.4553	16.9564
23	16.9564	17.4574
24	17.4574	17.9583
25	17.9583	18.4592
26	18.4592	18.9601
27	18.9601	19.4610
28	19.4610	19.9618
29	19.9618	20.4625
30	20.4625	20.9633


Center distance where number of teeth is 32 to 62 (unit: mm)

Number of teeth ($x = 0$)	Number of teeth ($x = +0.5$)	
	10	11
32	21.4640	21.9647
34	22.4653	22.9660
35	22.9660	23.4666
36	23.4666	23.9671
38	24.4677	24.9683
40	25.4688	25.9693
42	26.4698	26.9703
44	27.4707	27.9712
45	27.9712	28.4716
46	28.4716	28.9721
48	29.4725	29.9729
50	30.4733	30.9736
52	31.4740	31.9744
54	32.4747	32.9750
55	32.9750	33.4754
56	33.4754	33.9757
58	34.4760	34.9763
60	35.4766	35.9769
62	36.4772	36.9774

Center distance where number of teeth is 64 to 200 (unit: mm)

Number of teeth ($x = 0$)	Number of teeth ($x = +0.5$)	
	10	11
64	37.4777	37.9780
65	37.9780	38.4782
66	38.4782	38.9785
68	39.4787	39.9790
70	40.4792	40.9794
72	41.4796	41.9799
75	42.9803	43.4805
76	43.4805	43.9807
80	45.4813	45.9814
84	47.4820	47.9822
85	47.9822	48.4823
88	49.4826	49.9828
90	50.4830	50.9831
95	52.9837	53.4838
100	55.4844	55.9845
120	65.4866	65.9867
150	80.4890	80.9890
200	105.4915	105.9915

Mounting distance of a profile shifted gear and the meshing rack

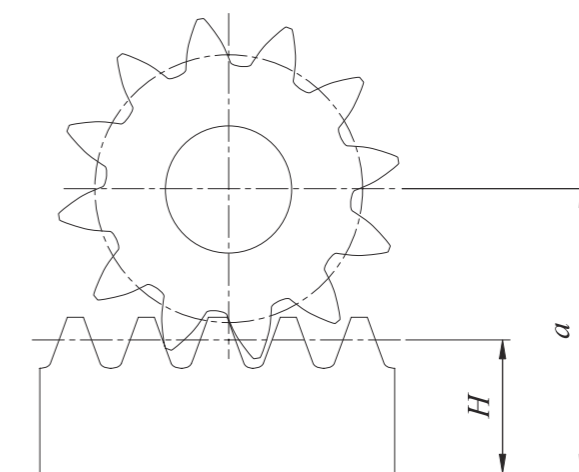


$$a = \frac{zm}{2} + H + xm$$


Where
 a : Mounting distance
 H : Pitch line height
 m : Module
 z : No. of teeth
 x : Profile shift coefficient



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating



S3T



S1T

* The precision grade of products with a module of less than 0.8 is equivalent to the value shown in the table.

Catalog Number	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Keyway	
				A _{H7(H8)}	B	C	D	E	F	G	Width × Depth	
SS0.5-15A	m0.5	15	S3T	3 _{H8}	8.5	7.5	8.5	5	11	16	—	
SS0.5-18A		18		4 _{H8}	10	9	10					
SS0.5-20A		20		3 _{H8}	11	10	11					
SS0.5-20B		20		4 _{H8}	11	10	11					
SS0.5-22A		22		4 _{H8}	12	11	12					
SS0.5-24A		24		4 _{H8}	13	12	13					
SS0.5-24B		24	5 _{H8}	13	12	13						
SS0.5-25B		25	5 _{H8}	13.5	12.5	13.5						
SS0.5-28A		28	4 _{H8}	12	14	15						
SS0.5-30B		30	5	13	15	16						
SS0.5-50B		50	6	22	25	26						
SS0.5-54A		54	5	25	27	28						
SS0.5-60A	60	6	28	30	31							
SS0.5-80A	80	6	28	40	41							
SS0.5-80B	80	8	28	48	49							
SS0.5-96A	96	8	28	60	61							
SS0.5-120A	120	8	28	60	61							
SS0.8-15A	m0.8	15	S3T	5 _{H8}	13.6	12	13.6	8	14	22	—	
SS0.8-20A		20	S1T	5 _{H8}	13	16	17.6		8	8		16
SS0.8-20B		20		6	18	21.6						
SS0.8-25A		25	5 _{H8}	16	20	21.6						
SS0.8-28A		28	6	18	22.4	24						
SS0.8-30A		30	5 _{H8}	20	24	25.6						
SS0.8-30C		30	8	20	24	25.6						
SS0.8-40A		40	6	28	32	33.6						
SS0.8-45A	45	6	28	36	37.6							

Socket head screw	Allowable torque (N·m)	Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
		Bending strength	Surface durability			
M3	0.46	0.022	0.047	0~0.10	0.0056	SS0.5-15A
M3	0.61	0.032	0.063		0.0076	SS0.5-18A
M3	0.72	0.040	0.073		0.010	SS0.5-20A
M3	0.83	0.049	0.084		0.0095	SS0.5-20B
M3	0.93	0.059	0.095		0.012	SS0.5-22A
M4	0.99	0.064	0.10		0.014	SS0.5-24A
M4	1.16	0.081	0.12		0.013	SS0.5-24B
M4	1.27	0.093	0.13		0.014	SS0.5-25B
M4	2.43	0.27	0.25		0.011	SS0.5-28A
M4	2.67	0.32	0.27		0.012	SS0.5-30B
M4	3.03	0.39	0.31		0.037	SS0.5-50B
M4	2.7	0.32	0.27		0.047	SS0.5-54A
M4	3.03	0.39	0.31	0.058	SS0.5-60A	
M4	4.24	0.72	0.43	0.079	SS0.5-80A	
M5	5.21	1.06	0.53	0.077	SS0.5-80B	
M5	6.68	1.70	0.68	0.099	SS0.5-96A	
M4	1.89	0.088	0.19	0.14	SS0.5-120A	
M4	2.94	0.17	0.30	0.019	SS0.8-15A	
M4	4.05	0.27	0.41	0.018	SS0.8-20A	
M4	4.73	0.34	0.48	0.017	SS0.8-20B	
M4	5.19	0.39	0.53	0.029	SS0.8-25A	
M4	7.55	0.72	0.77	0.037	SS0.8-28A	
M4	8.75	0.93	0.89	0.045	SS0.8-30A	
M4				0.041	SS0.8-30C	
M4				0.085	SS0.8-40A	
M4				0.098	SS0.8-45A	

Spur Gears

Helical Gears

Internal Gears

Racks

CP Racks & Pinions

Miter Gears

Bevel Gears

Screw Gears

Worm Gears

Gearboxes

Other Products

Spur Gears

Helical Gears

Internal Gears

Racks

CP Racks & Pinions

Miter Gears

Bevel Gears

Screw Gears

Worm Gears


Gearboxes

Other Products







Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating




S3




S1



S3T



S1T



S1K




H To order Hardened Plus, please specify **Catalog No. + H**. Example: **SS1-15H**

Catalog Number	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Keyway	Socket head screw			
				A _{H7}	B	C	D	E	F	G	Width × Depth	Size	J		
SS1-15	m1	15	S3	8	17	15	17	10	20	30	—	—	—		
SS1-15A			S3T	5								M4	4		
SS1-15B			S3T	6								M4	4		
SS1-16		16	S3	8	18	16	18					—	—		
SS1-16B			S3T	6								M4	4		
SS1-17			S3	8								19	17	19	—
SS1-18		S3	8	20	18	20	—								—
SS1-19		S3	8				21								19
SS1-20		20	S1	8	16	20	22					—	—		
SS1-20A			S1T	5								M4	5		
SS1-20B			S1T	6								M4	5		
SS1-20C		S1T	8	M5	5										
SS1-21		21	S1	8	17	21	23					—	—		
SS1-22		22	S1	8	18	22	24					—	—		
SS1-23		23	S1	8	18	23	25					—	—		
SS1-24		24	S1	8	20	24	26					—	—		
SS1-24A			S1T	6								M4	5		
SS1-24C			S1K	10								4 x 1.8	M4	5	
SS1-25		25	S1	8	20	25	27					—	—		
SS1-25B			S1T	8								M5	5		
SS1-25C			S1K	10								4 x 1.8	M4	5	
SS1-26		26	S1	8	22	26	28					—	—		
SS1-27		27	S1	8	22	27	29					—	—		
SS1-28		28	S1	8	22	28	30					—	—		
SS1-29	29	S1	8	24	29	31	—	—							
SS1-30	30	S1	10	25	30	32	—	—							
SS1-30A		S1T	6				M4	5							
SS1-30B		S1T	8				M5	5							
SS1-32	32	S1	10	26	32	34	—	—							
SS1-32A		S1T	8				M5	5							
SS1-34	34	S1	10	26	34	36	—	—							
SS1-35	35	S1	10	26	35	37	—	—							
SS1-36	36	S1	10	28	36	38	—	—							
SS1-38	38	S1	10	32	38	40	—	—							
SS1-40	40	S1	10	35	40	42	—	—							
SS1-40B		S1K	10				4 x 1.8	M4	5						
SS1-42	42	S1	10	35	42	44	—	—							
SS1-44	44	S1	10	35	44	46	—	—							
SS1-45	45	S1	10	35	45	47	—	—							
SS1-45A		S1T	8				M5	5							
SS1-45B		S1K	10				4 x 1.8	M4	5						
SS1-46	46	S1	10	35	46	48	—	—							
SS1-48	48	S1	10	35	48	50	—	—							

Allowable torque						Backlash (mm)	Weight (kg)	Catalog Number
Bending strength		Surface durability		Surface durability H				
N-m	kgf-m	N-m	kgf-m	N-m	kgf-m			
3.69	0.38	0.17	0.018	0.85	0.086	0.08~0.18	0.038	SS1-15
							0.044	SS1-15A
							0.042	SS1-15B
4.09	0.42	0.2	0.021	0.98	0.10		0.044	SS1-16
							0.049	SS1-16B
4.5	0.46	0.23	0.023	1.12	0.11		0.050	SS1-17
4.91	0.5	0.26	0.027	1.26	0.13		0.057	SS1-18
5.33	0.54	0.29	0.030	1.42	0.14		0.065	SS1-19
							0.033	SS1-20
5.75	0.59	0.33	0.033	1.59	0.16		0.037	SS1-20A
							0.036	SS1-20B
							0.032	SS1-20C
6.17	0.63	0.36	0.037	1.77	0.18		0.037	SS1-21
6.6	0.67	0.4	0.041	1.95	0.20		0.042	SS1-22
7.03	0.72	0.45	0.045	2.15	0.22		0.045	SS1-23
							0.052	SS1-24
7.47	0.76	0.49	0.050	2.36	0.24		0.055	SS1-24A
							0.046	SS1-24C
							0.055	SS1-25
7.91	0.81	0.54	0.055	2.57	0.26		0.054	SS1-25B
							0.049	SS1-25C
8.35	0.85	0.58	0.059	2.79	0.28		0.064	SS1-26
8.79	0.9	0.63	0.064	3.01	0.31		0.067	SS1-27
9.24	0.94	0.68	0.070	3.25	0.33		0.070	SS1-28
9.69	0.99	0.73	0.075	3.49	0.36	0.079	SS1-29	
						0.082	SS1-30	
10.1	1.03	0.79	0.081	3.74	0.38	0.089	SS1-30A	
						0.085	SS1-30B	
11.1	1.13	0.90	0.092	4.27	0.44	0.092	SS1-32	
						0.096	SS1-32A	
12.0	1.22	1.03	0.10	4.83	0.49	0.10	SS1-34	
12.4	1.27	1.09	0.11	5.13	0.52	0.10	SS1-35	
12.9	1.31	1.16	0.12	5.44	0.55	0.12	SS1-36	
13.8	1.41	1.30	0.13	6.08	0.62	0.14	SS1-38	
						0.16	SS1-40	
14.7	1.50	1.45	0.15	6.76	0.69	0.16	SS1-40B	
15.7	1.60	1.61	0.16	7.47	0.76	0.17	SS1-42	
16.6	1.69	1.77	0.18	8.23	0.84	0.18	SS1-44	
						0.19	SS1-45	
17.1	1.74	1.86	0.19	8.62	0.88	0.19	SS1-45A	
						0.19	SS1-45B	
17.6	1.79	1.95	0.20	9.02	0.92	0.19	SS1-46	
18.5	1.89	2.13	0.22	9.84	1.00	0.21	SS1-48	



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

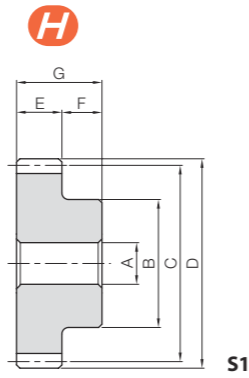



H To order Hardened Plus, please specify **Catalog No. + H**. Example: **SS1-50H**

Catalog Number	Module	No. of teeth	Shape	Bore		Hub dia.		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Keyway		Socket head screw					
				AH7	B	C	D						E	F	G	Width x Depth	Size	J		
SS1-50	m1	50	S1	10	35	50	52	10	10	20	—	—	—	—	—	—				
SS1-50A			H	8													—	M5	5	
SS1-52		52	S1	10		52	54										—	—	—	
SS1-54		54	S1	10		54	56										—	—	—	
SS1-55		55	S1	10		55	57										—	—	—	
SS1-56		56	S1	10		56	58										—	—	—	
SS1-58		58	S1	10		58	60										—	—	—	
SS1-60		60	S1	10		60	62										—	—	—	
SS1-60C			H	15																5 x 2.3
SS1-62		62	S1	10		40	62										64	—	—	—
SS1-64		64	S1	10			64										66	—	—	—
SS1-65		65	S1	10		40	65										67	—	—	—
SS1-66		66	S1	10			66										68	—	—	—
SS1-68		68	S1	10			68										70	—	—	—
SS1-70		70	S1	10			70										72	—	—	—
SS1-72		72	S1	10			72										74	—	—	—
SS1-75		75	S1	10			75										77	—	—	—
SS1-76		76	S1	10			76										78	—	—	—
SS1-80		80	S1	10			80										82	—	—	—
SS1-84		84	S1	10			84										86	—	—	—
SS1-85	85	S1	10	85	87		—	—	—											
SS1-88	88	S1	10	88	90	—	—	—												
SS1-90	90	S1	10	90	92	—	—	—												
SS1-95	95	S1	10	95	97	—	—	—												
SS1-96	96	S1	10	96	98	—	—	—												
SS1-100	100	S1	10	100	102	—	—	—												
SS1-110	110	S1	15	50	110	112	—	—	—											
SS1-120	120	S1	15	50	120	122	—	—	—											
SS1-150	150	S1	20	120	150	152	—	—	—											
SS1-200	200	S1	20	160	200	202	—	—	—											

Allowable torque						Backlash (mm)	Weight (kg)	Catalog Number
Bending strength		Surface durability		Surface durability H				
N-m	kgf-m	N-m	kgf-m	N-m	kgf-m			
19.5	1.98	2.32	0.24	10.7	1.09	0.08~0.18	0.22	SS1-50
20.4	2.08	2.52	0.26	11.6	1.18		0.22	SS1-50A
21.4	2.18	2.73	0.28	12.5	1.28		0.23	SS1-52
21.8	2.23	2.83	0.29	13.0	1.33		0.24	SS1-54
22.3	2.28	2.94	0.30	13.5	1.38		0.24	SS1-55
23.3	2.37	3.17	0.32	14.5	1.48		0.25	SS1-56
24.2	2.47	3.40	0.35	15.6	1.59		0.26	SS1-58
25.2	2.57	3.64	0.37	16.7	1.70		0.27	SS1-60
26.2	2.67	3.89	0.40	17.8	1.81		0.27	SS1-60C
26.6	2.72	4.02	0.41	18.4	1.87		0.32	SS1-62
27.1	2.77	4.15	0.42	18.9	1.93		0.34	SS1-64
28.1	2.86	4.42	0.45	20.1	2.05		0.35	SS1-65
29.1	2.96	4.70	0.48	21.4	2.18		0.35	SS1-66
30.0	3.06	4.98	0.51	22.6	2.31		0.37	SS1-68
31.5	3.21	5.43	0.55	24.6	2.51		0.39	SS1-70
32.0	3.26	5.59	0.57	25.3	2.58		0.41	SS1-72
33.9	3.46	6.23	0.63	28.1	2.87		0.43	SS1-75
35.8	3.66	6.90	0.7	31.1	3.17		0.44	SS1-76
36.3	3.71	7.08	0.72	31.8	3.25		0.48	SS1-80
37.8	3.85	7.62	0.78	34.2	3.48		0.52	SS1-84
38.8	3.95	7.98	0.81	35.8	3.65	0.53	SS1-85	
41.2	4.20	8.95	0.91	40.0	4.08	0.56	SS1-88	
41.7	4.25	9.15	0.93	40.8	4.16	0.59	SS1-90	
43.7	4.45	9.97	1.02	44.4	4.53	0.64	SS1-95	
48.6	4.95	12.2	1.24	53.9	5.50	0.65	SS1-96	
53.5	5.45	14.7	1.50	64.4	6.57	0.70	SS1-100	
68.2	6.96	23.6	2.41	102	10.4	0.87	SS1-110	
71.5	7.29	33.6	3.42	144	14.7	1.01	SS1-120	
						2.23	SS1-150	
						4.00	SS1-200	



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

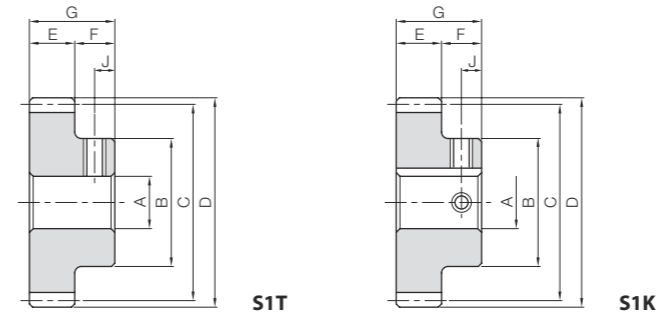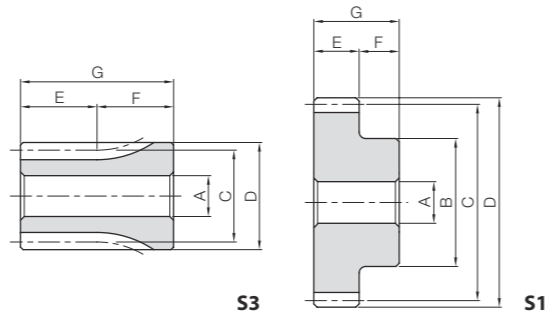

H To order Hardened Plus, please specify **Catalog No. + H**. Example: **SS1.5-12H**



Catalog Number	Module	No. of teeth	Shape	Bore				Face width	Hub width	Total length	Keyway	Socket head screw						
				AH7	B	C	D					Size	J					
SS1.5-12	m1.5	12	S3	8	21	18	21	15	15	30	—	—	—					
SS1.5-13		13	S3	8	22.5	19.5	22.5											
SS1.5-14		14	S1	8	16	21	24											
SS1.5-14B			S1T	8	16	21	24											
SS1.5-15		15	S1	8	18	22.5	25.5							—	—	—	—	—
SS1.5-16		16	S1	8	20	24	27							—	—	—	—	—
SS1.5-16B			S1T	8	20	24	27											
SS1.5-17		17	S1	8	21	25.5	28.5							—	—	—	—	—
SS1.5-18		18	S1	8	22	27	30							—	—	—	—	—
SS1.5-19		19	S1	8	23	28.5	31.5							—	—	—	—	—
SS1.5-20		20	S1	8	24	30	33							—	—	—	—	—
SS1.5-21		21	S1	8	25	31.5	34.5							—	—	—	—	—
SS1.5-22		22	S1	8	26	33	36							—	—	—	—	—
SS1.5-23		23	S1	8	27	34.5	37.5							—	—	—	—	—
SS1.5-24		24	S1	8	28	36	39							—	—	—	—	—
SS1.5-25		25	S1	8	30	37.5	40.5							—	—	—	—	—
SS1.5-26		26	S1	10	32	39	42							4 x 1.8	M4	5	—	—
SS1.5-26A			S1K	12	32	39	42											
SS1.5-27		27	S1	10	34	40.5	43.5							—	—	—	—	—
SS1.5-28		28	S1	10	36	42	45							4 x 1.8	M4	5	—	—
SS1.5-28A			S1K	12	36	42	45											
SS1.5-29		29	S1	10	37	43.5	46.5							—	—	—	—	—
SS1.5-30		30	S1	10	38	45	48							5 x 2.3	M4	5	—	—
SS1.5-30C			S1K	15	38	45	48											
SS1.5-32		32	S1	10	40	48	51							4 x 1.8	M4	5	—	—
SS1.5-32B			S1K	12	40	48	51											
SS1.5-34		34	S1	10	40	51	54							—	—	—	—	—
SS1.5-35		35	S1	10	42	52.5	55.5							—	—	—	—	—
SS1.5-36		36	S1	10	45	54	57							—	—	—	—	—
SS1.5-38		38	S1	12	45	57	60							—	—	—	—	—
SS1.5-40		40	S1	12	45	60	63							—	—	—	—	—

Allowable torque						Backlash (mm)	Weight (kg)	Catalog Number
Bending strength		Surface durability		Surface durability H				
N-m	kgf-m	N-m	kgf-m	N-m	kgf-m			
6.86	0.70	0.36	0.037	1.76	0.18	0.10~0.22	0.059	SS1.5-12
8.84	0.90	0.44	0.045	2.12	0.22			SS1.5-13
11.1	1.13	0.52	0.053	2.50	0.26			SS1.5-14
12.5	1.27	0.60	0.062	2.91	0.30			SS1.5-14B
13.8	1.41	0.70	0.071	3.36	0.34			SS1.5-15
15.2	1.55	0.80	0.082	3.84	0.39			SS1.5-16
16.6	1.69	0.91	0.093	4.35	0.44			SS1.5-16B
18.0	1.83	1.03	0.11	4.89	0.50			SS1.5-17
19.4	1.98	1.15	0.12	5.47	0.56			SS1.5-18
20.8	2.12	1.29	0.13	6.08	0.62			SS1.5-19
22.3	2.27	1.43	0.15	6.72	0.69			SS1.5-20
23.7	2.42	1.58	0.16	7.40	0.75			SS1.5-21
25.2	2.57	1.73	0.18	8.12	0.83			SS1.5-22
26.7	2.72	1.90	0.19	8.87	0.90			SS1.5-23
28.2	2.87	2.06	0.21	9.62	0.98			SS1.5-24
29.7	3.03	2.23	0.23	10.4	1.06			SS1.5-25
31.2	3.18	2.41	0.25	11.2	1.14			SS1.5-26
32.7	3.34	2.60	0.26	12.1	1.23			SS1.5-26A
34.2	3.49	2.79	0.28	12.9	1.32			SS1.5-27
37.3	3.80	3.19	0.33	14.8	1.51			SS1.5-28
40.4	4.12	3.63	0.37	16.7	1.71			SS1.5-28A
41.9	4.28	3.85	0.39	17.8	1.81			SS1.5-29
43.5	4.43	4.09	0.42	18.8	1.92			SS1.5-30
46.6	4.75	4.58	0.47	21.0	2.14			SS1.5-30C
49.8	5.07	5.10	0.52	23.4	2.38			SS1.5-32
								SS1.5-32B
								SS1.5-34
								SS1.5-35
								SS1.5-36
								SS1.5-38
								SS1.5-40



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating
Backlash	0.12 to 0.26

* The precision grade of J Series products is equivalent to the value shown in the table.

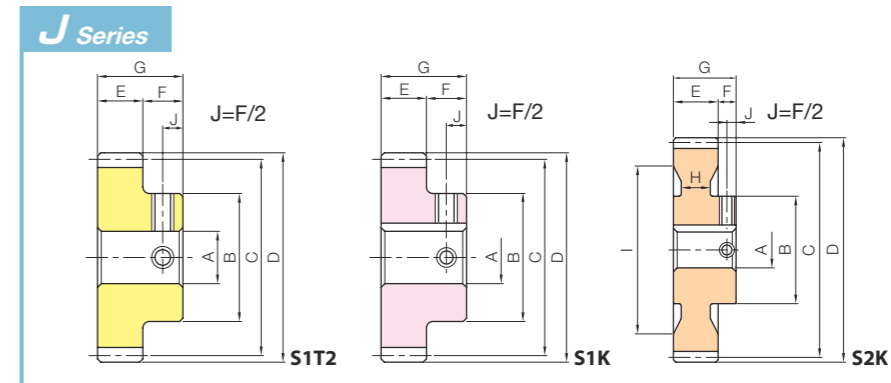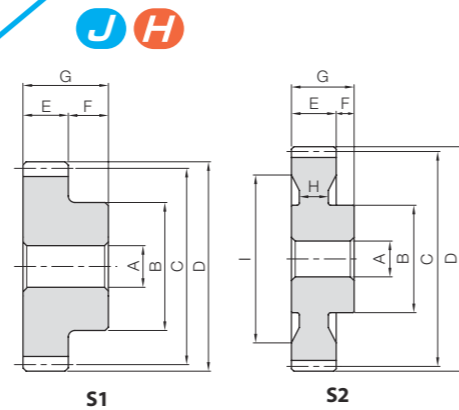

Ⓜ To order Hardened Plus, please specify **Catalog No. + H**. Example: **SS2-12H**

Catalog Number	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Web thickness	Web O.D.	Allowable torque						Weight (kg)			
												Bending strength		Surface durability		Surface durability Ⓜ					
												N·m	kgf·m	N·m	kgf·m	N·m	kgf·m				
SS2-12	12	S1	10	18	24	28						16.3	1.66	0.88	0.090	4.24	0.43	0.073			
SS2-13	13			20	26	30							21.0	2.14	1.07	0.11	5.11	0.52	0.090		
SS2-14	14			20	28	32							26.3	2.69	1.26	0.13	6.02	0.61	0.10		
SS2-15	15			24	30	34							29.6	3.01	1.48	0.15	7.01	0.71	0.12		
SS2-16	16			26	32	36							32.7	3.34	1.71	0.17	8.08	0.82	0.14		
SS2-17	17			28	34	38							36.0	3.67	1.96	0.20	9.23	0.94	0.16		
SS2-18	18			30	36	40							39.3	4.01	2.23	0.23	10.5	1.07	0.19		
SS2-19	19			31	38	42							42.6	4.35	2.52	0.26	11.8	1.20	0.21		
SS2-20	20			32	40	44							46.0	4.69	2.83	0.29	13.2	1.34	0.23		
SS2-21	21			34	42	46							49.4	5.04	3.15	0.32	14.7	1.50	0.26		
SS2-22	22			36	44	48							52.8	5.39	3.50	0.36	16.2	1.66	0.29		
SS2-23	23			37	46	50							56.3	5.74	3.86	0.39	17.9	1.82	0.32		
SS2-24	24			38	48	52							59.8	6.09	4.24	0.43	19.6	2.00	0.35		
SS2-25	25			40	50	54							63.3	6.45	4.64	0.47	21.4	2.18	0.38		
SS2-26	26			42	52	56							66.8	6.81	5.04	0.51	23.2	2.37	0.42		
SS2-27	27			45	54	58							70.4	7.17	5.45	0.56	25.1	2.56	0.46		
SS2-28	28	45	56	60							73.9	7.54	5.89	0.60	27.0	2.76	0.48				
SS2-29	29	47	58	62							77.5	7.91	6.33	0.65	29.1	2.96	0.52				
SS2-30	30	50	60	64							81.1	8.27	6.80	0.69	31.2	3.18	0.57				
SS2-32	32	50	64	68							88.4	9.01	7.78	0.79	35.6	3.63	0.63				
SS2-34	34	S1	12	50	68	72						95.7	9.76	8.84	0.90	40.3	4.11	0.70			
SS2-35	35			52	70	74							99.3	10.1	9.39	0.96	42.8	4.36	0.74		
SS2-36	36			55	72	76							103	10.5	9.96	1.02	45.3	4.62	0.80		
SS2-38	38			55	76	80							111	11.3	11.2	1.14	50.6	5.16	0.87		
SS2-40	40			55	80	84							118	12.0	12.5	1.27	56.2	5.73	0.93		
SS2-42	42			S1	15	84	88							125	12.8	13.8	1.41	62.1	6.34	1.01	
SS2-44	44					88	92								133	13.6	15.2	1.55	68.3	6.97	1.10
SS2-45	45					90	94		20	10	30				137	13.9	16.0	1.63	71.6	7.30	1.14
SS2-46	46	92	96										140	14.3	16.7	1.71	74.9	7.63	1.19		
SS2-48	48	96	100										148	15.1	18.3	1.87	81.7	8.33	1.28		
SS2-50	50	100	104										156	15.9	19.9	2.03	88.8	9.05	1.38		
SS2-52	52	104	108										163	16.6	21.7	2.21	96.2	9.81	1.48		
SS2-54	54	108	112										171	17.4	23.4	2.39	104	10.6	1.58		
SS2-55	55	110	114								175	17.8	24.4	2.48	108	11.0	1.64				
SS2-56	56	112	116								179	18.2	25.3	2.58	112	11.4	1.69				
SS2-58	58	S1	20	116	120							186	19.0	27.3	2.78	120	12.3	1.84			
SS2-60	60			120	124								194	19.8	29.3	2.99	129	13.1	1.96		
SS2-62	62			124	128								202	20.6	31.5	3.21	138	14.1	2.08		
SS2-64	64			128	132								209	21.3	33.7	3.44	147	15.0	2.20		
SS2-65	65			130	134								213	21.7	34.8	3.55	152	15.5	2.26		
SS2-66	66			132	136								217	22.1	36.0	3.67	157	16.0	2.33		
SS2-68	68			136	140								225	22.9	38.4	3.91	166	17.0	2.46		
SS2-70	70			140	144								232	23.7	40.8	4.16	177	18.0	2.60		
SS2-72	72	144	148								240	24.5	43.3	4.42	187	19.1	2.74				
SS2-75	75	150	154								252	25.7	47.3	4.82	203	20.7	2.92				
SS2-76	76	S2	20	60	152	156						256	26.1	48.6	4.96	209	21.3	3.00			
SS2-80	80			60	160	164							271	27.7	54.3	5.53	232	23.6	2.67		
SS2-84	84			70	168	172							287	29.2	60.2	6.14	256	26.1	3.09		
SS2-85	85			70	170	174							291	29.6	61.7	6.30	262	26.8	3.09		
SS2-88	88			70	176	180							302	30.8	66.5	6.78	282	28.7	3.29		
SS2-90	90			70	180	184							310	31.6	69.7	7.11	295	30.1	3.38		
SS2-95	95			70	190	194							330	33.6	78.2	7.97	329	33.6	3.69		
SS2-100	100			70	200	204							376	37.6	88.0	9.05	388	38.8	4.28		
SS2-120	120	90	240	244							210	35.7	36.4	108	11.0	421	43.0	5.91			
SS2-150	150	S1	25	240	300	304						—	—	—	—	—	—	—			




To order J Series products, please specify: **Catalog No. + J + BORE**. Example: **SS2-12J10**

Bore H7	* The product shapes of J Series items are identified by background color.																				
	Keyway JS9		10	12	14	15	16	17	18	19	20	22	25	28	30	32	35				
	Screw size		4x1.8			5x2.3				6x2.8			8x3.3			10x3.3					
Catalog Number		M4								M5								M6		M8	
SS2-12 J BORE	* S1T2																				
SS2-13 J BORE	* S1T2																				
SS2-14 J BORE	* S1K																				
SS2-15 J BORE		* S1K																			
SS2-16 J BORE		* S1K	S1K																		
SS2-17 J BORE		* S1K	S1K	S1K	S1K																
SS2-18 J BORE		* S1K	S1K	S1K	S1K	S1K															
SS2-19 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K														
SS2-20 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K													
SS2-21 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K												
SS2-22 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K											
SS2-23 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
SS2-24 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SS2-25 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SS2-26 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SS2-27 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SS2-28 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SS2-29 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SS2-30 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS2-32 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SS2-34 J BORE		* S1K	S1K	S1K	S1K	S															



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coated (excludes semi-custom products)
Backlash	0.18 to 0.38

* The precision grade of J Series products is equivalent to the value shown in the table.

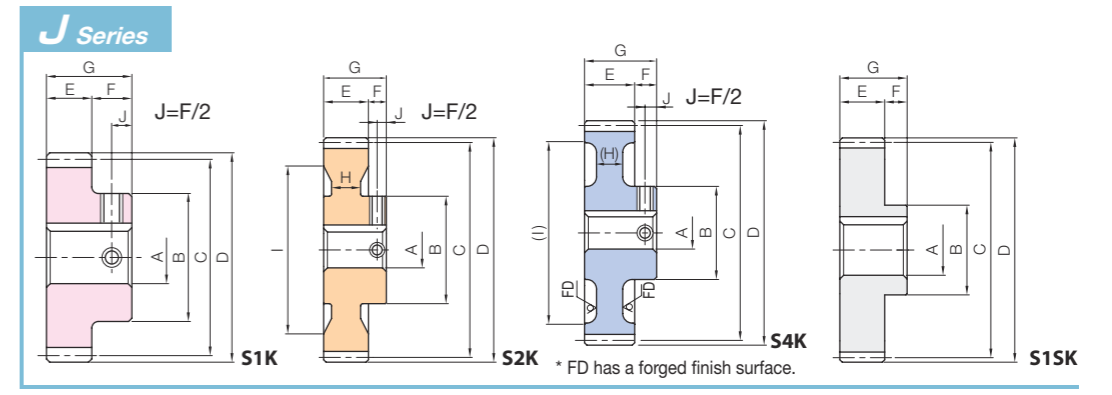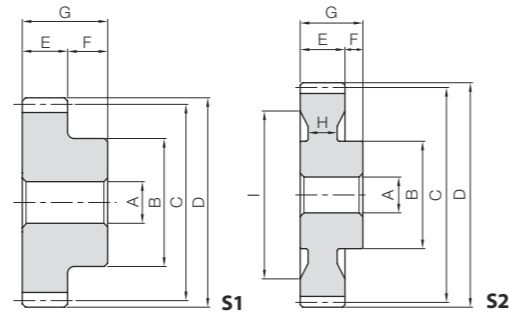

To order Hardened Plus, please specify **Catalog No. + H**. Example: **SS4-12H**

Catalog Number	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Web thickness	Web O.D.	Allowable torque						Weight (kg)		
												Bending strength		Surface durability		Surface durability (H)				
												N·m	kgf·m	N·m	kgf·m	N·m	kgf·m			
SS4-12	12	S1	A _{H7}	B	C	D	E	F	G	(H)	(I)	20	60	130	13.3	7.62	0.78	35.3	3.59	0.57
SS4-13	13													168	17.1	9.22	0.94	42.5	4.33	0.70
SS4-14	14													211	21.5	10.9	1.11	50.1	5.11	0.82
SS4-15	15													236	24.1	12.8	1.30	58.4	5.96	0.99
SS4-16	16													262	26.7	14.7	1.50	67.3	6.87	1.17
SS4-17	17													288	29.4	16.9	1.72	76.9	7.85	1.34
SS4-18	18													314	32.0	19.2	1.96	87.2	8.89	1.50
SS4-19	19													341	34.8	21.7	2.21	98.1	10.0	1.72
SS4-20	20													368	37.5	24.3	2.48	110	11.2	1.95
SS4-21	21													395	40.3	27.1	2.76	122	12.4	2.18
SS4-22	22													423	43.1	30.1	3.06	135	13.8	2.42
SS4-23	23													450	45.9	33.2	3.38	148	15.1	2.67
SS4-24	24													478	48.8	36.4	3.72	163	16.6	2.91
SS4-25	25													506	51.6	39.9	4.07	178	18.1	3.19
SS4-26	26													534	54.5	43.3	4.42	192	19.6	3.45
SS4-27	27													563	57.4	46.9	4.78	208	21.2	3.73
SS4-28	28													591	60.3	50.6	5.16	224	22.8	4.06
SS4-29	29													620	63.2	54.5	5.56	241	24.5	4.28
SS4-30	30													649	66.2	58.7	5.98	258	26.3	4.64
SS4-32	32													707	72.1	67.4	6.87	294	30.0	4.86
SS4-34	34													766	78.1	76.7	7.82	333	33.9	5.38
SS4-35	35													795	81.1	81.6	8.32	353	36.0	5.65
SS4-36	36													825	84.1	86.7	8.84	374	38.1	5.93
SS4-38	38													884	90.1	97.3	9.92	418	42.6	6.52
SS4-40	40													943	96.2	109	11.1	464	47.3	7.08
SS4-42	42													1000	102	120	12.3	512	52.2	7.73
SS4-44	44													1060	108	133	13.6	563	57.4	8.41
SS4-45	45													1090	112	139	14.2	590	60.1	8.76
SS4-46	46													1120	115	146	14.9	617	62.9	9.12
SS4-48	48													987	101	133	13.6	528	53.9	9.12
SS4-50	50													1040	106	146	14.8	575	58.6	9.60
SS4-52	52													1090	111	158	16.1	624	63.7	10.2
SS4-54	54	1140	116	172	17.5	676	68.9	10.8												
SS4-55	55	1160	119	179	18.2	702	71.6	11.1												
SS4-56	56	1190	121	186	18.9	729	74.3	11.5												
SS4-58	58	190	1240	127	200	20.4	785	80.0	12.5											
SS4-60	60	198	1290	132	215	22	842	85.9	13.2											
SS4-62	62	210	1340	137	231	23.6	902	92.0	13.1											
SS4-64	64	214	1390	142	248	25.2	964	98.3	13.4											
SS4-65	65	218	1420	145	256	26.1	996	102	13.7											
SS4-66	66	220	1450	148	265	27	1030	105	14.7											
SS4-68	68	225	1500	153	282	28.8	1090	112	15.5											
SS4-70	70	(248)	1550	158	300	30.6	1160	119	13.6											
SS4-80	80	(288)	1810	184	400	40.8	1540	157	16.3											
SS4-90S	90	S4	120	180	360	368	40	16	56	—	—	1910	195	467	47.6	34.6				
SS4-100S	100			200	400	408	2150	219	586	59.7	—	—	42.9							
SS4-110S	110			220	440	448	2390	244	720	73.4	—	—	52.0							
SS4-120S	120			240	480	488	2630	269	869	88.6	—	—	62.0							

[Precautions for Semi-custom Products] Please see Pages 38~40 for more details.

To order J Series products, please specify: **Catalog No. + J + BORE**. Example: **SS4-14J20**

Bore H7	* The product shapes of J Series items are identified by background color.												
	20	22	25	28	30	32	35	40	45	50	55	60	65
Keyway J _{s9}	20	22	25	28	30	32	35	40	45	50	55	60	65
Screw size	6x2.8	8x3.3	10x3.3	12x3.3	14x3.8	16x4.3	18x4.4						
Catalog Number	M5	M6	M8	M10	M12								
SS4-12													
SS4-13													
SS4-14 J BORE	* S1K	S1K											
SS4-15 J BORE	* S1K	S1K	S1K										
SS4-16 J BORE	* S1K	S1K	S1K	S1K	S1K								
SS4-17 J BORE	* S1K	S1K	S1K	S1K	S1K								
SS4-18 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K							
SS4-19 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SS4-20 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS4-21 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS4-22 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SS4-23 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS4-24 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS4-25 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SS4-26 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SS4-27 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-28 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-29 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SS4-30 J BORE	* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS4-32 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS4-34 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS4-35 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS4-36 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS4-38 J BORE		* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS4-40 J BORE			* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS4-42 J BORE			* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS4-44 J BORE			* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS4-45 J BORE			* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS4-46 J BORE			* S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
SS4-48 J BORE				* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-50 J BORE					* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-52 J BORE					* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-54 J BORE					* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-55 J BORE					* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-56 J BORE					* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-58 J BORE					* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-60 J BORE					* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-62 J BORE					* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-64 J BORE					* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-65 J BORE					* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-66 J BORE					* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-68 J BORE					* S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K	S2K
SS4-70 J BORE					* S4K	S4K	S4K	S4K	S4K	S4K	S4K	S4K	S4K
SS4-80 J BORE					* S4K	S4K	S4K	S4K	S4K	S4K	S4K	S4K	S4K
SS4-90S J BORE								S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS4-100S J BORE								S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS4-110S J BORE								S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS4-120S J BORE								S1SK	S1SK	S1SK	S1SK	S1SK	S1SK




** is a product with the original bore diameter, so Hardened Plus is not available. See Page 22 for more details on Hardened Plus.





Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coated (excludes semi-custom products)
Backlash	0.20 to 0.44

* The precision grade of J Series products is equivalent to the value shown in the table.

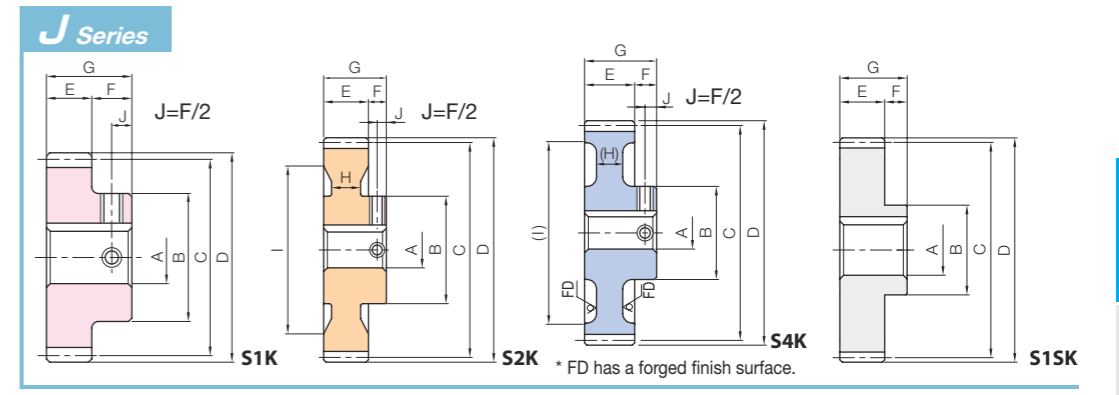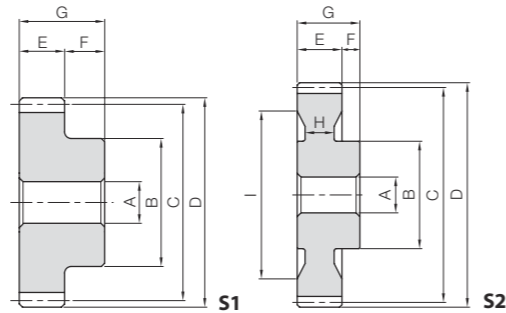

To order Hardened Plus, please specify **Catalog No. + H**. Example: **SS5-12H**

Catalog Number	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Web thickness	Web O.D.	Allowable torque						Weight (kg)							
												Bending strength		Surface durability		Surface durability (H)									
												N·m	kgf·m	N·m	kgf·m	N·m	kgf·m								
SS5-12	12	S1	22	46	60	70	50	25	75	—	—	254	25.9	15.2	1.55	69.7	7.11	1.21							
SS5-13	13			50	65	75						327	33.4	18.4	1.88	84.0	8.57	1.46							
SS5-14	14			52	70	80						412	42.0	21.8	2.22	99.1	10.1	1.70							
SS5-15	15			60	75	85						462	47.1	25.5	2.60	115	11.8	2.07							
SS5-16	16			65	80	90						512	52.2	29.5	3.01	133	13.6	2.40							
SS5-17	17			68	85	95						562	57.3	33.8	3.45	152	15.5	2.72							
SS5-18	18			70	90	100						614	62.6	38.4	3.92	172	17.6	3.03							
SS5-19	19			76	95	105						666	67.9	43.4	4.42	194	19.8	3.45							
SS5-20	20			82	100	110						718	73.3	48.6	4.96	217	22.1	3.90							
SS5-21	21			90	105	115						772	78.7	54.2	5.53	241	24.5	4.36							
SS5-22	22			S2	25	95						110	120	21	71	—	—	—	825	84.1	60.1	6.13	266	27.1	4.83
SS5-23	23					100						115	125						879	89.7	66.3	6.77	293	29.9	5.33
SS5-24	24					100						120	130						934	95.2	73.0	7.45	321	32.7	5.69
SS5-25	25					105						125	135						989	101	80.0	8.16	350	35.7	6.23
SS5-26	26					110						130	140						1040	106	87.1	8.88	379	38.7	6.79
SS5-27	27					110						135	145						1100	112	94.4	9.62	410	41.8	7.19
SS5-28	28					110						140	150						1160	118	102	10.4	441	45.0	7.62
SS5-29	29					115						145	155						1210	124	110	11.2	474	48.4	8.23
SS5-30	30					120						150	160						1270	129	118	12.1	508	51.8	8.87
SS5-32	32					120						160	170						1380	141	136	13.8	580	59.1	9.36
SS5-34	34	S4	30	120	170	180	21	71	—	—	—	1500	153	154	15.7	656	66.9	10.4							
SS5-35	35			120	175	185						1550	158	164	16.7	696	71.0	10.9							
SS5-36	36			120	180	190						1610	164	174	17.8	737	75.1	11.5							
SS5-38	38			120	190	200						1730	176	195	19.9	823	83.9	12.6							
SS5-40	40			120	200	210						1880	191	216	22.1	919	93.5	13.7							
SS5-42	42			120	210	220						2030	207	234	23.8	1015	103.1	14.8							
SS5-44	44			120	220	230						2180	222	261	26.6	1111	112.7	15.9							
SS5-45	45			120	225	235						2330	237	288	29.3	1207	122.3	17.0							
SS5-46	46			120	230	240						2480	252	315	32.0	1303	131.9	18.1							
SS5-48	48			120	240	250						2630	267	342	34.7	1400	141.6	19.2							
SS5-50	50	S2	40	120	250	260	21	71	—	—	—	2030	207	294	30.0	1150	117	15.0							
SS5-52	52			130	260	270						2180	222	321	32.6	1246	126.2	16.1							
SS5-54	54			130	270	280						2330	237	348	35.3	1342	135.8	17.2							
SS5-55	55			130	275	285						2480	252	375	38.0	1438	145.4	18.3							
SS5-56	56			130	280	290						2630	267	402	40.7	1534	155.0	19.4							
SS5-58	58			130	290	300						2780	282	429	43.4	1630	164.6	20.5							
SS5-60	60			130	300	310						2930	297	456	46.1	1726	174.2	21.6							
SS5-62S	62			S1	40	160						310	320	50	21	71	—	—	2420	247	423	43.1	—	—	32.2
SS5-64S	64					160						320	330						2570	262	450	45.8	—	—	34.2
SS5-65S	65					160						325	335						2720	277	477	48.5	—	—	35.2
SS5-66S	66	170	330			340	2870	292	504	51.2	—	—	36.2												
SS5-68S	68	170	340			350	3020	307	531	53.9	—	—	37.2												
SS5-70S	70	180	350			360	3170	322	558	56.6	—	—	41.3												
SS5-80S	80	200	400			410	3260	331	585	59.2	—	—	53.8												
SS5-90S	90	230	450			460	3350	340	612	61.9	—	—	68.6												
SS5-100S	100	250	500			510	3440	349	639	64.6	—	—	84.5												
SS5-110S	110	280	550			560	3530	358	666	67.3	—	—	103												
SS5-120S	120	300	600	610	3620	367	693	70.0	—	—	122														

[Precautions for Semi-custom Products] Please see Pages 38~40 for more details.



To order J Series products, please specify: **Catalog No. + J + BORE**. Example: **SS5-13J22**

Bore H7	* The product shapes of J Series items are identified by background color.																	
	Keyway JS9		22	25	28	30	32	35	40	45	50	55	60	65	70	75	80	85
	6x2.8	8x3.3	8x3.3	10x3.3	12x3.3	14x3.8	16x4.3	18x4.4	20x4.9	22x5.4								
Screw size	M5	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6
Catalog Number	M5	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6
SS5-12																		
SS5-13 J BORE	* S1K																	
SS5-14 J BORE	* S1K	* S1K	* S1K	* S1K														
SS5-15 J BORE	* S1K	* S1K	* S1K	* S1K	* S1K													
SS5-16 J BORE	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K												
SS5-17 J BORE	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K											
SS5-18 J BORE	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K											
SS5-19 J BORE	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K										
SS5-20 J BORE	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K									
SS5-21 J BORE		* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K								
SS5-22 J BORE		* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K							
SS5-23 J BORE		* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K						
SS5-24 J BORE		* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K					
SS5-25 J BORE		* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K				
SS5-26 J BORE		* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K			
SS5-27 J BORE		* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K			
SS5-28 J BORE		* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K			
SS5-29 J BORE		* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K		
SS5-30 J BORE		* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K		
SS5-32 J BORE				* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K		
SS5-34 J BORE				* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K		
SS5-35 J BORE				* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K		
SS5-36 J BORE				* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K		
SS5-38 J BORE				* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K	* S1K		
SS5-40 J BORE					* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K		
SS5-42 J BORE					* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K		
SS5-44 J BORE					* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K		
SS5-45 J BORE					* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K	* S2K		
SS5-46 J BORE					* S2K	* S2K												



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coated (excludes semi-custom products)

* The precision grade of J Series products is equivalent to the value shown in the table.

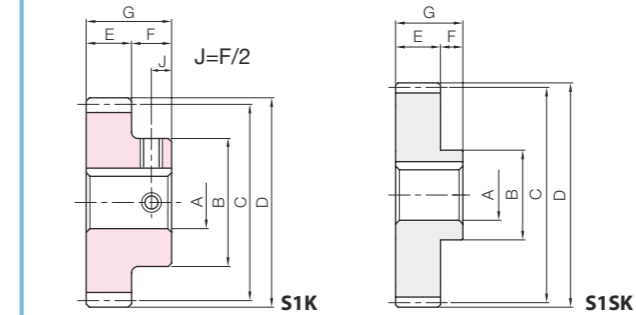

Catalog Number	No. of teeth	Shape	Bore A _{H7}	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Web thickness H	Web O.D. I	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)
												Bending strength	Surface durability	Bending strength	Surface durability		
SS8-12	12	S1	28	75	96	112	75	35	110	—	—	975	62.6	99.5	6.39	0.28~0.58	4.94
SS8-13	13			80	104	120						1260	75.2	128	7.66		5.85
SS8-14	14			85	112	128						1580	88.9	161	9.06		6.83
SS8-15	15			90	120	136						1770	104	181	10.6		7.87
SS8-16	16			100	128	144						1970	121	200	12.3		9.20
SS8-17	17			105	136	152						2160	139	220	14.1		10.4
SS8-18	18			110	144	160						2360	158	240	16.1		11.7
SS8-19	19			120	152	168						2560	178	261	18.2		13.3
SS8-20	20			130	160	176						2760	200	281	20.4		15.0
SS8-21	21			140	168	184						2960	223	302	22.8		16.7
SS8-22	22			150	176	192						3170	248	323	25.3		18.6
SS8-23	23			155	184	200						3380	273	344	27.9		20.2
SS8-24	24			160	192	208						2990	250	305	25.5		22.0
SS8-25	25			170	200	216						3160	273	323	27.8		24.1
SS8-26	26			170	208	224						3340	297	341	30.3		25.6
SS8-27	27		170	216	232	3520	322	359	32.8	27.2							
SS8-28	28		180	224	240	3700	348	377	35.5	29.6							
SS8-30	30		180	240	256	4060	404	414	41.2	33.0							
SS8-32S	32		40	200	256	272	4080	421	416	42.9	37.9						
SS8-34S	34			210	272	288	4420	479	451	48.9	42.6						
SS8-35S	35			210	280	296	4590	510	468	52.0	44.7						
SS8-36S	36			210	288	304	4760	542	486	55.3	46.8						
SS8-38S	38			220	304	320	5100	608	520	62.0	52.1						
SS8-40S	40			220	320	336	5450	679	555	69.3	56.7						
SS8-42S	42			230	336	352	5790	754	591	76.9	62.5						
SS8-44S	44			230	352	368	6140	834	626	85.0	67.6						
SS8-45S	45			230	360	376	6310	875	644	89.2	70.3						
SS8-46S	46			240	368	384	6490	917	662	93.6	74.0						
SS8-48S	48			240	384	400	6840	1010	697	103	79.5						
SS8-50S	50			240	400	416	7190	1100	733	112	85.3						
SS8-52S	52	240		416	432	7540	1200	769	122	91.4							
SS8-54S	54	240		432	448	7890	1300	805	132	97.6							
SS8-55S	55	240		440	456	8070	1350	823	138	101							
SS8-56S	56	240	448	464	8240	1400	841	143	104								
SS8-58S	58	240	464	480	8600	1510	877	154	111								
SS8-59S	59	240	472	488	8770	1570	895	160	114								
SS8-60S	60	240	480	496	8950	1630	913	166	118								

[Precautions for Semi-custom Products] Please see Pages 38~40 for more details.



To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore H ₇	* The product shapes of J Series items are identified by background color.																							
	28	30	32	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	120	130	140		
Keyway J _{s9}	8x3.3		10x3.3		12x3.3		14x3.8		16x4.3		18x4.4		20x4.9		22x5.4		25x5.4		28x6.4		32x7.4		36x8.4	
Screw size	M6			M8			M10			M12			M16			M20			M24					
Catalog Number	Background color indicates availability (S1K, S1SK, S15K, S15SK)																							
SS8-12 J BORE	S1K	S1K	S1K	S1K	S1K																			
SS8-13 J BORE	S1K	S1K	S1K	S1K	S1K																			
SS8-14 J BORE	S1K	S1K	S1K	S1K	S1K	S1K																		
SS8-15 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K																	
SS8-16 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																
SS8-17 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K															
SS8-18 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K														
SS8-19 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K													
SS8-20 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K												
SS8-21 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K											
SS8-22 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
SS8-23 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SS8-24 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SS8-25 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SS8-26 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SS8-27 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS8-28 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SS8-30 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SS8-32SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-34SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-35SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-36SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-38SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-40SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-42SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-44SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-45SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-46SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-48SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-50SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-52SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-54SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-55SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-56SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-58SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-59SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS8-60SJ BORE					S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coated (excludes semi-custom products)

* The precision grade of J Series products is equivalent to the value shown in the table.

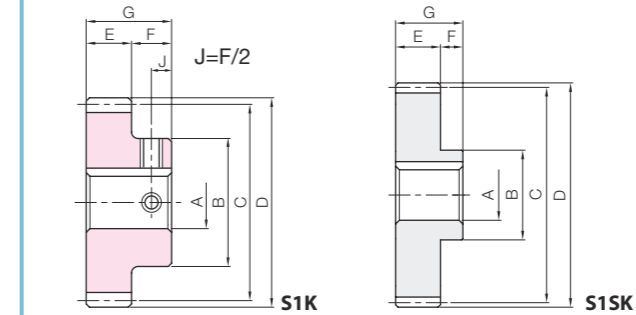

Catalog Number	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Web thickness	Web O.D.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)
			A _{H7}	B								Bending strength	Surface durability	Bending strength	Surface durability		
SS10-15	15	S1	30	115	150	170	90	40	130	—	—	3330	203	339	20.7	0.34~0.68	15.0
SS10-20	20		30	165	200	220						4310	323	440	33.0		
SS10-25	25		40	200	250	270						5930	529	605	54.0		

Catalog Number	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Web thickness	Web O.D.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)
			A _{H7}	B								Bending strength	Surface durability	Bending strength	Surface durability		
SS10-26S	26	S1	50	210	260	280	90	40	130	—	—	5790	522	590	53.3	0.34~0.68	46.4
SS10-27S	27			220	270	290						6100	566	622	57.7		
SS10-28S	28			220	280	300						6400	612	653	62.4		
SS10-29S	29			230	290	310						6720	660	685	67.3		
SS10-30S	30			240	300	320						7030	710	717	72.4		
SS10-32S	32			250	320	340						7660	815	781	83.1		
SS10-34S	34			260	340	360						8290	929	845	94.7		
SS10-35S	35			260	350	370						8610	988	878	101		
SS10-36S	36			270	360	380						8930	1050	910	107		
SS10-38S	38			270	380	400						9570	1180	976	120		
SS10-40S	40	280	400	420	10200	1320	1040	134	106								
SS10-42S	42	290	420	440	10900	1460	1110	149									
SS10-44S	44	290	440	460	11500	1620	1170	165									
SS10-45S	45	290	450	470	11800	1700	1210	173									
SS10-46S	46	290	460	480	12200	1780	1240	182									
SS10-48S	48	300	480	500	12800	1950	1310	199									
SS10-50S	50	300	500	520	13500	2140	1370	218									

[Precautions for Semi-custom Products] Please see Pages 38~40 for more details.

To order J Series products, please specify: **Catalog No. + J + BORE.**


Bore H7	* The product shapes of J Series items are identified by background color.																	
	30	32	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110
Keyway J _{S9}	8×3.3	10×3.3	12×3.3	14×3.8	16×4.3	18×4.4	20×4.9	22×5.4	25×5.4	28×6.4	32×7.4	36×8.4	40×9.4	45×10.4				
Screw size	M6	M8	M10	M12	M16	M20												
Catalog Number	M6	M8	M10	M12	M16	M20												
SS10-15 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
SS10-20 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SS10-25 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K

Bore H7	* The product shapes of J Series items are identified by background color.																					
	50	55	60	65	70	75	80	85	90	95	100	105	110	120	130	140	150	160	170	180	190	200
Keyway J _{S9}	14×3.8	16×4.3	18×4.4	20×4.9	22×5.4	25×5.4	28×6.4	32×7.4	36×8.4	40×9.4	45×10.4											
Catalog Number	14×3.8	16×4.3	18×4.4	20×4.9	22×5.4	25×5.4	28×6.4	32×7.4	36×8.4	40×9.4	45×10.4											
SS10-26SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK									
SS10-27SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK								
SS10-28SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK								
SS10-29SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK							
SS10-30SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK						
SS10-32SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK					
SS10-34SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK				
SS10-35SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK			
SS10-36SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK		
SS10-38SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	
SS10-40SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-42SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-44SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-45SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-46SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-48SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK
SS10-50SJ BORE	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK	S1SK



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coated except for portions given secondary operation

* The precision grade of F Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435

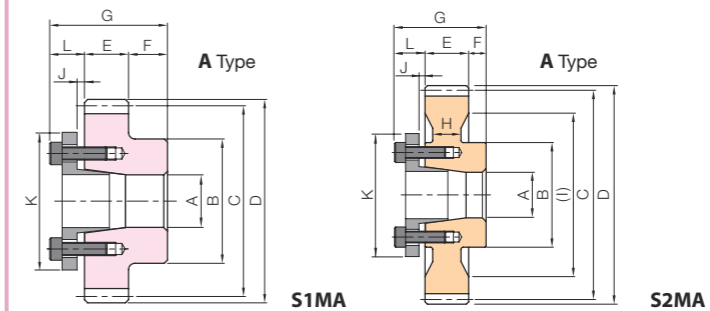

Features of F Series



- No rattling of shaft and gear when fastening
- Freely positionable mounting for easy meshing of teeth
- Easily mounted and removed for repeated use
- The bushing slips when overloaded to reduce damage to the gears.

Mounting Method and Precautions

- ① Shaft diameter recommended tolerance is h7. The limit is h8, but we recommend h6 when minimizing runout. Use 1.6a as reference for the surface roughness of the shaft diameter.
- ② Wipe away any debris, dirt or oil on the shaft surface and hole of the fastened section with thinner or the like, and lightly apply hydraulic oil #68. Do not apply molybdenum-based oil or oil with additives, as this may cause reduced fastening torque or slippage.
- ③ Pass completely through the shaft while pressing the bushing flange against the gear before tightening. Removal will not be possible, so be sure to leave a clearance of 1mm or more on the gear rear surface side. (Fig.1)
- ④ Use a torque wrench to fasten bolts on opposite sides when tightening. First tighten at 1/4 of the regulated torque, then at 1/2 of the regulated torque, before finally tightening up to the regulated torque. Do not tighten without passing through the shaft, or fasten the bolts after insertion on the draft tap side. (Fig.2)
- ⑤ If the shaft has a keyway, the fastened section contact area is reduced and the transmission rate is decreased by 15 to 20%.

Catalog Number	No. of teeth	Hub dia.		Pitch dia.	Outside dia.	Face width	Hub width	Web thickness	Web O.D.	Allowable torque (N·m)	
		B	C							Bending strength	Surface durability
SS1.5-26	26	32	39	42						28.2	2.06
SS1.5-27	27	34	40.5	43.5						29.7	2.23
SS1.5-28	28	36	42	45						31.2	2.41
SS1.5-29	29	37	43.5	46.5						32.7	2.60
SS1.5-30	30	38	45	48						34.2	2.79
SS1.5-32	32	40	48	51						37.3	3.19
SS1.5-34	34	40	51	54						40.4	3.63
SS1.5-35	35	42	52.5	55.5						41.9	3.85
SS1.5-36	36	45	54	57						43.5	4.09
SS1.5-38	38	45	57	60						46.6	4.58
SS1.5-40	40	45	60	63						49.8	5.10
SS1.5-42	42	45	63	66						52.9	5.40
SS1.5-44	44	45	66	69						56.1	5.72
SS1.5-45	45	45	67.5	70.5						57.7	5.88
SS1.5-46	46	45	69	72						59.3	6.04
SS1.5-48	48	45	72	75						62.4	6.37
SS1.5-50	50	45	75	78						65.7	6.69
SS1.5-52	52	50	78	81						68.9	7.02
SS1.5-54	54	50	81	84						72.1	7.35
SS1.5-55	55	50	82.5	85.5						73.7	7.51
SS1.5-56	56	50	84	87	15	10				75.3	7.68
SS1.5-58	58	50	87	90						78.5	8.01
SS1.5-60	60	50	90	93						81.8	8.34
SS1.5-62	62	55	93	96						85.0	8.67
SS1.5-64	64	55	96	99						88.3	9.00
SS1.5-65	65	55	97.5	100.5						89.9	9.17
SS1.5-66	66	55	99	102						91.5	9.33
SS1.5-68	68	55	102	105						94.8	9.66
SS1.5-70	70	55	105	108						98.0	10.0
SS1.5-72	72	55	108	111						101	10.3
SS1.5-75	75	60	112.5	115.5						106	10.8
SS1.5-76	76	60	114	117						108	11.0
SS1.5-80	80	60	120	123						114	11.7
SS1.5-84	84	60	126	129						121	12.3
SS1.5-85	85	60	127.5	130.5						123	12.5
SS1.5-88	88	60	132	135						128	13.0
SS1.5-90	90	60	135	138						131	13.3
SS1.5-95	95	60	142.5	145.5						139	14.2
SS1.5-100	100	60	150	153						147	15.0
SS1.5-120	120	70	180	183						180	18.4
SS1.5-150	150	180	225	228						192	19.6

* For the backlash of each product, please refer to the dimension table of the original product.

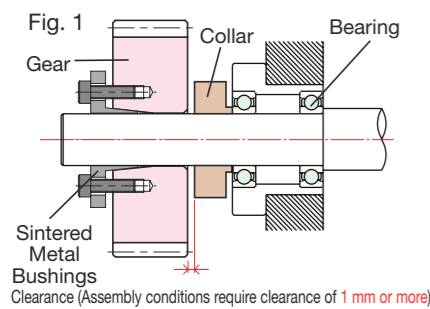

Removal Method and Precautions

- ① Turn off the power source (supply), check that no load is applied to the gear, and confirm that there is no danger due to falling, etc.
- ② Insert removed bolts into all draft taps, and gradually and evenly tighten each bolt in diagonal order until removal is complete.
- ③ The washer and thread surfaces will be roughened, compromising tightening strength, if the bolts are reused. Consequently, we recommend using new bolts of the same size.

To order F Series products, please specify: **Catalog Number + F + BORE + A.**

Bore A	* The product shapes of F Series items are identified by background color.															
	Catalog Number	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35
SS1.5-26 F Bore A	S1MA															
SS1.5-27 F Bore A	S1MA															
SS1.5-28 F Bore A	S1MA	S1MA														
SS1.5-29 F Bore A	S1MA	S1MA														
SS1.5-30 F Bore A	S1MA	S1MA														
SS1.5-32 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA											
SS1.5-34 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA										
SS1.5-35 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA									
SS1.5-36 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA								
SS1.5-38 F Bore A		S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-40 F Bore A		S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-42 F Bore A		S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-44 F Bore A		S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-45 F Bore A		S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-46 F Bore A		S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-48 F Bore A		S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-50 F Bore A		S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-52 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-54 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-55 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-56 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-58 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-60 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-62 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA							
SS1.5-64 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA						
SS1.5-65 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA						
SS1.5-66 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA						
SS1.5-68 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA						
SS1.5-70 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA						
SS1.5-72 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA						
SS1.5-75 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA		
SS1.5-76 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA		
SS1.5-80 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA		
SS1.5-84 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA		
SS1.5-85 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA		
SS1.5-88 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA		
SS1.5-90 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA		
SS1.5-95 F Bore A					S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA		
SS1.5-100 F Bore A					S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	S2MA		
SS1.5-120 F Bore A					S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	S2MA
SS1.5-150 F Bore A										S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA
Ref. slipping torque N·m		18	23	37	39	42	45	48	49	97	110	124	141	149	163	173
Ref. thrust load kN		3.59	3.76	5.21	5.1	5.17	5.23	5.28	5.12	9.68	9.98	9.90	10.0	9.89	10.1	9.88
Sintered Metal Bushings	L	10														
	K	29	31	36	37	38	39	40	42	46	47	51	53	56	58	61
Clearance	J	2								3						
Total Length	G	35					37						39			
Hex socket bolt	Qty	3								4						
	Size	M4×12					M4×15						M5×18			
	Tightening torque N·m						3.9						7.8			
Bushing weight (g)		20	22	38	40	41	43	45	49	71	71	81	84	93	97	106



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coated except for portions given secondary operation



* The precision grade of F Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435

Features of F Series

- No rattling of shaft and gear when fastening
- Freely positionable mounting for easy meshing of teeth
- Easily mounted and removed for repeated use
- The bushing slips when overloaded to reduce damage to the gears.

Mounting Method and Precautions

- ① Shaft diameter recommended tolerance is h7. The limit is h8, but we recommend h6 when minimizing runout. Use 1.6a as reference for the surface roughness of the shaft diameter.
- ② Wipe away any debris, dirt or oil on the shaft surface and hole of the fastened section with thinner or the like, and lightly apply hydraulic oil #68. Do not apply molybdenum-based oil or oil with additives, as this may cause reduced fastening torque or slippage.
- ③ Pass completely through the shaft while pressing the bushing flange against the gear before tightening. Removal will not be possible, so be sure to leave a clearance of 1mm or more on the gear rear surface side. (Fig.1)
- ④ Use a torque wrench to fasten bolts on opposite sides when tightening. First tighten at 1/4 of the regulated torque, then at 1/2 of the regulated torque, before finally tightening up to the regulated torque. Do not tighten without passing through the shaft, or fasten the bolts after insertion on the draft tap side. (Fig.2)
- ⑤ If the shaft has a keyway, the fastened section contact area is reduced and the transmission rate is decreased by 15 to 20%.

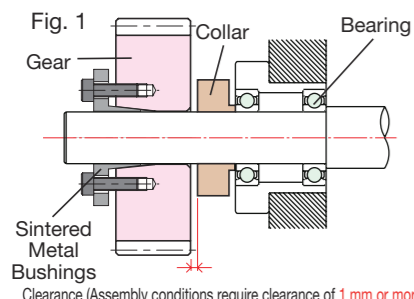


Catalog Number	No. of teeth	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Web thickness (H)	Web O.D. (I)	Allowable torque (N·m)	
									Bending strength	Surface durability
SS2-23	23	37	46	50					56.3	3.86
SS2-24	24	38	48	52					59.8	4.24
SS2-25	25	40	50	54					63.3	4.64
SS2-26	26	42	52	56					66.8	5.04
SS2-27	27	45	54	58					70.4	5.45
SS2-28	28	45	56	60					73.9	5.89
SS2-29	29	47	58	62					77.5	6.33
SS2-30	30	50	60	64					81.1	6.80
SS2-32	32	50	64	68					88.4	7.78
SS2-34	34	50	68	72					95.7	8.84
SS2-35	35	52	70	74					99.3	9.39
SS2-36	36	55	72	76					103	9.96
SS2-38	38	55	76	80					111	11.2
SS2-40	40	55	80	84					118	12.5
SS2-42	42	55	84	88					125	13.8
SS2-44	44	55	88	92					133	15.2
SS2-45	45	55	90	94					137	16.0
SS2-46	46	55	92	96					140	16.7
SS2-48	48	55	96	100					148	18.3
SS2-50	50	55	100	104					156	19.9
SS2-52	52	55	104	108	20	10			163	21.7
SS2-54	54	55	108	112					171	23.4
SS2-55	55	55	110	114					175	24.4
SS2-56	56	55	112	116					179	25.3
SS2-58	58	60	116	120					186	27.3
SS2-60	60	60	120	124					194	29.3
SS2-62	62	60	124	128					202	31.5
SS2-64	64	60	128	132					209	33.7
SS2-65	65	60	130	134					213	34.8
SS2-66	66	60	132	136					217	36.0
SS2-68	68	60	136	140					225	38.4
SS2-70	70	60	140	144					232	40.8
SS2-72	72	60	144	148					240	43.3
SS2-75	75	60	150	154					252	47.3
SS2-76	76	60	152	156					256	48.6
SS2-80	80	60	160	164			12	136	271	54.3
SS2-84	84	70	168	172				140	287	60.2
SS2-85	85	70	170	174				146	291	61.7
SS2-88	88	70	176	180				150	302	66.5
SS2-90	90	70	180	184				156	310	69.7
SS2-95	95	70	190	194				166	330	78.2
SS2-100	100	70	200	204				176	291	72.7
SS2-120	120	90	240	244				210	357	108

* For the backlash of each product, please refer to the dimension table of the original product.

Removal Method and Precautions

- ① Turn off the power source (supply), check that no load is applied to the gear, and confirm that there is no danger due to falling, etc.
- ② Insert removed bolts into all draft taps, and gradually and evenly tighten each bolt in diagonal order until removal is complete.
- ③ The washer and thread surfaces will be roughened, compromising tightening strength, if the bolts are reused. Consequently, we recommend using new bolts of the same size.

F Series

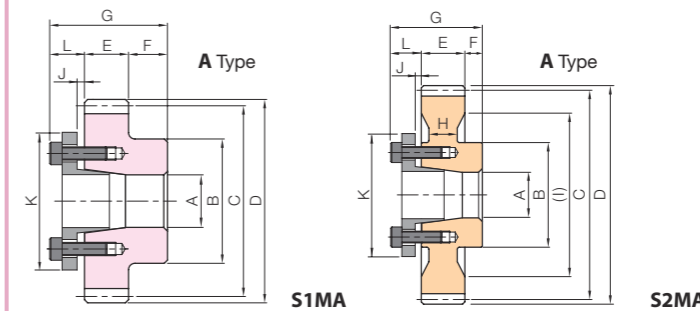

To order F Series products, please specify: **Catalog Number + F + BORE + A.**

Bore A	* The product shapes of F Series items are identified by background color.															
	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	
Ref. slipping torque N·m	23	37	39	42	45	48	49	97	110	124	141	149	163	173	725	
Ref. thrust load kN	3.76	5.21	5.10	5.17	5.23	5.28	5.12	9.68	9.98	9.90	10.0	9.89	10.1	9.88	12.3	
Sintered Metal Bushings	L	10			12					14					19	
Clearance	J	2						3								
Total Length	G	40			42					44					49	
Hex socket bolt	Qty	3						4							6	
Size	M4x12				M4x15					M5x18					M6x25	
Tightening torque N·m					3.9					7.8					13.7	
Bushing weight (g)	22	38	40	41	43	45	49	71	71	81	84	93	97	106	237	



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coated except for portions given secondary operation

* The precision grade of F Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435

Features of F Series



- No rattling of shaft and gear when fastening
- Freely positionable mounting for easy meshing of teeth
- Easily mounted and removed for repeated use
- The bushing slips when overloaded to reduce damage to the gears.

Mounting Method and Precautions

- ① Shaft diameter recommended tolerance is h7. The limit is h8, but we recommend h6 when minimizing runout. Use 1.6a as reference for the surface roughness of the shaft diameter.
- ② Wipe away any debris, dirt or oil on the shaft surface and hole of the fastened section with thinner or the like, and lightly apply hydraulic oil #68. Do not apply molybdenum-based oil or oil with additives, as this may cause reduced fastening torque or slippage.
- ③ Pass completely through the shaft while pressing the bushing flange against the gear before tightening. Removal will not be possible, so be sure to leave a clearance of 1mm or more on the gear rear surface side. (Fig.1)
- ④ Use a torque wrench to fasten bolts on opposite sides when tightening. First tighten at 1/4 of the regulated torque, then at 1/2 of the regulated torque, before finally tightening up to the regulated torque. Do not tighten without passing through the shaft, or fasten the bolts after insertion on the draft tap side. (Fig.2)
- ⑤ If the shaft has a keyway, the fastened section contact area is reduced and the transmission rate is decreased by 15 to 20%.


Catalog Number	No. of teeth	Hub dia.		Pitch dia.	Outside dia.	Face width	Hub width	Web thickness	Web O.D.	Allowable torque (N·m)		
		B	C							Bending strength	Surface durability	
SS2.5-22	22	44	55	60						103	6.99	
SS2.5-23	23	46	57.5	62.5						110	7.71	
SS2.5-24	24	48	60	65						117	8.47	
SS2.5-25	25	50	62.5	67.5						124	9.26	
SS2.5-26	26	55	65	70						130	10.1	
SS2.5-27	27	60	67.5	72.5						137	10.9	
SS2.5-28	28	60	70	75						144	11.7	
SS2.5-29	29	62	72.5	77.5						151	12.6	
SS2.5-30	30	65	75	80						159	13.6	
SS2.5-32	32	70	80	85						173	15.6	
SS2.5-34	34	70	85	90						187	17.7	
SS2.5-35	35	70	87.5	92.5						194	18.8	
SS2.5-36	36	70	90	95						201	20.0	
SS2.5-38	38	70	95	100						216	22.4	
SS2.5-40	40	70	100	105						230	24.9	
SS2.5-42	42	70	105	110						245	27.6	
SS2.5-44	44	70	110	115						260	30.5	
SS2.5-45	45	70	112.5	117.5						267	31.9	
SS2.5-46	46	70	115	120						274	33.5	
SS2.5-48	48	70	120	125						289	36.7	
SS2.5-50	50	70	125	130						304	40.0	
SS2.5-52	52	70	130	135						319	43.5	
SS2.5-54	54	70	135	140						334	47.2	
SS2.5-55	55	70	137.5	142.5						341	49.1	
SS2.5-56	56	70	140	145						349	51.0	
SS2.5-58	58	70	145	150						364	55.0	
SS2.5-60	60	70	150	155				(10)	(127)	379	59.1	
SS2.5-62	62	80	155	160						130	394	63.4
SS2.5-64	64	80	160	165						131	409	67.8
SS2.5-65	65	80	162.5	167.5						134	416	70.1
SS2.5-66	66	80	165	170						140	424	72.4
SS2.5-68	68	80	170	175						140	439	77.2
SS2.5-70	70	80	175	180				15		146	454	82.1
SS2.5-72	72	80	180	185						151	469	87.1
SS2.5-75	75	80	187.5	192.5						159	492	95.0
SS2.5-76	76	80	190	195						160	499	97.7
SS2.5-80	80	80	200	205						(177)	441	90.9
SS2.5-90	90	90	225	230						(202)	505	117

* For the backlash of each product, please refer to the dimension table of the original product.

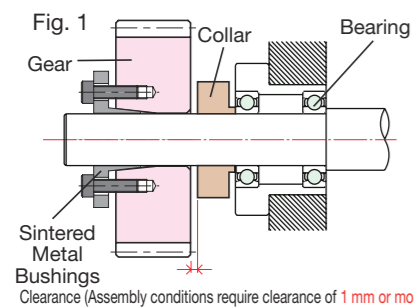

Removal Method and Precautions

- ① Turn off the power source (supply), check that no load is applied to the gear, and confirm that there is no danger due to falling, etc.
- ② Insert removed bolts into all draft taps, and gradually and evenly tighten each bolt in diagonal order until removal is complete.
- ③ The washer and thread surfaces will be roughened, compromising tightening strength, if the bolts are reused. Consequently, we recommend using new bolts of the same size.

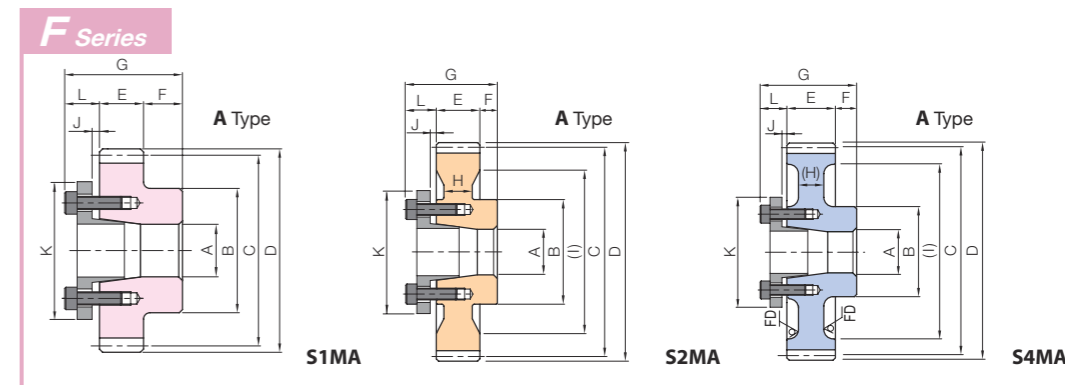

To order F Series products, please specify: **Catalog Number + F + BORE + A.**

Bore A	* The product shapes of F Series items are identified by background color.														
	Catalog Number	15	16	17	18	19	20	22	25	28	30	32	35	40	
SS2.5-22 F Bore A	S1MA	S1MA													
SS2.5-23 F Bore A	S1MA	S1MA	S1MA	S1MA											
SS2.5-24 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA										
SS2.5-25 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA									
SS2.5-26 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA									
SS2.5-27 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA									
SS2.5-28 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA									
SS2.5-29 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA							
SS2.5-30 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA						
SS2.5-32 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-34 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-35 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-36 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-38 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-40 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-42 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-44 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-45 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-46 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-48 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-50 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-52 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-54 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-55 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-56 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-58 F Bore A							S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS2.5-60 F Bore A									S4MA	S4MA	S4MA	S4MA	S4MA	S4MA	
SS2.5-62 F Bore A									S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS2.5-64 F Bore A									S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS2.5-65 F Bore A									S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS2.5-66 F Bore A									S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS2.5-68 F Bore A									S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS2.5-70 F Bore A									S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS2.5-72 F Bore A									S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS2.5-75 F Bore A									S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS2.5-76 F Bore A									S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS2.5-80 F Bore A									S4MA	S4MA	S4MA	S4MA	S4MA	S4MA	
SS2.5-90 F Bore A									S4MA	S4MA	S4MA	S4MA	S4MA	S4MA	
Bore A	15	16	17	18	19	20	22	25	28	30	32	35	40		
Ref. slipping torque N·m	39	42	45	48	49	97	110	124	141	149	163	173	725		
Ref. thrust load kN	5.10	5.17	5.23	5.28	5.12	9.68	9.98	9.90	10.0	9.89	10.1	9.88	12.3		
Sintered Metal	L	12						14						19	
Bushings	K	37	38	39	40	42	46	47	51	53	56	58	61	71	
Clearance	J	3						3							
Total Length	G	49						51						56	
With hex socket Bolt	Qty	4						4						6	
	Size	M4×15						M5×18						M6×25	
	Tightening torque N·m	3.9						7.8						13.7	
Bushing weight (g)		40	41	43	45	49	71	71	81	84	93	97	106	237	



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coated except for portions given secondary operation

* The precision grade of F Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435

Features of F Series



- No rattling of shaft and gear when fastening
- Freely positionable mounting for easy meshing of teeth
- Easily mounted and removed for repeated use
- The bushing slips when overloaded to reduce damage to the gears

Mounting Method and Precautions

- ① Shaft diameter recommended tolerance is h7. The limit is h8, but we recommend h6 when minimizing runout. Use 1.6a as reference for the surface roughness of the shaft diameter.
- ② Wipe away any debris, dirt or oil on the shaft surface and hole of the fastened section with thinner or the like, and lightly apply hydraulic oil #68. Do not apply molybdenum-based oil or oil with additives, as this may cause reduced fastening torque or slippage.
- ③ Pass completely through the shaft while pressing the bushing flange against the gear before tightening. Removal will not be possible, so be sure to leave a clearance of 1mm or more on the gear rear surface side. (Fig.1)
- ④ Use a torque wrench to fasten bolts on opposite sides when tightening. First tighten at 1/4 of the regulated torque, then at 1/2 of the regulated torque, before finally tightening up to the regulated torque. Do not tighten without passing through the shaft, or fasten the bolts after insertion on the draft tap side. (Fig.2)
- ⑤ If the shaft has a keyway, the fastened section contact area is reduced and the transmission rate is decreased by 15 to 20%.


Catalog Number	No. of teeth	Hub dia.		Pitch dia.	Outside dia.	Face width	Hub width	Web thickness	Web O.D.	Allowable torque (N·m)	
		B	C							D	E
SS3-19	19	45	57	63						144	8.88
SS3-20	20	50	60	66						155	9.95
SS3-21	21	52	63	69						167	11.1
SS3-22	22	54	66	72						178	12.3
SS3-23	23	56	69	75						190	13.6
SS3-24	24	58	72	78						202	14.9
SS3-25	25	60	75	81						214	16.3
SS3-26	26	65	78	84						226	17.7
SS3-27	27	65	81	87						237	19.2
SS3-28	28	70	84	90						250	20.7
SS3-29	29	70	87	93						262	22.3
SS3-30	30	75	90	96						274	24.0
SS3-32	32	75	96	102						298	27.4
SS3-34	34	80	102	108						323	31.2
SS3-35	35	80	105	111						335	33.1
SS3-36	36	80	108	114						348	35.2
SS3-38	38	80	114	120						373	39.4
SS3-40	40	80	120	126						398	44.0
SS3-42	42	80	126	132						423	48.9
SS3-44	44	80	132	138						449	54.0
SS3-45	45	80	135	141						461	56.6
SS3-46	46	80	138	144						474	59.4
SS3-48	48	80	144	150						500	65.0
SS3-50	50	80	150	156						(10) (123) 525	70.9
SS3-52	52	80	156	162						126	55.1
SS3-54	54	80	162	168						132	57.7
SS3-55	55	80	165	171						131	59.0
SS3-56	56	80	168	174						134	60.2
SS3-58	58	80	174	180						144	62.8
SS3-60	60	80	180	186						(10) (153) 654	105
SS3-62	62	80	186	192						150	68.0
SS3-64	64	80	192	198						158	58.8
SS3-65	65	80	195	201						161	59.9
SS3-66	66	90	198	204						160	61.0
SS3-68	68	90	204	210						170	63.2
SS3-70	70	90	210	216						176	65.4
SS3-72	72	90	216	222						182	67.5
SS3-75	75	90	225	231						190	70.8
SS3-76	76	90	228	234						190	71.9
SS3-80	80	90	240	246						(10) (213) 763	162

* For the backlash of each product, please refer to the dimension table of the original product.

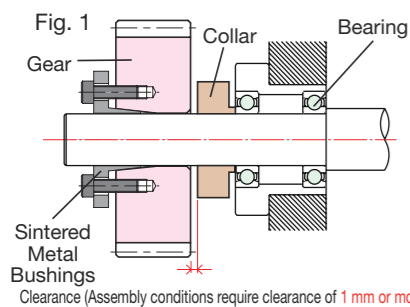

Removal Method and Precautions

- ① Turn off the power source (supply), check that no load is applied to the gear, and confirm that there is no danger due to falling, etc.
- ② Insert removed bolts into all draft taps, and gradually and evenly tighten each bolt in diagonal order until removal is complete.
- ③ The washer and thread surfaces will be roughened, compromising tightening strength, if the bolts are reused. Consequently, we recommend using new bolts of the same size.

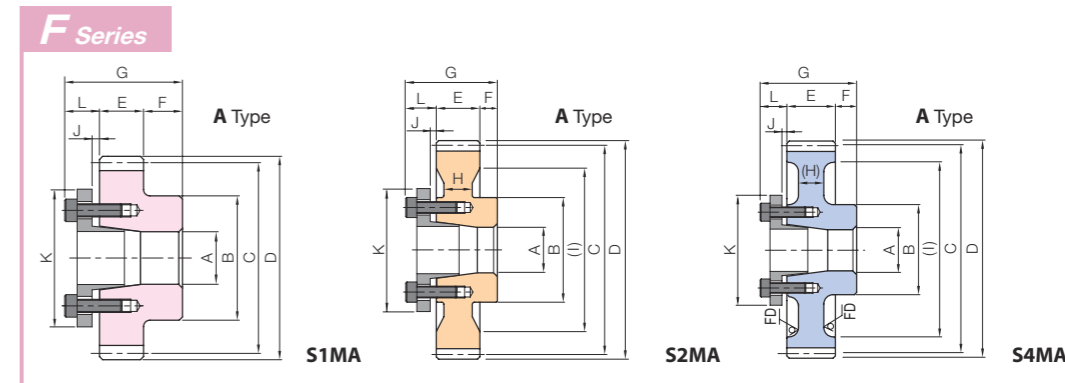


To order F Series products, please specify: **Catalog Number + F + BORE + A.**

Bore A	* The product shapes of F Series items are identified by background color.													
	15	16	17	18	19	20	22	25	28	30	32	35	40	
Catalog Number	15	16	17	18	19	20	22	25	28	30	32	35	40	
SS3-19 F Bore A	S1MA													
SS3-20 F Bore A	S1MA	S1MA	S1MA	S1MA										
SS3-21 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA									
SS3-22 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA									
SS3-23 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA									
SS3-24 F Bore A	S1MA	S1MA	S1MA	S1MA	S1MA									
SS3-25 F Bore A						S1MA	S1MA							
SS3-26 F Bore A						S1MA	S1MA	S1MA						
SS3-27 F Bore A						S1MA	S1MA	S1MA	S1MA	S1MA				
SS3-28 F Bore A						S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA		
SS3-29 F Bore A						S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA		
SS3-30 F Bore A						S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA		
SS3-32 F Bore A						S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA		
SS3-34 F Bore A						S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS3-35 F Bore A						S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS3-36 F Bore A						S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS3-38 F Bore A								S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS3-40 F Bore A								S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS3-42 F Bore A								S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS3-44 F Bore A								S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS3-45 F Bore A								S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS3-46 F Bore A								S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS3-48 F Bore A								S1MA	S1MA	S1MA	S1MA	S1MA	S1MA	
SS3-50 F Bore A								S4MA	S4MA	S4MA	S4MA	S4MA	S4MA	
SS3-52 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-54 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-55 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-56 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-58 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-60 F Bore A								S4MA	S4MA	S4MA	S4MA	S4MA	S4MA	
SS3-62 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-64 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-65 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-66 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-68 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-70 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-72 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-75 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-76 F Bore A								S2MA	S2MA	S2MA	S2MA	S2MA	S2MA	
SS3-80 F Bore A										S4MA	S4MA	S4MA	S4MA	
Bore A	15	16	17	18	19	20	22	25	28	30	32	35	40	
Ref. slipping torque N·m	39	42	45	48	49	97	110	124	141	149	163	173	725	
Ref. thrust load kN	5.10	5.17	5.23	5.28	5.12	9.68	9.98	9.90	10.0	9.89	10.1	9.88	12.3	
Sintered Metal Bushings	L	12					14					19		
Clearance J	K	37	38	39	40	42	46	47	51	53	56	58	61	71
Total Length G		57					59					64		
With hex socket Bolt	Qty	4					4					6		
Tightening torque N·m	Size	M4×15					M5×18					M6×25		
Bushing weight (g)		40	41	43	45	49	71	71	81	84	93	97	106	237




Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating



S5

J Series



S5K



* The precision grade of J Series products is equivalent to the value shown in the table.

To order Hardened Plus, please specify **Catalog No. + H**. Example: **SSA1-20H**

Catalog Number	Module	No. of teeth	Shape	Bore	Pitch dia.	Outside dia.	Face width	Allowable torque				Backlash (mm)	Weight (kg)				
								Bending strength		Surface durability							
								N·m	kgf·m	N·m	kgf·m						
SSA1-20	m1	20	S5	AH7	C	D	E	10	0.08~0.18	0.021	5.75	0.59	0.33	0.033	1.59	0.16	
SSA1-24		24									26	7.47	0.76	0.49	0.050	2.36	0.24
SSA1-25		25									27	7.91	0.81	0.54	0.055	2.57	0.26
SSA1-28		28									30	9.24	0.94	0.68	0.070	3.25	0.33
SSA1-30		30									32	10.1	1.03	0.79	0.081	3.74	0.38
SSA1-32		32									34	11.1	1.13	0.90	0.092	4.27	0.44
SSA1-35		35									37	12.4	1.27	1.09	0.11	5.13	0.52
SSA1-36		36									38	12.9	1.31	1.16	0.12	5.44	0.55
SSA1-40		40									42	14.7	1.50	1.45	0.15	6.76	0.69
SSA1-45		45									47	17.1	1.74	1.86	0.19	8.62	0.88
SSA1-48		48									50	18.5	1.89	2.13	0.22	9.84	1.00
SSA1-50		50									52	19.5	1.98	2.32	0.24	10.7	1.09
SSA1-55	55	57	21.8	2.23	2.83	0.29	13.0	1.33									
SSA1-56	56	58	22.3	2.28	2.94	0.30	13.5	1.38									
SSA1-60	60	62	24.2	2.47	3.40	0.35	15.6	1.59									
SSA1-70	70	72	29.1	2.96	4.70	0.48	21.4	2.18									
SSA1-80	80	82	33.9	3.46	6.23	0.63	28.1	2.87									
SSA1-100	100	102	43.7	4.45	9.97	1.02	44.4	4.53									
SSA1-120	120	122	53.5	5.45	14.7	1.50	64.4	6.57									
SSA1.5-20	m1.5	20	S5	AH7	C	D	E	15	0.10~0.22	0.074	19.4	1.98	1.15	0.12	5.47	0.56	
SSA1.5-24		24									36	25.2	2.57	1.73	0.18	8.12	0.83
SSA1.5-25		25									37.5	26.7	2.72	1.90	0.19	8.87	0.90
SSA1.5-28		28									42	31.2	3.18	2.41	0.25	11.2	1.14
SSA1.5-30		30									45	34.2	3.49	2.79	0.28	12.9	1.32
SSA1.5-32		32									48	37.3	3.80	3.19	0.33	14.8	1.51
SSA1.5-35		35									52.5	41.9	4.28	3.85	0.39	17.8	1.81
SSA1.5-36		36									54	43.5	4.43	4.09	0.42	18.8	1.92
SSA1.5-40		40									60	49.8	5.07	5.10	0.52	23.4	2.38
SSA1.5-45		45									67.5	57.7	5.88	6.53	0.67	29.8	3.03
SSA1.5-48		48									72	62.4	6.37	7.47	0.76	34.0	3.46
SSA1.5-50		50									75	65.7	6.69	8.15	0.83	36.9	3.77
SSA1.5-55	55	82.5	73.7	7.51	9.96	1.02	44.9	4.58									
SSA1.5-56	56	84	75.3	7.68	10.4	1.06	46.6	4.75									
SSA1.5-60	60	90	81.8	8.34	12.0	1.22	53.7	5.47									
SSA1.5-70	70	105	98.0	10.0	16.6	1.69	73.6	7.50									
SSA1.5-80	80	120	114	11.7	22.0	2.24	96.7	9.86									
SSA1.5-100	100	150	147	15.0	35.5	3.62	152	15.5									

To order J Series products, please specify: **Catalog No. + J + BORE**. Example: **SSA1-20J8**


Bore H7	* The product shapes of J Series items are identified by background color.																							
	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50					
Keyway JS9	3x1.4			4x1.8			5x2.3			6x2.8			8x3.3			10x3.3			12x3.3			14x3.8		
Screw size	3x1.4			4x1.8			5x2.3			6x2.8			8x3.3			10x3.3			12x3.3			14x3.8		
Catalog Number	—																							
SSA1-20 J BORE	* S5K																							
SSA1-24 J BORE	* S5K	S5K																						
SSA1-25 J BORE	* S5K	S5K																						
SSA1-28 J BORE	* S5K	S5K	S5K																					
SSA1-30 J BORE	* S5K	S5K	S5K																					
SSA1-32 J BORE	* S5K	S5K	S5K	S5K																				
SSA1-35 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K																		
SSA1-36 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K																		
SSA1-40 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K																	
SSA1-45 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K															
SSA1-48 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K														
SSA1-50 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K													
SSA1-55 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K												
SSA1-56 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K											
SSA1-60 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K										
SSA1-70 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K									
SSA1-80 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K								
SSA1-100 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K						
SSA1-120 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K					
SSA1.5-20 J BORE	* S5K	S5K																						
SSA1.5-24 J BORE	* S5K	S5K	S5K	S5K	S5K																			
SSA1.5-25 J BORE	* S5K	S5K	S5K	S5K	S5K																			
SSA1.5-28 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K																	
SSA1.5-30 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																
SSA1.5-32 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K															
SSA1.5-35 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K														
SSA1.5-36 J BORE	* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K													
SSA1.5-40 J BORE				* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K											
SSA1.5-45 J BORE				* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K										
SSA1.5-48 J BORE				* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K									
SSA1.5-50 J BORE				* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K								
SSA1.5-55 J BORE				* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K							
SSA1.5-56 J BORE				* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K						
SSA1.5-60 J BORE				* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K					
SSA1.5-70 J BORE				* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K					
SSA1.5-80 J BORE				* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K					
SSA1.5-100 J BORE				* S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K					

To order J Series Hardened Plus products, please specify: **Catalog No. + H + J + BORE**. Example: **SSA1-24HJ10**

*** is a product with the original bore diameter, so Hardened Plus is not available. See Page 22 for more details on Hardened Plus.




Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating



S5

J Series



S5K



To order Hardened Plus, please specify **Catalog No. + H**. Example: **SSA2-15H**

Catalog Number	Module	No. of teeth	Shape	Bore	Pitch dia.	Outside dia.	Face width	Allowable torque				Backlash (mm)	Weight (kg)				
								Bending strength		Surface durability							
								N-m	kgf-m	N-m	kgf-m						
SSA2-15	m2	15	S5	A _{H7}	C	D	E	29.6	3.01	1.48	0.15	7.01	0.71	0.12~0.26	0.099		
SSA2-18		18						36	40	39.3	4.01	2.23	0.23			10.5	1.07
SSA2-20		20						40	44	46.0	4.69	2.83	0.29			13.2	1.34
SSA2-24		24						48	52	59.8	6.09	4.24	0.43			19.6	2.00
SSA2-25		25						50	54	63.3	6.45	4.64	0.47			21.4	2.18
SSA2-28		28						56	60	73.9	7.54	5.89	0.60			27.0	2.76
SSA2-30		30						60	64	81.1	8.27	6.80	0.69			31.2	3.18
SSA2-32		32						64	68	88.4	9.01	7.78	0.79			35.6	3.63
SSA2-35		35						70	74	99.3	10.1	9.39	0.96			42.8	4.36
SSA2-36		36						72	76	103	10.5	9.96	1.02			45.3	4.62
SSA2-40	40	80	84	118	12.0	12.5	1.27	56.2	5.73	0.14~0.28	0.75						
SSA2-45	45	90	94	137	13.9	16.0	1.63	71.6	7.30								
SSA2-48	48	96	100	148	15.1	18.3	1.87	81.7	8.33								
SSA2-50	50	100	104	156	15.9	19.9	2.03	88.8	9.05								
SSA2-55	55	110	114	175	17.8	24.4	2.48	108	11.0								
SSA2-56	56	112	116	179	18.2	25.3	2.58	112	11.4								
SSA2-60	60	120	124	194	19.8	29.3	2.99	129	13.1								
SSA2-70	70	140	144	232	23.7	40.8	4.16	177	18.0								
SSA2-80	80	160	164	271	27.7	54.3	5.53	232	23.6								
SSA2-100	100	200	204	291	29.7	72.7	7.42	288	29.3								
SSA2.5-15	m2.5	15	S5	A _{H7}	C	D	E	57.7	5.89	2.96	0.30	13.9	1.41	0.14~0.28	0.19		
SSA2.5-18		18						45	50	76.7	7.82	4.47	0.46			20.7	2.11
SSA2.5-20		20						50	55	89.8	9.16	5.66	0.58			26.1	2.66
SSA2.5-24		24						60	65	117	11.9	8.47	0.86			38.8	3.95
SSA2.5-25		25						62.5	67.5	124	12.6	9.26	0.94			42.3	4.32
SSA2.5-28		28						70	75	144	14.7	11.7	1.20			53.4	5.45
SSA2.5-30		30						75	80	159	16.2	13.6	1.39			61.6	6.28
SSA2.5-32		32						80	85	173	17.6	15.6	1.59			70.3	7.17
SSA2.5-35		35						87.5	92.5	194	19.8	18.8	1.92			84.4	8.61
SSA2.5-36		36						90	95	201	20.5	20.0	2.04			89.5	9.12
SSA2.5-40	40	100	105	230	23.5	24.9	2.54	111	11.3	0.14~0.28	1.47						
SSA2.5-45	45	112.5	117.5	267	27.2	31.9	3.26	141	14.4								
SSA2.5-48	48	120	125	289	29.5	36.7	3.74	161	16.4								
SSA2.5-50	50	125	130	304	31.0	40.0	4.08	175	17.9								
SSA2.5-55	55	137.5	142.5	341	34.8	49.1	5.01	213	21.7								
SSA2.5-56	56	140	145	349	35.6	51.0	5.20	221	22.5								
SSA2.5-60	60	150	155	379	38.6	59.1	6.03	254	25.9								
SSA2.5-70	70	175	180	454	46.3	82.1	8.37	348	35.5								
SSA2.5-80	80	200	205	441	45.0	90.9	9.27	359	36.7								

To order J Series products, please specify: **Catalog No. + J + BORE**. Example: **SSA2-15J10**

Bore H7	* The product shapes of J Series items are identified by background color.																			
	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50		
Keyway J _{s9}	4x1.8		5x2.3				6x2.8				8x3.3				10x3.3		12x3.3		14x3.8	
Screw size	4x1.8		5x2.3				6x2.8				8x3.3				10x3.3		12x3.3		14x3.8	
Catalog Number	—																			
SSA2-15 J BORE	* S5K	S5K																		
SSA2-18 J BORE	* S5K	S5K	S5K	S5K																
SSA2-20 J BORE		* S5K	S5K	S5K	S5K	S5K														
SSA2-24 J BORE			* S5K	S5K	S5K	S5K	S5K	S5K												
SSA2-25 J BORE				* S5K	S5K	S5K	S5K	S5K	S5K	S5K										
SSA2-28 J BORE					* S5K	S5K	S5K	S5K	S5K	S5K	S5K									
SSA2-30 J BORE						* S5K	S5K	S5K	S5K	S5K	S5K	S5K								
SSA2-32 J BORE							* S5K	S5K	S5K	S5K	S5K	S5K	S5K							
SSA2-35 J BORE								* S5K	S5K	S5K	S5K	S5K	S5K	S5K						
SSA2-36 J BORE									* S5K	S5K	S5K	S5K	S5K	S5K	S5K					
SSA2-40 J BORE											* S5K	S5K	S5K	S5K	S5K	S5K				
SSA2-45 J BORE												* S5K	S5K	S5K	S5K	S5K	S5K			
SSA2-48 J BORE													* S5K	S5K	S5K	S5K	S5K	S5K		
SSA2-50 J BORE														* S5K	S5K	S5K	S5K	S5K		
SSA2-55 J BORE															* S5K	S5K	S5K	S5K		
SSA2-56 J BORE																* S5K	S5K	S5K		
SSA2-60 J BORE																	* S5K	S5K		
SSA2-70 J BORE																		* S5K		
SSA2-80 J BORE																				
SSA2-100 J BORE																				
SSA2.5-15 J BORE																				
SSA2.5-18 J BORE																				
SSA2.5-20 J BORE																				
SSA2.5-24 J BORE																				
SSA2.5-25 J BORE																				
SSA2.5-28 J BORE																				
SSA2.5-30 J BORE																				
SSA2.5-32 J BORE																				
SSA2.5-35 J BORE																				
SSA2.5-36 J BORE																				
SSA2.5-40 J BORE																				
SSA2.5-45 J BORE																				
SSA2.5-48 J BORE																				
SSA2.5-50 J BORE																				
SSA2.5-55 J BORE																				
SSA2.5-56 J BORE																				
SSA2.5-60 J BORE																				
SSA2.5-70 J BORE																				
SSA2.5-80 J BORE																				

To order J Series Hardened Plus products, please specify: **Catalog No. + H + J + BORE**. Example: **SSA2-15HJ12**

*** is a product with the original bore diameter, so Hardened Plus is not available. See Page 22 for more details on Hardened Plus.



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coated except for portions given secondary operation



* The precision grade of F Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435

Features of F Series

- No rattling of shaft and gear when fastening
- Freely positionable mounting for easy meshing of teeth
- Easily mounted and removed for repeated use
- The bushing slips when overloaded to reduce damage to the gears.

Mounting Method and Precautions

- ① Shaft diameter recommended tolerance is h7. The limit is h8, but we recommend h6 when minimizing runout. Use 1.6a as reference for the surface roughness of the shaft diameter.
- ② Wipe away any debris, dirt or oil on the shaft surface and hole of the fastened section with thinner or the like, and lightly apply hydraulic oil #68. Do not apply molybdenum-based oil or oil with additives, as this may cause reduced fastening torque or slippage.
- ③ Pass completely through the shaft while pressing the bushing flange against the gear before tightening. Removal will not be possible, so be sure to leave a clearance of 1mm or more on the gear rear surface side. (Fig.1)
- ④ Use a torque wrench to fasten bolts on opposite sides when tightening. First tighten at 1/4 of the regulated torque, then at 1/2 of the regulated torque, before finally tightening up to the regulated torque. Do not tighten without passing through the shaft, or fasten the bolts after insertion on the draft tap side. (Fig.2)
- ⑤ If the shaft has a keyway, the fastened section contact area is reduced and the transmission rate is decreased by 15 to 20%.

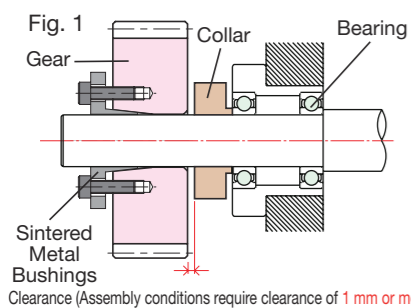


Catalog Number	Module	No. of teeth	Pitch dia.		Face width	Allowable torque (N·m)		
			C	D		Bending strength	Surface durability	
SSA2-24	m2	24	48	52	20	59.8	4.24	
SSA2-25		25	50	54		63.3	4.64	
SSA2-28		28	56	60		73.9	5.89	
SSA2-30		30	60	64		81.1	6.80	
SSA2-32		32	64	68		88.4	7.78	
SSA2-35		35	70	74		99.3	9.39	
SSA2-36		36	72	76		103	9.96	
SSA2-40		40	80	84		118	12.5	
SSA2-45		45	90	94		137	16.0	
SSA2-48		48	96	100		148	18.3	
SSA2-50	m2.5	50	100	104	25	156	19.9	
SSA2-55		55	110	114		175	24.4	
SSA2-56		56	112	116		179	25.3	
SSA2-60		60	120	124		194	29.3	
SSA2-70		70	140	144		232	40.8	
SSA2-80		80	160	164		271	54.3	
SSA2-100		100	200	204		291	72.7	
SSA2.5-24		24	60	65		25	117	8.47
SSA2.5-25		25	62.5	67.5			124	9.26
SSA2.5-28		28	70	75			144	11.7
SSA2.5-30	30	75	80	159	13.6			
SSA2.5-32	32	80	85	173	15.6			
SSA2.5-35	35	87.5	92.5	194	18.8			
SSA2.5-36	36	90	95	201	20.0			
SSA2.5-40	40	100	105	230	24.9			
SSA2.5-45	45	112.5	117.5	267	31.9			
SSA2.5-48	48	120	125	289	36.7			
SSA2.5-50	50	125	130	304	40.0			
SSA2.5-55	55	137.5	142.5	341	49.1			
SSA2.5-56	56	140	145	349	51.0			
SSA2.5-60	60	150	155	379	59.1			
SSA2.5-70	70	175	180	454	82.1			
SSA2.5-80	80	200	205	441	90.9			

* For the backlash of each product, please refer to the dimension table of the original product.

Removal Method and Precautions

- ① Turn off the power source (supply), check that no load is applied to the gear, and confirm that there is no danger due to falling, etc.
- ② Insert removed bolts into all draft taps, and gradually and evenly tighten each bolt in diagonal order until removal is complete.
- ③ The washer and thread surfaces will be roughened, compromising tightening strength, if the bolts are reused. Consequently, we recommend using new bolts of the same size.

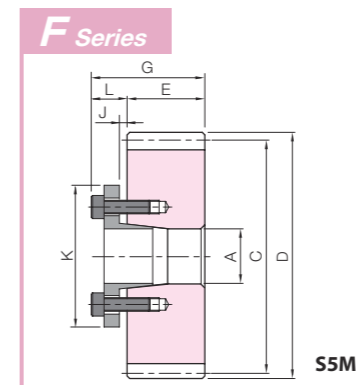

To order F Series products, please specify: **Catalog Number + F + BORE.**

Bore A	* The product shapes of F Series items are identified by background color.																
	Catalog Number	12	14	15	16	17	18	19	20	22	25	28	30	32	35		
SSA2-24 F Bore	S5M																
SSA2-25 F Bore	S5M	S5M	S5M														
SSA2-28 F Bore			S5M	S5M	S5M	S5M	S5M										
SSA2-30 F Bore			S5M	S5M	S5M	S5M	S5M										
SSA2-32 F Bore			S5M	S5M	S5M	S5M	S5M										
SSA2-35 F Bore			S5M	S5M	S5M	S5M	S5M	S5M	S5M								
SSA2-36 F Bore			S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M							
SSA2-40 F Bore						S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2-45 F Bore						S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2-48 F Bore						S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2-50 F Bore						S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2-55 F Bore						S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2-56 F Bore						S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2-60 F Bore						S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2-70 F Bore						S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2-80 F Bore						S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2-100 F Bore						S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2.5-24 F Bore			S5M	S5M	S5M	S5M	S5M										
SSA2.5-25 F Bore			S5M	S5M	S5M	S5M	S5M										
SSA2.5-28 F Bore						S5M	S5M										
SSA2.5-30 F Bore						S5M	S5M	S5M	S5M								
SSA2.5-32 F Bore						S5M	S5M	S5M	S5M	S5M							
SSA2.5-35 F Bore						S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2.5-36 F Bore						S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2.5-40 F Bore									S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2.5-45 F Bore									S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2.5-48 F Bore									S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2.5-50 F Bore									S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2.5-55 F Bore									S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2.5-56 F Bore									S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2.5-60 F Bore									S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2.5-70 F Bore									S5M	S5M	S5M	S5M	S5M	S5M	S5M		
SSA2.5-80 F Bore									S5M	S5M	S5M	S5M	S5M	S5M	S5M		
Bore A	12	14	15	16	17	18	19	20	22	25	28	30	32	35			
Ref. slipping torque N·m	23	37	39	42	45	48	49	97	110	124	141	149	163	173			
Ref. thrust load kN	3.76	5.21	5.1	5.17	5.23	5.28	5.12	9.68	9.98	9.9	10	9.89	10.1	9.88			
Sintered Metal Bushings	L	10	12						14								
Clearance	K	31	36	37	38	39	40	42	46	47	51	53	56	58	61		
Total Length	J	2															
Hex socket bolt	G	m2	30						32								
		m2.5	35						37								
Tightening torque N·m	Size	M4x12						M4x15						M5x18			
		3.9						7.8									
Bushing weight (g)		22	38	40	41	43	45	49	71	71	81	84	93	97	106		



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coated except for portions given secondary operation

* The precision grade of F Series products is equivalent to the value shown in the table.
* Bushing material: S45C, screw material: SCM435

Features of F Series

- No rattling of shaft and gear when fastening
- Freely positionable mounting for easy meshing of teeth
- Easily mounted and removed for repeated use
- The bushing slips when overloaded to reduce damage to the gears.

Mounting Method and Precautions

- ① Shaft diameter recommended tolerance is h7. The limit is h8, but we recommend h6 when minimizing runout. Use 1.6a as reference for the surface roughness of the shaft diameter.
- ② Wipe away any debris, dirt or oil on the shaft surface and hole of the fastened section with thinner or the like, and lightly apply hydraulic oil #68. Do not apply molybdenum-based oil or oil with additives, as this may cause reduced fastening torque or slippage.
- ③ Pass completely through the shaft while pressing the bushing flange against the gear before tightening. Removal will not be possible, so be sure to leave a clearance of 1mm or more on the gear rear surface side. (Fig.1)
- ④ Use a torque wrench to fasten bolts on opposite sides when tightening. First tighten at 1/4 of the regulated torque, then at 1/2 of the regulated torque, before finally tightening up to the regulated torque. Do not tighten without passing through the shaft, or fasten the bolts after insertion on the draft tap side. (Fig.2)
- ⑤ If the shaft has a keyway, the fastened section contact area is reduced and the transmission rate is decreased by 15 to 20%.

Catalog Number	Module	No. of teeth	Pitch dia.			Allowable torque (N·m)	
			C	D	E	Bending strength	Surface durability
SSA3-20	m3	20	60	66	30	155	9.95
SSA3-24		24	72	78		202	14.9
SSA3-25		25	75	81		214	16.3
SSA3-28		28	84	90		250	20.7
SSA3-30		30	90	96		274	24.0
SSA3-32		32	96	102		298	27.4
SSA3-35		35	105	111		335	33.1
SSA3-36		36	108	114		348	35.2
SSA3-40		40	120	126		398	44.0
SSA3-45		45	135	141		461	56.6
SSA3-48		48	144	150		500	65.0
SSA3-50		50	150	156		525	70.9
SSA3-55		55	165	171		590	86.9
SSA3-56		56	168	174		602	90.3
SSA3-60		60	180	186		654	105
SSA3-70		70	210	216		654	121
SSA3-80	80	240	246	763	162		

* For the backlash of each product, please refer to the dimension table of the original product.

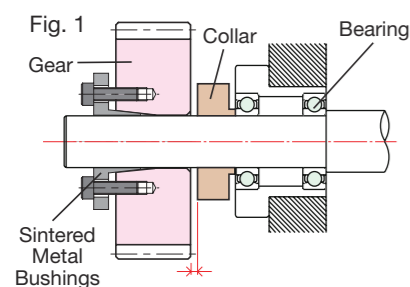


Fig. 1 Clearance (Assembly conditions require clearance of 1 mm or more)





Fig. 2 Hex socket bolt ②

Removal Method and Precautions

- ① Turn off the power source (supply), check that no load is applied to the gear, and confirm that there is no danger due to falling, etc.
- ② Insert removed bolts into all draft taps, and gradually and evenly tighten each bolt in diagonal order until removal is complete.
- ③ The washer and thread surfaces will be roughened, compromising tightening strength, if the bolts are reused. Consequently, we recommend using new bolts of the same size.

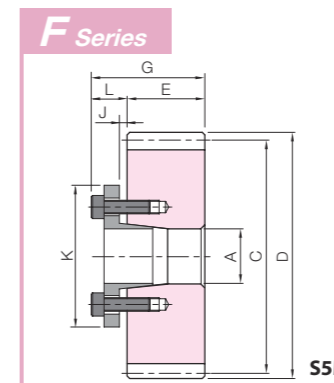



To order F Series products, please specify: **Catalog Number + F + BORE.**

Bore A	* The product shapes of F Series items are identified by background color.													
	Catalog Number	15	16	17	18	19	20	22	25	28	30	32	35	40
SSA3-20 F Bore	S5M	S5M	S5M	S5M										
SSA3-24 F Bore	S5M	S5M	S5M	S5M	S5M									
SSA3-25 F Bore	S5M	S5M	S5M	S5M	S5M	S5M								
SSA3-28 F Bore							S5M	S5M	S5M	S5M	S5M	S5M	S5M	
SSA3-30 F Bore							S5M	S5M	S5M	S5M	S5M	S5M	S5M	
SSA3-32 F Bore							S5M	S5M	S5M	S5M	S5M	S5M	S5M	
SSA3-35 F Bore							S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M
SSA3-36 F Bore							S5M	S5M	S5M	S5M	S5M	S5M	S5M	S5M
SSA3-40 F Bore									S5M	S5M	S5M	S5M	S5M	S5M
SSA3-45 F Bore									S5M	S5M	S5M	S5M	S5M	S5M
SSA3-48 F Bore									S5M	S5M	S5M	S5M	S5M	S5M
SSA3-50 F Bore									S5M	S5M	S5M	S5M	S5M	
SSA3-55 F Bore									S5M	S5M	S5M	S5M	S5M	S5M
SSA3-56 F Bore									S5M	S5M	S5M	S5M	S5M	S5M
SSA3-60 F Bore									S5M	S5M	S5M	S5M	S5M	S5M
SSA3-70 F Bore									S5M	S5M	S5M	S5M	S5M	S5M
SSA3-80 F Bore									S5M	S5M	S5M	S5M	S5M	S5M
Ref. slipping torque N·m	39	42	45	48	49	97	110	124	141	149	163	173	725	
Ref. thrust load kN	5.10	5.17	5.23	5.28	5.12	9.68	9.98	9.90	10.0	9.89	10.1	9.88	12.3	
Sintered Metal Bushings	L	12						14						19
Clearance	K	37	38	39	40	42	46	47	51	53	56	58	61	71
Total Length	J	3						3						
Hex socket bolt	Qty	4						4						6
	Size	M4×15						M5×18						M6×25
	Tightening torque N·m	3.9						7.8						13.7
Bushing weight (g)		40	41	43	45	49	71	71	81	84	93	97	106	237



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

* The precision grade of products with a module of less than 0.8 is equivalent to the value shown in the table.





Catalog Number	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Keyway
				A _{H7}	B	C	D	E	F	G	Width × Depth
SSY0.8-20	m0.8	20	S1	5	13.5	16	17.6	4	8	12	—
SSY0.8-25		25	S1	5	17	20	21.6				
SSY0.8-30		30	S1	5	20	24	25.6				
SSY0.8-40		40	S1	5	25	32	33.6				
SSY0.8-40A		40	S1T	6	25	32	33.6				
SSY0.8-50		50	S1	5	25	40	41.6				
SSY0.8-50A	50	S1T	6	25	40	41.6					
SSY1-12	m1	12	S1	5	9	12	14	6	8	14	—
SSY1-12A		12	S1T	5	9	12	14				
SSY1-14		14	S1	5	11	14	16				
SSY1-14A		14	S1T	5	11	14	16				
SSY1-15		15	S1	6	12	15	17				
SSY1-15A		15	S1T	6	12	15	17				
SSY1-16		16	S1	6	13	16	18				
SSY1-16A		16	S1T	6	13	16	18				
SSY1-18		18	S1	6	14	18	20				
SSY1-18A		18	S1T	6	14	18	20				
SSY1-20		20	S1	6	16	20	22				
SSY1-20A		20	S1T	6	16	20	22				
SSY1-20B		20	S1T	8	16	20	22				
SSY1-24		24	S1	6	16	24	26				
SSY1-24A		24	S1T	6	16	24	26				
SSY1-25		25	S1	6	16	25	27				
SSY1-28		28	S1	6	16	28	30				
SSY1-28A		28	S1T	6	16	28	30				
SSY1-30	30	S1	6	25	30	32					
SSY1-30A	30	S1T	6	25	30	32					
SSY1-30B	30	S1T	8	25	30	32					
SSY1-32	32	S1	6	25	32	34					
SSY1-35	35	S1	6	25	35	37					
SSY1-35A	35	S1T	8	25	35	37					
SSY1-36	36	S1	6	25	36	38					
SSY1-40	40	S1	8	28	40	42					
SSY1-40A	40	S1T	8	28	40	42					
SSY1-45	45	S1	8	28	45	47					
SSY1-48	48	S1	8	28	48	50					
SSY1-48A	48	S1T	8	28	48	50					

Socket head screw	Size	J	Allowable torque (N-m)		Allowable torque (kgf-m)		Backlash (mm)	Weight (kg)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
—	—	—	1.47	0.085	0.15	0.0087	0~0.10	0.013	SSY0.8-20
—	—	—	2.03	0.134	0.21	0.014		0.022	SSY0.8-25
—	—	—	2.60	0.197	0.27	0.020		0.032	SSY0.8-30
—	—	—	3.77	0.362	0.39	0.037		0.054	SSY0.8-40
M4	4	—	—	—	—	—		0.053	SSY0.8-40A
—	—	—	4.98	0.580	0.51	0.059		0.068	SSY0.8-50
M4	4	—	—	—	—	—	0.067	SSY0.8-50A	
—	—	—	1.22	0.069	0.12	0.0070	0.0072	SSY1-12	
M4	4	—	—	—	—	—	0.0070	SSY1-12A	
—	—	—	1.98	0.096	0.20	0.010	0.011	SSY1-14	
M4	4	—	—	—	—	—	0.011	SSY1-14A	
—	—	—	2.22	0.11	0.23	0.011	0.012	SSY1-15	
M4	4	—	—	—	—	—	0.012	SSY1-15A	
—	—	—	2.46	0.13	0.25	0.013	0.015	SSY1-16	
M4	4	—	—	—	—	—	0.014	SSY1-16A	
—	—	—	2.95	0.16	0.30	0.017	0.019	SSY1-18	
M4	4	—	—	—	—	—	0.018	SSY1-18A	
—	—	—	3.45	0.20	0.35	0.021	0.024	SSY1-20	
M4	4	—	—	—	—	—	0.024	SSY1-20A	
M5	4	—	—	—	—	—	0.021	SSY1-20B	
—	—	—	4.48	0.30	0.46	0.030	0.031	SSY1-24	
M4	4	—	—	—	—	—	0.030	SSY1-24A	
—	—	—	4.74	0.32	0.48	0.033	0.033	SSY1-25	
—	—	—	5.55	0.41	0.57	0.042	0.039	SSY1-28	
M4	4	—	—	—	—	—	0.038	SSY1-28A	
—	—	—	6.08	0.47	0.62	0.048	0.061	SSY1-30	
M4	4	—	—	—	—	—	0.060	SSY1-30A	
M5	4	—	—	—	—	—	0.057	SSY1-30B	
—	—	—	6.63	0.54	0.68	0.055	0.066	SSY1-32	
—	—	—	7.45	0.66	0.76	0.067	0.073	SSY1-35	
M5	4	—	—	—	—	—	0.069	SSY1-35A	
—	—	—	7.73	0.70	0.79	0.071	0.076	SSY1-36	
—	—	—	8.84	0.87	0.90	0.089	0.092	SSY1-40	
M5	4	—	—	—	—	—	0.091	SSY1-40A	
—	—	—	10.3	1.12	1.05	0.11	0.11	SSY1-45	
—	—	—	11.1	1.28	1.13	0.13	0.12	SSY1-48	
M5	4	—	—	—	—	—	0.12	SSY1-48A	



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating



Catalog Number	Module	No. of teeth	Shape	Bore				Face width	Hub width	Total length	Keyway	
				A _{H7}	B	C	D					
SSY1-50	m1	50	S1	8	28	50	52	6	8	14	—	
SSY1-55		55	S1	8	28	55	57				—	
SSY1-56		56	S1	8	28	56	58				—	
SSY1-60		60	S1	8	35	60	62				4 x 1.8	
SSY1-60A		60	S1K	10	35	60	62					—
SSY1-64		64	S1	8	35	64	66				—	
SSY1-65		65	S1	8	35	65	67				—	
SSY1-70		70	S1	8	35	70	72				—	
SSY1-72		72	S1	8	35	72	74				—	
SSY1-75		75	S1	8	35	75	77				—	
SSY1-80		80	S1	10	40	80	82				—	
SSY1-85		85	S1	10	40	85	87				—	
SSY1-90		90	S1	10	40	90	92				—	
SSY1-95		95	S1	10	40	95	97				—	
SSY1-96		96	S1	10	40	96	98				—	
SSY1-100		100	S1	10	50	100	102				—	
SSY1-110		110	S1	10	50	110	112				—	
SSY1-120		120	120	S1	10	50	120				122	—
SSY1-120A				S1K	12	35	120				122	4 x 1.8


Socket head screw	Allowable torque (N-m)	Allowable torque (kgf-m)		Backlash (mm)	Weight (kg)	Catalog Number	
		Bending strength	Surface durability				
—	11.7	1.39	1.19	0.08~0.18	0.13	SSY1-50	
—	13.1	1.70	1.34		0.15	SSY1-55	
—	13.4	1.77	1.37		0.15	SSY1-56	
M4	4	14.5	2.04		1.48	0.19	SSY1-60
		15.7	2.34		1.60	0.18	
—	16.0	2.41	1.63		0.21	SSY1-64	
—	17.4	2.82	1.78		0.21	SSY1-65	
—	17.4	2.82	1.78		0.24	SSY1-70	
—	18.0	2.99	1.84		0.24	SSY1-72	
—	18.9	3.26	1.93		0.25	SSY1-75	
—	20.3	3.74	2.07		0.26	SSY1-80	
—	21.8	4.25	2.22		0.31	SSY1-85	
—	23.3	4.79	2.37		0.34	SSY1-90	
—	24.7	5.37	2.52		0.37	SSY1-95	
—	25.0	5.49	2.55		0.40	SSY1-96	
—	26.2	5.98	2.67		0.41	SSY1-100	
—	29.1	7.31	2.97		0.48	SSY1-110	
M4	4	32.1	8.80		3.27	0.56	SSY1-120
		32.1	8.80		3.27	0.58	

Spur Gears
Helical Gears
Internal Gears
Racks
CP Racks & Pinions
Miter Gears
Bevel Gears
Screw Gears
Worm Gears
Gearboxes
Other Products

Spur Gears
Helical Gears
Internal Gears
Racks
CP Racks & Pinions
Miter Gears
Bevel Gears
Screw Gears
Worm Gears
Gearboxes
Other Products



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating



S5

Catalog Number	Module	No. of teeth	Shape	Bore			Face width	Allowable torque (N·m)		Allowable torque (kgf·m)	
				A _{H7}	C	D		Bending strength	Surface durability	Bending strength	Surface durability
SSAY1-20	m1	20	S5	6	20	22	6	3.45	0.20	0.35	0.021
SSAY1-24		24			26	4.48		0.30	0.46	0.030	
SSAY1-25		25			27	4.74		0.32	0.48	0.033	
SSAY1-28		28			30	5.55		0.41	0.57	0.042	
SSAY1-30		30			32	6.08		0.47	0.62	0.048	
SSAY1-32		32		34	6	6.63		0.54	0.68	0.055	
SSAY1-35		35		37		7.45		0.66	0.76	0.067	
SSAY1-36		36		38		7.73		0.70	0.79	0.071	
SSAY1-40		40		42		8.84		0.87	0.90	0.089	
SSAY1-45		45		47		10.3		1.12	1.05	0.11	
SSAY1-48	48	50	8	11.1	1.28	1.13	0.13				
SSAY1-50	50	52		11.7	1.39	1.19	0.14				
SSAY1-55	55	57		13.1	1.70	1.34	0.17				
SSAY1-56	56	58		13.4	1.77	1.37	0.18				
SSAY1-60	60	62		14.5	2.04	1.48	0.21				
SSAY1-70	70	72	10	17.4	2.82	1.78	0.29				
SSAY1-80	80	82		20.3	3.74	2.07	0.38				
SSAY1-100	100	102		26.2	5.98	2.67	0.61				

Backlash (mm)	Weight (kg)	Catalog Number
0.08~0.18	0.013	SSAY1-20
	0.020	SSAY1-24
	0.022	SSAY1-25
	0.028	SSAY1-28
	0.032	SSAY1-30
	0.037	SSAY1-32
	0.044	SSAY1-35
	0.047	SSAY1-36
	0.058	SSAY1-40
	0.074	SSAY1-45
0.084	SSAY1-48	
0.090	SSAY1-50	
0.11	SSAY1-55	
0.11	SSAY1-56	
0.13	SSAY1-60	
0.18	SSAY1-70	
0.23	SSAY1-80	
0.37	SSAY1-100	


Spur Gears
Helical Gears
Internal Gears
Racks
CP Racks & Pinions
Miter Gears
Bevel Gears
Screw Gears
Worm Gears
Gearboxes
Other Products

Spur Gears
Helical Gears
Internal Gears
Racks
CP Racks & Pinions
Miter Gears
Bevel Gears
Screw Gears
Worm Gears
Gearboxes
Other Products




Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	SUS303
Heat treatment	-
Tooth hardness	(less than 187HB)

* The precision grade of J Series products is equivalent to the value shown in the table.

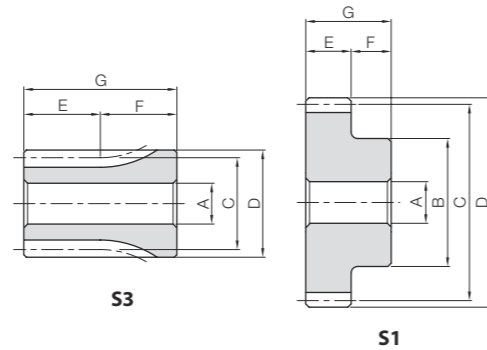

J Series

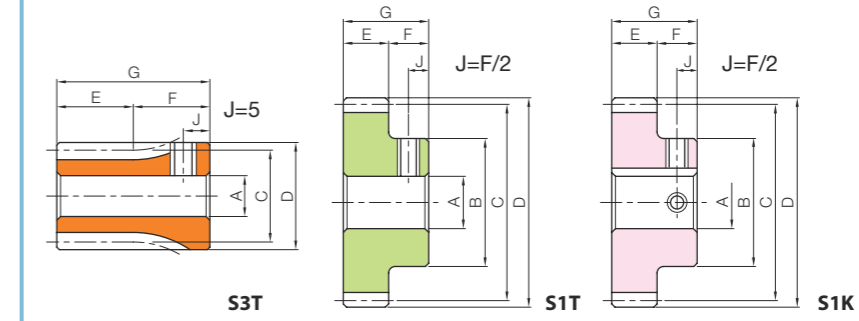

To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	No. of teeth	Shape	Bore AH7	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Allowable torque (N-m)				Backlash (mm)	Weight (kg)
										Bending strength	Surface durability	Bending strength	Surface durability		
SUS1-15	15	S3	8	17	15	17	10	20	30	2.04	0.12	0.21	0.013	0.08~0.18	0.038
SUS1-16	16			18	16	18				2.26	0.14	0.23	0.015		0.044
SUS1-18	18			20	18	20				2.71	0.18	0.28	0.019		0.058
SUS1-20	20			16	20	22				3.18	0.23	0.32	0.024		0.033
SUS1-22	22			18	22	24				3.65	0.29	0.37	0.029		0.042
SUS1-24	24			20	24	26				4.13	0.35	0.42	0.036		0.053
SUS1-25	25	S1	10	20	25	27	10	20	20	4.37	0.38	0.45	0.039	0.08~0.18	0.056
SUS1-28	28			23	28	30				5.11	0.48	0.52	0.049		0.074
SUS1-30	30			25	30	32				5.60	0.56	0.57	0.057		0.087
SUS1-32	32			26	32	34				6.11	0.64	0.62	0.066		0.098
SUS1-35	35			26	35	37				6.87	0.78	0.70	0.079		0.11
SUS1-36	36			28	36	38				7.12	0.82	0.73	0.084		0.12
SUS1-40	40			35	40	42				8.15	1.03	0.83	0.11		0.16
SUS1-42	42			35	42	44				8.66	1.14	0.88	0.12		0.17
SUS1-45	45			35	45	47				9.44	1.32	0.96	0.13		0.19
SUS1-48	48			35	48	50				10.2	1.51	1.04	0.15		0.21
SUS1-50	50			35	50	52				10.8	1.65	1.10	0.17		0.22
SUS1-55	55			40	55	57				12.1	2.01	1.23	0.21		0.28
SUS1-56	56	40	56	58	12.3	2.09	1.26	0.21	0.28						
SUS1-60	60	40	60	62	13.4	2.42	1.37	0.25	0.31						
SUS1-64	64	45	64	66	14.5	2.77	1.47	0.28	0.37						
SUS1-70	70	50	70	72	16.1	3.34	1.64	0.34	0.45						
SUS1-75	75	55	75	77	17.4	3.86	1.77	0.39	0.53						
SUS1-80	80	60	80	82	18.7	4.42	1.91	0.45	0.61						
SUS1-90	90	60	90	92	21.4	5.67	2.19	0.58	0.72						
SUS1-100	100	12	60	100	102	24.1	7.08	2.46	0.72	0.83					
SUS1-120	120		60	120	122	29.6	10.4	3.01	1.06	1.10					


Catalog Number	* The product shapes of J Series items are identified by background color.																
	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	
Keyway JS9	-																
Screw size	4x1.8			5x2.3				6x2.8				8x3.3			10x3.3		
Catalog Number	M5				M4				M5				M6			M8	
SUS1-15 J BORE	S3T																
SUS1-16 J BORE	S3T																
SUS1-18 J BORE	S3T																
SUS1-20 J BORE	S1T																
SUS1-22 J BORE	S1T																
SUS1-24 J BORE	S1T																
SUS1-25 J BORE	S1T																
SUS1-28 J BORE	S1T	S1K	S1K														
SUS1-30 J BORE	S1T	S1K	S1K														
SUS1-32 J BORE	S1T	S1K	S1K	S1K													
SUS1-35 J BORE	S1T	S1K	S1K	S1K													
SUS1-36 J BORE	S1T	S1K	S1K	S1K	S1K	S1K											
SUS1-40 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SUS1-42 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SUS1-45 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SUS1-48 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SUS1-50 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SUS1-55 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SUS1-56 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SUS1-60 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SUS1-64 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SUS1-70 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SUS1-75 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
SUS1-80 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SUS1-90 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SUS1-100 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SUS1-120 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	






Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)

* The precision grade of J Series products is equivalent to the value shown in the table.

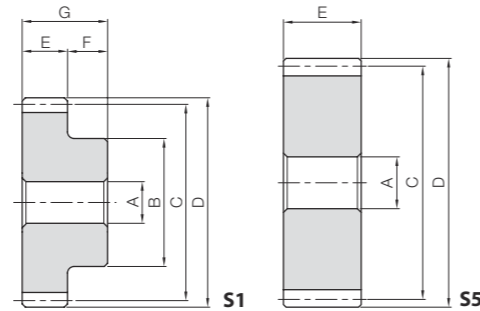

J Series

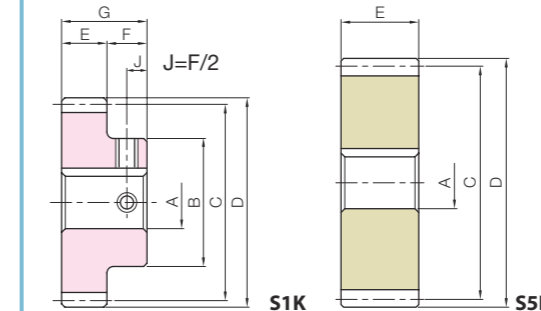

To order J Series products, please specify: **Catalog No. + J + BORE.**


Catalog Number	No. of teeth	Shape	Bore AH7	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Allowable torque (N·m)				Backlash (mm)	Weight (kg)		
										Bending strength	Surface durability	Bending strength	Surface durability				
SUS2.5-15	15	S1	15	30	37.5	42.5	18	43	—	—	31.9	2.11	3.25	0.21	0.14~0.28	0.26	
SUS2.5-16	16			32	40	45					35.3	2.44	3.60	0.25			0.30
SUS2.5-18	18			38	45	50					42.4	3.18	4.32	0.32			
SUS2.5-20	20			40	50	55					49.6	4.02	5.06	0.41			
SUS2.5-22	22			44	55	60					57.0	4.96	5.81	0.51			
SUS2.5-24	24			48	60	65					64.5	6.01	6.58	0.61			
SUS2.5-25	25			50	62.5	67.5					68.3	6.58	6.96	0.67			
SUS2.5-28	28			60	70	75					79.8	8.34	8.14	0.85			
SUS2.5-30	30			65	75	80					87.6	9.65	8.93	0.98			
SUSA2.5-32	32			S5	20	80					85	25	—	—			
SUSA2.5-35	35	87.5	92.5			107	13.4	10.9	1.36								
SUSA2.5-36	36	90	95			111	14.2	11.3	1.45								
SUSA2.5-40	40	100	105			127	17.7	13.0	1.81								
SUSA2.5-42	42	105	110			135	19.6	13.8	2.00								
SUSA2.5-45	45	112.5	117.5			148	22.7	15.0	2.31								
SUSA2.5-48	48	120	125			160	26.1	16.3	2.66								
SUSA2.5-50	50	125	130			168	28.4	17.1	2.90								
SUSA2.5-55	55	137.5	142.5			189	34.9	19.2	3.56								
SUSA2.5-56	56	140	145			193	36.2	19.6	3.70								
SUSA2.5-60	60	150	155	209	42.0	21.3	4.28										
SUSA2.5-64	64	160	165	226	48.2	23.0	4.91										
SUS3-15	15	S1	15	36	45	51	20	50	—	—	55.1	3.71	5.62	0.38	0.14~0.32	0.47	
SUS3-16	16			38	48	54					61.1	4.29	6.23	0.44			
SUS3-18	18			40	54	60					73.3	5.59	7.47	0.57			
SUS3-20	20			50	60	66					85.8	7.07	8.74	0.72			
SUS3-22	22			54	66	72					98.5	8.73	10.0	0.89			
SUS3-24	24			58	72	78					111	10.6	11.4	1.08			
SUS3-25	25			60	75	81					118	11.6	12.0	1.18			
SUS3-28	28			70	84	90					138	14.7	14.1	1.50			
SUS3-30	30			75	90	96					151	17.0	15.4	1.74			
SUSA3-32	32			S5	25	96					102	30	—	—			—
SUSA3-35	35	105	111			185	23.6	18.9	2.40								
SUSA3-36	36	108	114			192	25.0	19.6	2.55								
SUSA3-40	40	120	126			220	31.3	22.4	3.19								
SUSA3-42	42	126	132			234	34.7	23.9	3.54								
SUSA3-45	45	135	141			255	40.2	26.0	4.10								
SUSA3-48	48	144	150			276	46.2	28.2	4.71								
SUSA3-50	50	150	156			290	50.4	29.6	5.14								
SUSA3-55	55	165	171			326	61.7	33.2	6.30								
SUSA3-56	56	168	174			333	64.1	33.9	6.54								
SUSA3-60	60	180	186	362	74.3	36.9	7.58										
SUS4-15	15	S1	20	45	60	68	40	25	65	—	—	131	9.06	13.3	0.92	0.18~0.38	1.05
SUS4-20	20			65	80	88						203	17.3	20.7	1.76		
SUS4-25	25			84	100	108						280	28.3	28.5	2.89		
SUS4-30	30			100	120	128						359	41.7	36.6	4.25		
SUSA4-40	40	S5	30	160	168	—	—	—	—	521	77.1	53.2	7.86	0.18~0.38	6.15		
SUSA4-50	50			200	208					573	103	58.5	10.5				

Bore H7	* The product shapes of J Series items are identified by background color.																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Keyway JS9	5x2.3			6x2.8				8x3.3			10x3.3		12x3.3		14x3.8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Screw size	M4				M5				M6			M8		M10																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
Catalog Number	<table border="1"> <tr> <td>SUS2.5-15 J BORE</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS2.5-16 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS2.5-18 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS2.5-20 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS2.5-22 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS2.5-24 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS2.5-25 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS2.5-28 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td></tr> <tr> <td>SUS2.5-30 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td></tr> <tr> <td>SUSA2.5-32 J BORE</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td></td></tr> <tr> <td>SUSA2.5-35 J BORE</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td></td></tr> <tr> <td>SUSA2.5-36 J BORE</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td></td></tr> <tr> <td>SUSA2.5-40 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA2.5-42 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA2.5-45 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA2.5-48 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA2.5-50 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA2.5-55 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA2.5-56 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA2.5-60 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA2.5-64 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUS3-15 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS3-16 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS3-18 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS3-20 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS3-22 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS3-24 J BORE</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td></tr> <tr> <td>SUS3-25 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td></tr> <tr> <td>SUS3-28 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td></td></tr> <tr> <td>SUS3-30 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr> <td>SUSA3-32 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA3-35 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA3-36 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA3-40 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA3-42 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA3-45 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA3-48 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA3-50 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA3-55 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA3-56 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA3-60 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUS4-15 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>SUS4-20 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr> <td>SUS4-25 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr> <td>SUS4-30 J BORE</td><td></td><td></td><td></td><td></td><td></td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td><td>S1K</td></tr> <tr> <td>SUSA4-40 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> <tr> <td>SUSA4-50 J BORE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td><td>S5K</td></tr> </table>																SUS2.5-15 J BORE	S1K	S1K														SUS2.5-16 J BORE	S1K	S1K	S1K													SUS2.5-18 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K									SUS2.5-20 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								SUS2.5-22 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							SUS2.5-24 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						SUS2.5-25 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					SUS2.5-28 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				SUS2.5-30 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			SUSA2.5-32 J BORE	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K		SUSA2.5-35 J BORE	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K		SUSA2.5-36 J BORE	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K		SUSA2.5-40 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA2.5-42 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA2.5-45 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA2.5-48 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA2.5-50 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA2.5-55 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA2.5-56 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA2.5-60 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA2.5-64 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUS3-15 J BORE	S1K	S1K	S1K	S1K	S1K											SUS3-16 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K									SUS3-18 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K									SUS3-20 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						SUS3-22 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					SUS3-24 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				SUS3-25 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			SUS3-28 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		SUS3-30 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	SUSA3-32 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA3-35 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA3-36 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA3-40 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA3-42 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA3-45 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA3-48 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA3-50 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA3-55 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA3-56 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUSA3-60 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	SUS4-15 J BORE						S1K	S1K	S1K								SUS4-20 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	SUS4-25 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	SUS4-30 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	SUSA4-40 J BORE											S5K	S5K	S5K	S5K	S5K	SUSA4-50 J BORE											S5K	S5K	S5K	S5K	S5K
SUS2.5-15 J BORE	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
SUS2.5-16 J BORE	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
SUS2.5-18 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
SUS2.5-20 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
SUS2.5-22 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
SUS2.5-24 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
SUS2.5-25 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
SUS2.5-28 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
SUS2.5-30 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
SUSA2.5-32 J BORE	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
SUSA2.5-35 J BORE	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
SUSA2.5-36 J BORE	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
SUSA2.5-40 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA2.5-42 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA2.5-45 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA2.5-48 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA2.5-50 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA2.5-55 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA2.5-56 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA2.5-60 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA2.5-64 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUS3-15 J BORE	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
SUS3-16 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
SUS3-18 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
SUS3-20 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
SUS3-22 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
SUS3-24 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
SUS3-25 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
SUS3-28 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
SUS3-30 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA3-32 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA3-35 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA3-36 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA3-40 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA3-42 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA3-45 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA3-48 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA3-50 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA3-55 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA3-56 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA3-60 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUS4-15 J BORE						S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
SUS4-20 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUS4-25 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUS4-30 J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA4-40 J BORE											S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SUSA4-50 J BORE											S5K	S5K	S5K	S5K	S5K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	




Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)

* The gear grade listed is the value before clamping.
The precision grade of products with a module of 0.5 or less is equivalent to the value shown in the table.

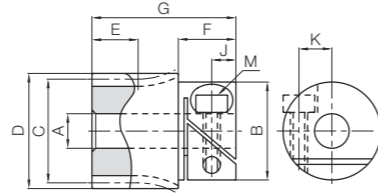

S3

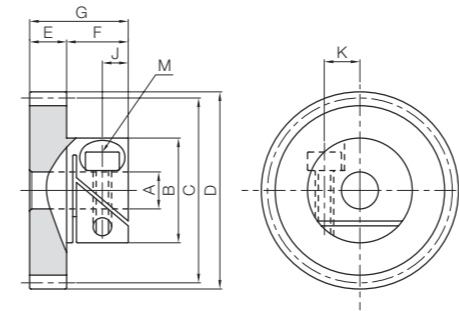

S1


Catalog Number	Module	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Hex socket screw											
				A _{H7}	B						C	D	E	F	G	M	J	K				
SUSF0.5-16	m0.5	16	S3	4	14	8	9	7	8	22	M2.5	3.3	4.4									
SUSF0.5-24		12				13																
SUSF0.5-28		14				15																
SUSF0.5-30		15				16																
SUSF0.5-32		16				17																
SUSF0.5-35		S1	35	6	17	17.5	18.5	5	10	15	M3	4.5	5.7									
SUSF0.5-45			22.5			23.5																
SUSF0.5-50			25			26																
SUSF0.5-60			30			31																
SUSF0.5-70			35			36																
SUSF0.5-80	40		41																			
SUSF1-14	m1		14			S3	6							17	14	16	8	10	25	M3	4.5	5.7
SUSF1-15			15												17							
SUSF1-16		16	18																			
SUSF1-18		18	20																			
SUSF1-20		20	22																			
SUSF1-24		S1	24	8	19	24	26	6	14	20	M4	5.3	7.7									
SUSF1-25			25			27																
SUSF1-28			28			30																
SUSF1-30			30			32																
SUSF1-32			32			34																
SUSF1-35	35		37																			
SUSF1-36	36		38																			
SUSF1-40	40		42																			
SUSF1-45	45	47																				
SUSF1-48	48	50																				
SUSF1-50	50	52																				
SUSF1-60	60	62																				
SUSF1-64	64	66																				
SUSF1-70	70	72																				
SUSF1-100	100	102																				

Allowable torque (N·m)		Allowable torque (kgf·m)		Ref. slipping torque	Standard screw tightening torque (N·m)	Backlash (mm)	Weight (g)	Catalog Number
Bending strength	Surface durability	Bending strength	Surface durability					
0.40	0.023	0.040	0.0023	0.62	0.45	0~0.10	13.9	SUSF0.5-16
0.72	0.056	0.074	0.0057				20.0	SUSF0.5-24
0.89	0.079	0.091	0.0080				16.0	SUSF0.5-28
0.98	0.091	0.10	0.0093				16.9	SUSF0.5-30
0.76	0.075	0.078	0.0077				22.6	SUSF0.5-32
0.86	0.088	0.088	0.009	1.79	0.80		24.2	SUSF0.5-35
1.18	0.15	0.12	0.015				30.4	SUSF0.5-45
1.34	0.19	0.14	0.019				34.1	SUSF0.5-50
1.67	0.28	0.17	0.029				44.5	SUSF0.5-60
2.01	0.39	0.20	0.040				54.7	SUSF0.5-70
2.34	0.51	0.24	0.052	4.50	2.00	88.2	SUSF0.5-80	
1.46	0.088	0.15	0.0090	1.79	0.80	33.3	SUSF1-14	
1.63	0.10	0.17	0.010			36.2	SUSF1-15	
1.81	0.12	0.18	0.012			39.3	SUSF1-16	
2.17	0.15	0.22	0.015			26.5	SUSF1-18	
1.91	0.14	0.19	0.015			29.4	SUSF1-20	
2.48	0.21	0.25	0.021			35.9	SUSF1-24	
2.62	0.23	0.27	0.023			37.8	SUSF1-25	
3.06	0.29	0.31	0.030			43.7	SUSF1-28	
3.36	0.34	0.34	0.034			49.7	SUSF1-30	
3.66	0.39	0.37	0.039			54.4	SUSF1-32	
4.12	0.47	0.42	0.047	2.22	0.80	61.9	SUSF1-35	
4.27	0.49	0.44	0.050			64.5	SUSF1-36	
4.89	0.62	0.50	0.063			75.9	SUSF1-40	
5.66	0.79	0.58	0.081			91.8	SUSF1-45	
6.14	0.91	0.63	0.093			102	SUSF1-48	
6.45	0.99	0.66	0.10			131	SUSF1-50	
8.03	1.45	0.82	0.15			172	SUSF1-60	
8.67	1.66	0.88	0.17			191	SUSF1-64	
9.63	2.00	0.98	0.20			221	SUSF1-70	
14.5	4.25	1.48	0.43			411	SUSF1-100	



Specifications	
Precision grade	JIS grade N10 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	Polyacetal (Hub: SUS303)
Heat Treatment	—
Tooth hardness	(110 to 120HRR)

* The gear grade listed is the value before clamping.
The precision grade of products with a module of 0.5 or less is equivalent to the value shown in the table.

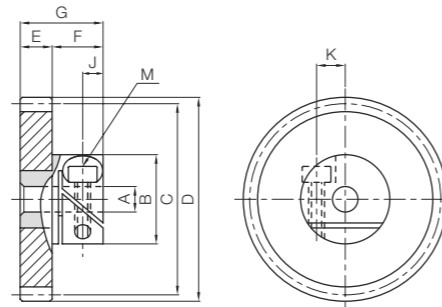

S1


Catalog Number	Module	No. of teeth	Shape	Bore		Pitch dia.		Outside dia.		Face width	Hub width	Total length	Hex socket screw			
				A _{H7}	B	C	D	E	F				G	M	J	K
DSF0.5-36	m0.5	36	S1	5	14	18	19	5	8.5	13.5	M2.5	3.3	4.4			
DSF0.5-40		20				21										
DSF0.5-48		24				25										
DSF0.5-50		25				26										
DSF0.5-60		30				31										
DSF0.5-80		40				41										
DSF0.5-120	120	60	61	10	15	M3	4.5	6								
DSF1-20	m1	20	S1	5	14	20	22	6	8.5	14.5	M2.5	3.3	4.4			
DSF1-24		24				26										
DSF1-25		25				27										
DSF1-28		28				30										
DSF1-30		30				32										
DSF1-32		32				34										
DSF1-35		35				37										
DSF1-36		36				38										
DSF1-40		40				42										
DSF1-45		45				47										
DSF1-48	48	50	8	19	48	50	10	16	M3	4.5	6					
DSF1-50	50	52														
DSF1-60	60	62														
DSF1-64	64	66														
DSF1-80	80	82														
DSF1-90	90	92														
DSF1-100	100	102														

Allowable torque (N·m)	Allowable torque (kgf·m)	Ref. slipping torque	Standard screw tightening torque (N·m)	Backlash (mm)	Weight (g)	Catalog Number
0.49	0.050	0.62	0.45	0~0.10	11.7	DSF0.5-36
0.55	0.057				12.1	DSF0.5-40
0.69	0.071				13.1	DSF0.5-48
0.73	0.075				13.4	DSF0.5-50
0.90	0.092				14.9	DSF0.5-60
1.25	0.13				18.8	DSF0.5-80
1.93	0.20	2.22	0.80	40.1	DSF0.5-120	
0.96	0.098	0.62	0.45	0~0.10	12.7	DSF1-20
1.22	0.12				13.9	DSF1-24
1.28	0.13				14.2	DSF1-25
1.48	0.15				15.3	DSF1-28
1.61	0.16				26.5	DSF1-30
1.75	0.18				27.3	DSF1-32
1.96	0.20	28.7	DSF1-35			
2.04	0.21	29.1	DSF1-36			
2.33	0.24	31.2	DSF1-40			
2.69	0.27	34.0	DSF1-45			
2.92	0.30	2.22	0.80	35.8	DSF1-48	
3.07	0.31			37.1	DSF1-50	
3.78	0.39			44.5	DSF1-60	
4.07	0.41			47.7	DSF1-64	
5.23	0.53			63.1	DSF1-80	
5.95	0.61			74.4	DSF1-90	
6.68	0.68	87.0	DSF1-100			




Specifications	
Precision grade	JIS grade N9 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	MC602ST with S45C core
Heat Treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade of J Series products is equivalent to the value shown in the table.

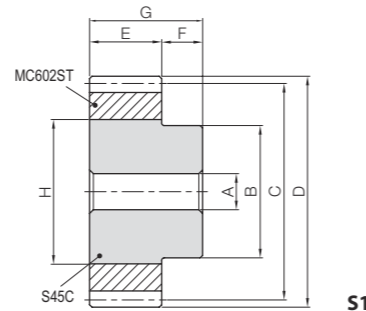

S1

J Series

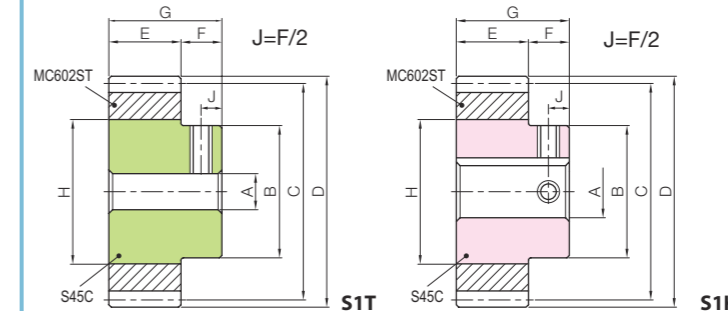

S1T

S1K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Core O.D.	Allowable torque (N·m)		Backlash (mm)	Weight (kg)											
			A _{H7}	B							Bending strength	Bending strength													
NSU1-30	30	S1	8	20	30	32	10	10	20	H	1.23	0.13	0~0.34	0.046											
NSU1-32	32			22	32	34					1.34	0.14													
NSU1-35	35			25	35	37					1.50	0.15													
NSU1-36	36			25	36	38					1.56	0.16													
NSU1-40	40			25	40	42					1.78	0.18													
NSU1-45	45		10	30	45	47					34	2.06			0.21	0~0.36	0.12								
NSU1-48	48			30	48	50					34	2.23			0.23										
NSU1-50	50			30	50	52					34	2.35			0.24										
NSU1-60	60			40	60	62					45	2.93			0.30										
NSU1-70	70			40	70	72					45	3.46			0.35										
NSU1-80	80	S1	10	80	82	15	12	27	H	4.00	0.41	0~0.40	0.25												
NSU1-90	90			40	90					92	55			4.56	0.46										
NSU1-100	100			100	102					65	5.12			0.52											
NSU1.5-28	28			S1	10					30	42			45	15	12	27	3.82	0.39	0~0.38	0.15				
NSU1.5-30	30									45	48			30				4.15	0.42						
NSU1.5-32	32		48							51	33			4.51				0.46							
NSU1.5-35	35		52.5							55.5	36			5.07				0.52							
NSU1.5-36	36		54							57	36			5.26				0.54							
NSU1.5-40	40		12		40					60	63			20				14	34			6.00	0.61	0~0.42	0.31
NSU1.5-45	45									67.5	70.5											45	6.94		
NSU1.5-48	48	72				75	45	7.53	0.77																
NSU1.5-50	50	75				78	45	7.92	0.81																
NSU1.5-56	56	84				87	55	9.09	0.93																
NSU1.5-60	60	S1	12	90	93	20	14	34	9.89	1.01	0~0.44	0.51													
NSU1.5-70	70			105	108				70	11.7			1.19												
NSU1.5-80	80			120	123				85	13.5			1.38												
NSU1.5-90	90			135	138				100	15.4			1.57												
NSU2-20	20			S1	10				22	40			44		20	14	34			5.89	0.60	0~0.46	2.38		
NSU2-22	22		44						48	30			6.66	0.68											
NSU2-24	24		30						48	52			30	7.43				0.76							
NSU2-25	25		50						54	30			7.85	0.80											
NSU2-28	28		56						60	35			9.05	0.92											
NSU2-30	30		12		40				60	64			20	14				34	9.84	1.00	0~0.46			2.38	
NSU2-32	32	64				68	40	10.7	1.09																
NSU2-35	35	70				74	45	12.0	1.22																
NSU2-36	36	72				76	45	12.5	1.27																
NSU2-40	40	80				84	60	14.2	1.45																
NSU2-44	44	S1	15	88	92	20	14	34	16.0	1.63	0~0.46	2.38													
NSU2-45	45			90	94				60	16.5					1.68										
NSU2-48	48			96	100				65	17.8					1.82										
NSU2-50	50			100	104				65	18.8					1.92										
NSU2-56	56			112	116				65	21.5					2.20										
NSU2-60	60		60	120	124				85	23.5			2.39	0~0.46	1.29										
NSU2-70	70				140				144	105			27.7			2.82									
NSU2-80	80				160				164	125			32.0			3.27									

Catalog Number	* The product shapes of J Series items are identified by background color.															
	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35
NSU1-30 J BORE	S1T															
NSU1-32 J BORE	S1T	S1K														
NSU1-35 J BORE	S1T	S1K	S1K													
NSU1-36 J BORE	S1T	S1K	S1K													
NSU1-40 J BORE		S1K	S1K													
NSU1-45 J BORE		S1K	S1K	S1K	S1K	S1K	S1K									
NSU1-48 J BORE		S1K	S1K	S1K	S1K	S1K	S1K									
NSU1-50 J BORE		S1K	S1K	S1K	S1K	S1K	S1K									
NSU1-60 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
NSU1-70 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
NSU1-80 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
NSU1-90 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
NSU1-100 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
NSU1.5-28 J BORE		S1K	S1K	S1K	S1K	S1K	S1K									
NSU1.5-30 J BORE		S1K	S1K	S1K	S1K	S1K	S1K									
NSU1.5-32 J BORE		S1K	S1K	S1K	S1K	S1K	S1K									
NSU1.5-35 J BORE		S1K	S1K	S1K	S1K	S1K	S1K									
NSU1.5-36 J BORE		S1K	S1K	S1K	S1K	S1K	S1K									
NSU1.5-40 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
NSU1.5-45 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
NSU1.5-48 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
NSU1.5-50 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
NSU1.5-56 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
NSU1.5-60 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
NSU1.5-70 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
NSU1.5-80 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
NSU1.5-90 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
NSU2-20 J BORE		S1K														
NSU2-22 J BORE		S1K	S1K	S1K	S1K	S1K	S1K									
NSU2-24 J BORE		S1K	S1K	S1K	S1K	S1K	S1K									
NSU2-25 J BORE		S1K	S1K	S1K	S1K	S1K	S1K									
NSU2-28 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
NSU2-30 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
NSU2-32 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
NSU2-35 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
NSU2-36 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
NSU2-40 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
NSU2-44 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
NSU2-45 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
NSU2-48 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
NSU2-50 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
NSU2-56 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
NSU2-60 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
NSU2-70 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
NSU2-80 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K






Plastic Spur Gears with Steel Core




Specifications	
Precision grade	JIS grade N9 (JIS B1702-1: 1999)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	MC901 with SUS303 core
Heat Treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade of J Series products is equivalent to the value shown in the table.

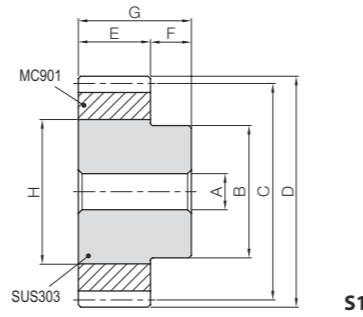

S1

J Series

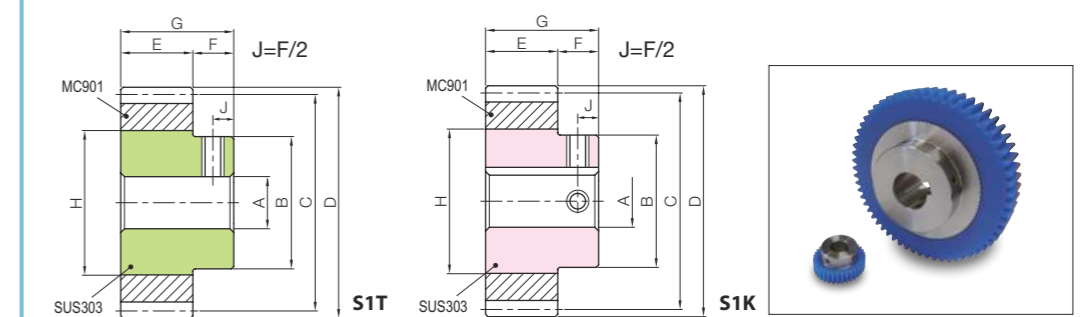

S1T

S1K

To order J Series products, please specify: **Catalog No. + J + BORE.**


Catalog Number	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Core O.D.	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (kg)
			A _{H7}	B										
PU1-30	30	S1	8	20	30	32	10	10	20	20	1.03	0.10	0~0.34	0.046
PU1-35	35			25	35	37								
PU1-40	40		25	40	42									
PU1-50	50		30	50	52									
PU1-60	60		40	60	62									
PU1-80	80		40	80	82									
PU1.5-30	30	S1	10	30	45	48	15	12	27	30	3.46	0.35	0~0.38	0.15
PU1.5-35	35			33	52.5	55.5								
PU1.5-40	40		40	60	63									
PU1.5-50	50		40	75	78									
PU1.5-60	60		50	90	93									
PU1.5-80	80		60	120	123									
PU2-20	20	S1	10	22	40	44	20	14	34	22	4.91	0.50	0~0.42	0.10
PU2-25	25			30	50	54								
PU2-30	30		35	60	64									
PU2-35	35		40	70	74									
PU2-40	40		55	80	84									
PU2-50	50		60	100	104									
PU2-60	60	60	120	124										

Bore H7	* The product shapes of J Series items are identified by background color.																	
	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35		
Keyway JS9	—			4x1.8			5x2.3			6x2.8			8x3.3			10x3.3		
Screw size	—			M4			M5			M6			M8					
Catalog Number	M5			M4			M5			M6			M8					
PU1-30 J BORE	S1T																	
PU1-35 J BORE	S1T	S1K	S1K															
PU1-40 J BORE		S1K	S1K															
PU1-50 J BORE		S1K	S1K	S1K	S1K	S1K	S1K											
PU1-60 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
PU1-80 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
PU1.5-30 J BORE		S1K	S1K	S1K	S1K	S1K	S1K											
PU1.5-35 J BORE		S1K	S1K	S1K	S1K	S1K	S1K											
PU1.5-40 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
PU1.5-50 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
PU1.5-60 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PU1.5-80 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PU2-20 J BORE		S1K																
PU2-25 J BORE		S1K	S1K	S1K	S1K	S1K	S1K											
PU2-30 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
PU2-35 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
PU2-40 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PU2-50 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PU2-60 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		




Specifications	
Precision grade	JIS grade N9 (JIS B1702-1: 1999)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	MC901
Heat treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade is equivalent to the value shown in the table.

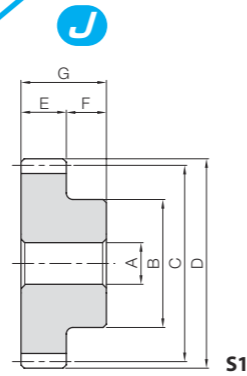

J Series

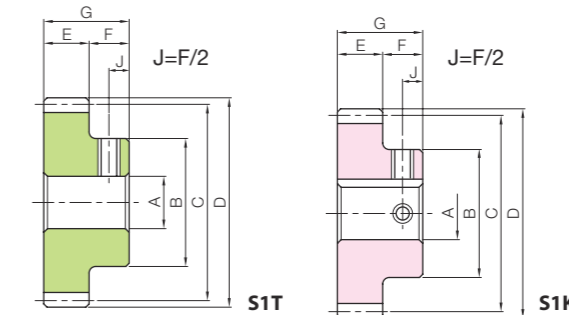


To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (kg)
			A	B									
PS1-15	15	S1	6	12	15	17	10	10	20	0.41	0.042	0~0.32	0.0027
PS1-16	16			12	16	18				0.45	0.046		0.0030
PS1-18	18			14	18	20				0.53	0.054		0.0041
PS1-20	20			16	20	22				0.61	0.063		0.0053
PS1-22	22			18	22	24				0.69	0.071		0.0062
PS1-24	24			20	24	26				0.77	0.079		0.0077
PS1-25	25	S1	8	20	25	27	10	10	20	0.82	0.083	0~0.34	0.0082
PS1-26	26			20	26	28				0.86	0.088		0.0086
PS1-28	28			22	28	30				0.94	0.096		0.010
PS1-30	30			25	30	32				1.03	0.10		0.013
PS1-32	32			26	32	34				1.11	0.11		0.014
PS1-35	35			26	35	37				1.25	0.13		0.016
PS1-36	36	S1	10	28	36	38	10	10	20	1.30	0.13	0~0.36	0.018
PS1-40	40			35	40	42				1.48	0.15		0.024
PS1-45	45			35	45	47				1.71	0.17		0.028
PS1-48	48			48	50	50				1.86	0.19		0.030
PS1-50	50			50	52	52				1.96	0.20		0.032
PS1-55	55			55	57	57				2.18	0.22		0.037
PS1-60	60	S1	10	60	60	62	10	10	20	2.41	0.25	0~0.36	0.042
PS1-65	65			65	67	67				2.64	0.27		0.048
PS1-70	70			70	72	72				2.87	0.29		0.057
PS1-75	75			75	77	77				3.11	0.32		0.064
PS1-80	80			80	82	82				3.34	0.34		0.071
PS1-85	85			85	87	87				3.57	0.36		0.079
PS1-90	90	S1	10	90	90	92	10	10	20	3.80	0.39	0~0.36	0.087
PS1-95	95			95	97	97				4.03	0.41		0.095
PS1-100	100	40	100	102	4.27	0.44	0.10						



Bore H8	* The product shapes of J Series items are identified by background color.														
	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30
Keyway J _{S9}	—		4x1.8			5x2.3			6x2.8			8x3.3			
Screw size	—		M4			M4			M5			M6			
Catalog Number	M4	M5	M4			M5			M6						
PS1-15 J BORE	S1T														
PS1-16 J BORE	S1T														
PS1-18 J BORE	S1T														
PS1-20 J BORE	S1T														
PS1-22 J BORE		S1T													
PS1-24 J BORE		S1T													
PS1-25 J BORE		S1T													
PS1-26 J BORE		S1T													
PS1-28 J BORE		S1T	S1K												
PS1-30 J BORE		S1T	S1K	S1K											
PS1-32 J BORE		S1T	S1K	S1K											
PS1-35 J BORE		S1T	S1K	S1K											
PS1-36 J BORE		S1T	S1K	S1K	S1K	S1K									
PS1-40 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PS1-45 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PS1-48 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PS1-50 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PS1-55 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PS1-60 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PS1-65 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PS1-70 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PS1-75 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PS1-80 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PS1-85 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PS1-90 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PS1-95 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PS1-100 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		

* In regard to MC Nylon gears, other materials are available for plastic gears, including Ultra High Molecular Weight Polyethylene (U-PE), which has excellent abrasion resistance and resin conforming to the Plastic Implementation Measure (PIM). A single piece order is acceptable and will be produced as a custom-made gear. Please see Page 26 for more details on quotations and orders.

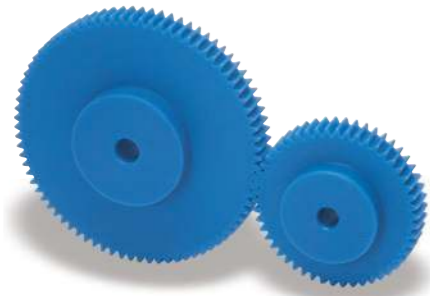

Specifications	
Precision grade	JIS grade N9 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	MC901
Heat treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade is equivalent to the value shown in the table.

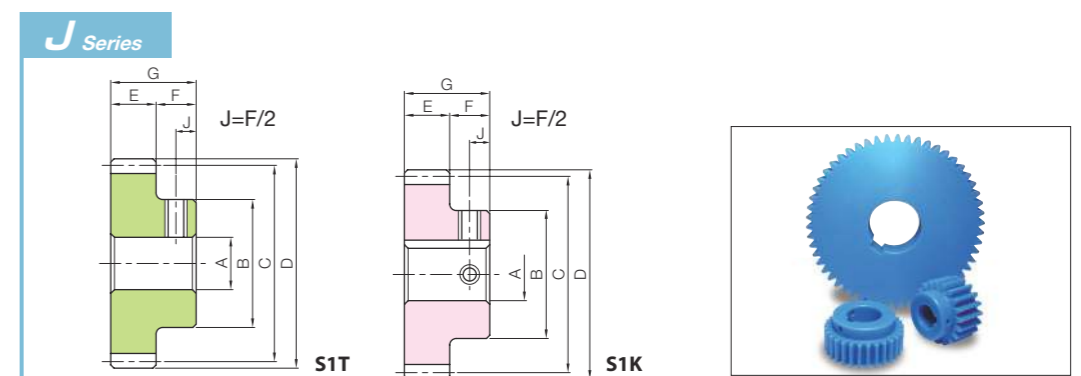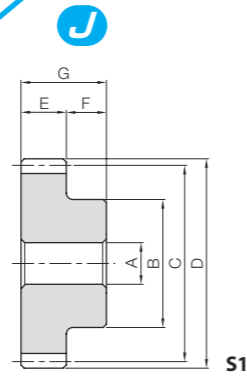


Catalog Number	No. of teeth	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (kg)															
			A _{H8}	B																									
PS1.5-15	15	S1	8	18	22.5	25.5	15	10	25	1.39	0.14	0~0.38	0.0084																
PS1.5-16	16			20	24	27								1.53	0.16														
PS1.5-18	18			22	27	30										1.79	0.18												
PS1.5-20	20			24	30	33												2.07	0.21										
PS1.5-22	22			26	33	36														2.34	0.24								
PS1.5-24	24			28	36	39																2.61	0.27						
PS1.5-25	25			30	37.5	40.5																		2.76	0.28				
PS1.5-26	26			32	39	42																				2.91	0.3		
PS1.5-28	28			36	42	45																						3.18	0.32
PS1.5-30	30			38	45	48																							
PS1.5-32	32	40	48	51	3.76	0.38																							
PS1.5-35	35	42	52.5	55.5			4.22	0.43																					
PS1.5-36	36	45	54	57					4.38	0.45																			
PS1.5-40	40	45	60	63							5.00	0.51																	
PS1.5-45	45	45	67.5	70.5									5.79	0.59															
PS1.5-48	48	45	72	75											6.27	0.64													
PS1.5-50	50	45	75	78													6.60	0.67											
PS1.5-55	55	45	82.5	85.5															7.36	0.75									
PS1.5-60	60	50	90	93																	8.14	0.83							
PS1.5-65	65	50	97.5	100.5																			8.91	0.91					
PS1.5-70	70	50	105	108	9.69	0.99																							
PS1.5-75	75	50	112.5	115.5			10.5	1.07																					
PS1.5-80	80	55	120	123					11.3	1.15																			
PS1.5-85	85	55	127.5	130.5							12.0	1.23																	
PS1.5-90	90	55	135	138									12.8	1.31															
PS1.5-95	95	60	142.5	145.5											13.6	1.39													
PS1.5-100	100	60	150	153													14.4	1.47											

To order J Series products, please specify: **Catalog No. + J + BORE.**



Bore H8	* The product shapes of J Series items are identified by background color.															
	8	10	12	14	15	16	17	18	19	20	22	25	28	30		
Keyway J _{S9}	—			4x1.8			5x2.3			6x2.8			8x3.3			
Screw size	—			M4			M5			M6			—			
Catalog Number	M5	M4			M5			M6			—			—		
PS1.5-15 J BORE	S1T															
PS1.5-16 J BORE	S1T															
PS1.5-18 J BORE	S1T	S1K														
PS1.5-20 J BORE	S1T	S1K	S1K													
PS1.5-22 J BORE	S1T	S1K	S1K													
PS1.5-24 J BORE	S1T	S1K	S1K	S1K	S1K											
PS1.5-25 J BORE	S1T	S1K	S1K	S1K	S1K	S1K	S1K									
PS1.5-26 J BORE	S1T	S1K	S1K	S1K	S1K	S1K	S1K									
PS1.5-28 J BORE	S1T	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
PS1.5-30 J BORE	S1T	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
PS1.5-32 J BORE	S1T	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PS1.5-35 J BORE	S1T	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PS1.5-36 J BORE	S1T	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
PS1.5-40 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PS1.5-45 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PS1.5-48 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PS1.5-50 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PS1.5-55 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PS1.5-60 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
PS1.5-65 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
PS1.5-70 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
PS1.5-75 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
PS1.5-80 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
PS1.5-85 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
PS1.5-90 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
PS1.5-95 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
PS1.5-100 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	

* In regard to MC Nylon gears, other materials are available for plastic gears, including Ultra High Molecular Weight Polyethylene (U-PE), which has excellent abrasion resistance and resin conforming to the Plastic Implementation Measure (PIM). A single piece order is acceptable and will be produced as a custom-made gear. Please see Page 26 for more details on quotations and orders.

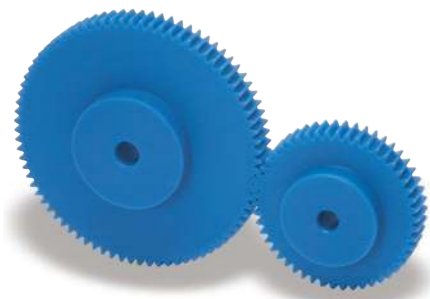

Specifications	
Precision grade	JIS grade N9 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	MC901
Heat treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade is equivalent to the value shown in the table.

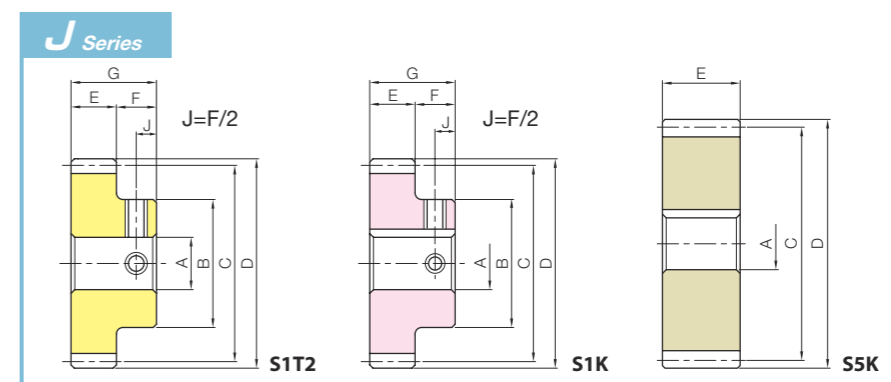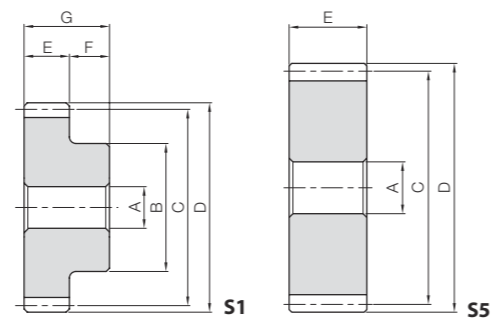

To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (kg)															
			A _{H8}	B																								
PS2-12	12	S1	10	18	24	28	10	30	2.25	0.23	0~0.42	0.011																
PS2-13	13			20	26	30							2.59	0.26														
PS2-14	14			20	28	32									2.96	0.30												
PS2-15	15			24	30	34											3.29	0.34										
PS2-16	16			26	32	36													3.63	0.37								
PS2-18	18			30	36	40															4.24	0.43						
PS2-20	20			32	40	44																	4.91	0.50				
PS2-22	22			35	44	48																			5.55	0.57		
PS2-24	24			38	48	52																					6.19	0.63
PS2-25	25			40	50	54																						
PS2-26	26	42	52	56	6.90	0.70																						
PS2-28	28	45	56	60			7.54	0.77																				
PS2-30	30	50	60	64					8.20	0.84																		
PSA2-32	32	S5	12	64							68	20	20	8.91	0.91	0~0.44	0.072											
PSA2-35	35			70							74							10.0	1.02									
PSA2-36	36			72							76									10.4	1.06							
PSA2-40	40			80							84											11.9	1.21					
PSA2-45	45			90							94													13.7	1.40			
PSA2-48	48			96							100															14.9	1.52	
PSA2-50	50			100							104																	15.7
PSA2-55	55			110	114	17.5					1.78																	
PSA2-60	60			120	124		19.3	1.97																				
PSA2-65	65			130	134				21.1	2.15																		
PSA2-70	70	140	144	23.0	2.34																							
PSA2-75	75	150	154									24.9	2.54															
PSA2-80	80	160	164											26.7	2.72													
PSA2-85	85	170	174													28.5	2.91											
PSA2-90	90	180	184															30.4	3.10									
PSA2-95	95	190	194																	32.3	3.29							
PSA2-100	100	200	204																			34.2	3.48					

Bore H8	* The product shapes of J Series items are identified by background color.																											
	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50										
Keyway J _{S9}	4x1.8				5x2.3				6x2.8				8x3.3				10x3.3				12x3.3				14x3.8			
Screw size	M4				M5				M6				M8				—											
Catalog Number	PS2-12 J BORE S1T2																											
PS2-13 J BORE	S1T2																											
PS2-14 J BORE	S1T2																											
PS2-15 J BORE	S1K																											
PS2-16 J BORE	S1K S1K																											
PS2-18 J BORE	S1K S1K S1K S1K S1K																											
PS2-20 J BORE	S1K S1K S1K S1K S1K S1K																											
PS2-22 J BORE	S1K S1K S1K S1K S1K S1K S1K S1K																											
PS2-24 J BORE	S1K S1K S1K S1K S1K S1K S1K S1K S1K S1K																											
PS2-25 J BORE	S1K S1K S1K S1K S1K S1K S1K S1K S1K S1K																											
PS2-26 J BORE	S1K S1K S1K S1K S1K S1K S1K S1K S1K S1K																											
PS2-28 J BORE	S1K S1K S1K S1K S1K S1K S1K S1K S1K S1K S1K																											
PS2-30 J BORE	S1K S1K S1K S1K S1K S1K S1K S1K S1K S1K S1K S1K																											
PSA2-32 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-35 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-36 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-40 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-45 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-48 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-50 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-55 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-60 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-65 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-70 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-75 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-80 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-85 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-90 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-95 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											
PSA2-100 J BORE	S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K S5K																											



* In regard to MC Nylon gears, other materials are available for plastic gears, including Ultra High Molecular Weight Polyethylene (U-PE), which has excellent abrasion resistance and resin conforming to the Plastic Implementation Measure (PIM). A single piece order is acceptable and will be produced as a custom-made gear. Please see Page 26 for more details on quotations and orders.

Stainless Steel Hubs for PSA Now Available!
Standardized sectional stainless steel hubs. They create a secure method for fastening to the shaft.

Knockdown style
Please see Page 180 for more details.

How to attach gears to shafts

To attach gears to shafts, in case of light loads, methods include using keys, taper pins, spring pins, and press fitting after mounting the setscrews. Since loosening tends to occur in the conditions below, plastic gears are better fastened by using a steel hub.

1. When the circumferential temperature is high
2. For large diameter gears
3. If forward-reverse motion impacts keys


For fastening steel hubs into plastic gears with bolts, see right for various methods.

Fastening with a steel hub bolt




Specifications	
Precision grade	JIS grade N9 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	MC901
Heat treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade is equivalent to the value shown in the table.

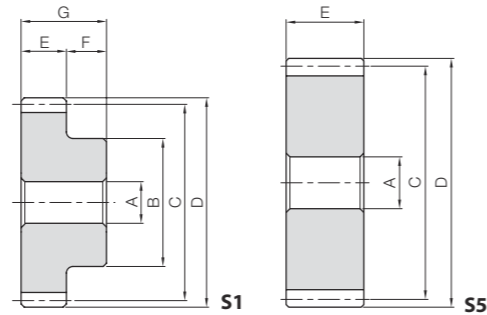

J Series

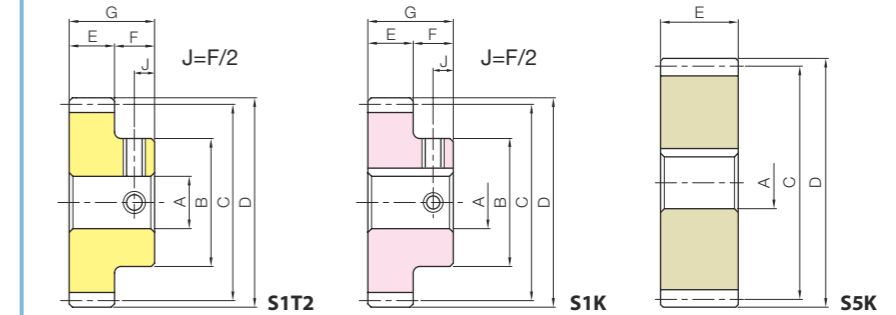

To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Allowable torque (N-m)	Allowable torque (kgf-m)	Backlash (mm)	Weight (kg)							
			A _{H8}	B																
PS2.5-12	12	S1	10	23	30	35	12	37	4.39	0.45	0~0.44	0.023								
PS2.5-13	13			25	32.5	37.5							5.06	0.52						
PS2.5-14	14			25	35	40									5.77	0.59				
PS2.5-15	15			30	37.5	42.5											6.42	0.65		
PS2.5-16	16			32	40	45													7.09	0.72
PS2.5-18	18			38	45	50														
PS2.5-20	20	40	50	55	9.59	0.98														
PS2.5-22	22	44	55	60			10.8	1.11												
PS2.5-24	24	48	60	65					12.1	1.23										
PS2.5-25	25	50	62.5	67.5							12.8	1.30								
PS2.5-26	26	55	65	70									13.5	1.37						
PS2.5-28	28	60	70	75											14.7	1.50				
PS2.5-30	30	65	75	80	16.0	1.63														
PSA2.5-32	32	S5	15	80			85	—									—	17.4	1.77	0~0.48
PSA2.5-35	35			87.5			92.5		19.5	1.99										
PSA2.5-36	36			90			95				20.3	2.07								
PSA2.5-40	40			100			105						23.2	2.36						
PSA2.5-45	45			112.5			117.5								26.8	2.73				
PSA2.5-48	48			120	125	29.0	2.96													
PSA2.5-50	50	125	130	30.6	3.12															
PSA2.5-55	55	137.5	142.5					34.1	3.48											
PSA2.5-60	60	150	155							37.7	3.84									

Bore H8	* The product shapes of J Series items are identified by background color.																			
	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50		
Keyway J ₉	4x1.8		5x2.3				6x2.8				8x3.3				10x3.3		12x3.3		14x3.8	
Screw size	M4				M5				M6				M8				—			
Catalog Number	—																			
PS2.5-12 J BORE	S1T2																			
PS2.5-13 J BORE	S1K																			
PS2.5-14 J BORE	S1K	S1K																		
PS2.5-15 J BORE		S1K	S1K																	
PS2.5-16 J BORE		S1K	S1K	S1K	S1K															
PS2.5-18 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K											
PS2.5-20 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
PS2.5-22 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
PS2.5-24 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
PS2.5-25 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
PS2.5-26 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
PS2.5-28 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
PS2.5-30 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PSA2.5-32 J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K				
PSA2.5-35 J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K			
PSA2.5-36 J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K			
PSA2.5-40 J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K			
PSA2.5-45 J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K			
PSA2.5-48 J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K			
PSA2.5-50 J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K			
PSA2.5-55 J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K			
PSA2.5-60 J BORE				S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K			



* In regard to MC Nylon gears, other materials are available for plastic gears, including Ultra High Molecular Weight Polyethylene (U-PE), which has excellent abrasion resistance and resin conforming to the Plastic Implementation Measure (PIM). A single piece order is acceptable and will be produced as a custom-made gear. Please see Page 26 for more details on quotations and orders.

Stainless Steel Hubs for PSA Now Available !

Standardized sectional stainless steel hubs. They create a secure method for fastening to the shaft.

Knockdown style

Please see Page 180 for more details.


How to attach gears to shafts

To attach gears to shafts, in case of light loads, methods include using keys, taper pins, spring pins, and press fitting after mounting the setscrews. Since loosening tends to occur in the conditions below, plastic gears are better fastened by using a steel hub.

1. When the circumferential temperature is high
2. For large diameter gears
3. If forward-reverse motion impacts keys


For fastening steel hubs into plastic gears with bolts, see right for various methods.

Fastening with a steel hub bolt

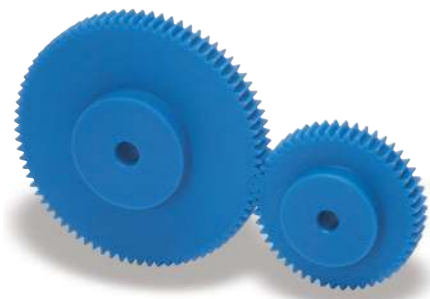


Specifications	
Precision grade	JIS grade N9 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	MC901
Heat treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade is equivalent to the value shown in the table.

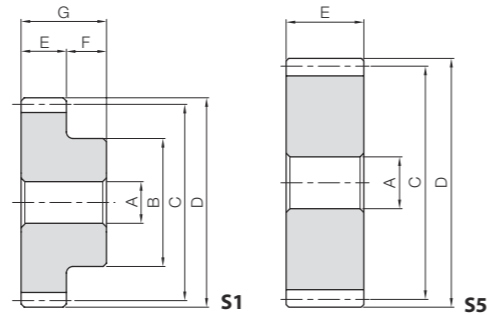

J Series

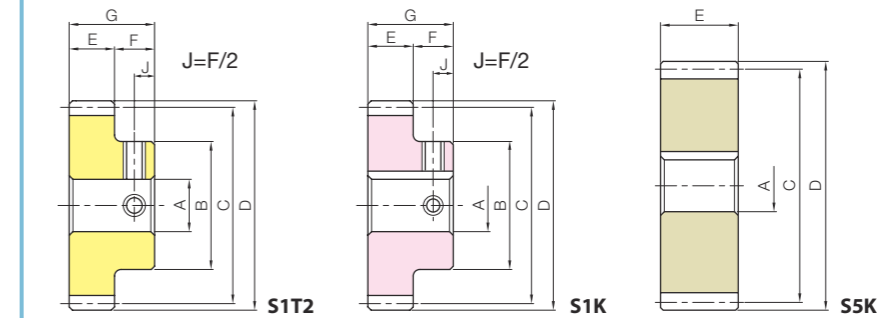

To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (kg)
			A _{H8}	B									
PS3-12	12	S1	12	28	36	42	15	45	7.58	0.77	0~0.52	0.040	
PS3-13	13			30	39	45							
PS3-14	14			32	42	48							
PS3-15	15			36	45	51							
PS3-16	16			38	48	54							
PS3-18	18			40	54	60							
PS3-20	20	14	14	50	60	66	30	15	16.6	1.69	0~0.54	0.12	
PS3-22	22			54	66	72							
PS3-24	24			58	72	78							
PS3-25	25			60	75	81							
PS3-26	26			65	78	84							
PS3-28	28	18	18	70	84	90	—	—	25.5	2.60	0~0.56	0.25	
PS3-30	30			75	90	96							
PSA3-32	32			96	102	102							
PSA3-35	35	S5	18	105	111	111	—	—	30.1	3.07	0~0.56	0.24	
PSA3-36	36			108	114	114							
PSA3-40	40			120	126	126							
PSA3-45	45			135	141	141							
PSA3-48	48			144	150	150							
PSA3-50	50			150	156	156							
PSA3-55	55	165	171	171	52.8	5.39	0.61						
PSA3-60	60	180	186	186	58.9	6.01	0.74						
					65.1	6.64	0.88						

* The product shapes of J Series items are identified by background color.

Bore H8	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50
Keyway J _{s9}	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50
Screw size	4x1.8	5x2.3			6x2.8			8x3.3			10x3.3		12x3.3	14x3.8			
Catalog Number	M4			M5			M6		M8								
PS3-12 J BORE	S1T2																
PS3-13 J BORE	S1K																
PS3-14 J BORE	S1K	S1K															
PS3-15 J BORE		S1K	S1K	S1K	S1K												
PS3-16 J BORE		S1K	S1K	S1K	S1K	S1K	S1K										
PS3-18 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K									
PS3-20 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
PS3-22 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
PS3-24 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
PS3-25 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
PS3-26 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
PS3-28 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PS3-30 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
PSA3-32 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	
PSA3-35 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K
PSA3-36 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K
PSA3-40 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K
PSA3-45 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K
PSA3-48 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K
PSA3-50 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K
PSA3-55 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K
PSA3-60 J BORE						S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K	S5K

* In regard to MC Nylon gears, other materials are available for plastic gears, including Ultra High Molecular Weight Polyethylene (U-PE), which has excellent abrasion resistance Poly Ether Ether Ketone (PEEK) also has quality properties. A single piece order is acceptable and will be produced as a custom-made gear. Please see Page 26 for more details on quotations and orders.

Stainless Steel Hubs for PSA Now Available!

Standardized sectional stainless steel hubs. They create a secure method for fastening to the shaft.

Knockdown style


Please see Page 180 for more details.


How to attach gears to shafts

To attach gears to shafts, in case of light loads, methods include using keys, taper pins, spring pins, and press fitting after mounting the setscrews. Since loosening tends to occur in the conditions below, plastic gears are better fastened by using a steel hub.

1. When the circumferential temperature is high
2. For large diameter gears
3. If forward-reverse motion impacts keys

For fastening steel hubs into plastic gears with bolts, see right for various methods.

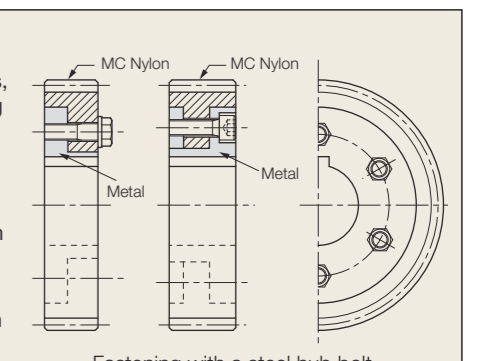

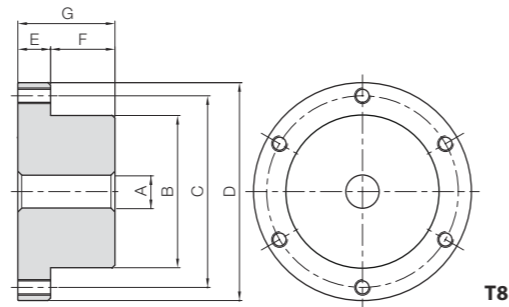

Material: SUS303

Catalog Number	Shape	Bore		Socket head screw			Flange diameter	Flange length	Hub width	Total length	Recommended fastening torque		Coupling torque		Weight (kg)
		A _{H7}	B	No.	Size	C					D	E	F	G	
SUKB20030	T8	10	30	6	M5	42	51	10	20	30	3.00	0.31	83	8.5	0.24
SUKB20046		12	46	6	M5	58	67	10	20	30	3.00	0.31	115	11.7	0.51
SUKB20066		15	66	6	M5	78	87	10	20	30	3.00	0.31	154	15.7	0.98
SUKB25038	T8	12	38	6	M6	53	63	12.5	24.5	37	5.20	0.53	151	15.4	0.48
SUKB25058		15	58	6	M6	73	83	12.5	24.5	37	5.20	0.53	208	21.2	1.00
SUKB25083		18	83	6	M6	98	108	12.5	24.5	37	5.20	0.53	280	28.5	1.91
SUKB30046	T8	15	46	6	M8	64	76	15	30	45	12.5	1.27	329	33.6	0.83
SUKB30070		18	70	6	M8	88	100	15	30	45	12.5	1.27	453	46.2	1.75
SUKB30100		20	100	6	M8	118	130	15	30	45	12.5	1.27	607	61.9	3.34

Features of Stainless Steel Hubs

- This is an attached stainless steel hub with excellent rust resistance.
- Perfectly matches with PSA Plastic Spur Gears, and suitable for food processing machinery.
- Efficient use of materials and superior cost performance for this product.

Coupling Torque for Stainless Steel Hubs

Coupling torque for Stainless Steel Hubs is calculated from the frictional force generated by the fastening torque at the contact face of the gear and the stainless steel hub.

Fastening Torque F(N) is calculated from the equation below.

$$F = \frac{n \cdot 1000 \cdot T}{K \cdot d}$$


- n : Number → No. of threaded holes shown in the dimension table.
- T : Tightening torque (N·m) → Fastening torque shown in the dimension table.
- K : Torque coefficient → Set the value at 0.164
- d : Nominal diameter (mm) → Socket head screw size shown in the dimension table (M5 = 5mm)

Coupling torque T_r(N·m) is calculated from the equation below.


$$T_r = \frac{F \cdot \mu \cdot d_w}{2000}$$

- F : Fastening torque (N) → The value obtained from the calculation above.
- μ : Friction factor at the contact face of the gear and the stainless steel hub → Set the value at 0.18
- d_w : Pitch diameter of the threaded hole (mm) → Socket head screw size C shown in the dimension table

Assembly Example of Stainless Steel Hubs

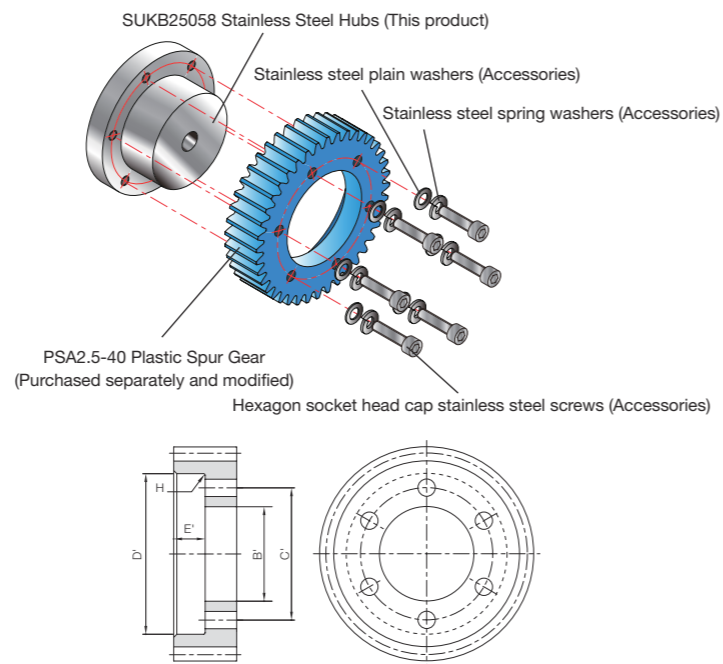

Stainless Steel Hubs	Partner							
	Catalog Number	Bore	Drilled hole		Bore 2	Hole length	Accessories	
		B' _{H8}	No.	Size	C'	D'	E' ±0.1	Bolt (size)
SUKB20030	PSA2-32 ~ PSA2-36	30	6	φ 5.5	42	51	10	M5×20
SUKB20046	PSA2-40 ~ PSA2-48	46			58	67		
SUKB20066	PSA2-50 ~	66			78	87		
SUKB25038	PSA2.5-32 ~ PSA2.5-36	38	6	φ 6.6	53	63	12.5	M6×25
SUKB25058	PSA2.5-40 ~ PSA2.5-48	58			73	83		
SUKB25083	PSA2.5-50 ~	83			98	108		
SUKB30046	PSA3-32 ~ PSA3-36	46	6	φ 9	64	76	15	M8×30
SUKB30070	PSA3-40 ~ PSA3-48	70			88	100		
SUKB30100	PSA3-50 ~	100			118	130		

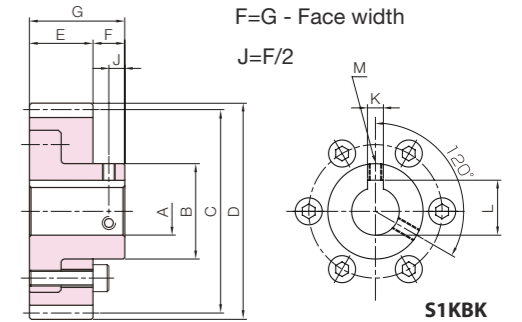


To order J Series products, please specify: **Catalog No. + J + BORE.**


Bore H7	* The product shapes of J Series items are identified by background color.																											
	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50										
Keyway J _{S9}	4x1.8				5x2.3				6x2.8				8x3.3				10x3.3				12x3.3				14x3.8			
Screw size	M4				M5				M6				M8				M10											
Catalog Number	S1K BK																											
PSUKB2-32 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-35 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-36 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-40 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-45 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-48 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-50 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-55 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-60 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-65 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-70 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-75 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-80 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-85 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-90 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-95 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2-100 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2.5-32 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2.5-35 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2.5-36 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2.5-40 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2.5-45 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2.5-48 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2.5-50 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2.5-55 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB2.5-60 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB3-32 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB3-35 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB3-36 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB3-40 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB3-45 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB3-48 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB3-50 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB3-55 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										
PSUKB3-60 J BORE	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK	S1K BK										




Specifications	
Precision grade	JIS grade N12 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	Duracon (R) (M90-44)**
Heat treatment	—
Tooth hardness	(110 to 120HRR)



S8



S8B



S9


* The precision grade of these products is equivalent to the value shown in the table.

** "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.


Catalog Number	Module	No. of teeth	Shape	Bore 1	Bore 2	Hub dia. 1	Hub dia. 2	Pitch dia.	Outside dia.	Face width	Hub width
				A	(A')	B	B'	C	D	E	F
DS0.5-12	m0.5	12	S8	2	(4)	4.5	—	6	7	3	4
DS0.5-15		15	S8	—	(5.5)	4.5	—	7.5	8.5		
DS0.5-16		16	S8	3	(6)	6	—	8	9		
DS0.5-20		20	S8B	—	—	8	5	10	11		
DS0.5-24		24	S9	4	—	8	5	12	13		
DS0.5-40	m0.5	40	S9	5	—	12	8	20	21	3	5
DS0.5-48		48				12	8	24	25		
DS0.5-50		50	12	8	25	26					
DS0.5-56		56	10	10	28	29					
DS0.5-60		60	10	10	30	31					
DS0.5-70	m0.5	70	S9	6	—	14	10	35	36	3	5
DS0.5-80		80				14	10	40	41		
DS0.8-12	m0.8	12	S9	3	—	6	4	9.6	11.2	4	5
DS0.8-15		15				6	4.5	12	13.6		
DS0.8-16		16				8	6	12.8	14.4		
DS0.8-20		20				8	8	16	17.6		
DS0.8-24		24				10	8	19.2	20.8		
DS0.8-30	m0.8	30	S9	6	—	12	10	24	25.6	4	6
DS0.8-45		45				12	10	36	37.6		
DS0.8-50		50				14.5	11.7	40	41.6		
DS0.8-56		56				14.5	11.7	44.8	46.4		

Total length	Web thickness	Web O.D.	Hole depth	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (g)	Catalog Number
G	(H)	(I)	(J)	Bending strength	Bending strength			
7	—	—	(0.6)	0.063	0.0064	0~0.30	0.17	DS0.5-12
	—	—	(0.6)	0.092	0.0094		0.23	DS0.5-15
	—	—	(0.6)	0.10	0.010		0.28	DS0.5-16
	(2.4)	(8)	—	0.14	0.014		0.47	DS0.5-20
	(1.8)	(9.5)	—	0.17	0.018		0.58	DS0.5-24
8	(1.8)	(16.5)	—	0.33	0.034	0~0.30	1.53	DS0.5-40
		(21)	—	0.42	0.043		1.91	DS0.5-48
		(21.5)	—	0.44	0.045		2.02	DS0.5-50
		(24.5)	—	0.50	0.051		2.77	DS0.5-56
		(26.5)	—	0.54	0.055		3.02	DS0.5-60
9	(2)	(31.5)	—	0.64	0.066	0~0.48	3.71	DS0.5-70
		(36.5)	—	0.75	0.076		4.51	DS0.5-80
		(6.7)	—	0.22	0.022		0.48	DS0.8-12
		(8.8)	—	0.31	0.032		0.64	DS0.8-15
		(9.2)	—	0.35	0.035		0.84	DS0.8-16
10	(2)	(12.7)	—	0.47	0.048	0~0.48	1.26	DS0.8-20
		(15)	—	0.59	0.060		1.59	DS0.8-24
		(19.5)	—	0.79	0.080		2.37	DS0.8-30
		(31)	—	1.31	0.13		4.18	DS0.8-45
		(35)	—	1.50	0.15		5.60	DS0.8-50
		(39.5)	—	1.70	0.17		6.55	DS0.8-56




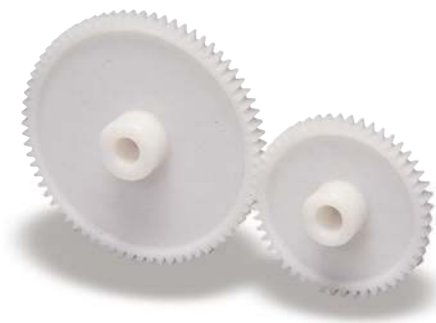

Specifications	
Precision grade	JIS grade N12 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	Duracon (R) (M90-44)**
Heat treatment	—
Tooth hardness	(110 to 120HRR)



S8B



S9

* The precision grade of these products is equivalent to the value shown in the table.


** "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.

Catalog Number	Module	No. of teeth	Shape	Bore 1	Bore 2	Hub dia. 1	Hub dia. 2	Pitch dia.	Outside dia.	Face width	Hub width
				A	(A')	B	B'	C	D	E	F
DS1-12	m1	12	S8B	4	—	8	6	12	14	6	6
DS1-16		10				8	16	18			
DS1-18		10				8	18	20			
DS1-20		11.7				9	20	22			
DS1-24		11.7	9	24	26						
DS1-28		28	S9	6	—	11.7	9	28	30	6	6
DS1-30		14				12	30	32			
DS1-32		14				12	32	34			
DS1-35		14				12	35	37			
DS1-36		14	12	36	38						
DS1-40		40	S9	8	—	16	14	40	42	6	8
DS1-48		16				14	48	50			
DS1-50		16				14	50	52			
DS1-60		18				15.6	60	62			
DS1-64		18				15.6	64	66			
DS1-70		18				15.6	70	72			
DS1-80	18	15.6				80	82				

Total Length	Web thickness	Web O.D.	Hole depth	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (g)	Catalog Number
G	(H)	(I)	(J)	Bending strength	Bending strength	0~0.60		
12	(5.5)	(8.5)	—	0.44	0.045	0~0.60	1.10	DS1-12
		(11.5)		0.71	0.073		1.87	DS1-16
		(13.5)		0.83	0.085		2.15	DS1-18
		(15)		0.96	0.098		2.85	DS1-20
		(17)		1.22	0.12		3.81	DS1-24
		(23)		1.48	0.15		4.39	DS1-28
		(24)		1.61	0.16		5.46	DS1-30
		(26.5)		1.75	0.18		5.86	DS1-32
		(29)		1.96	0.20		6.73	DS1-35
		(30)		2.04	0.21		7.01	DS1-36
14	(3)	(34)	—	2.33	0.24	0~0.60	8.39	DS1-40
		(40)		2.92	0.30		12.0	DS1-48
		(42.5)		3.07	0.31		12.6	DS1-50
		(52.5)		3.78	0.39		17.6	DS1-60
		(56.5)		4.07	0.41		19.4	DS1-64
		(62.5)		4.50	0.46		22.4	DS1-70
		(72.5)		5.23	0.53		27.9	DS1-80



When using the injection molded spur gear with an idler gear (bearing metal press fitting) and diameter smaller than the inside diameter of the molded gear, please press fit the following standard bushing.



T8

Catalog Number	Inner dia.	Outside dia.	Length	Gear example
	d ^{+0.02} ₀	D ^{+0.02} _{-0.01}	L ⁰ _{-0.3}	
BB30507	3	5	7	DS0.5
BB30608	3	6	8	DS0.5, DS0.8
BB40609	4	6	9	DS0.8
BB40612	4	6	12	DS1
BB50812	5	8	12	DS1
BB50814	5	8	14	DS1

Material: Oil-free copper alloy




■ Dimensional tolerance of molded item (unit: mm)

Dimensional classification	Grade	Rough grade
	3 or less	±0.20
4 to 6	±0.25	
7 to 10	±0.30	
11 to 18	±0.35	
19 to 30	±0.40	
Over 30	±0.50	




Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	Free cutting brass (C3604)
Heat Treatment	—
Tooth hardness	(80HV or more)


* The precision grade of products with a module of less than 0.8 is equivalent to the value shown in the table.



S3T



S1




S1T

Catalog Number	Module	No. of teeth	Shape	Bore				Hub dia.	Pitch dia.	Outside dia.	Face width			Hub width	Total length	Keyway
				A _{H7}	B	C	D				E	F	G			
BSS0.5-15A	m0.5	15	S3T	3	8.5	7.5	8.5	3	11	14	—	—	—	—	—	
BSS0.5-16A		16			9	8	9									
BSS0.5-20		20	S1	4	8.5	10	11	3	7	10	—	—	—	—	—	
BSS0.5-20A				3	11	11	12									
BSS0.5-22A		22	S1T	3	9	11	12	3	7	10	—	—	—	—	—	
BSS0.5-24B				4	10	12	13									
BSS0.5-25		25	S1	4	11	12.5	13.5	3	7	10	—	—	—	—	—	
BSS0.5-30		30	S1	4	13	15	16	3	7	10	—	—	—	—	—	—
BSS0.5-30A				3	12	15	16									
BSS0.5-30B				4	12	15	16									
BSS0.5-30C				5	12	15	16									
BSS0.5-38A		38	S1T	4	16	19	20	3	7	10	—	—	—	—	—	
BSS0.5-40		40	S1	4	17	20	21	3	7	10	—	—	—	—	—	
BSS0.5-50A		50	S1T	4	22	25	26	3	7	10	—	—	—	—	—	
BSS0.8-20		m0.8	20	S1	5	13.5	16	17.6	4	8	12	—	—	—	—	—
BSS0.8-24B						16	19.2	20.8								
BSS0.8-25	17					20	21.6									
BSS0.8-30	30		S1	5	20	24	25.6	4	8	12	—	—	—	—	—	
BSS0.8-30A				4	20	24	25.6									
BSS0.8-40	40		S1	5	20	32	33.6	4	8	12	—	—	—	—	—	
BSS1-16B	m1	16	S1T	6	12	16	18	6	8	14	—	—	—	—	—	
BSS1-18B					15	18	20									
BSS1-20C					16	18	20									
BSS1-30B					25	30	32									
BSS1-40A					28	40	42									

Socket head screw	Size	J	Allowable torque (N·m)		Allowable torque (kgf·m)	Backlash (mm)	Weight (kg)	Catalog Number			
			Bending strength	Bending strength							
M3	2.5	—	0.058	0.0059	0.0054	0.0054	BSS0.5-15A				
			0.065	0.0066				0.0062	BSS0.5-16A		
—	—	—	0.091	0.0093	0.0043	0.0098	BSS0.5-20				
			0.10	0.011				0.0054	BSS0.5-22A		
M3	3.5	—	0.12	0.012	0.0063	0.0063	BSS0.5-24B				
			0.12	0.013				0.0077	BSS0.5-25		
—	—	—	0.16	0.016	0.011	0.011	BSS0.5-30				
								M3	3.5	0.010	BSS0.5-30A
								M3	3.5	0.0099	BSS0.5-30B
								M4	3.5	0.0092	BSS0.5-30C
M3	3.5	—	0.22	0.022	0.018	0.018	BSS0.5-38A				
—	—	—	0.23	0.024	0.020	0.020	BSS0.5-40				
M3	3.5	—	0.31	0.031	0.033	0.033	BSS0.5-50A				
—	—	—	0.31	0.032	0.014	0.014	BSS0.8-20				
M4	4	—	0.40	0.041	0.021	0.021	BSS0.8-24B				
—	—	—	0.43	0.043	0.024	0.024	BSS0.8-25				
—	—	—	0.55	0.056	0.034	0.034	BSS0.8-30				
M3	4	—	0.79	0.081	0.035	0.035	BSS0.8-30A				
—	—	—	0.52	0.053	0.046	0.046	BSS0.8-40				
M4	4	—	0.62	0.063	0.015	0.015	BSS1-16B				
M4			0.73	0.074	0.021	0.021	BSS1-18B				
M4			1.28	0.13	0.026	0.026	BSS1-20C				
M4			1.86	0.19	0.065	0.065	BSS1-30B				
M4	—	—	—	—	0.10	0.10	BSS1-40A				



Specifications	
Precision grade	JIS grade N9 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)




S5

Catalog Number	Module	No. of teeth	Shape	Bore		Pitch dia.		Outside dia.		Face width		Allowable torque (N-m)		Allowable torque (kgf-m)	
				A _{H8}	C	D	E	Bending strength	Surface durability	Bending strength	Surface durability				
SSR2-120 SSR2-200	m2	120 200	S5	194 354	240 400	244 404	20	366 630	44.0 84.2	37.4 64.3	4.49 8.59				
SSR2.5-120 SSR2.5-200	m2.5	120 200	S5	245 445	300 500	305 505	25	715 1230	88.5 169	72.9 126	9.02 17.2				
SSR3-120 SSR3-160	m3	120 160	S5	296 416	360 480	366 486	30	1240 1680	157 226	126 171	16.0 23.0				

Backlash (mm)	Weight (kg)	Catalog Number
0.12~0.26	2.46 4.28	SSR2-120 SSR2-200
0.14~0.28	4.62 8.01	SSR2.5-120 SSR2.5-200
0.14~0.32	7.77 10.6	SSR3-120 SSR3-160



Helical Gears

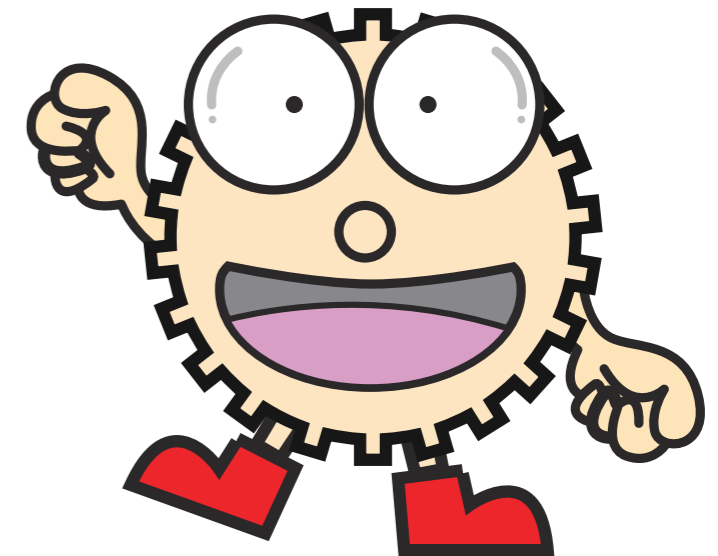

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Helical Gears

K H G 1 - 20 R

Direction of Helix (Right)

No. of Teeth (20)

Module (1)

Other Products (Ground Gears)

Type (Helical Gears)

Material (SCM440)

Material

S S45C

K SCM440

Type

H Helical Gears

Other Information

G Ground Gears

Features



KHK stock helical gears are quiet, high-strength and easy to use. They are suitable wherever you require high-speed rotation including in machine tools, speed reducers, etc. The following table lists the main features.

Catalog Number	KHG	SH
Module	1~3	2~3
Reference section of gear	Rotating plane	Normal plane
Material	SCM440	S45C
Heat Treatment	Thermal refined, gear teeth induction hardened	—
Tooth Surface Finish	Ground	Cut
Precision JIS B 1702-1:1998	N6	N8
Secondary Operations	Possible except for tooth	Possible
Features	It has excellent accuracy, strength, wear resistance and quietness, and allows secondary operations. Usable in the same center distance of the spur gear.	It has higher strength and quietness than the SS spur gears.

Selection Hints




It is important to thoroughly understand the contents of the product tables as well as "CAUTION" notes before making the selection. You must specify the right or left hand by including the letter R or L in the catalog number when ordering.

1. Caution in Selecting the Mating Gears

The KHK stock helical gears KHG series (transverse module) and SH series (normal module) are not interchangeable. Please keep this in mind when making your selection. Also, right hand and left hand helical mating gears operate as a set. See the photos below for reference and for help in making a proper selection.

Direction of Helix

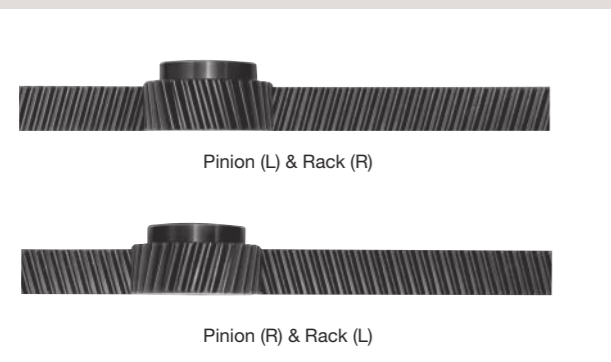

Mating Helical Gear Selection Chart (○ Allowable × Not allowable)

Catalog Number and Direction of Helix	KHG		SH		KRHG KRHGF		SRH		
	RH	LH	RH	LH	RH	LH	RH	LH	
KHG	RH	×	○	×	×	×	○	×	×
	LH	○	×	×	×	○	×	×	×
SH	RH	×	×	×	○	×	×	×	○
	LH	×	×	○	×	×	×	○	×

2. Caution in Selecting Gears Based on Gear Strength

The gear strength values shown in the product pages were computed by assuming the application environment in the table below. Therefore, they should be used as reference only. We recommend that each user computes their own values by applying the actual usage conditions.

Calculation of Bending Strength of Gears

Item	Catalog Number	KHG	SH
Formula NOTE 1		Formula of spur and helical gears on bending strength (JGMA401-01)	
No. of teeth of mating gears		Same no. of teeth	
Rotational Speed		600rpm	100rpm
Design Life (Durability)		Over 10 ⁷ cycles	
Impact from motor		Uniform load	
Impact from load		Uniform load	
Direction of load		Bidirectional load (calculated with allowable bending stress of 2/3)	
Allowable bending stress at root σ_{Fim} (kgf/mm ²) NOTE 2		30	19
Safety factor S_F		1.2	

Calculation of Surface Durability (Except where it is common with bending strength)

Item	Catalog Number	KHG	SH
Formula NOTE 1		Formula of spur and helical gears on surface durability (JGMA402-01)	
Kinematic viscosity of lubricant		100cSt(50°C)	
Gear support		Symmetric support by bearings	
Allowable Hertz stress σ_{Hlim} (kgf/mm ²)		116	49
Safety factor S_H		1.15	

[NOTE 1] The gear strength formula is based on JGMA (Japanese Gear Manufacturers Association) specifications. The units for the rotational speed (rpm) and the stress (kgf/mm²) are adjusted to the units needed in the formula.

Product Precautions



Common Notes

[Caution on Product Characteristics]

- (1) The allowable torque shown in the table are calculated values according to the assumed usage conditions. Please see Page 190 for more details.
- (2) The backlash values shown in the table are the theoretical values for the backlash in the normal direction of gears of the same series in mesh.
- (3) A set of helical gears must be identical in module and number of teeth, but opposite in spiral hands.
- (4) These helical gears produce axial thrust forces. Please see Page 193 for more details.
- (5) For the helical gear series combinations, see the Mating Gear Selection Chart on Page 190.
- (6) Keyways are made according to JIS B1301 standards, Js9 tolerance. Also note that keyway tooth position alignment is not performed.
- (7) For products having a tapped hole, a set screw is included.

[Caution on Secondary Operations]

- (1) Please read "Cautions on Performing Secondary Operations" on Page 192 when performing modifications and/or secondary operations for safety concerns.
- (2) Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).

[J Series]

- (1) Cancellation is not possible for made-to-order products. For lead time details, see Page 38.
- (2) Certain products which would otherwise have a very long tapped hole are counterbored. For details, please see the KHK website.
- (3) Black oxide is not re-applied to parts undergoing secondary operations.
- (4) For bores over $\phi 50$, the bore tolerance is H8.

KHG Ground Helical Gears

[Caution on Secondary Operations]

- (1) Because of the influence of hardening residual stress, avoid removing the entire boss, as it may cause the gears to deform.


Application Hints

In order to use KHK stock gears safely, carefully read the Application Hints before proceeding. If there are questions or you require clarifications, please contact our technical department or your nearest distributor.


E-mail: info@khkgears.net

1. Caution on Performing Secondary Operations

- ① If re boring, it is important to pay special attention to locating the center in order to avoid runout.
- ② The reference datum for gear machining is the bore. Therefore, use the bore for locating the center. If it is too difficult to do for small bores, the alternative is to use one spot on the bore and the runout of the side surface.
- ③ If reworking using scroll chucks, we recommend the use of new or rebored jaws for improved precision. Please exercise caution not to crush the teeth.

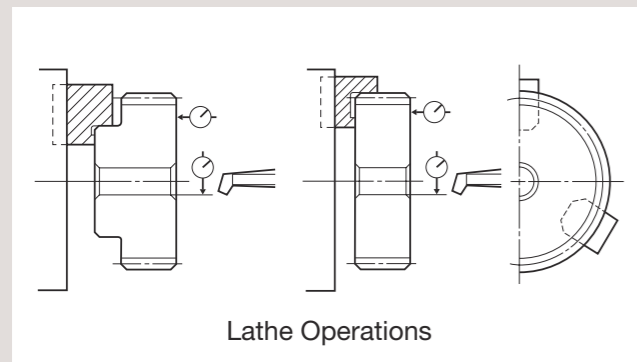


- ④ The maximum bore size is dictated by the requirement that the strength of the hub is to be higher than that of the gear teeth. The maximum bore size should be 60% to 70% of the hub diameter (or tooth root diameter), and 50% to 60% for keyway applied modifications.
- ⑤ In order to avoid stress concentration, round the keyway corners.

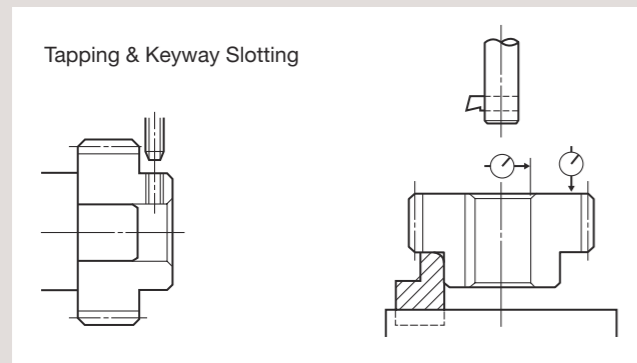

- ⑥ To avoid problems of reduced gear precision and other manufacturing difficulties, do not attempt to machine the gears to reduce face widths.
- ⑦ When induction-hardening S45C products, thermal stress cracks may appear. Also, note that the precision grade of the product declines by 1 or 2 grades, as deformation on material may occur. If you require tolerance for bore or other parts, machining is necessary after heat treatment.

2. Points of Caution during Assembly

- ① The recommended center distance tolerance of KHK stock helical gears is H7 for ground gears and H8 for cut gears. The amount of backlash is given in the product table for each gear. For the center distance of SH, refer to the dimensional table page.

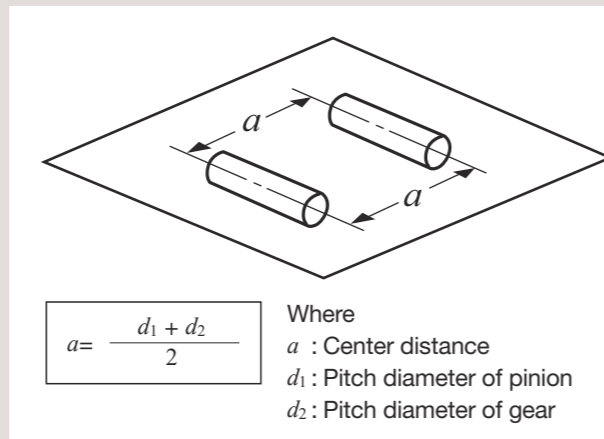

- ② The table below indicates the tolerance on the total length of KHK stock spur gears. Please refer to this data when designing gearboxes or other components.

Total Length Tolerance for Spur and Helical Gears

Total Length (mm)	Tolerance
30 or less	0 -0.10
31 to 100	0 -0.15
Over 100	0 -0.20

[Note] The following products are excluded from this table: Spur pinion shafts, Injection molded spur gears, F-loc hub spur gears, and MC nylon products.

- ③ Verify that the two shafts are parallel. Incorrect assembly will lead to uneven teeth contact which will cause noise and wear. (After assembly, check the tooth contact by painting a thin layer of red lead primer or the like on the gear teeth, meshing them together and rotating them.)


■ Test example: Abrasion occurred on SSG3-30 due to poor edge contact (only 30% with proper contact).



Poor tooth contact and pitting

Gear oil (equivalent to JIS gear oil category 2 No. 3)
 The design conditions were load torque at 278 rpm, 42.5 kg/m (12 kW), 1.5 times the allowable bending strength, and 3 times the allowable surface durability torque.
 The pitting occurred on the poor tooth contact area after 60 hours of continuous operation.

- ④ Due to the helix of helical gears, they produce thrust force (axial). The bearings must be selected properly to be able to handle these thrust forces. The direction of the thrust forces depend on the helix direction and the direction of rotation as shown below.
 For details, use gear calculation software GCSW.

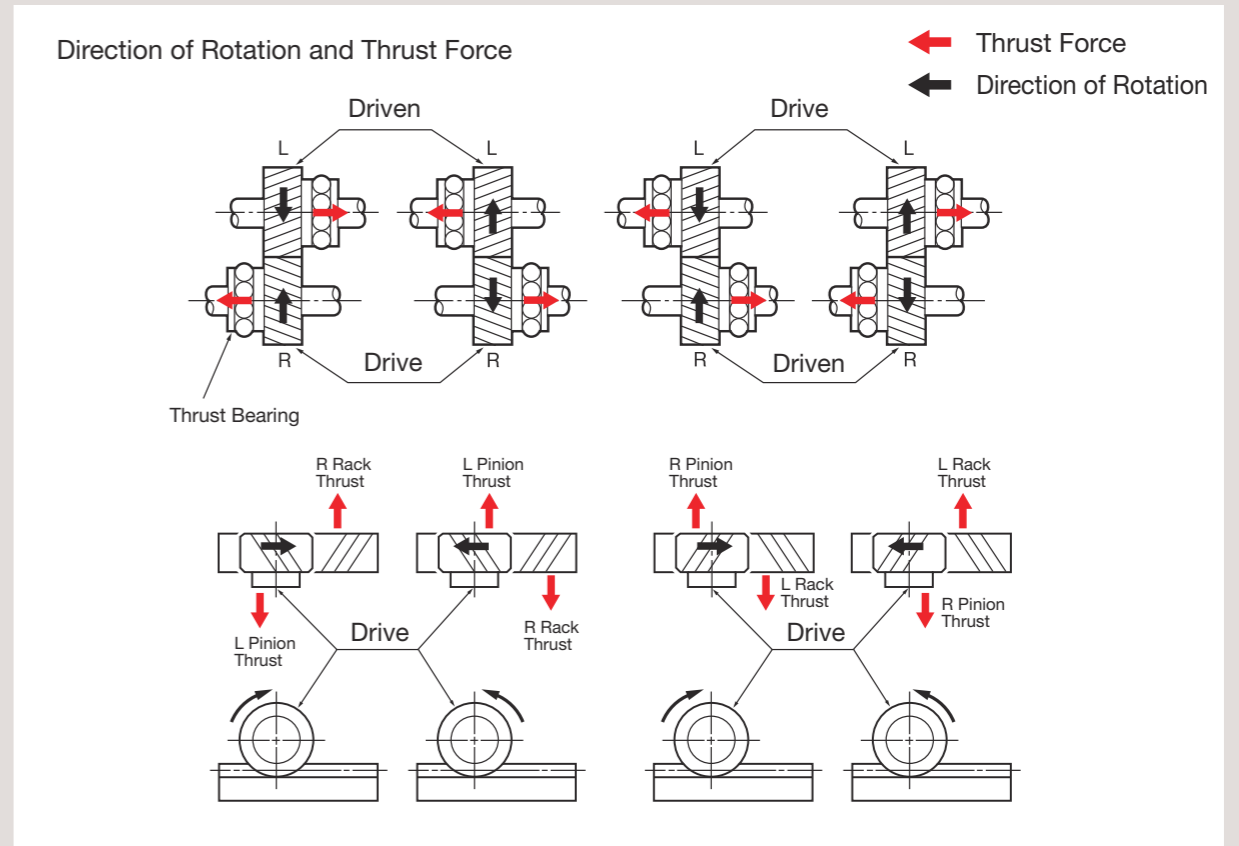

3. Cautions on Starting

- ① Check the following items before starting.
 - Are the gears installed securely?
 - Is there uneven tooth contact?
 - Is there adequate backlash?
(Be sure to avoid zero-backlash.)
 - Has proper lubrication been supplied?
- ② If gears are exposed, be sure to attach a safety cover to ensure safety. Also, be careful not to touch rotating gears.
- ③ If there is any abnormality such as noise or vibration during startup, stop the operation immediately and check the assembly condition such as tooth contact, eccentricity and looseness.

KHK considers safety a priority in the use of our products.

When handling, adding secondary operations, assembling, and operating KHK products, please be aware of the following issues in order to prevent accidents.



Warning: Precautions for preventing physical and property damage

1. When using KHK products, follow relevant safety regulations (Occupational Safety and Health Regulations, etc.).
2. Pay attention to the following items when installing, removing, or performing maintenance and inspection of the product.
 - ① Turn off the power switch.
 - ② Do not reach or crawl under the product.
 - ③ Wear appropriate clothing and protective equipment for the work.




Caution Cautions in Preventing Accidents

1. Before using a KHK product, read the precautions in the catalog carefully in order to use it correctly.
2. Avoid use in environments that may adversely affect the product.
3. Our products are manufactured under a superior quality control system based on the ISO9000 quality management system; if you notice any malfunctions upon purchasing a product, please contact the supplier.



Specifications	
Precision grade	JIS grade N6 (JIS B1702-1: 1998)*
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Transverse pressure angle	20°
Helix angle	21°30'
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth


* The precision grade of J Series products is equivalent to the value shown in the table.

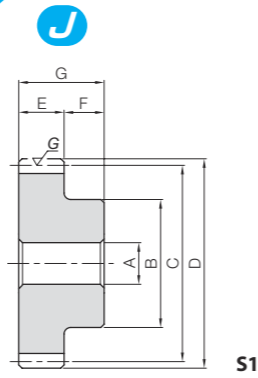


S1

Usable in the assembly distance of the spur gear.


KHG ground helical gears use a "transverse" module. The assembly distance is the same as spur gear pairs with the same module and number of teeth. Improved strength and low noise: Take the next step up from spur gears.



J Series



S1T




S1K

To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	No. of teeth	Direction of helix	Shape	Bore				Face width	Hub width	Total length	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)											
				A _{H7}	B	C	D				Bending strength	Surface durability	Bending strength	Surface durability													
KHG1-20R KHG1-20L	20	R L	S1	6	17	20	22	8	10	18	7.79	4.98	0.79	0.51	0.08~0.16	0.034											
KHG1-24R KHG1-24L	24	R L		8	20	24	26				10.1	7.43	1.03	0.76			0.046										
KHG1-28R KHG1-28L	28	R L		20	28	30	12.4				10.4	1.27	1.06	0.056													
KHG1-30R KHG1-30L	30	R L		25	30	32	13.6				12.1	1.39	1.23					0.072									
KHG1-35R KHG1-35L	35	R L		25	35	37	15.1				15.4	1.54	1.57						0.088								
KHG1-36R KHG1-36L	36	R L		10	25	36	38				15.7	16.3	1.60							1.67	0.091						
KHG1-40R KHG1-40L	40	R L		30	40	42	17.9				20.5	1.83	2.10							0.12							
KHG1-48R KHG1-48L	48	R L		30	48	50	22.5				30.5	2.29	3.11									0.16					
KHG1-50R KHG1-50L	50	R L		35	50	52	23.6				33.3	2.41	3.40										0.18				
KHG1-60R KHG1-60L	60	R L		12	40	60	62				29.3	49.4	2.99											5.04	0.26		
KHG1-70R KHG1-70L	70	R L		40	70	72	35.2				68.9	3.58	7.02											0.32			
KHG1-90R KHG1-90L	90	R L		15	50	90	92				46.9	118	4.78													12.1	0.53

* The product shapes of J Series items are identified by background color.


Bore H7	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30
Keyway J _{s9}	-		4x1.8		5x2.3		6x2.8		8x3.3						
Screw size	-		M4		M4		M5		M5		M5		M6		
Catalog Number	M4	M5	M4		M4		M5		M5		M5		M6		
KHG1-20R J BORE	S1T														
KHG1-20L J BORE	S1T														
KHG1-24R J BORE		S1T													
KHG1-24L J BORE		S1T													
KHG1-28R J BORE															
KHG1-28L J BORE															
KHG1-30R J BORE			S1K	S1K											
KHG1-30L J BORE			S1K	S1K											
KHG1-35R J BORE			S1K	S1K											
KHG1-35L J BORE			S1K	S1K											
KHG1-36R J BORE			S1K	S1K											
KHG1-36L J BORE			S1K	S1K											
KHG1-40R J BORE			S1K	S1K	S1K	S1K	S1K	S1K							
KHG1-40L J BORE			S1K	S1K	S1K	S1K	S1K	S1K							
KHG1-48R J BORE			S1K	S1K	S1K	S1K	S1K	S1K							
KHG1-48L J BORE			S1K	S1K	S1K	S1K	S1K	S1K							
KHG1-50R J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K						
KHG1-50L J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K						
KHG1-60R J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
KHG1-60L J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
KHG1-70R J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
KHG1-70L J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
KHG1-90R J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
KHG1-90L J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K

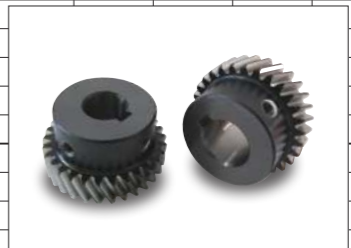



Specifications	
Precision grade	JIS grade N6 (JIS B1702-1: 1998)*
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Transverse pressure angle	20°
Helix angle	21°30'
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.

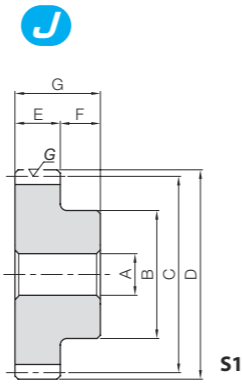


S1

Usable in the assembly distance of the spur gear.

KHG ground helical gears use a "transverse" module. The assembly distance is the same as spur gear pairs with the same module and number of teeth. Improved strength and low noise: Take the next step up from spur gears.



J Series



S1K



To order J Series products, please specify: **Catalog No. + J + BORE.**


Catalog Number	No. of teeth	Direction of helix	Shape	Bore AH7	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Allowable torque (N-m)		Allowable torque (kgf-m)		Backlash (mm)	Weight (kg)								
											Bending strength	Surface durability	Bending strength	Surface durability										
KHG1.5-20R KHG1.5-20L	20	R L	S1		24	30	33	12	12	24	26.3	18.5	2.68	1.89	0.08~0.16	0.088								
KHG1.5-22R KHG1.5-22L	22	R L			26	33	36				27.4	20.8	2.79	2.12			0.11							
KHG1.5-24R KHG1.5-24L	24	R L			28	36	39				30.9	25.3	3.15	2.58				0.13						
KHG1.5-25R KHG1.5-25L	25	R L			30	37.5	40.5				32.7	27.7	3.33	2.83					0.15					
KHG1.5-26R KHG1.5-26L	26	R L			32	39	42				34.5	30.2	3.52	3.08						0.17				
KHG1.5-28R KHG1.5-28L	28	R L			36	42	45				38.1	35.7	3.89	3.64							0.19			
KHG1.5-30R KHG1.5-30L	30	R L			38	45	48				41.8	41.6	4.26	4.24								0.22		
KHG1.5-32R KHG1.5-32L	32	R L			40	48	51				45.5	48.0	4.64	4.89									0.26	
KHG1.5-36R KHG1.5-36L	36	R L			45	54	57				52.9	62.2	5.40	6.35										0.33
KHG1.5-40R KHG1.5-40L	40	R L			50	60	63				60.5	78.5	6.17	8.00										
KHG1.5-48R KHG1.5-48L	48	R L	50	72	75	75.8	117	7.73	12.0	0.52														
KHG1.5-50R KHG1.5-50L	50	R L	18	60	75	78	79.6	128	8.12		13.1	0.63												
KHG1.5-52R KHG1.5-52L	52	R L		60	78	81	83.5	140	8.51		14.2		0.67											
KHG1.5-60R KHG1.5-60L	60	R L	20	60	90	93	99.1	191	10.1		19.5	0.81												
KHG1.5-80R KHG1.5-80L	80	R L		70	120	123	132	343	13.5		35.0		1.37											
KHG1.5-90R KHG1.5-90L	90	R L		70	135	138	151	442	15.4		45.1			1.65										
KHG1.5-100R KHG1.5-100L	100	R L		70	150	153	170	554	17.4		56.5				1.97									

Bore H7	* The product shapes of J Series items are identified by background color.																							
	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40									
Keyway Js9	4x1.8				5x2.3				6x2.8				8x3.3				10x3.3				12x3.3			
Screw size	M4				M5				M6				M8											
Catalog Number	S1K				S1K				S1K				S1K				S1K							
KHG1.5-20R J BORE	S1K																							
KHG1.5-20L J BORE	S1K																							
KHG1.5-22R J BORE	S1K																							
KHG1.5-22L J BORE	S1K																							
KHG1.5-24R J BORE	S1K	S1K	S1K																					
KHG1.5-24L J BORE	S1K	S1K	S1K																					
KHG1.5-25R J BORE	S1K	S1K	S1K	S1K	S1K																			
KHG1.5-25L J BORE	S1K	S1K	S1K	S1K	S1K																			
KHG1.5-26R J BORE	S1K	S1K	S1K	S1K	S1K																			
KHG1.5-26L J BORE	S1K	S1K	S1K	S1K	S1K																			
KHG1.5-28R J BORE			S1K	S1K	S1K	S1K	S1K	S1K																
KHG1.5-28L J BORE			S1K	S1K	S1K	S1K	S1K	S1K																
KHG1.5-30R J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K															
KHG1.5-30L J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K															
KHG1.5-32R J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K															
KHG1.5-32L J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K															
KHG1.5-36R J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K														
KHG1.5-36L J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K														
KHG1.5-40R J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K												
KHG1.5-40L J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K											
KHG1.5-48R J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K											
KHG1.5-48L J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K											
KHG1.5-50R J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
KHG1.5-50L J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
KHG1.5-52R J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
KHG1.5-52L J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
KHG1.5-60R J BORE										S1K	S1K	S1K	S1K	S1K	S1K									
KHG1.5-60L J BORE										S1K	S1K	S1K	S1K	S1K	S1K									
KHG1.5-80R J BORE										S1K	S1K	S1K	S1K	S1K	S1K									
KHG1.5-80L J BORE										S1K	S1K	S1K	S1K	S1K	S1K									
KHG1.5-90R J BORE										S1K	S1K	S1K	S1K	S1K	S1K									
KHG1.5-90L J BORE										S1K	S1K	S1K	S1K	S1K	S1K									
KHG1.5-100R J BORE										S1K	S1K	S1K	S1K	S1K	S1K									
KHG1.5-100L J BORE										S1K	S1K	S1K	S1K	S1K	S1K									



Specifications	
Precision grade	JIS grade N6 (JIS B1702-1: 1998)*
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Transverse pressure angle	20°
Helix angle	21°30'
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth


* The precision grade of J Series products is equivalent to the value shown in the table.

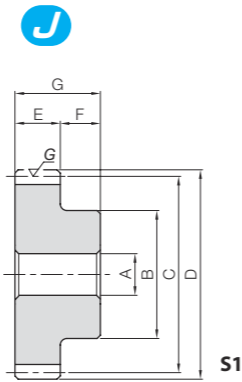


S1

Usable in the assembly distance of the spur gear.

KHG ground helical gears use a "transverse" module. The assembly distance is the same as spur gear pairs with the same module and number of teeth. Improved strength and low noise: Take the next step up from spur gears.



J Series



S1K



To order J Series products, please specify: **Catalog No. + J + BORE.**


Catalog Number	No. of teeth	Direction of helix	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)																		
				A _{H7}	B						Bending strength	Surface durability	Bending strength	Surface durability																				
KHG2-15R KHG2-15L	15	R L	S1	12	24	30	34	16	13	29	40.5	22.8	4.13	2.32	0.10~0.20	0.11																		
KHG2-18R KHG2-18L	18	R L															15	32	40	44	56.6	40.8	5.77	4.16	0.20									
KHG2-20R KHG2-20L	20	R L																								18	36	44	48	64.9	50.6	6.62	5.16	0.25
KHG2-22R KHG2-22L	22	R L																																
KHG2-25R KHG2-25L	25	R L															15	42	52	56	81.8	73.4	8.34	7.49	0.37									
KHG2-26R KHG2-26L	26	R L																								18	45	56	60	90.4	86.6	9.21	8.83	0.43
KHG2-28R KHG2-28L	28	R L															20	50	60	64	99.1	101	10.1	10.3	0.50									
KHG2-30R KHG2-30L	30	R L																								25	50	64	68	108	117	11.0	11.9	0.55
KHG2-32R KHG2-32L	32	R L															15	50	70	74	121	142	12.3	14.5	0.63									
KHG2-35R KHG2-35L	35	R L																								18	50	72	76	126	151	12.8	15.4	0.65
KHG2-36R KHG2-36L	36	R L	20	60	80	84	143	191	14.6	19.5	0.85																							
KHG2-40R KHG2-40L	40	R L										25	60	90	94	166	248	16.9	25.3	1.02														
KHG2-45R KHG2-45L	45	R L	15	60	96	100	172	273	17.5	27.9	1.13																							
KHG2-48R KHG2-48L	48	R L										18	60	100	104	181	299	18.4	30.5	1.16														
KHG2-50R KHG2-50L	50	R L	20	65	120	124	225	447	22.9	45.6	1.65																							
KHG2-60R KHG2-60L	60	R L										25	70	140	144	269	625	27.4	63.7	2.21														
KHG2-70R KHG2-70L	70	R L	15	80	160	164	301	799	30.7	81.4	2.93																							
KHG2-80R KHG2-80L	80	R L										18	90	180	184	344	1030	35.0	105	3.73														
KHG2-90R KHG2-90L	90	R L	20	100	200	204	387	1290	39.4	132	4.64																							
KHG2-100R KHG2-100L	100	R L																																

Bore H7	* The product shapes of J Series items are identified by background color.																			
	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50			
Keyway J _{s9}	4x1.8			5x2.3			6x2.8			8x3.3			10x3.3		12x3.3		14x3.8			
Screw size	M4				M5				M6				M8				M10			
Catalog Number	S1K																			
KHG2-15R J BORE	S1K																			
KHG2-15L J BORE	S1K																			
KHG2-18R J BORE	S1K	S1K	S1K	S1K	S1K															
KHG2-18L J BORE	S1K	S1K	S1K	S1K	S1K															
KHG2-20R J BORE			S1K	S1K	S1K															
KHG2-20L J BORE			S1K	S1K	S1K															
KHG2-22R J BORE			S1K	S1K	S1K	S1K	S1K	S1K												
KHG2-22L J BORE			S1K	S1K	S1K	S1K	S1K	S1K												
KHG2-25R J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K											
KHG2-25L J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K											
KHG2-26R J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K											
KHG2-26L J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K											
KHG2-28R J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
KHG2-28L J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
KHG2-30R J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
KHG2-30L J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
KHG2-32R J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
KHG2-32L J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
KHG2-35R J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
KHG2-35L J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
KHG2-36R J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
KHG2-36L J BORE						S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
KHG2-40R J BORE									S1K	S1K	S1K	S1K	S1K	S1K	S1K					
KHG2-40L J BORE									S1K	S1K	S1K	S1K	S1K	S1K	S1K					
KHG2-45R J BORE									S1K	S1K	S1K	S1K	S1K	S1K	S1K					
KHG2-45L J BORE									S1K	S1K	S1K	S1K	S1K	S1K	S1K					
KHG2-48R J BORE									S1K	S1K	S1K	S1K	S1K	S1K	S1K					
KHG2-48L J BORE									S1K	S1K	S1K	S1K	S1K	S1K	S1K					
KHG2-50R J BORE										S1K	S1K	S1K	S1K	S1K	S1K					
KHG2-50L J BORE										S1K	S1K	S1K	S1K	S1K	S1K					
KHG2-60R J BORE											S1K	S1K	S1K	S1K	S1K					
KHG2-60L J BORE											S1K	S1K	S1K	S1K	S1K					
KHG2-70R J BORE											S1K	S1K	S1K	S1K	S1K	S1K				
KHG2-70L J BORE											S1K	S1K	S1K	S1K	S1K	S1K				
KHG2-80R J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K			
KHG2-80L J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K			
KHG2-90R J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K			
KHG2-90L J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K			
KHG2-100R J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K			
KHG2-100L J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K			





Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle	15°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating




Catalog Number	Module	No. of teeth	Direction of helix	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width		Total length
					AH7	B				C	D	
SH2-15R SH2-15L	m2	15	R L	S1	12	24	31.06	35.06	25	10	35	
SH2-20R SH2-20L		20	R L		12	32	41.41	45.41				
SH2-30R SH2-30L		30	R L		12	50	62.12	66.12				
SH2-40R SH2-40L		40	R L		18	60	82.82	86.82				
SH2-60R SH2-60L		60	R L		18	70	124.23	128.23				
SH2-90R SH2-90L		90	R L		18	120	186.35	190.35				
SH3-15R SH3-15L	m3	15	R L	S1	15	36	46.59	52.59	35	15	50	
SH3-20R SH3-20L		20	R L		15	50	62.12	68.12				
SH3-30R SH3-30L		30	R L		20	70	93.17	99.17				
SH3-40R SH3-40L		40	R L		20	80	124.23	130.23				
SH3-60R SH3-60L		60	R L		20	140	186.35	192.35				

Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
Bending strength	Surface durability	Bending strength	Surface durability			
43.7	2.90	4.46	0.30	0.12~0.26	0.15	SH2-15R SH2-15L
67.1	5.85	6.84	0.60		0.30	SH2-20R SH2-20L
117	15.3	11.9	1.56		0.72	SH2-30R SH2-30L
169	28.9	17.2	2.95		1.21	SH2-40R SH2-40L
275	70.8	28.0	7.22		2.61	SH2-60R SH2-60L
437	173	44.6	17.6		6.17	SH2-90R SH2-90L
138	9.67	14.0	0.99	0.14~0.32	0.52	SH3-15R SH3-15L
211	19.4	21.6	1.98		0.99	SH3-20R SH3-20L
368	50.2	37.5	5.12		2.20	SH3-30R SH3-30L
531	95.5	54.1	9.73		3.80	SH3-40R SH3-40L
866	236	88.3	24.0		9.18	SH3-60R SH3-60L

Reference Section of Gears

Transverse module (SH helical gears) and normal module (KHG ground helical gears) are available for the gear teeth according to the gear reference cross section. Even if products have the same helix angle and module, transverse and normal module gears have different gear teeth and thus cannot engage.

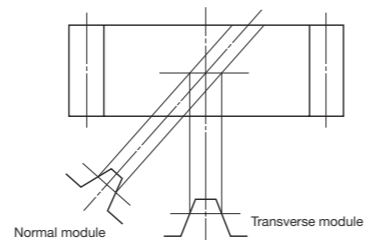

* Above is for illustration purposes only and differs from actual tooth forms.


Center Distance Table of SH Helical Gears

Catalog Number	SH2-15 ^R _L	SH2-20 ^R _L	SH2-30 ^R _L	SH2-40 ^R _L	SH2-60 ^R _L	SH2-90 ^R _L
SH2-15 ^R _L	31.06	—	—	—	—	—
SH2-20 ^R _L	36.23	41.41	—	—	—	—
SH2-30 ^R _L	46.59	51.76	62.12	—	—	—
SH2-40 ^R _L	56.94	62.12	72.47	82.82	—	—
SH2-60 ^R _L	77.65	82.82	93.17	103.53	124.23	—
SH2-90 ^R _L	108.70	113.88	124.23	134.59	155.29	186.35

Center Distance Table of SH Helical Gears

Catalog Number	SH3-15 ^R _L	SH3-20 ^R _L	SH3-30 ^R _L	SH3-40 ^R _L	SH3-60 ^R _L
SH3-15 ^R _L	46.59	—	—	—	—
SH3-20 ^R _L	54.35	62.12	—	—	—
SH3-30 ^R _L	69.88	77.65	93.17	—	—
SH3-40 ^R _L	85.41	93.17	108.70	124.23	—
SH3-60 ^R _L	116.47	124.23	139.76	155.29	186.35

KHG Ground Helical Gears

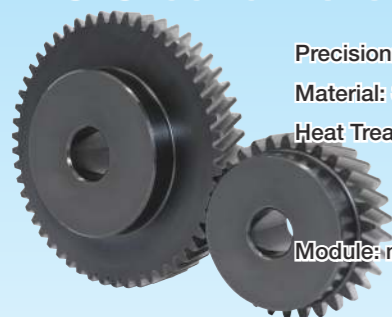

Precision: JIS Grade N6
Material: SCM440
Heat Treatment: Thermal refined /
gear teeth induction
hardened
Module: m1 to 3

Please see Page 194 for more details.

KRHG/KRHGF/KRHGFD Ground Helical Racks

Precision: KHK Grade 1
Material: SCM440
Heat Treatment: Thermal refining only
Module: m1 to 3
Nominal Total Length: 100, 500, 1,000 mm



Please see Page 256 for more details.

SH Helical Gears



Precision: JIS Grade N8
Material: S45C
Heat Treatment: -
Module: m2, 3

Please see Page 202 for more details.

SRH·SRHF·SRHFD Helical Racks

Precision: KHK Grade 5
Material: S45C
Heat Treatment: -
Module: m2, 3
Nominal Total Length: 100, 500, 1,000 mm



Please see Page 258 for more details.

ZSTP Ground Helical Gears Dedicated for racks



Precision: JIS Grade N6
Material: SCM440
Heat Treatment: Thermal refined /
gear teeth induction
hardened
Module: m2 to 6

Please see Page 262 for more details.

SHE Helical Gears Dedicated for racks




Precision: JIS Grade N8
Material: S45C
Heat Treatment: -
Module: m1.5 to 6

Please see Page 260 for more details.

ZST/ZSTD Hardened Ground Helical Racks

Precision: DIN Grade 6 (KHK Grade 2 equivalent)
Material: DIN C45 (JIS S45C equivalent)
Heat Treatment: Gear teeth induction hardened
Module: m2 to 6
Nominal Total Length: 1,000, 2,000 mm



Please see Page 262 for more details.

SRHEF Helical Racks

Precision: KHK Grade 4
Material: S45C
Heat Treatment: -
Module: m1.5 to 6
Nominal Total Length: 1,000 mm




Please see Page 260 for more details.



Internal Gears

SI Steel Internal Gears	SIR Internal Ring Gears
	
Material: S45C m0.5-3 Page 208	Material: S45C m2-3 Page 210

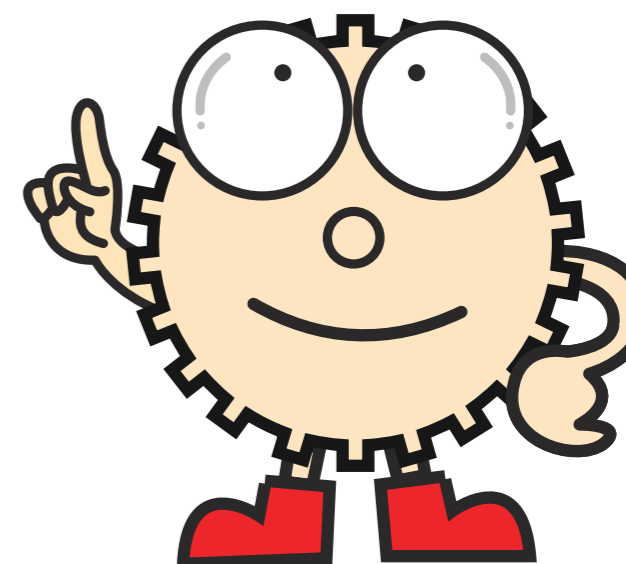

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Internal Gears

S I R 2 - 120



Features

KHK stock internal gears are offered in modules 0.5 to 3 in 50 to 200 teeth. They can be used in many applications including planetary gear drives.


Catalog Number	SI	SIR
Module	0.5~3	2~3
Material	S45C	S45C
Heat Treatment	—	—
Tooth Surface Finish	Cut	Cut
Precision JIS B 1702-1:1998	N8 NOTE 1	N9
Secondary Operations	Possible	Possible
Features	A popular type of internal gear; Allows secondary operations.	They have a ring shape with a large number of teeth. Allows secondary operations.

[Note 1] The product accuracy class having a module less than 0.8 corresponds to 'equivalent' as shown in the table.


Application Examples

KHK stock internal gears are used to reduce the size of various equipment, such as reduction gears.

■ Design example of reduction gear (not a design for machinery or a device in actual use)

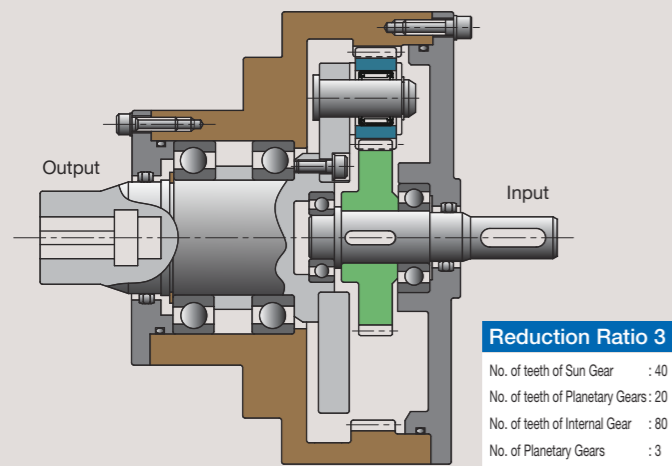

Planetary Gear Mechanism used in a reduction gear

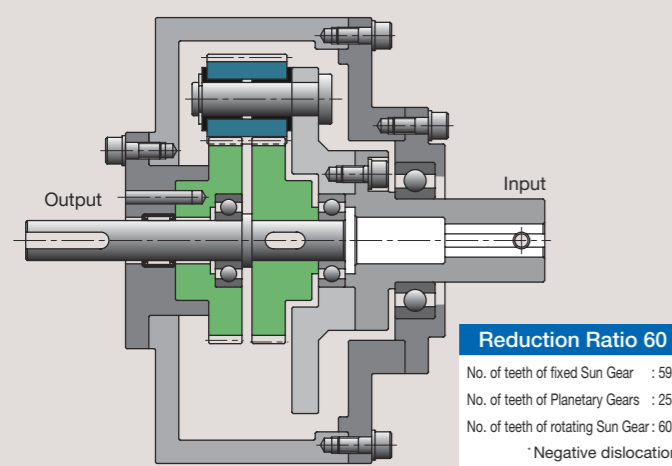


Mechanical Paradox Gear Mechanism used in a large reduction gear

Example of combinations

No. of teeth of Internal Gear	No. of Planetary Gears	No. of teeth of sun gear	No. of teeth of Planetary Gears	Reduction ratio of planetary type	Reduction ratio of solar type	Reduction ratio of star type
60	3	18	21	4.333	1.3	-3.333
80	3	16	32	6	1.2	-5
80	3	40	20	3	1.5	-2
100	3	20	40	6	1.2	-5
100	3	50	25	3	1.5	-2

Types of Planetary Gear Mechanism

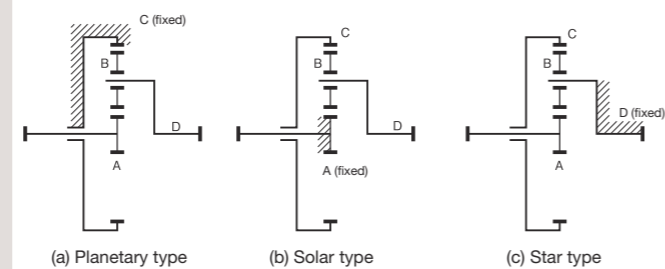

Selection Hints

Please select the most suitable products by carefully considering the characteristics of items and contents of the product tables.

1. Caution in Selecting the Mating Gears

KHK stock internal gears can mate with any spur gears of the same module, however, there are cases of interference depending on the number of teeth of the mating gear. The table below contains the assumptions established for these products in order to compute gear strengths.

Interferences and the symptoms

Type	SYMPTOMS	CAUSES
Involute interference	The tip of the internal gear digs into the root of the pinion.	Too few teeth on the pinion.
Trochoid interference	The exiting pinion tooth contacts the internal gear tooth.	Too little difference in number of teeth of the two gears.
Trimming interference	Pinion can slide in or out axially but cannot move radially.	Too little difference in number of teeth of the two gears.

Allowable Mating Pinions and Number of Teeth

No. of teeth of Internal Gear	No. of teeth of Allowable Mating Pinions		
	Lower limit No. of teeth due to involute interference	Upper limit No. of teeth due to trochoid interference	Upper limit No. of teeth due to trimming interference
50	22	41	33
60	21	51	43
80	20	72	64
100	19	92	84
120	19	112	104
160	19	152	144
200	18	192	184

2. Caution in Selecting Gears Based on Gear Strength

The gear strength values shown in the product pages were computed by assuming the application environment in the table below. Therefore, they should be used as reference only. We recommend that each user computes their own values by applying the actual usage conditions. The table below contains the assumptions established for various products in order to compute gear strengths.

Calculation of Bending Strength of Gears

Item	Catalog Number	SI	SIR
Formula NOTE 1	Formula of spur and helical gears on bending strength (JGMA401-01)		
No. of teeth of mating gears	30		
Rotational Speed	100rpm		
Design Life (Durability)	Over 10 ⁷ cycles		
Impact from motor	Uniform load		
Impact from load	Uniform load		
Direction of load	Bidirectional load (calculated with allowable bending stress of 2/3)		
Allowable bending stress at root σ_{Hlim} (kgf/mm ²)	19		
Safety factor S_F	1.2		

Calculation of Surface Durability (Except where it is common with bending strength)

Item	Catalog Number	SI	SIR
Formula NOTE 1	Formula of spur and helical gears on surface durability (JGMA402-01)		
Kinematic viscosity of lubricant	100cSt (50°C)		
Gear support	Symmetric support by bearings		
Allowable Hertz stress σ_{Hlim} (kgf/mm ²)	49		
Safety factor S_H	1.15		

[NOTE 1] The gear strength formula is based on JGMA (Japanese Gear Manufacturers Association) specifications. The units for the rotational speed (rpm) and the stress (kgf/mm²) are adjusted to the units needed in the formula.

Application Hints

In order to use KHK stock internal gears safely, read the Application Hints carefully before proceeding. Please refer to Page 48 for "Cautions on Handling" and Page 49 for "Cautions on Starting".

1. Caution on Performing Secondary Operations

- ① If performing outer diameter machining, it is important to pay special attention to locating the center in order to avoid runout.
- ② Please exercise caution not to cause deformation when chucking the outer diameter. Gear precision may deteriorate and cause trouble.
- ③ To avoid problems of reduced gear precision and other manufacturing difficulties, do not attempt to machine the gears to reduce face widths.

KHK considers safety a priority in the use of our products.

When handling, adding secondary operations, assembling, and operating KHK products, please be aware of the following issues in order to prevent accidents.

Warning: Precautions for preventing physical and property damage

1. When using KHK products, follow relevant safety regulations (Occupational Safety and Health Regulations, etc.).
2. Pay attention to the following items when installing, removing, or performing maintenance and inspection of the product.
 - ① Turn off the power switch.
 - ② Do not reach or crawl under the product.
 - ③ Wear appropriate clothing and protective equipment for the work.

Caution Cautions in Preventing Accidents

1. Before using a KHK product, read the precautions in the catalog carefully in order to use it correctly.
2. Avoid use in environments that may adversely affect the product.
3. Our products are manufactured under a superior quality control system based on the ISO9000 quality management system; if you notice any malfunctions upon purchasing a product, please contact the supplier.

2. Points of Caution during Assembly


- ① KHK stock internal gears are designed to give the proper normal direction backlash when assembled using the center distance given by the formula below. The amount of backlash is given in the dimension table for each gear.

$$a = \frac{d_2 - d_1}{2}$$

Where
 a : Center distance
 d_1 : Pitch diameter of pinion
 d_2 : Pitch diameter of internal gear

- ② Refer to the figure below for the direction of rotation of internal gears.

Gear Ratio and Direction of Rotation

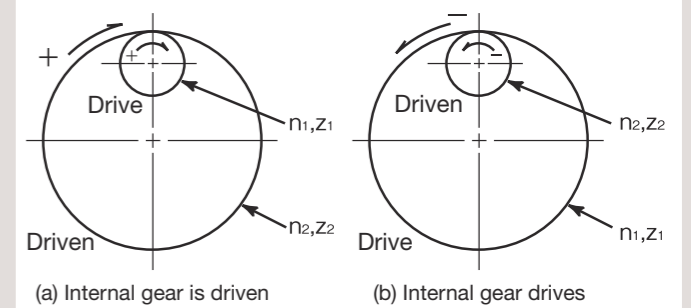

$$\text{Gear Ratio } i = \frac{z_2}{z_1} = \frac{n_1}{n_2} \quad \begin{matrix} z : \text{No. of teeth} \\ n : \text{Rotational speed} \end{matrix}$$

- ③ To use as a planetary gear drive, the following conditions must be satisfied.


Gear tooth conditions for planetary gear mechanisms

- Condition 1: $z_c = z_a + 2z_b$
 - Condition 2: $\frac{z_a + z_c}{N} = \text{Integer}$
 - Condition 3: $z_b + 2 < (z_a + z_b) \sin \frac{180^\circ}{N}$
- z_a : No. of teeth of Sun Gear
 z_b : No. of teeth of Planetary Gears
 z_c : No. of teeth of Internal Gear
 N : No. of Planetary Gears



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

* The precision grade of products with a module of less than 0.8 is equivalent to the value shown in the table.



T1

Catalog Number	Module	No. of teeth	Shape	Outside dia.				Face width		Allowable torque (N·m)				Backlash (mm)	Weight (kg)
				A	C	D	E	Bending strength	Surface durability	Bending strength	Surface durability				
SI0.5-60 SI0.5-80 SI0.5-100	m0.5	60	T1	29	30	50	5	3.75	0.67	0.38	0.068	0.04~0.15	0.049		
		80		39	40	60	4.85	0.75	0.49	0.077					
		100		49	50	70	5.97	0.87	0.61	0.089					
SI0.8-60 SI0.8-80 SI0.8-100	m0.8	60	46.4	48	75	15.4	2.87	1.57	0.29	0.16	0.05~0.16	0.16			
		80	62.4	64	90	19.9	3.24	2.03	0.33	0.20					
		100	78.4	80	105	24.5	3.75	2.50	0.38	0.23					
SI1-60 SI1-80 SI1-100	m1	60	58	60	90	30.0	5.95	3.06	0.61	0.28	0.09~0.21	0.35			
		80	78	80	110	38.8	6.59	3.96	0.67	0.43					
		100	98	100	130	47.8	7.64	4.87	0.78	0.43					
SI1.5-50 SI1.5-60 SI1.5-80 SI1.5-100	m1.5	50	72	75	115	87.1	20.9	8.88	2.13	0.70	0.11~0.25	0.81			
		60	87	90	130	101	20.6	10.3	2.10	1.04					
		80	117	120	160	131	23.3	13.4	2.38	1.26					
SI2-50 SI2-60 SI2-80 SI2-100	m2	50	96	100	150	206	50.3	21.0	5.13	1.54	0.12~0.28	1.79			
		60	116	120	170	240	50.5	24.5	5.15	2.28					
		80	156	160	210	311	57.0	31.7	5.81	2.77					
SI2.5-50 SI2.5-60 SI2.5-80	m2.5	50	120	125	185	403	101	41.1	10.3	2.87	0.14~0.31	3.33			
		60	145	150	210	469	101	47.8	10.3	4.25					
		80	195	200	260	607	114	61.9	11.6	4.25					
SI3-50 SI3-60	m3	50	144	150	220	697	178	71.0	18.1	4.79	0.15~0.35	5.57			
		60	174	180	250	811	178	82.7	18.2	5.57					

- [Caution on Product Characteristics] ① The backlash values shown in the table are the theoretical values for the normal direction for the internal ring in mesh with an SS spur gear.
 ② The allowable torques shown in the table are calculated values according to the assumed usage conditions. Please see Page 207 for more details.
 ③ Please check for the involute interference, trochoid interference and trimming interference prior to using internal gears.
 [Caution on Secondary Operations] ① Please read "Cautions on Performing Secondary Operations" (Page 207) when performing modifications and/or secondary operations for safety concerns.
 KHK Quick-Mod Gears, the KHK system for quick modification of KHK stock gears, is also available.
 ② Avoid performing secondary operations that narrow the tooth width, as it affects precision and strength.


Ground internal gears are available.



Klingelberg Gear Grinding Machine VIPER 500W

Internal ground gear machining range	
Maximum gear accuracy	JIS B 1702-1:1998 Grade N5 (former JIS Grade 1)
Maximum module	About m4 (DP6, CP12), special sizes available
Max. helix angle	27°, right/left helix direction available
Maximum outer diameter	φ 500mm
Minimum inner diameter	φ 150mm
Maximum weight	500 kgf (jig weight included)

Planetary Gear Systems created by using KHK Stock Gears

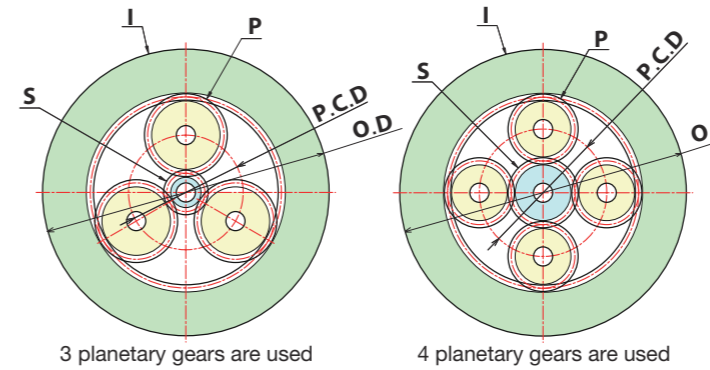

3 planetary gears are used

4 planetary gears are used

KHK's stock internal and spur gears working together will allow you to create planetary gear devices. "In the table below, we introduce examples of planetary gear Note 1. The Speed ratio are for planetary gear systems created with a stationary internal gear. When used as speed reducers, the input is the sun gear and the output is the carrier. "Selection of the number of teeth also enables you to create various planetary gear devices with different transmission

Speed ratio Note 1	Stock gears used in the system										Allowable transmission torque (kgf·m)				Total weight (kg)			
	Internal gears (I)			Planetary gears (P)				Sun gear (S)			Sun gear_T1		Planetary carrier_T2					
	OD(mm)	Catalog Number	No. of teeth	Catalog Number	No. of teeth	Quantity	P.C.D(mm)	Equal angles	Catalog Number	No. of teeth	Bending strength	Surface durability	Bending strength	Surface durability				
6	90	SI1-60	60	SSA1-24	24	3	36	120°	SSS1-12	12	0.58	0.0023	3.47	0.11	0.48			
	130	SI1.5-60		SSA1.5-24			54		SS1.5-12		1.77	0.0081	10.7	0.40	1.20			
	170	SI2-60		SSA2-24			72		SS2-12		4.21	0.020	25.2	0.99	2.66			
	210	SI2.5-60		SSA2.5-24			90		SS2.5-12		8.21	0.040	49.3	1.98	5.03			
	250	SI3-60		SSA3-24			108		SS3-12		14.2	0.070	85.2	3.49	8.57			
	110	SI1-80		SSA1-32			32		3		48	120°	SS1-16	16	0.99	0.0047	5.96	0.24
	160	SI1.5-80	SSA1.5-32	72	SS1.5-16	3.35		0.026		20.1	1.32		1.72					
	210	SI2-80	SSA2-32	96	SS2-16	7.95		0.064		47.7	3.22		3.85					
	260	SI2.5-80	SSA2.5-32	120	SS2.5-16	15.5		0.13		93.2	6.45		7.33					
	105	SI0.8-100	SS0.8-40A	40	4	48		90°		SS0.8-20A	20		0.95		0.0082	5.68	0.41	0.59
	130	SI1-100	SSA1-40			60				SS1-20			1.85		0.016	11.1	0.82	0.84
	190	SI1.5-100	SSA1.5-40			90	SS1.5-20		6.24	0.058		37.5	2.90	2.62				
250	SI2-100	SSA2-40	120			SS2-20	14.8		0.14	88.8		7.09	6.01					
60	SI0.5-80	SS0.5-30B	30			4	25		90°	SS0.5-20A		20	0.23	0.0012	1.13	0.070	0.12	
90	SI0.8-80	SS0.8-30C					40			SS0.8-20A			0.93	0.0050	4.65	0.30	0.40	
110	SI1-80	SSA1-30		50	SS1-20		1.82	0.010		9.08	0.60		0.59					
160	SI1.5-80	SSA1.5-30		75	SS1.5-20		6.13	0.035		30.63	2.13		1.86					
210	SI2-80	SSA2-30		100	SS2-20		14.5	0.087		72.6	5.21		4.18					
260	SI2.5-80	SSA2.5-30		125	SS2.5-20		28.4	0.17		142	10.4		7.97					
3	60	SI0.5-80	80	20	4	30	90°	SSG0.5-40B	40	0.46	0.0016	1.39	0.10	0.13				
	90	SI0.8-80				SS0.8-20A		48		SS0.8-40A	1.89	0.0068	5.68	0.41	0.35			
	110	SI1-80				SSA1-20		60		SS1-40	3.70	0.014	11.1	0.82	0.60			
	160	SI1.5-80				SSA1.5-20		90		SS1.5-40	12.5	0.048	37.5	2.91	1.77			
	210	SI2-80				SSA2-20		120		SS2-40	29.6	0.12	88.8	7.12	3.93			
	260	SI2.5-80				SSA2.5-20		150		SS2.5-40	57.8	0.24	173	14.3	7.47			
	70	SI0.5-100	SS0.5-25B	100	25	3	37.5	120°	SS0.5-50B	50	0.47	0.0020	1.42	0.12	0.16			
	130	SI1-100	SSA1-25				75		SS1-50		3.79	0.017	11.4	1.01	0.75			
	190	SI1.5-100	SSA1.5-25				112.5		SS1.5-50		12.8	0.060	38.4	3.58	2.24			
	250	SI2-100	SSA2-25				150		SS2-50		30.4	0.15	91.1	8.79	5.02			

Calculation of Allowable Transmission Torque

M Made to Order

One advantage of a planetary gear system is that they share load burdens by grouping multiple planetary gears. This enables high torque capacity transmission.

The following formula is the calculation method for T1 (Allowable transmission torque of Sun Gear) and T2 (Allowable transmission torque of Planetary Carrier), shown in the table.

$$T1 = Ts \cdot Zp \cdot \eta \quad (\text{kgf} \cdot \text{m}) \quad \dots \dots (1)$$

$$T2 = Ts \cdot Zp \cdot u \cdot \eta \quad (\text{kgf} \cdot \text{m}) \quad \dots \dots (2)$$

Here,

Ts : Allowable transmission torque for a Sun gear (kgf·m) on a meshed pair of sun gear and planetary gear.

For a sun gear meshed with a planetary gear, the number of revolutions is set to 100rpm.

Zp : Number of planetary gears used in the system


u : Speed ratio

η : Contact efficiency for torque transmission

In consideration of machining accuracy, variation in tooth thickness or other factors on the planetary carrier, the contact efficiency is set to 75%.



Specifications	
Precision grade	JIS grade N9 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating



Catalog Number	Module	No. of teeth	Shape	Dimensions (mm)				Allowable torque (N-m)				Backlash (mm)	Weight (kg)
				A	C	D	E	Bending strength	Surface durability	Bending strength	Surface durability		
SIR2-120	m2	120	T1	236	240	286	20	413	68.8	42.1	7.02	0.12~0.28	2.98
SIR2-200		200		396	400	446	20	677	110	69.0	11.2		
SIR2.5-120	m2.5	120	T1	295	300	355	25	807	138	82.3	14.0	0.14~0.31	5.55
SIR2.5-200		200		495	500	555	25	1320	220	135	22.5		
SIR3-120	m3	120	T1	354	360	424	30	1390	244	142	24.9	0.15~0.35	9.28
SIR3-160		160		474	480	544	30	1840	315	188	32.1		

- [Caution on Product Characteristics]
- The backlash values shown in the table are the theoretical values for the normal direction for the internal ring in mesh with an SS spur gear.
 - The allowable torques shown in the table are calculated values according to the assumed usage conditions. Please see Page 207 for more details.
 - Please check for the involute interference, trochoid interference and trimming interference prior to using internal gears.
- [Caution on Secondary Operations]
- Please read "Cautions on Performing Secondary Operations" (Page 207) when performing modifications and/or secondary operations for safety concerns. KHK Quick-Mod Gears, the KHK system for quick modification of KHK stock gears, is also available.
 - Avoid performing secondary operations that narrow the tooth width, as it affects precision and strength.

Established equipment and technology
Custom gears are also available.

Diameter ϕ 700mm maximum, Module 6.5 maximum, Cutting Stroke 170 mm



Gear cutting by CNC Gear Shaper

Racks

MRGF/MRGFD Hardened Ground Racks Material: SCM415 m1.5-3 Page 224	KRGF-H/KRGFD-H Hardened Ground Racks Material: SCM440 m1.5-3 Page 226	KRG/KRGF/KRGFD Thermal Refined Ground Racks Material: SCM440 m1-3 Page 228	SRG/SRGF/SRFGD/SRFGK Hardened Ground Racks Material: S45C m0.5-6 Page 230	KRF-H/KRFD-H Hardened Racks Material: SCM440 m1.5-5 Page 232	SRF-H/SRFD-H Hardened Racks Material: S45C m1.5-6 Page 234	SRF-HL/SRFD-HL Laser Hardened Racks Material: S45C m1.5-6 Page 236
KRF/KRFD Thermal Refined Racks Material: SCM440 m1.5-5 Page 238	SRAF/SRAFD/SRAFK Square Racks Material: S45C m1.5-4 Page 240	SR Racks Material: S45C m0.5-10 Page 242	SRF Steel Racks with Machined Ends Material: S45C m0.5-10 Page 243	SRFD/SRFK Steel Racks with Bolt Holes Material: S45C m0.5-6 Page 244	SUR/SURF/SURFD Stainless Steel Racks Material: SUS304 m1-4 Page 246	DRF/DRFD/DRFK Plastic Racks Material: Polyacetal m1-3 Page 248
PR/PRF Plastic Racks Material: MC901 m1-3 Page 250	BSR Racks Material: Free cutting brass (C3604) m0.5-1 Page 251	SRO/SROS Round Racks Material: S45C m1-5 Page 252	SURO Stainless Steel Round Racks Material: SUS303 m1-3 Page 253	DR Molded Flexible Racks Material: Duracon (R) (M25-44) m0.8-2 Page 254	SSDR/ARL/SRS Rack Clamps for Pinions/Rack Guide Rails For Molded Flexible Racks Material: S45C, etc. Page 254	KRHG/KRHGF/KRHGFD Ground Helical Racks Material: SCM440 m1-3 Page 256
SRH/SRHF/SRHFD Helical Racks Material: S45C m2, 3 Page 258	SRHEF Helical Racks Material: S45C m1.5-6 Page 260	SHE Helical Gears Material: S45C m1.5-6 Page 260	ZST/ZSTD Hardened Ground Helical Racks Material: DIN C45 (S45C equivalent) m2-6 Page 262	ZSTP Ground Helical Gears Material: SCM440 m2-6 Page 262	ZST-GL Assembly Gauges Material: S45C m1.5-6 Page 264	


M Includes Made to Order

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Racks

K R G F 2 - 500 H

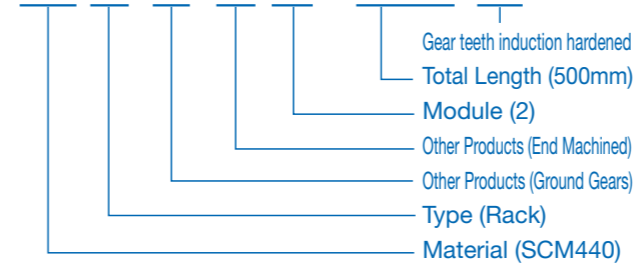

Material		Other Information	
M	SCM415	F	Racks with Machined Ends
K	SCM440	D	Racks with Bolt Holes
S	S45C	K	Racks with Drill Holes
SU	Stainless Steel	G	Ground Gears
BS	Brass	H	Gear teeth induction hardened
P	MC901	HL	Laser hardened
D	Polyacetal	ZST	#####
Type			
R	Racks		
RH	Helical Racks		
RO	Round Racks		
S	Spur Gears		
H	Helical Gears		

Features



KHK stock racks are made for high precision linear motion applications. We offer a large selection of racks ranging from module 0.5 to 10 and lengths up to 2000 mm. The following table lists the main features.

Racks

Catalog Number <small>Note 1</small>	Module	Total Length mm Parentheses show no. of teeth	Material	Heat Treatment	Tooth Surface Finish	Gear accuracy <small>KHK R.001 Note 3</small> <small>Parentheses show JIS B 1702-1</small>	Features
MRGF/MRGFD	1.5~3	500	SCM415	Tooth area carburized	Ground	1	Racks that have been carburized and ground that have excellent accuracy, strength and wear resistance. Secondary operations are possible except for tooth.
KRGF-H KRGFD-H	1.5~3	500, 1000	SCM440	Thermal refined, gear teeth induction hardened	Ground	1	Racks that have been tempered, hardened and ground that have excellent accuracy, strength and wear resistance. Secondary operations are possible except for tooth.
KRG/KRGF/ KRGFD	1~3	100, 500, 1000	SCM440	Thermal refined	Ground	1	Racks that have been tempered and ground that have excellent accuracy and strength.
SRG/SRGF SRGFD/SRGFK	0.5~6	100, 300, 500, 1000	S45C	Gear teeth induction hardened <small>NOTE 2</small>	Ground	3	Racks that have been hardened and ground with a good balance of accuracy, wear resistance and cost. Secondary operations are possible except for tooth.
KRF-H/KRFD-H	1.5~5	1000	SCM440	Thermal refined, gear teeth induction hardened	Cut	5	Racks that have been tempered and hardened that have excellent strength and wear resistance. Secondary operations are possible except for tooth.
SRF-H SRFD-H	1.5~6	1000	S45C	Gear teeth induction hardened	Cut	5	Racks that have been hardened with excellent wear resistance. Secondary operations are possible except for tooth.
SRF-HL SRFD-HL	1.5~6	1000, 1500, 2000	S45C	Gear teeth laser hardened	Cut	4	Racks that have been laser hardened with a good balance of wear resistance and cost. Secondary operations are possible except for tooth.
KRF/KRFD	1.5~5	500, 1000	SCM440	Thermal refined	Cut	4	Racks that have been tempered with excellent strength.
SRAF/SRAFD SRAFK	1.5~4	1000, 2000	S45C	—	Cut	4	These racks have smaller tooth height in comparison to SRF Racks.
SR/SRF SRFD/SRFK	0.5~10	100, 300, 500, 1000, 1500, 2000	S45C	—	Cut	4	Many lineups are available at a low price and excellent usability.
SUR/SURF SURFD	1~4	500, 1000	SUS304	Solution treated	Cut	5	Stainless steel racks with rust resistance.
DRF/DRFD DRFK	1~3	500, 1000	Polyacetal	—	Cut	5	Racks made of polyacetal with shorter overall length than nylon, making them suitable for joining together.
PR/PRF	1~3	500, 1000	MC901	—	Cut	5	Nylon racks can be used with no lubrication.
BSR	0.5~1	300	Free-cutting Brass (C3604)	—	Cut	4	Brass racks with excellent machinability.
SRO/SROS	1~5	500, 1000	S45C	—	Cut	4	Round racks that are suitable when the rack side moves.
SURO	1~3	500, 1000	SUS303	—	Cut	5	Round racks made of stainless steel. Suitable when the rack side moves.
DR	0.8~2	2000	Duracon (R) (M25-44) <small>NOTE 4</small>	—	Injection Molded	8	Thin plastic racks that can be bent.
KRHG/KRHGF KRHGD	1~3	100, 500, 1000	SCM440	Thermal refined	Ground	1	Helical racks that have been tempered and ground with excellent accuracy that have higher strength and quietness as compared with KRGF.
SRH/SRHF SRHFD	2~3	100, 500, 1000	S45C	—	Cut	5	As they are helical racks, they have higher strength and quietness as compared with SRF.
SRHEF	1.5~6	1000	S45C	—	Cut	4	As they are helical racks, they have higher strength and quietness as compared with SRF. They can be used like CP racks.
ZST/ZSTD	2~6	1000, 2000	DIN C45 (JIS Grade S45C equivalent)	Gear teeth induction hardened	Ground	Grade 2 equivalent	Helical racks that have been hardened and ground that have excellent accuracy, wear resistance and quietness. They can be used like CP racks. Secondary operations are possible except for tooth.

Pinion

SHE	1.5~6	(18~30)	S45C	—	Cut	(N8)	SRHEF pinions that have excellent strength and quietness as compared with SS due to its helix.
ZSTP	2~6	(18~30)	SCM440	Thermal refined, gear teeth induction hardened	Ground	(N6)	ZST pinions with high accuracy that have excellent strength, wear resistance and quietness due to its helix. Secondary operations are possible except for tooth.

[NOTE 1] The catalog numbers of the above racks with (F) suffix have both ends machined so that they can be butted against each other. The items with (D) have mounting screw holes for immediate assembly.

[NOTE 2] Products with module under 1 are thermal refined, without their gear teeth being induction hardened.

[NOTE 3] Precision grade standard of racks are set by KHK. Please see "Precision of Racks" in Selection Hints section for details.

[NOTE 4] "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.

- KHK stock racks have round semi-topping at the corners of the top land of the gear tooth.
- Black products are KHK stock gears that have an applied black oxide coating for rust resistance.

Application Examples



KHK stock racks & pinions are adopted in driving devices for all kinds of linear motion systems, including transport devices.

Circular saw cutting machine HS-400 manufactured by Kooki Co., Ltd.



SRFD racks and SSG spur gears used for automatic and manual drive for cutting, machining of both ends and deburring



Clamp Seamer Welder



The SRCPFD racks and SSCP spur gears used to drive weld torches at constant speed, and the SRO round racks and SS spur gears used to position workpieces

Automatic packaging machine manufactured by Toyota Machinery Co., Ltd.



SUR stainless steel rack used for film winding tension part

Dremax Long Strip Cutter



PR plastic rack used for feeding Long Strip Cutter

Lathe Auto Loader



SRO Round Rack used as a workpiece storage device (lifting/lowering table)

Lathe Gantry Loader



KRG Ground Rack used as a workpiece conveying device

Selection Hints

Please select the most suitable products by carefully considering the characteristics of items and contents of the product tables. It is also important to read all applicable "CAUTION" notes shown below before the final selection.

1. Caution in Selecting the Mating Gears

- ① With the exception of helical racks, KHK stock racks can mate with any spur gears of the same module. Products with different tooth width can also be mated as a pinion.
- ② See the table on the right for the mating gears of the helical racks.
Be sure to check the combination of helix direction (right or left) when selecting.

2. Caution in Selecting Gears Based on Gear Strength

The gear strength values shown in the product pages were computed by assuming the application environment in the table below. Therefore, they should be used as reference only. We recommend that each user computes their own values by applying the actual usage conditions.

■ Calculation of Bending Strength of Gears

Item	Racks					Pinion					Racks		
	MRGF	KRGF-H KRGFD-H KRF-H KRFD-H	KRG/KRGF KRGFD	SRG/SRGF SRGFD/SRGFK SRF-H/SRFD-H ZST/ZSTD	SRF-HL SRFD-HL	SRAF/SRAFDF SRAFK/SR/SRF SRFD/SRFK/SRO SROS/SRH/SRHF SRHFD/SRHEF	SUR SURF SURFD SURO	BSR	SHE	ZSTP	DRF DRFD DRFK	PR PRF	DR
Formula NOTE 1	Formula of spur and helical gears on bending strength (JGMA401-01)										The Lewis formula		
No. of teeth of mating gears	30 Note 2										Racks (30)		
Rotational Speed of Pinion	100rpm										(100rpm)		
Design Life (Durability)	Over 10 ⁷ cycles										Allowable bending stress (kgf/mm ²)		
Impact from motor	Uniform load										m 0.8 4.0		
Impact from load	Uniform load										m 1.0 3.5		
Direction of load	Bidirectional load (calculated with allowable bending stress of 2/3)										m 1.5 1.8 NOTE 4		
Allowable bending stress at root σ_{Flim} (kgf/mm ²)	47	32	20 NOTE 3					10.5	4	19	30	Lubrication) Lubrication) Grease Lubrication)	
Safety factor S_F	1.2												

■ Calculation of Surface Durability (Except where it is common with bending strength)

Item	Racks											
	MRGF	KRGF-H KRGFD-H KRF-H KRFD-H	KRG/KRGF KRGFD	SRG/SRGF SRGFD/SRGFK SRF-H/SRFD-H ZST/ZSTD	SRF-HL SRFD-HL	SRAF/SRAFDF SRAFK/SR/SRF SRFD/SRFK/SRO SROS/SRH/SRHF SRHFD/SRHEF	SUR SURF SURFD SURO	BSR	SHE	ZSTP	DRF DRFD DRFK	PR PRF
Formula NOTE 1	Formula of spur and helical gears on surface durability (JGMA402-01)											
Kinematic viscosity of lubricant	100cSt(50°C)											
Gear support	Supported on one end.											
Allowable Hertz stress σ_{Hlim} (kgf/mm ²)	166	112	79	90 NOTE 3	80	52.5	41.3	-	49	112		
Safety factor S_{H1}	1.15											

- [NOTE 1] The gear strength formula is based on JGMA (Japanese Gear Manufacturers Association) specifications, "MC Nylon Technical Data" by Mitsubishi Chemical Advanced Materials and "Duracon (R) Gear" by Polyplastics Co. The units for the rotational speed (rpm) and the stress (kgf/mm²) are adjusted to the units needed in the formula.
- [NOTE 2] No. of mating teeth in the ZST and ZSTD racks is the "minimum number of teeth" of the ZSTP pinion. The No. of mating teeth in the SRHEF racks is also calculated by the "minimum number of teeth" of the SHE pinion.
- [NOTE 3] For SRG, or SRGF Ground Racks, with a module less than m0.8, the allowable bending stress and allowable hertz stress are respectively 24.5 (kgf/mm²) and 62.5 (kgf/mm²).
- [NOTE 4] The values for DR m 1.5 racks were assumed by KHK. Usage conditions for SDDR (DR Rack Pinion) are the same for the SSCP Pinion, shown on Page 269.

When selecting KHK standard gears, glance over the Cautions on Product Characteristics and Cautions on Performing Secondary Operations on Page 216.

- ① Products not listed in this catalog or materials, modules, number of teeth and the like not listed in the dimensional tables can be manufactured as custom items. Please see Page 26 for more details about custom-made orders.
- ② The color and shape of the product images listed on the dimension table page of each product may differ from the actual product. Be sure to confirm the shape in the dimension table before selection.
- ③ The details (specifications, dimensions, etc.) listed in the catalog may be changed without prior notice. Changes are announced on the KHK website.
Website URL: <https://khkgears.net/new/>
Overseas Sales Department: Phone: +81-48-254-1744 Fax: +81-48-254-1765 E-mail: info@khkgears.net

■ Mating Helical Gear Selection Chart (○ Allowable X Not allowable)

Catalog Number and Direction of Helix	KRHG KRHGF		ZST ZSTD	SRHEF	SRH/SRHF SRHFD	
	RH	LH	RH	RH	RH	LH
KHG	LH	○	X	X	X	X
	RH	X	○	X	X	X
ZSTP	LH	X	○	○	X	X
SHE	LH	X	○	○	X	X
SH	LH	X	X	X	○	X
	RH	X	X	X	X	○



Selecting the Gears

Step 1

Determine the calculated load torque applied to the gear and the gear type suitable for the purpose.

Step 2

Select provisionally from the allowable torque table in this catalog based on the load torque.

■ For provisional selection from this catalog

Catalog Number	Module	No. of teeth	Shape	Total Length			Height	Height to top line	Allowable Torque (kg)			Allowable Torque (kgf)		
				A	B	C			Spur Gears	Racks	Internal	Spur Gears	Racks	Internal
KRG1-100	m1	20	R1	98	10	15	14	1330	841	156	85.1			
				101	15	20	18.5	1400	1440	352	147			
				100	25	30	27.5	980	4010	977	408			
KRG2-100	m2	14	R1	101	30	35	32	1800	5770	1410	588			
				100	35	40	38.5	1400	1440	352	147			
				100	45	50	48.5	1000	4010	977	408			
KRG3-100	m3	9	R1	101	30	35	32	1800	5770	1410	588			
				100	35	40	38.5	1400	1440	352	147			
				100	45	50	48.5	1000	4010	977	408			

Step 3


Calculate the strength under the actual usage conditions.

Calculate the strength formally using the various gear strength formulas. Please see our separate technical reference book for more details. We recommend using the Website that allows the strength to be easily calculated.

■ Use the strength calculation function on our website.

■ Bending strength

Calculated values of the strength at which the gear teeth do not break due to fatigue.



Example of failure due to insufficient bending strength

■ Surface durability

Calculated values of the strength at which the gear teeth do not wear due to surface fatigue damage.



Example of wear due to insufficient surface durability

Product Precautions

Common Notes
[Caution on Product Characteristics]

- (1) The allowable forces shown in the table are calculated values according to the assumed usage conditions. Please see Page 214 for more details.
- (2) The backlash values shown in the table are the theoretical values for the backlash in the circumferential direction of recommended pinions with the same pitch.
- (3) There is a decarburized layer on the surface, so 0.5mm or so will not be at the specified hardness.
- (4) After attaching the racks to the base, fasten with dowel pins. Clamping only with mounting screws could possibly cause the screws to be broken, due to a heavy load.

[Caution on Secondary Operations]

- (1) Please read "Cautions on Performing Secondary Operations" on Page 221 when performing modifications and/or secondary operations for safety concerns.
- (2) Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).

[J Series]

- (1) Cancellation is not possible for made-to-order products. For lead time details, see Page 38.
- (2) Up to 20 units can be handled; for larger orders, please request a price and delivery quote.
- (3) Black oxide is not re-applied to parts undergoing secondary operations.

MRGF Hardened Ground Racks
[Caution on Secondary Operations]

- (1) In the illustration, the area surrounded with ---- line is masked during the carburization process (max. HRC40 or so) and can be modified.

KRF-H Hardened Racks
[Caution on Product Characteristics]

- (1) The dimensions may vary widely due to hardening. Therefore, the total composite error is excluded from the rack accuracy table on Page 219.

SRF-H Hardened Racks
[Caution on Product Characteristics]

- (1) The dimensions may vary widely due to hardening. Therefore, the total composite error is excluded from the rack accuracy table on Page 219.

SRF-HL Laser Hardened Racks
[Caution on Secondary Operations]

- (1) Due to the gear teeth being laser hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 1 mm).

SRFD Steel Racks with Bolt Holes
[Caution on Secondary Operations]

- (1) Avoid hardening racks with bolt holes, due to mounting hole deformation.

SUR(F,D) Stainless Steel Racks
[Caution on Product Characteristics]

- (1) The stainless steel material is given solution treatment and passivation.

DRF(D,K) Plastic Racks
[Caution on Product Characteristics]

- (1) Boiling sterilization is not required when using this product in food machines. Note that POM plastic complies with the Food Sanitation Law of the US Food and Drug Administration (FDA), and boiling or exposing it to steam will cause the material to be damaged.

Product Precautions

PR(F) Plastic Racks
[Caution on Product Characteristics]

- (1) These plastic racks expand and contract depending on the temperature and humidity. The length per 1m changes by 0.45 mm when the temperature changes by 10°C, and about 5 mm with water absorption of 2%. The bending is 5 mm or less per 1 m, but may exceed 5 mm over time in products with total length 1000 mm. Mount for use while correcting along the gear cutting reference surface (bottom).

SRO(S) Round Racks
[Caution on Product Characteristics]

- (1) Because this is extruded material, the outer diameter may be out of H9 tolerance in parts.

[Caution on Secondary Operations]

- (1) Avoid hardening round racks, due to twisting and deformation occurring and the difficulty of straightening the rack after hardening.

SURO Stainless Steel Racks
[Caution on Product Characteristics]

- (1) Because this is extruded material, the outer diameter may be out of H9 tolerance in parts.

DR Molded Flexible Racks
[Caution on Product Characteristics]

- (1) When using the DR flexible rack in an arc, the minimum bending radius (R) is 150 mm for both the external and internal teeth. This increases the pitch errors and tooth profile errors which prevent the teeth from meshing at the normal center distance, so be sure to make adjustments before use.
- (2) It cannot be used where positioning accuracy is required.
- (3) For the dimensional tolerance of each part, see the dimensional tolerance of molded items in the separate table.

SRS Rack Clamps
[Caution on Product Characteristics]

- (1) M4 x 12 pan head machine screws with cross holes are included.
- (2) The set includes a rack clamp and 10 machine screws.

KRHG(F,D) Ground Helical Racks
[Caution on Product Characteristics]

- (1) For the helical gear series combinations, see the Mating Gear Selection Chart on Page 190.
- (2) These bevel gears produce axial thrust forces. Please see Page 193 for more details.

SRH(F) Helical Racks
[Caution on Product Characteristics]

- (1) For the helical gear series combinations, see the Mating Gear Selection Chart on Page 190.
- (2) These bevel gears produce axial thrust forces. Please see Page 193 for more details.

SRHFD Helical Racks
[Caution on Product Characteristics]

- (1) For the helical gear series combinations, see the Mating Gear Selection Chart on Page 190.
- (2) These bevel gears produce axial thrust forces. Please see Page 193 for more details.

[Caution on Secondary Operations]

- (1) Avoid hardening racks with bolt holes, due to mounting hole deformation.

SRHEF Helical Racks

[Caution on Product Characteristics]

- (1) For the helical gear series combinations, see the Mating Gear Selection Chart on Page 190.
- (2) These bevel gears produce axial thrust forces. Please see Page 193 for more details.
- (3) For the assembly joining gauge, use ZST-GL on Page 264.

SHE Helical Gears

[Caution on Product Characteristics]

- (1) The backlash values shown in the table are the theoretical values for the backlash in the circumferential direction of SRHEF Helical Racks with the same pitch.

ZST(D) Hardened Ground Helical Racks

[Caution on Product Characteristics]

- (1) For the helical gear series combinations, see the Mating Gear Selection Chart on Page 190.
- (2) These bevel gears produce axial thrust forces. Please see Page 193 for more details.

ZSTP Ground Helical Gears

[Caution on Product Characteristics]

- (1) The backlash values shown in the table are the theoretical values for the backlash in the circumferential direction of ZST Helical Racks with the same pitch.

[Caution on Secondary Operations]

- (1) Because of the influence of hardening residual stress, avoid removing the entire boss, as it may cause the gears to deform.

3. Cautions on Selecting Racks By Precision

The precision standards of KHK stock racks are established by us. The table below indicates the tolerance ranges of our racks.

① Pitch Errors of Racks (KHK R 001)

Our precision grades for pitch errors are established by referring to old JIS Standards. The precision grades are set from 1 to 8, in accordance with the tolerance of a single pitch error (S.P.E.), adjacent tooth-to-tooth error (T.T.E.), and the total composite error (T.C.E.) for each module and length.

■ Precision Grades of Racks

Unit: μm

Grade	Pitch Error	Rack Length (nominal)											
		Over $m0.4$ to 1 CP2.5		Over $m1$ to 1.6 CP5		Over $m1.6$ to 2.5 -		Over $m2.5$ to 4 CP10		Over $m4$ to 6 CP15		Over $m6$ to 10 CP20	
		1000 or less	1001 up to 2000	1000 or less	1001 up to 2000	1000 or less	1001 up to 2000	1000 or less	1001 up to 2000	1000 or less	1001 up to 2000	1000 or less	1001 up to 2000
1	S.P.E.	10	-	10	12	11	12	11	13	13	14	14	16
	T.C.E.	28	-	29	33	30	35	32	37	35	40	40	45
2	S.P.E.	14	-	14	17	15	17	16	18	18	20	20	23
	T.C.E.	39	-	41	48	43	49	46	53	50	57	58	64
3	S.P.E.	20	-	20	24	21	25	23	26	25	29	29	32
	T.C.E.	56	-	57	67	60	70	64	74	71	80	81	91
4	S.P.E.	28	-	29	33	30	35	32	37	35	40	40	45
	T.C.E.	79	-	81	95	85	99	91	105	100	115	115	130
5	S.P.E.	39	-	41	48	43	49	46	53	50	57	58	64
	T.C.E.	110	-	115	135	120	140	130	145	140	160	160	180
8	S.P.E.	206	206	212	212	219	219	-	-	-	-	-	-


- [NOTE] ① Since the pitch accuracy of racks may vary due to humidity, the precision grades are evaluated at the bottom surface of the product, at the temperature of 20°C. The dimensions of the KHK PR Plastic Racks may vary widely due to humidity. Therefore, the total composite error is assumed to be excluded from this accuracy standard.
- ② For the accuracy of CP Rack, convert CP to m (module) when reference is made to the data in the table. ($m = CP / \pi$).

■ Comparison Table of Precision Grades of Racks

KHK R001	1	2	3	4	5	6	7	8
DIN 3962	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12


- * Values in the table are guidelines only and not guaranteed values.
- * In the gray area, there are no equivalent products for stock gears.

■ Pitch inspection and a sample report using Karl Zeiss ACCURA Coordinate Measuring Machine. (KHK R 001 Grade 1)

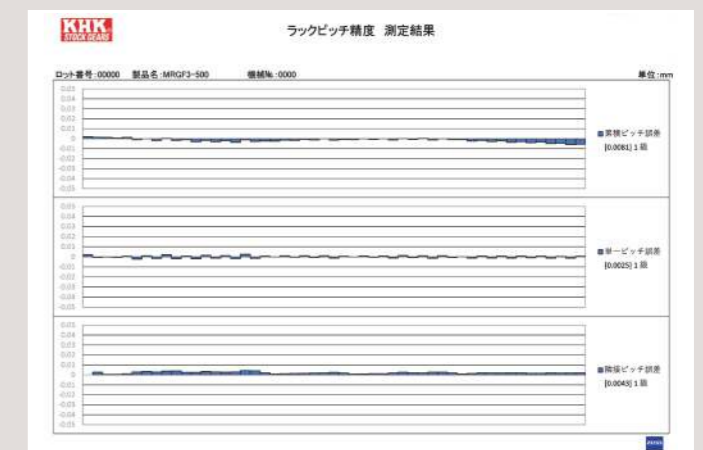

② Precision of Rack Blanks

■ Tolerances for Face Width and Height

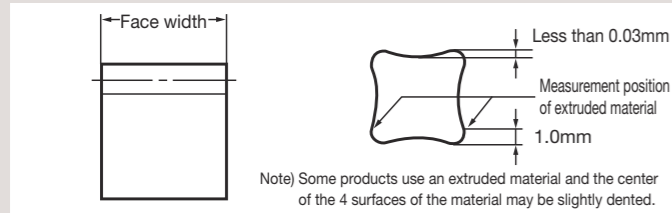


Unit: mm

Precision grade (KHK R 001)	Grade 1	Grade 2	Grades 3 to 5
Face width			
8 or less	0 -0.05	0 -0.10	0 -0.22
9 to 10		0 -0.10	0 -0.27
11 to 18		0 -0.10	0 -0.33
19 to 30		0 -0.15	0 -0.39
31 to 50		0 -0.15	0 -0.46
51 to 90		0 -0.15	0 -0.46

[NOTE] Dimensional tolerance of hardened products is that prior to hardening. Dimensional tolerance for plastic racks is the value obtained when machining is performed, and may increase slightly due to aging. * BSR products are not applicable.

■ Maximum Curvature Values (Flatness Tolerance L)

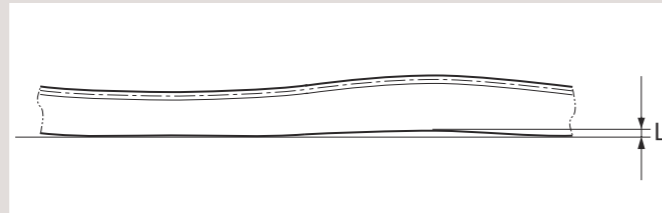

Unit: mm

Precision grade (KHK R 001)	Grade 1 & 2	Grade 3	Grade 4 & 5
Length (nominal)			
500	0.05	0.1	0.2
1000	0.1	0.2	0.3
1500	—	—	0.3
2000	—	—	0.4

[NOTE] The straightness tolerances of round racks are 0.15/500 mm and 0.2/1000 mm. Plastic racks change over time so are excluded from this precision standard.

■ Tolerance on Total Length

Unit: mm

Product Type	Module	Dimensional Tolerance
F Type End Machined Product	m0.5	(-0.1 -0.3)
	m0.8(CP2.5)	(-0.1 -0.5)
	m1 up to 2.5	(-0.2 -0.6)
	m2.5 or more	(-0.2 -0.8)
FRCP and DR Flexible Racks	Uniform	±10
Products other than the above	Uniform	+3 -2

[NOTE] For Type-F racks with machined ends, the dimensional tolerance is a calculated value according to assumed usage conditions, without consideration of pitch errors and aged deterioration.

③ Backlash of Racks & Pinions

■ Backlash of Racks & Pinions (Circumferential)

Unit: mm

Module	CP	Precision Grade (KHK R 001)													
		Grade 1		Grade 2	Grade 3	Grade 4		Grade 5							
		Straight	Helical			Excludes thermal refined racks	Includes thermal refined racks	Stainless Steel	Helical SRHF	SRHEF	Hardened	Thermal Refined + Hardened	MC nylon	POM * Excludes DR	
m0.5	-	-	-	-	0.11 0.00	0.13 0.00	-	-	-	-	-	-	-	-	-
m0.8	CP2.5	-	-	-	0.12 0.00	0.14 0.00	-	-	-	-	-	-	-	-	-
m1	-	-	-	-	0.19 0.04	0.21 0.04	-	0.23 0.04	-	-	-	-	0.39 0.18	0.36 0.15	
m1.5	CP5	0.14 0.04	0.15 0.05	0.14 0.04	0.19 0.04	0.25 0.09	0.27 0.09	0.27 0.09	-	0.28 0.10	0.29 0.05	0.31 0.05	0.42 0.21	0.39 0.18	
m2	-	0.16 0.05	0.17 0.06	0.16 0.05	0.21 0.05	0.28 0.11	0.30 0.11	0.30 0.11	0.31 0.12	0.32 0.12	0.32 0.07	0.34 0.07	0.45 0.24	0.42 0.21	
m2.5	-	0.16 0.05	0.17 0.06	0.16 0.05	0.21 0.05	0.31 0.13	0.33 0.13	0.33 0.13	-	0.35 0.14	0.35 0.09	0.37 0.09	0.49 0.26	0.46 0.23	
m3	CP10	0.16 0.05	0.17 0.06	0.16 0.05	0.21 0.05	0.35 0.14	0.37 0.14	0.37 0.14	0.38 0.15	0.39 0.15	0.39 0.10	0.41 0.10	0.56 0.32	0.52 0.28	
m4	-	-	-	0.16 0.05	0.21 0.05	0.42 0.18	0.44 0.18	0.44 0.18	-	0.47 0.19	0.46 0.14	0.48 0.14	-	-	
m5	CP15	-	-	0.17 0.05	0.22 0.05	0.47 0.20	0.49 0.20	-	-	0.52 0.21	0.51 0.16	0.53 0.16	-	-	
m6	CP20	-	-	0.17 0.05	0.22 0.05	0.54 0.22	-	-	-	0.57 0.23	0.58 0.18	-	-	-	
m8	-	-	-	-	-	0.63 0.28	-	-	-	-	-	-	-	-	
m10	-	-	-	-	-	0.70 0.33	-	-	-	-	-	-	-	-	

Application Hints



In order to use KHK stock racks safely, carefully read the Application Hints before proceeding. If there are questions or you require clarifications, please contact our technical department or your nearest distributor.


E-mail info@khkgears.net

1. Cautions on Handling

- ① KHK products are packaged one by one to prevent scratches and dents, but if you find issues such as rust, scratches, or dents when the product is removed from the box after purchase, please contact the supplier.
- ② Depending on the handling method, the product may become deformed or damaged. Long racks and plastic racks deform particularly easily, so please handle with care.

2. Caution on Performing Secondary Operations

- ① Secondary operations can be performed on all KHK stock racks except for the racks with their gear teeth induction hardened. To avoid problems of gear precision, do not reduce the face width.
- ② Height of pitch lines of racks are controlled by measuring the bottom surface as the reference datum and over-pin measurements on tooth thickness. If you machine the bottom surfaces, the precision of the racks may be affected.
- ③ When connecting two racks, the machining of the mating ends requires careful consideration in terms of the pitch (p) accuracy. The meshing will be poor if the pitch straddling the connection has a positive tolerance. We recommend a minus tolerance on pitch of at the connection. The below is an indication of pitch tolerance for each module.




Module	Pitch (p)	Tolerance
m0.5	1.57	-0.05 -0.15
m0.8	2.51	-0.05 -0.25
m1	3.14	-0.1 -0.3
m1.5	4.71	
m2	6.28	
m2.5	7.85	
m3	9.42	-0.1 -0.4
m4	12.57	
m5	15.71	
m6	18.85	
m8	25.13	
m10	31.42	

- ④ To use dowel pins to secure racks, attach the racks to the base and drill both simultaneously.
- ⑤ Products made of S45C and SCM440 can be induction hardened. However, the precision is decreased. There is a decarburized layer (about 0.5 mm) on the block surface. The hardness of the decarburized layer does not increase even if it is quenched.
- ⑥ To be able to handle parts safely, all burrs and sharp corners should be removed after the secondary operations are done.
- ⑦ If you are going to modify the gear by gripping the teeth, please exercise caution not to crush the teeth by applying too much pressure.

3. Points of Caution during Assembly


- ① The recommended assembly distance tolerance of KHK stock racks is H7 for ground racks and H8 for cut racks. Flexible racks need to be adjusted by the customer. The backlash values are given in the table on Page 220. Make sure that the mounting distance stays constant for the length of the rack.

Mounting distance a = Height of pitch line of rack + Pitch radius of pinion




[NOTE] Pinions are assumed to be standard stock spur gears ($x=0$).

- ② The recommended flatness and squareness of the mounting surface of KHK stock racks is 0.01 mm for ground racks and 0.05 mm for cut racks.

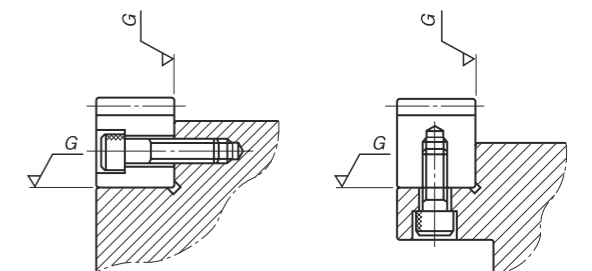


- ③ If the racks are not secured properly to the base, they could shift during operation and cause unexpected problems. It is very important to insure firm mounting by the use of dowel pins or similar devices.
- ④ Machined end type racks such as SRF and SRFD series have smaller pitch tolerance at the end face. If you try to connect the racks without any space, the pitch at the connection will be too small and will cause problems. Please follow the diagrams for assembly on the next page.
- ⑤ With SRFD etc., if using more than 10 racks connected together to form a rack with mounting holes machined along a length of 1 meter, the pitch precision and machining precision may cause the rack and base mounting holes to deviate, leading to set screw interference with the counterbored hole and preventing mounting. When using a rack for long lengths such as 10 meters or 20 meters, have the mounting holes additionally machined into long holes.

As an example of Rack Joining, we recommend the following method.

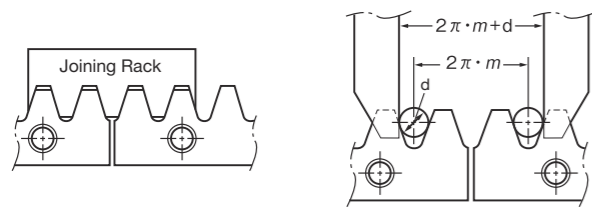

[NOTE] Joining gauge racks for helical racks must have the opposite hand from the racks. Please use 100 mm short racks as a joining gauge rack, or alternatively the rack of the same specifications on hand.

How to mount racks on a mounting base (For SRFD2-1000)

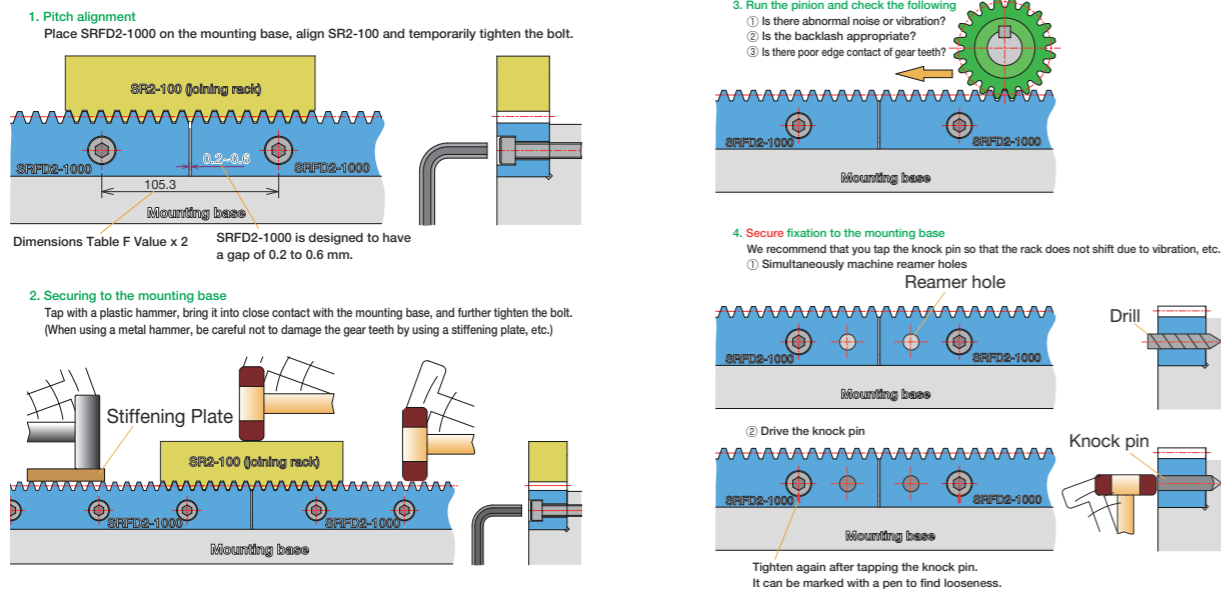

4. Cautions on Starting

- ① Check the following items before starting.
 - Are the gears installed securely?
 - Is there uneven tooth contact?
 - Is there adequate backlash?
 - (Be sure to avoid zero-backlash.)
 - Has proper lubrication been supplied?
- ② If gears are exposed, be sure to attach a safety cover to ensure safety. Also, be careful not to touch rotating gears.
- ③ If there is any abnormality such as noise or vibration during startup, stop the operation immediately and check the assembly condition such as tooth contact, eccentricity and looseness.

KHK considers safety a priority in the use of our products.

When handling, adding secondary operations, assembling, and operating KHK products, please be aware of the following issues in order to prevent accidents.


- Warning: Precautions for preventing physical and property damage**
1. When using KHK products, follow relevant safety regulations (Occupational Safety and Health Regulations, etc.).
 2. Pay attention to the following items when installing, removing, or performing maintenance and inspection of the product.
 - ① Turn off the power switch.
 - ② Do not reach or crawl under the product.
 - ③ Wear appropriate clothing and protective equipment for the work.

- Caution Cautions in Preventing Accidents**
1. Before using a KHK product, read the precautions in the catalog carefully in order to use it correctly.
 2. Avoid use in environments that may adversely affect the product.
 3. Our products are manufactured under a superior quality control system based on the ISO9000 quality management system; if you notice any malfunctions upon purchasing a product, please contact the supplier.


Comparison of Racks & Pinions and Ball Screws

Since racks have a simple mechanism, the material, hardening, strength and precision can be designed according to the environment. They are also inexpensive, with parts that can be purchased separately for replacement. In the designing process, please refer to Features of Racks & Pinions and Ball Screws in the table below.

Racks & Pinions

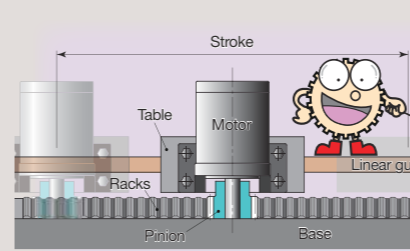

Ball screw

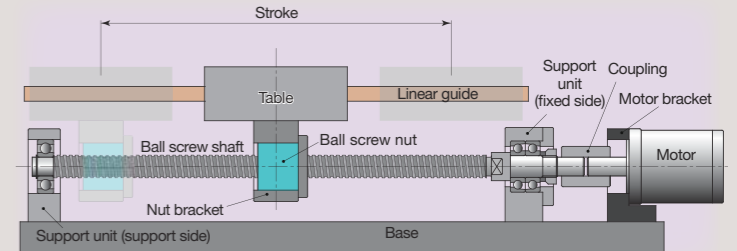

Features of Racks & Pinions

Advantages	Details
Few component parts	Since it does not have parts such as balls and retainers, there is less risk of accidentally falling apart during assembly and disassembly.
Supports heavy loads	Racks with large module can be used for heavy loads.
High transmission efficiency	High transmission efficiency of about 98% (excluding lubrication oil stirring resistance and bearing resistance).
High transport speed	The transport speed can be increased.
No length limit	The racks can be connected and used for a long period of time.
Flexible production is available	Materials, hardening, shapes and the like can be designed flexibly, allowing easy adjustment to the machine.
High-precision products can be manufactured	Gear grinding can be provided to minimize pitch error.
Can be used for food-related machinery	MC nylon and stainless steel products can be manufactured.

Disadvantages

Disadvantages	Details
Backlash is present	Backlash is required for smooth rotation. Backlash may become a problem in forward/reverse rotation positioning.
Lubrication is required	Metal racks require lubrication. Plastic racks do not require lubrication at light loads, but their precision is lower.


Features of Ball Screws

Advantages	Details
High transmission efficiency	Transmission efficiency of 90% or higher.
High-precision products can be manufactured	High-precision ball screws can be manufactured by grinding.
No backlash	The use of pressure eliminates backlash.

Disadvantages


Disadvantages	Details
Length is limited	There is a limit to the length due to the deflection of the screws.
Hard to manufacture special products	Since it is hard to manufacture special products, machines must be adjusted to the shape of the ball screw.

Laser Hardened Racks

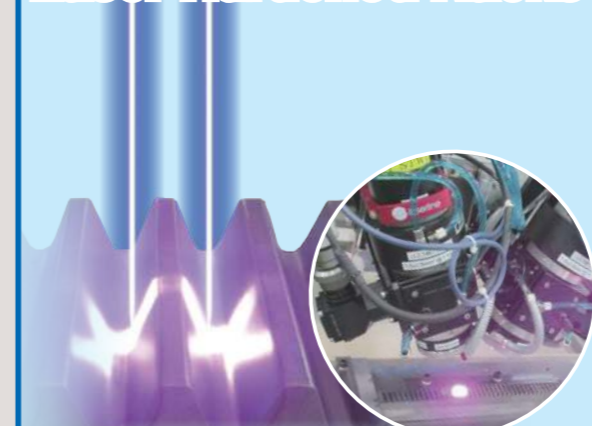

- Lasers used for hardening gear teeth
In this environmentally friendly hardening method, powerful light provides instantaneous hardening and cooling water is not required due to diffusion of heat.
- Can be hardened on surfaces other than the teeth
Lasers excel at spot hardening. As long as the laser can be irradiated, even the inside of bores can be hardened.
- Less distortion due to burning during hardening
As the laser hardens necessary areas in spots, distortion due to burning can be minimized.

Lasers enable hardening that barely changes the precision grade.




* Please see Page 236 for products.




Specifications	
Precision grade	KHK R 001 Grade 1 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM415
Heat treatment	Tooth area carburized
Tooth hardness	55 to 60HRC

* The precision grade of J Series products is equivalent to the value shown in the table.

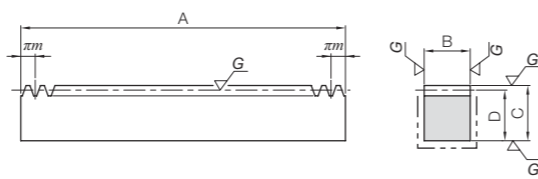

RF

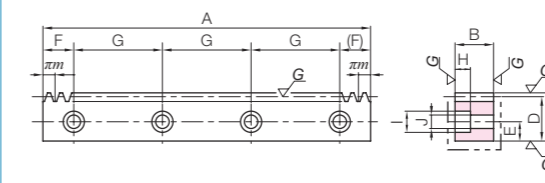

RD



Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
MRGF1.5-500	m1.5	106	RF	499.51	15	20	18.5	5070	4620	517	472
MRGF2-500	m2	80		502.65	20	25	23	9010	8240	918	840
MRGF2.5-500	m2.5	64		502.65	25	30	27.5	14100	12900	1440	1310
MRGF3-500	m3	53		499.51	30	35	32	20300	18600	2070	1900

Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.14	1.09	MRGF1.5-500
0.05~0.16	1.82	MRGF2-500
0.05~0.16	2.71	MRGF2.5-500
0.05~0.16	3.76	MRGF3-500

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● MRGFD1.5-500J	m1.5	106	RD	499.51	15	20	18.5	8	24.76	150	4	M5
● MRGFD2-500J	m2	80		502.65	20	25	23	10	26.33			
● MRGFD2.5-500J	m2.5	64		502.65	25	30	27.5	12	26.33			
● MRGFD3-500J	m3	53		499.51	30	35	32	14	24.76			

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	5070	4620	517	472	0.04~0.14	1.07	● MRGFD1.5-500J
7	11	7	9010	8240	918	840	0.05~0.16	1.78	● MRGFD2-500J
8.6	14	9	14100	12900	1440	1310	0.05~0.16	2.64	● MRGFD2.5-500J
10.8	17.5	11	20300	18600	2070	1900	0.05~0.16	3.63	● MRGFD3-500J

Surface durability is
4 times higher than SRG Hardened Ground Racks,
2 times higher than KRG-H Hardened Ground Racks.

Recommended Mating Pinions



MSGA/MSGB Ground Spur Gears

Please see Page 50 for more details.

DLS Schmiersysteme Rack & Pinion Lubrication System

PUS lubricated spur gear




Page 474






Specifications	
Precision grade	KHK R 001 Grade 1 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC

* The precision grade of J Series products is equivalent to the value shown in the table.

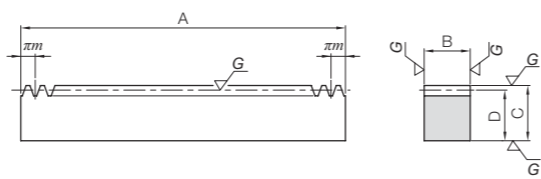

RF

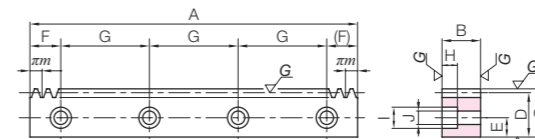

RD



Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
KRGF1.5-500H KRGF1.5-1000H	m1.5	106 212	RF	499.51 999.03	15	20	18.5	3450	2100	352	215
				502.65 1005.31	20	25	23	6130	3750	625	382
KRGF2.5-500H KRGF2.5-1000H	m2.5	64 128	RF	502.65 1005.31	25	30	27.5	9580	5870	977	598
				499.51 999.03	30	35	32	13800	8470	1410	863

Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.14	1.09 2.18	KRGF1.5-500H KRGF1.5-1000H
0.05~0.16	1.82 3.63	KRGF2-500H KRGF2-1000H
0.05~0.16	2.71 5.43	KRGF2.5-500H KRGF2.5-1000H
0.05~0.16	3.76 7.53	KRGF3-500H KRGF3-1000H

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● KRGFD1.5-500HJ ● KRGFD1.5-1000HJ	m1.5	106 212	RD	499.51 999.03	15	20	18.5	8	24.76 49.51	150 180	4 6	M5
				502.65 1005.31	20	25	23	10	26.33 52.65	150 180	4 6	M6
● KRGFD2.5-500HJ ● KRGFD2.5-1000HJ	m2.5	64 128	RD	502.65 1005.31	25	30	27.5	12	26.33 52.65	150 180	4 6	M8
				499.51 999.03	30	35	32	14	24.76 49.51	150 180	4 6	M10

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	3450	2100	352	215	0.04~0.14	1.07 2.14	● KRGFD1.5-500HJ ● KRGFD1.5-1000HJ
7	11	7	6130	3750	625	382	0.05~0.16	1.78 3.58	● KRGFD2-500HJ ● KRGFD2-1000HJ
8.6	14	9	9580	5870	977	598	0.05~0.16	2.64 5.31	● KRGFD2.5-500HJ ● KRGFD2.5-1000HJ
10.8	17.5	11	13800	8470	1410	863	0.05~0.16	3.63 7.32	● KRGFD3-500HJ ● KRGFD3-1000HJ

Recommended Mating Pinions



KSG Ground Spur Gears

Please see Page 54 for more details.

DLS Schmiersysteme Rack & Pinion Lubrication System

PUS lubricated spur gear






Page 474



Specifications	
Precision grade	KHK R 001 grade 1
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refining only
Tooth hardness	225 to 352HB

* The precision grade of J Series products is equivalent to the value shown in the table.

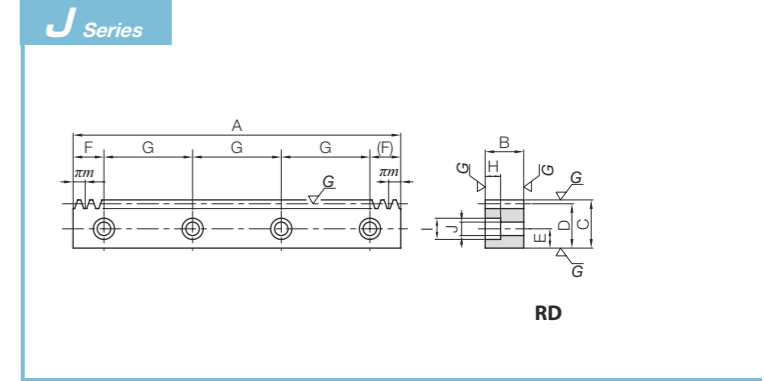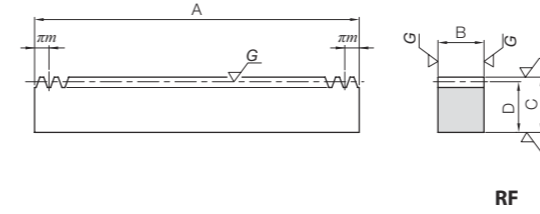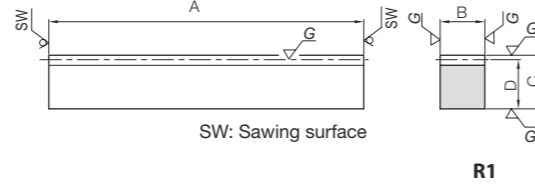

Catalog Number	Module	Effective number of teeth	Shape	Total Length				Allowable force (N)				Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability	Bending strength	Surface durability
KRG1-100	m1	29	R1	98	10	15	14	1530	641	156	65.3		
KRG1.5-100	m1.5	20		101	15	20	18.5	3450	1440	352	147		
KRG2-100	m2	14		98	20	25	23	6130	2560	625	261		
KRG2.5-100	m2.5	11		100	25	30	27.5	9580	4010	977	408		
KRG3-100	m3	9		101	30	35	32	13800	5770	1410	588		

Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.14	0.11	KRG1-100
0.04~0.14	0.22	KRG1.5-100
0.05~0.16	0.35	KRG2-100
0.05~0.16	0.54	KRG2.5-100
0.05~0.16	0.76	KRG3-100

Catalog Number	Module	No. of teeth	Shape	Total Length				Allowable force (N)				Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability	Bending strength	Surface durability
KRGF1-500 KRGF1-1000	m1	159 318	RF	499.51 999.03	10	15	14	1530	641	156	65.3		
KRGF1.5-500 KRGF1.5-1000	m1.5	106 212		499.51 999.03	15	20	18.5	3450	1440	352	147		
KRGF2-500 KRGF2-1000	m2	80 160		502.65 1005.31	20	25	23	6130	2560	625	261		
KRGF2.5-500 KRGF2.5-1000	m2.5	64 128		502.65 1005.31	25	30	27.5	9580	4010	977	408		
KRGF3-500 KRGF3-1000	m3	53 106		499.51 999.03	30	35	32	13800	5770	1410	588		

Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.14	0.55 1.49	KRGF1-500 KRGF1-1000
0.04~0.14	1.09 2.18	KRGF1.5-500 KRGF1.5-1000
0.05~0.16	1.82 3.63	KRGF2-500 KRGF2-1000
0.05~0.16	2.71 5.43	KRGF2.5-500 KRGF2.5-1000
0.05~0.16	3.76 7.53	KRGF3-500 KRGF3-1000

Catalog Number	Module	No. of teeth	Shape	Total Length				Mounting hole dimensions				No. of holes	Screw size
				A	B	C	D	E	F	G			
● KRGFD1-500J ● KRGFD1-1000J	m1	159 318	RD	499.51 999.03	10	15	14	6	24.76 49.51	150 180	4 6	M4	
● KRGFD1.5-500J ● KRGFD1.5-1000J	m1.5	106 212		499.51 999.03	15	20	18.5	8	24.76 49.51	150 180	4 6	M5	
● KRGFD2-500J ● KRGFD2-1000J	m2	80 160		502.65 1005.31	20	25	23	10	26.33 52.65	150 180	4 6	M6	
● KRGFD2.5-500J ● KRGFD2.5-1000J	m2.5	64 128		502.65 1005.31	25	30	27.5	12	26.33 52.65	150 180	4 6	M8	
● KRGFD3-500J ● KRGFD3-1000J	m3	53 106		499.51 999.03	30	35	32	14	24.76 49.51	150 180	4 6	M10	

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
5	8	4.5	1530	641	156	65.3	0.04~0.14	0.54 1.08	● KRGFD1-500J ● KRGFD1-1000J
6	10	6	3450	1440	352	147	0.04~0.14	1.07 2.14	● KRGFD1.5-500J ● KRGFD1.5-1000J
7	11	7	6130	2560	625	261	0.05~0.16	1.78 3.58	● KRGFD2-500J ● KRGFD2-1000J
8.6	14	9	9580	4010	977	408	0.05~0.16	2.64 5.31	● KRGFD2.5-500J ● KRGFD2.5-1000J
10.8	17.5	11	13800	5770	1410	588	0.05~0.16	3.62 7.32	● KRGFD3-500J ● KRGFD3-1000J

* Module 10 and ground racks with total lengths up to (A) 1500mm and heights up to (C) 120mm are also available by request as custom-made products.

Recommended Mating Pinions




SSG Ground Spur Gears

Please see Page 58 for more details.


DLS Schmiersysteme
Rack & Pinion Lubrication System
 PUS lubricated spur gear

Page 474

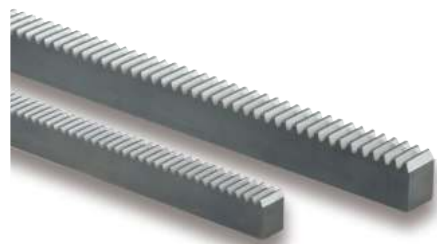

Specifications	
Precision grade	KHK R 001 Grade 3 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened **
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.
** Products with module less than 0.8 are not gear teeth hardened.
It is a tempered product with the teeth hardness of 200 to 270 HB.

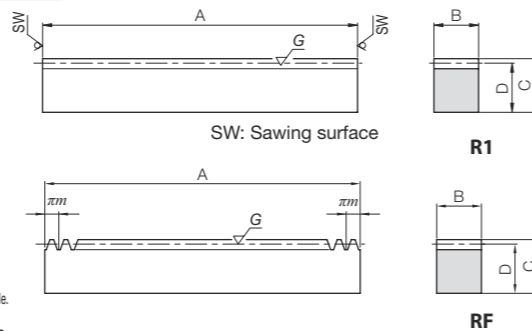

Catalog Number	Module	Effective number of teeth	Shape	Total Length\Face width				Allowable force (N)				Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
SRG0.5-100 (Made to Order)	m0.5	61	R1	101	5	12	11.5	293	80.5	29.9	8.21	0~0.11	0.046
SRG0.8-100 (Made to Order)	m0.8	38		101	8	12.3	11.5	751	206	76.6	21.0	0~0.12	0.073
SRG1-100	m1	29	R1	98	10	12	11	862	514	87.9	52.4	0.04~0.19	0.085
SRG1.5-100	m1.5	20		101	15	20	18.5	2160	1360	220	138	0.04~0.19	0.22
SRG2-100	m2	14		98	20	25	23	3830	2410	391	246	0.05~0.21	0.35
SRG2.5-100	m2.5	11	R1	100	25	30	27.5	5990	3770	611	384	0.05~0.21	0.54
SRG3-100	m3	9		101	30	35	32	8620	5420	879	553	0.05~0.21	0.76
SRG4-100	m4	6		98	40	45	41	15300	9640	1560	983	0.05~0.21	1.26
SRG5-110	m5	5	R1	108	50	50	45	24000	15100	2440	1540	0.05~0.22	1.91
SRG6-110	m6	4		111	60	60	54	34500	21700	3520	2210	0.05~0.22	2.82

Catalog Number	Module	No. of teeth	Shape	Total Length\Face width				Allowable force (N)				Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
SRGF0.5-300 (Made to Order)	m0.5	191	RF	300.02	5	12	11.5	293	80.5	29.9	8.21	0~0.11	0.14
SRGF0.8-300 (Made to Order)	m0.8	119		299.08	8	12.3	11.5	751	206	76.6	21.0	0~0.12	0.22
SRGF1-300	m1	96	RF	301.59	10	12	11	862	514	87.9	52.4	0.04~0.19	0.26
SRGF1-500	m1	159		499.51									
SRGF1.5-500	m1.5	106		499.51	15	20	18.5	2160	1360	220	138	0.04~0.19	1.09
SRGF1.5-1000	m1.5	212											
SRGF2-500	m2	80		502.65	20	25	23	3830	2410	391	246	0.05~0.21	1.82
SRGF2-1000	m2	160											
SRGF2.5-500	m2.5	64		502.65	25	30	27.5	5990	3770	611	384	0.05~0.21	2.71
SRGF2.5-1000	m2.5	128											
SRGF3-500	m3	53		499.51	30	35	32	8620	5420	879	553	0.05~0.21	3.76
SRGF3-1000	m3	106											
SRGF4-500	m4	40		502.65	40	45	41	15300	9640	1560	983	0.05~0.21	6.47
SRGF4-1000	m4	80											
SRGF5-500	m5	32		502.65	50	50	45	24000	15100	2440	1540	0.05~0.22	8.88
SRGF5-1000	m5	64											
SRGF6-500	m6	26		490.09	60	60	54	34500	21700	3520	2210	0.05~0.22	12.5
SRGF6-1000	m6	53	999.03										

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● SRGFK1-300J ● SRGFK1-500J	m1	96 159	RA	301.59 499.51	10	12	11	5	20.80	130	3	M4
									24.76	150	4	
● SRGFD1.5-500J ● SRGFD1.5-1000J	m1.5	106 212	RD	499.51 999.03	15	20	18.5	8	24.76	150	4	M5
									49.51	180	6	
● SRGFD2-500J ● SRGFD2-1000J	m2	80 160		502.65 1005.31	20	25	23	10	26.33	150	4	M6
									52.65	180	6	
● SRGFD2.5-500J ● SRGFD2.5-1000J	m2.5	64 128		502.65 1005.31	25	30	27.5	12	26.33	150	4	M8
									52.65	180	6	
● SRGFD3-500J ● SRGFD3-1000J	m3	53 106		499.51 999.03	30	35	32	14	24.76	150	4	M10
									49.51	180	6	
● SRGFD4-500J ● SRGFD4-1000J	m4	40 80		502.65 1005.31	40	45	41	18	26.33	150	4	M12
									52.65	180	6	
● SRGFD5-500J ● SRGFD5-1000J	m5	32 64		502.65 1005.31	50	50	45	20	31.33	220	3	M14
									62.65	220	5	
● SRGFD6-500J ● SRGFD6-1000J	m6	26 53		490.09 999.03	60	60	54	23	25.04	220	3	M16
									59.51	220	5	


[Precautions for Made to Order Products] Prices and lead times for Made to Order products require separate estimates. Contact your dealer.

PUS lubricated spur gear



Please see Page 476 for more details.

J Series

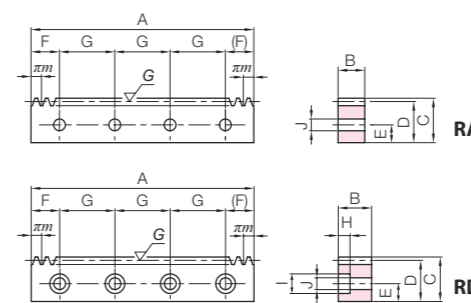

Recommended Mating Pinions



SSG Ground Spur Gears

Please see Page 58 for more details.



SSGS Ground Spur Gears

Please see Page 56 for more details.


* Module 10 and ground racks with total lengths up to (A) 1500mm and heights up to (C) 120mm are also available by request as custom-made products.

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
—	—	4.5	862	514	87.9	52.4	0.04~0.19	0.26 0.43	● SRGFK1-300J ● SRGFK1-500J
6	10	6	2160	1360	220	138	0.04~0.19	1.07 2.14	● SRGFD1.5-500J ● SRGFD1.5-1000J
7	11	7	3830	2410	391	246	0.05~0.21	1.78 3.58	● SRGFD2-500J ● SRGFD2-1000J
8.6	14	9	5990	3770	611	384	0.05~0.21	2.64 5.31	● SRGFD2.5-500J ● SRGFD2.5-1000J
10.8	17.5	11	8620	5420	879	553	0.05~0.21	3.63 7.32	● SRGFD3-500J ● SRGFD3-1000J
13	20	14	15300	9640	1560	983	0.05~0.21	6.21 12.6	● SRGFD4-500J ● SRGFD4-1000J
15.2	23	16	24000	15100	2440	1540	0.05~0.22	8.56 17.2	● SRGFD5-500J ● SRGFD5-1000J
17.5	26	18	34500	21700	3520	2210	0.05~0.22	12.0 24.6	● SRGFD6-500J ● SRGFD6-1000J






Specifications	
Precision grade	KHK R 001 grade 5
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating

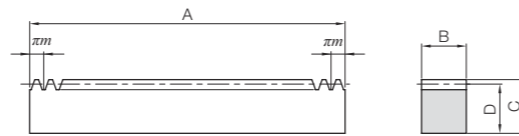

RF

J Series

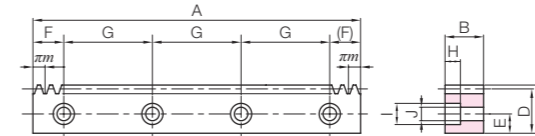

RD




Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
KRF1.5-1000H	m1.5	212	RF	999.03	15	20	18.5	3140	1710	320	175
KRF2-1000H	m2	160		1005.31	20	25	23	5570	3090	568	315
KRF2.5-1000H	m2.5	128		1005.31	25	30	27.5	8710	4890	888	499
KRF3-1000H	m3	106		999.03	30	35	32	12500	7110	1280	725
KRF4-1000H	m4	80		1005.31	40	45	41	22300	12900	2270	1310
KRF5-1000H	m5	64		1005.31	50	50	45	34800	20400	3550	2080

Backlash (mm)	Weight (kg)	Catalog Number
0.05~0.31	2.18	KRF1.5-1000H
0.07~0.34	3.63	KRF2-1000H
0.09~0.37	5.43	KRF2.5-1000H
0.10~0.41	7.53	KRF3-1000H
0.14~0.48	12.9	KRF4-1000H
0.16~0.53	17.8	KRF5-1000H

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● KRFD1.5-1000HJ	m1.5	212	RD	999.03	15	20	18.5	8	49.51	180	6	M5
● KRFD2-1000HJ	m2	160		1005.31	20	25	23	10	52.65	180	6	M6
● KRFD2.5-1000HJ	m2.5	128		1005.31	25	30	27.5	12	52.65	180	6	M8
● KRFD3-1000HJ	m3	106		999.03	30	35	32	14	49.51	180	6	M10
● KRFD4-1000HJ	m4	80		1005.31	40	45	41	18	52.65	180	6	M12
● KRFD5-1000HJ	m5	64		1005.31	50	50	45	20	62.65	220	5	M14

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	3140	1710	320	175	0.05~0.31	2.14	● KRFD1.5-1000HJ
7	11	7	5570	3090	568	315	0.07~0.34	3.58	● KRFD2-1000HJ
8.6	14	9	8710	4890	888	499	0.09~0.37	5.31	● KRFD2.5-1000HJ
10.8	17.5	11	12500	7110	1280	725	0.10~0.41	7.32	● KRFD3-1000HJ
13	20	14	22300	12900	2270	1310	0.14~0.48	12.6	● KRFD4-1000HJ
15.2	23	16	34800	20400	3550	2080	0.16~0.53	17.2	● KRFD5-1000HJ

Recommended Mating Pinions

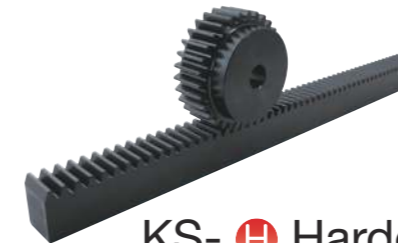


KS-  Hardened Spur Gears

Please see Page 100 for more details.




Specifications	
Precision grade	KHK R 001 grade 5
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating

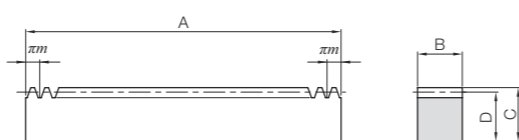

RF

J Series

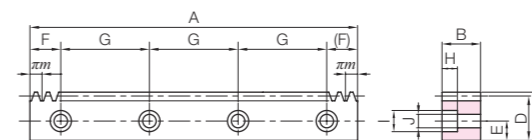

RD



Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
SRF1.5-1000H	m1.5	212	RF	999.03	15	20	18.5	1960	1110	200	113
SRF2-1000H	m2	160		1005.31	20	25	23	3480	2000	355	204
SRF2.5-1000H	m2.5	128		1005.31	25	30	27.5	5440	3160	555	322
SRF3-1000H	m3	106		999.03	30	35	32	7840	4590	799	468
SRF4-1000H	m4	80		1005.31	40	45	41	13900	8310	1420	847
SRF5-1000H	m5	64		1005.31	50	50	45	21800	13200	2220	1340
SRF6-1000H	m6	53	999.03	60	60	54	31400	19200	3200	1960	

Backlash (mm)	Weight (kg)	Catalog Number
0.05~0.29	2.18	SRF1.5-1000H
0.07~0.32	3.63	SRF2-1000H
0.09~0.35	5.43	SRF2.5-1000H
0.10~0.39	7.53	SRF3-1000H
0.14~0.46	12.9	SRF4-1000H
0.16~0.51	17.8	SRF5-1000H
0.18~0.58	25.4	SRF6-1000H

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● SRFD1.5-1000HJ	m1.5	212	RD	999.03	15	20	18.5	8	49.51	180	6	M5
● SRFD2-1000HJ	m2	160		1005.31	20	25	23	10	52.65	180	6	M6
● SRFD2.5-1000HJ	m2.5	128		1005.31	25	30	27.5	12	52.65	180	6	M8
● SRFD3-1000HJ	m3	106		999.03	30	35	32	14	49.51	180	6	M10
● SRFD4-1000HJ	m4	80		1005.31	40	45	41	18	52.65	180	6	M12
● SRFD5-1000HJ	m5	64		1005.31	50	50	45	20	62.65	220	5	M14
● SRFD6-1000HJ	m6	53	999.03	60	60	54	23	59.51	220	5	M16	

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	1960	1110	200	113	0.05~0.29	2.14	● SRFD1.5-1000HJ
7	11	7	3480	2000	355	204	0.07~0.32	3.58	● SRFD2-1000HJ
8.6	14	9	5440	3160	555	322	0.09~0.35	5.31	● SRFD2.5-1000HJ
10.8	17.5	11	7840	4590	799	468	0.10~0.39	7.32	● SRFD3-1000HJ
13	20	14	13900	8310	1420	847	0.14~0.46	12.6	● SRFD4-1000HJ
15.2	23	16	21800	13200	2220	1340	0.16~0.51	17.2	● SRFD5-1000HJ
17.5	26	18	31400	19200	3200	1960	0.18~0.58	24.6	● SRFD6-1000HJ

Recommended Mating Pinions




SS- Hardened Spur Gears

Please see Page 106 for more details.




Specifications	
Precision grade	KHK R 001 Grade 4 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth laser hardened
Tooth hardness	55 to 65HRC
Surface treatment	Black oxide coating

* The precision grade of these products is equivalent to the value shown in the table.

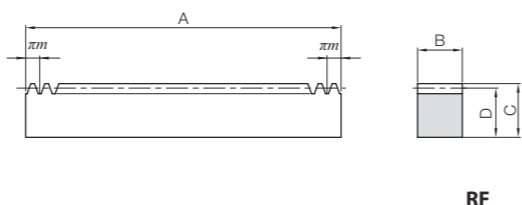

RF

J Series

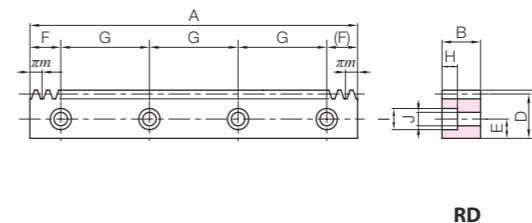

RD



Catalog Number	Module	No. of teeth	Shape	Total Length				Allowable force (N)				Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
SRF1.5-1000HL	m1.5	212	RF	999.03	15	20	18.5	2160	961	220	98.0	0.09~0.25	2.18
SRF1.5-1500HL		320		1507.96									
SRF1.5-2000HL		435		2049.88									
SRF2-1000HL	m2	160		1005.31	20	25	23	3830	1730	391	177	0.11~0.28	3.63
SRF2-1500HL		240		1507.96									
SRF2-2000HL		326		2048.31									
SRF2.5-1000HL	m2.5	128		1005.31	25	30	27.5	5990	2740	611	280	0.13~0.31	5.43
SRF2.5-1500HL		192		1507.96									
SRF2.5-2000HL		261		2049.88									
SRF3-1000HL	m3	106		999.03	30	35	32	8620	3990	879	407	0.14~0.35	7.53
SRF3-1500HL		160		1507.96									
SRF3-2000HL		217		2045.17									
SRF4-1000HL	m4	80	1005.31	40	45	41	15300	7220	1560	736	0.18~0.42	12.9	
SRF4-1500HL		120	1507.96										
SRF4-2000HL		163	2048.31										
SRF5-1000HL	m5	64	1005.31	50	50	45	24000	11400	2440	1170	0.20~0.47	17.8	
SRF5-1500HL		96	1507.96										
SRF5-2000HL		130	2042.04										
SRF6-1000HL	m6	53	999.03	60	60	54	34500	16700	3520	1700	0.22~0.54	25.4	
SRF6-1500HL		80	1507.96										
SRF6-2000HL		108	2035.75										

* Total length change just 1/12 compared to induction hardening! These hardened racks have minimal deformation due to heat treatment.

Laser hardened total length change

With induction hardening

Total length change 0.233 mm



With laser hardening

Total length change 0.019 mm



* This is a measurement of the total length change (cumulative pitch) when induction hardening and laser hardening are applied to SRF3-1000.

Recommended Mating Pinions




SS- Hardened Spur Gears

Please see Page 106 for more details.


Catalog Number	Module	No. of teeth	Shape	Total Length				Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
SRFD1.5-1000HLJ	m1.5	212	RD	999.03	15	20	18.5	8	49.51	180	6	M5
SRFD1.5-1500HLJ		320		1507.96								
SRFD1.5-2000HLJ		435		2049.88								
SRFD2-1000HLJ	m2	160		1005.31	20	25	23	10	52.65	180	6	M6
SRFD2-1500HLJ		240		1507.96								
SRFD2-2000HLJ		326		2048.31								
SRFD2.5-1000HLJ	m2.5	128		1005.31	25	30	27.5	12	52.65	180	6	M8
SRFD2.5-1500HLJ		192		1507.96								
SRFD2.5-2000HLJ		261		2049.88								
SRFD3-1000HLJ	m3	106		999.03	30	35	32	14	49.51	180	6	M10
SRFD3-1500HLJ		160		1507.96								
SRFD3-2000HLJ		217		2045.17								
SRFD4-1000HLJ	m4	80	1005.31	40	45	41	18	52.65	180	6	M12	
SRFD4-1500HLJ		120	1507.96									
SRFD4-2000HLJ		163	2048.31									
SRFD5-1000HLJ	m5	64	1005.31	50	50	45	20	62.65	220	5	M14	
SRFD5-1500HLJ		96	1507.96									
SRFD5-2000HLJ		130	2042.04									
SRFD6-1000HLJ	m6	53	999.03	60	60	54	23	59.51	220	5	M16	
SRFD6-1500HLJ		80	1507.96									
SRFD6-2000HLJ		108	2035.75									

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	2160	961	220	98.0	0.09~0.25	2.14	SRFD1.5-1000HLJ
								3.23	SRFD1.5-1500HLJ
								4.40	SRFD1.5-2000HLJ
7	11	7	3830	1730	391	177	0.11~0.28	3.58	SRFD2-1000HLJ
								5.36	SRFD2-1500HLJ
								7.29	SRFD2-2000HLJ
8.6	14	9	5990	2740	611	280	0.13~0.31	5.31	SRFD2.5-1000HLJ
								7.97	SRFD2.5-1500HLJ
								10.8	SRFD2.5-2000HLJ
10.8	17.5	11	8620	3990	879	407	0.14~0.35	7.32	SRFD3-1000HLJ
								11.1	SRFD3-1500HLJ
								15.0	SRFD3-2000HLJ
13	20	14	15300	7220	1560	736	0.18~0.42	12.6	SRFD4-1000HLJ
								18.8	SRFD4-1500HLJ
								25.6	SRFD4-2000HLJ
15.2	23	16	24000	11400	2440	1170	0.20~0.47	17.2	SRFD5-1000HLJ
								25.9	SRFD5-1500HLJ
								35.0	SRFD5-2000HLJ
17.5	26	18	34500	16700	3520	1700	0.22~0.54	24.6	SRFD6-1000HLJ
								37.2	SRFD6-1500HLJ
								50.2	SRFD6-2000HLJ

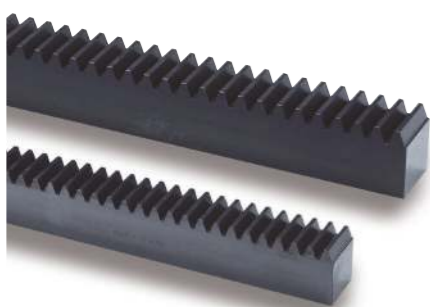


Specifications	
Precision grade	KHK R 001 Grade 4 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refining only
Tooth hardness	225 to 352HB
Surface treatment	Black oxide coating

* The precision grade of J Series products is equivalent to the value shown in the table.

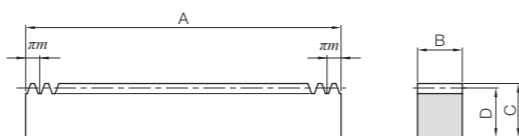

RF

J Series

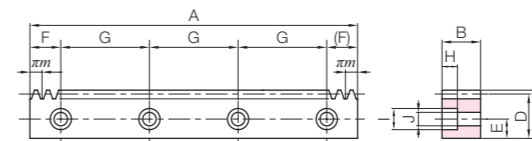

RD



Catalog Number	Module	No. of teeth	Shape	Total Length	Face width		Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
					A	B			C	D	Bending strength	Surface durability
KRF1.5-500 KRF1.5-1000	m1.5	106	RF	499.51	15	20	18.5	3450	953	352	97.2	
		212		999.03								
KRF2-500 KRF2-1000	m2	80		502.65	20	25	23	6130	1760	625	179	
		160		1005.31								
KRF2.5-500 KRF2.5-1000	m2.5	64		502.65	25	30	27.5	9580	2810	977	287	
		128		1005.31								
KRF3-500 KRF3-1000	m3	53		499.51	30	35	32	13800	4120	1410	421	
		106		999.03								
KRF4-500 KRF4-1000	m4	40		502.65	40	45	41	24500	7530	2500	768	
		80		1005.31								
KRF5-500 KRF5-1000	m5	32	502.65	50	50	45	38300	12000	3910	1220		
		64	1005.31									

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width		Height	Height to pitch line	Mounting hole dimensions			
					A	B			C	D	E	F
● KRFD1.5-500J ● KRFD1.5-1000J	m1.5	106	RD	499.51	15	20	18.5	8	24.76	150	4	M5
		212		999.03					49.51	180	6	
● KRFD2-500J ● KRFD2-1000J	m2	80		502.65	20	25	23	10	26.33	150	4	M6
		160		1005.31					52.65	180	6	
● KRFD2.5-500J ● KRFD2.5-1000J	m2.5	64		502.65	25	30	27.5	12	26.33	150	4	M8
		128		1005.31					52.65	180	6	
● KRFD3-500J ● KRFD3-1000J	m3	53		499.51	30	35	32	14	24.76	150	4	M10
		106		999.03					49.51	180	6	
● KRFD4-500J ● KRFD4-1000J	m4	40		502.65	40	45	41	18	26.33	150	4	M12
		80		1005.31					52.65	180	6	
● KRFD5-500J ● KRFD5-1000J	m5	32	502.65	50	50	45	20	31.33	150	3	M14	
		64	1005.31					62.65	220	5		

Backlash (mm)	Weight (kg)	Catalog Number
0.09~0.27	1.09 2.18	KRF1.5-500 KRF1.5-1000
0.11~0.30	1.82 3.63	KRF2-500 KRF2-1000
0.13~0.33	2.71 5.43	KRF2.5-500 KRF2.5-1000
0.14~0.37	3.76 7.53	KRF3-500 KRF3-1000
0.18~0.44	6.47 12.9	KRF4-500 KRF4-1000
0.20~0.49	8.88 17.8	KRF5-500 KRF5-1000

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	3450	953	352	97.2	0.09~0.27	1.07 2.14	● KRFD1.5-500J ● KRFD1.5-1000J
7	11	7	6130	1760	625	179	0.11~0.30	1.78 3.58	● KRFD2-500J ● KRFD2-1000J
8.6	14	9	9580	2810	977	287	0.13~0.33	2.64 5.31	● KRFD2.5-500J ● KRFD2.5-1000J
10.8	17.5	11	13800	4120	1410	421	0.14~0.37	3.63 7.32	● KRFD3-500J ● KRFD3-1000J
13	20	14	24500	7530	2500	768	0.18~0.44	6.21 12.6	● KRFD4-500J ● KRFD4-1000J
15.2	23	16	38300	12000	3910	1220	0.20~0.49	8.56 17.2	● KRFD5-500J ● KRFD5-1000J


Recommended Mating Pinions



KS Thermal Refined Spur Gears


Please see Page 100 for more details.



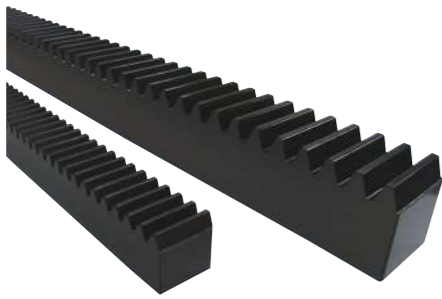

Specifications	
Precision grade	KHK R 001 Grade 4 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating


* The precision grade of J Series products is equivalent to the value shown in the table.

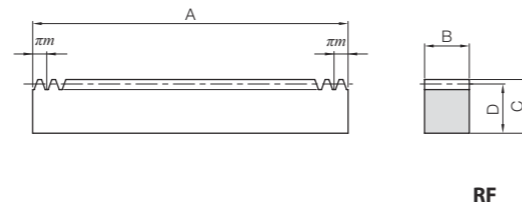

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
								Bending strength	Surface durability	Bending strength	Surface durability
SRAF1.5-1000	m1.5	212	RF	999.03	15	15	13.5	2160	421	220	42.9
SRAF2-1000	m2	160		1005.31	20	20	18	3830	775	391	79.0
SRAF2.5-1000	m2.5	128		1005.31	25	25	22.5	5990	1240	611	127
SRAF3-1000	m3	106		999.03	30	30	27	8620	1820	879	186
SRAF4-1000	m4	80		1005.31	40	40	36	15300	3330	1560	339
SRAF1.5-2000	m1.5	435		2049.88	17	17	15.5	2443	421	249	43
SRAF2-2000	m2	326		2048.31	20	20	18	3833	775	391	79
SRAF2.5-2000	m2.5	261		2049.88	25	25	22.5	5989	1241	611	127
SRAF3-2000	m3	217	2045.17	30	30	27	8624	1821	879	186	

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
								A	B	C	D	E
● SRAFK1.5-1000J	m1.5	212	RA	999.03	15	15	13.5	5	49.51	180	6	M5
● SRAFD2-1000J	m2	160	RD	1005.31	20	20	18	7	52.65			
● SRAFD2.5-1000J	m2.5	128	RD	1005.31	25	25	22.5	9	52.65			
● SRAFD3-1000J	m3	106	RD	999.03	30	30	27	11	49.51			
● SRAFD4-1000J	m4	80	RD	1005.31	40	40	36	15	52.65			

J Series

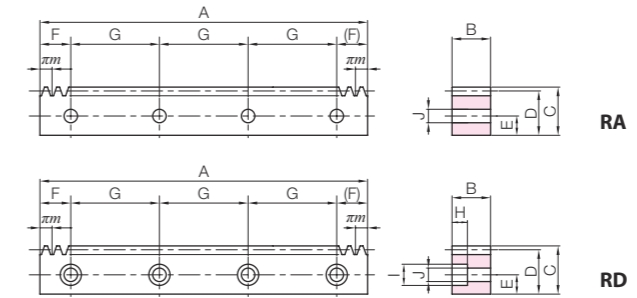

Backlash (mm)	Weight (kg)	Catalog Number
0.09~0.25	1.59	SRAF1.5-1000
0.11~0.28	2.84	SRAF2-1000
0.13~0.31	4.44	SRAF2.5-1000
0.14~0.35	6.35	SRAF3-1000
0.18~0.42	11.4	SRAF4-1000
0.09~0.25	4.24	SRAF1.5-2000
0.11~0.28	5.79	SRAF2-2000
0.13~0.31	9.05	SRAF2.5-2000
0.14~0.35	13.0	SRAF3-2000

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
—	—	6	2160	421	220	42.9	0.09~0.25	1.57	● SRAFK1.5-1000J
7	11	7	3830	775	391	79.0	0.11~0.28	2.79	● SRAFD2-1000J
8.6	14	9	5990	1240	611	127	0.13~0.31	4.33	● SRAFD2.5-1000J
10.8	17.5	11	8620	1820	879	186	0.14~0.35	6.14	● SRAFD3-1000J
13	20	14	15300	3330	1560	339	0.18~0.42	11.0	● SRAFD4-1000J

Recommended Mating Pinions




SS Spur Gears

Please see Page 104 for more details.



Specifications	
Precision grade	KHK R 001 grade 4
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

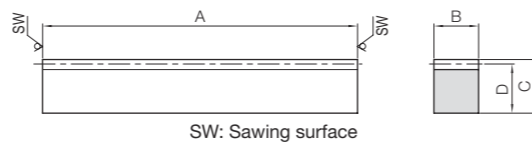

R1

Catalog Number	Module	Effective number of teeth	Shape	Total Length				Allowable force (N)				Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength		Surface durability			
SR0.5-100	m0.5	62	R1	101	5	12	11.5	240	39.6	24.4	4.04	0.00~0.13	0.046
SR0.8-100	m0.8	38		101	8	12.3	11.5	613	108	62.5	11.0	0.00~0.14	0.073
SR1-100	m1	29		98	10	12	11	958	177	97.7	18.0	0.04~0.21	0.085
SR1-300		303		0.26									
SR1-500		505		0.44									
SR1.5-100	m1.5	20		101	15	20	18.5	2160	421	220	42.9	0.09~0.25	0.22
SR1.5-300		303		0.66									
SR1.5-500		505		1.10									
SR2-100	m2	14		98	20	25	23	3830	775	391	79.0	0.11~0.28	0.35
SR2-300		303		1.09									
SR2-500		505		1.82									
SR2.5-100	m2.5	11		100	25	30	27.5	5990	1240	611	127	0.13~0.31	0.54
SR2.5-300		303		1.64									
SR2.5-500		505		2.73									
SR3-100	m3	9		101	30	35	32	8620	1820	879	186	0.14~0.35	0.76
SR3-300		303		2.28									
SR3-500		505		3.81									
SR4-100	m4	6		98	40	45	41	15300	3330	1560	339	0.18~0.42	1.26
SR4-500		505		6.50									
SR5-110	m5	5	108	50	50	45	24000	5300	2440	540	0.20~0.47	1.91	
SR5-500		505	8.92										
SR6-110	m6	4	111	60	60	54	34500	7740	3520	789	0.22~0.54	2.82	
SR6-500		505	12.8										
SR8-130	m8	3	123	75	75	67	44200	10400	4510	1060	0.28~0.63	4.85	
SR10-160	m10	3	155	90	80	70	66300	16100	6770	1640	0.33~0.70	7.67	

Recommended Mating Pinions




SS Spur Gears

Please see Page 104 for more details.



Specifications	
Precision grade	KHK R 001 grade 4
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

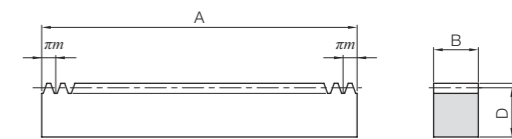


RF

Catalog Number	Module	No. of teeth	Shape	Total Length				Allowable force (N)				Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength		Surface durability			
SRF0.5-300	m0.5	191	RF	300.02	5	12	11.5	240	39.6	24.4	4.04	0.00~0.13	0.14
SRF0.8-300	m0.8	119		299.08	8	12.3	11.5	613	108	62.5	11.0	0.00~0.14	0.22
SRF1-300	m1	96		301.59	10	12	11	958	177	97.7	18.0	0.04~0.21	0.26
SRF1-500		159		0.43									
SRF1-1000		318		0.86									
SRF1.5-300	m1.5	64		301.59	15	20	18.5	2160	421	220	42.9	0.09~0.25	0.66
SRF1.5-500		106		1.09									
SRF1.5-1000		212		2.18									
SRF1.5-1500		320		3.28									
SRF1.5-2000	435	4.47											
SRF2-300	m2	48		301.59	20	25	23	3830	775	391	79.0	0.11~0.28	1.09
SRF2-500		80		1.82									
SRF2-1000		160		3.63									
SRF2-1500		240		5.45									
SRF2-2000	326	7.40											
SRF2.5-300	m2.5	38		298.45	25	30	27.5	5990	1240	611	127	0.13~0.31	1.61
SRF2.5-500		64		2.71									
SRF2.5-1000		128		5.43									
SRF2.5-1500		192		8.14									
SRF2.5-2000	261	11.1											
SRF3-300	m3	32	301.59	30	35	32	8620	1820	879	186	0.14~0.35	2.27	
SRF3-500		53	3.76										
SRF3-1000		106	7.53										
SRF3-1500		160	11.4										
SRF3-2000		217	15.4										
SRF4-500	m4	40	502.65	40	45	41	15300	3330	1560	339	0.18~0.42	6.47	
SRF4-1000		80	12.9										
SRF4-1500		120	19.4										
SRF4-2000		163	26.4										
SRF5-500	m5	32	502.65	50	50	45	24000	5300	2440	540	0.20~0.47	8.88	
SRF5-1000		64	17.8										
SRF5-1500		96	26.6										
SRF5-2000		130	36.1										
SRF6-500	m6	26	490.09	60	60	54	34500	7740	3520	789	0.22~0.54	12.5	
SRF6-1000		53	25.4										
SRF6-1500		80	38.4										
SRF6-2000		108	51.8										
SRF8-500	m8	20	502.66	75	75	67	44200	10400	4510	1060	0.28~0.63	19.8	
SRF8-1000		40	39.7										
SRF10-1000	m10	32	1005.31	90	80	70	66300	16100	6770	1640	0.33~0.70	49.7	




Specifications	
Precision grade	KHK R 001 Grade 4 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

* The precision grade of J Series products is equivalent to the value shown in the table.

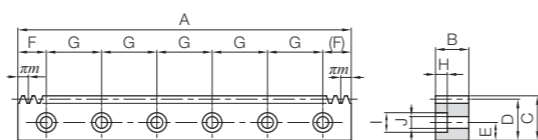

RD

J Series

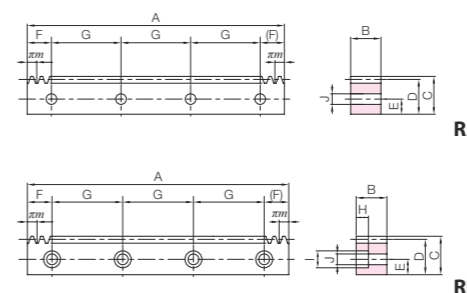

Catalog Number ● : J Series (Available-on-request)	Module	No. of teeth	Shape	Total Length			Face width	Height	Height to pitch line		Mounting hole dimensions																									
				A	B	C			D	E	F	G	No. of holes	Screw size																						
●SRFK0.5-300J	m0.5	191	RA	300.02	5	12	11.5	5.5	15.01	90	4	M3																								
●SRFK0.8-300J	m0.8	119		299.08	8	12.3																														
●SRFK1-300J	m1	96		301.59	10	12							11	5	20.80	130	3	M4																		
●SRFK1-500J		159		499.51																																
●SRFD1.5-300J ●SRFD1.5-500J SRFD1.5-1000 SRFD1.5-1500 SRFD1.5-2000	m1.5	64	RD	301.59	15	20	18.5	8	20.80	130	3	M5																								
●SRFD2-300J ●SRFD2-500J SRFD2-1000 SRFD2-1500 SRFD2-2000		48		301.59									20	25	23	10	20.80	130	3	M6																
●SRFD2.5-300J ●SRFD2.5-500J SRFD2.5-1000 SRFD2.5-1500 SRFD2.5-2000		80		502.65																	25	30	27.5	12	26.33	150	4	M8								
●SRFD3-300J ●SRFD3-500J SRFD3-1000 SRFD3-1500 SRFD3-2000		160		1005.31																									30	35	32	14	49.51	180	6	M10
●SRFD4-500J SRFD4-1000 SRFD4-1500 SRFD4-2000		240		1507.96																																
●SRFD5-500J SRFD5-1000 SRFD5-1500 SRFD5-2000	326	2048.31	50	50	45	20	31.33	220	3	M14																										
●SRFD6-500J SRFD6-1000 SRFD6-1500 SRFD6-2000	38	298.45									60	60	54	23	25.04	220	3	M16																		
	64	502.65																	60	60	54	23	59.51	220	5	M16										
	128	1005.31																									60	60	54	23	93.98	220	7	M16		
	192	1507.96																																	60	60
	261	2049.88	60	60	54	23	27.88	220	10	M16																										

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number ● : J Series (Available-on-request)
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
—	—	3.4	240	39.6	24.4	4.04	0.00~0.13	0.13	●SRFK0.5-300J
—	—	4.5	613	108	62.5	11.0	0.00~0.14	0.21	●SRFK0.8-300J
—	—	4.5	958	177	97.7	18.0	0.04~0.21	0.26	●SRFK1-300J ●SRFK1-500J
6	10	6	2160	421	220	42.9	0.09~0.25	0.64	●SRFD1.5-300J ●SRFD1.5-500J SRFD1.5-1000 SRFD1.5-1500 SRFD1.5-2000
7	11	7	3830	775	391	79.0	0.11~0.28	1.06	●SRFD2-300J ●SRFD2-500J SRFD2-1000 SRFD2-1500 SRFD2-2000
8.6	14	9	5990	1240	611	127	0.13~0.31	1.55	●SRFD2.5-300J ●SRFD2.5-500J SRFD2.5-1000 SRFD2.5-1500 SRFD2.5-2000
10.8	17.5	11	8620	1820	879	186	0.14~0.35	2.17	●SRFD3-300J ●SRFD3-500J SRFD3-1000 SRFD3-1500 SRFD3-2000
13	20	14	15300	3330	1560	339	0.18~0.42	6.21	●SRFD4-500J SRFD4-1000 SRFD4-1500 SRFD4-2000
15.2	23	16	24000	5300	2440	540	0.20~0.47	8.56	●SRFD5-500J SRFD5-1000 SRFD5-1500 SRFD5-2000
17.5	26	18	34500	7740	3520	789	0.22~0.54	12.0	●SRFD6-500J SRFD6-1000 SRFD6-1500 SRFD6-2000

Recommended Mating Pinions




SS Spur Gears

Please see Page 104 for more details.







Specifications	
Precision grade	KHK R 001 grade 5
Gear teeth	Standard full depth
Pressure angle	20°
Material	SUS304
Heat treatment	Solution treated
Tooth hardness	(less than 187HB)

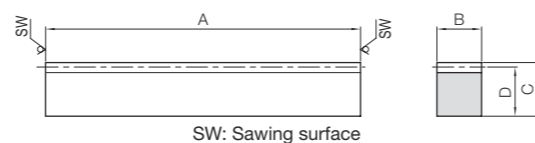

R1

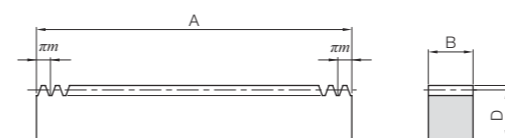

RF

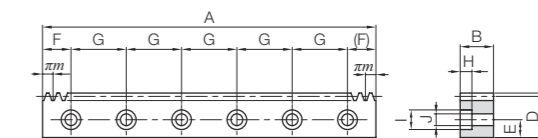

RD

Catalog Number	Module	Effective number of teeth	Shape	Total Length				Allowable force (N)				Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability	Bending strength	Surface durability
SUR1-500	m1	159	R1	505	10	12	11	457	99.4	46.6	10.1		
SUR1.5-500	m1.5	105			15	20	18.5	1030	237	105	24.2		
SUR2-500	m2	79			20	25	23	1830	436	187	44.5		
SUR2.5-500	m2.5	63			25	30	27.5	2860	698	292	71.2		
SUR3-500	m3	52			30	35	32	4120	1030	420	105		
SUR4-500	m4	39			40	45	41	7320	1870	746	191		

Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.23	0.44	SUR1-500
0.09~0.27	1.11	SUR1.5-500
0.11~0.30	1.84	SUR2-500
0.13~0.33	2.75	SUR2.5-500
0.14~0.37	3.84	SUR3-500
0.18~0.44	6.57	SUR4-500

Catalog Number	Module	No. of teeth	Shape	Total Length				Allowable force (N)				Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability	Bending strength	Surface durability
SURF1.5-1000	m1.5	212	RF	999.03	15	20	18.5	1030	237	105	24.2		
SURF2-1000	m2	160		1005.31	20	25	23	1830	436	187	44.5		
SURF2.5-1000	m2.5	128		1005.31	25	30	27.5	2860	698	292	71.2		
SURF3-1000	m3	106		999.03	30	35	32	4120	1030	420	105		
SURF4-1000	m4	80		1005.31	40	45	41	7320	1870	746	191		

Backlash (mm)	Weight (kg)	Catalog Number
0.09~0.27	2.20	SURF1.5-1000
0.11~0.30	3.67	SURF2-1000
0.13~0.33	5.48	SURF2.5-1000
0.14~0.37	7.61	SURF3-1000
0.18~0.44	13.1	SURF4-1000

Catalog Number	Module	No. of teeth	Shape	Total Length				Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
SURFD1.5-1000	m1.5	212	RD	999.03	15	20	18.5	8	49.51			M5
SURFD2-1000	m2	160		1005.31	20	25	23	10	52.65			M6
SURFD2.5-1000	m2.5	128		1005.31	25	30	27.5	12	52.65	180	6	M8
SURFD3-1000	m3	106		999.03	30	35	32	14	49.51			M10
SURFD4-1000	m4	80		1005.31	40	45	41	18	52.65			M12


Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	1030	237	105	24.2	0.09~0.27	2.16	SURFD1.5-1000
7	11	7	1830	436	187	44.5	0.11~0.30	3.61	SURFD2-1000
8.6	14	9	2860	698	292	71.2	0.13~0.33	5.37	SURFD2.5-1000
10.8	17.5	11	4120	1030	420	105	0.14~0.37	7.40	SURFD3-1000
13	20	14	7320	1870	746	191	0.18~0.44	12.7	SURFD4-1000

Recommended Mating Pinions




SUS/SUSA Stainless Steel Spur Gears

Please see Page 154 for more details.

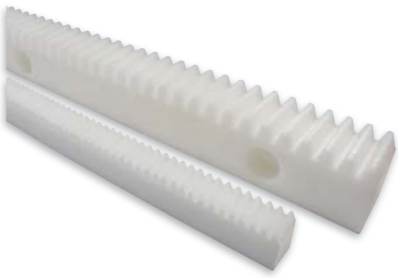


Specifications	
Precision grade	KHK R 001 Grade 5 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	Polyacetal
Heat treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade of J Series products is equivalent to the value shown in the table.

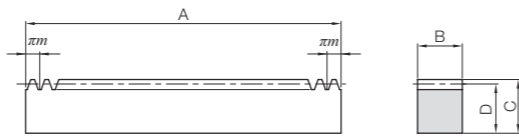

RF

J Series

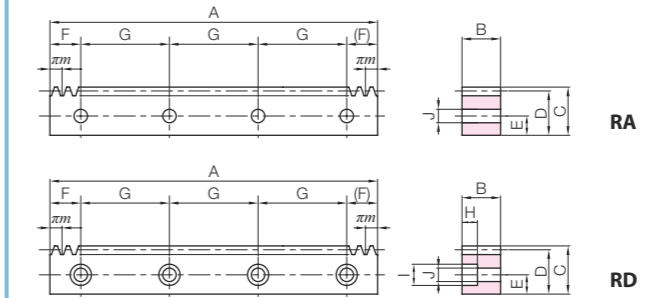

RA

RD

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)	Allowable force (kgf)	Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Bending strength		
DRF1-500	m1	159	RF	499.51	10	12	11	80.7	8.23	0.15~0.36	0.077
DRF1.5-500 DRF1.5-1000	m1.5	106 212		499.51 999.03	15	20	18.5	182	18.5	0.18~0.39	0.20 0.39
DRF2-500 DRF2-1000	m2	80 160		502.65 1005.31	20	25	23	323	32.9	0.21~0.42	0.33 0.65
DRF2.5-500 DRF2.5-1000	m2.5	64 128		502.65 1005.31	25	30	27.5	504	51.4	0.23~0.46	0.49 0.98
DRF3-500 DRF3-1000	m3	53 106		499.51 999.03	30	35	32	726	74.1	0.28~0.52	0.68 1.35

Catalog Number	Module	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● DRFK1-500J	m1	159	RA	499.51	10	12	11	5	24.76	150	4	M4
● DRFD1.5-500J ● DRFD1.5-1000J	m1.5	106 212	RD	499.51 999.03	15	20	18.5	8	24.76 49.51	150 180	4 6	M5
● DRFD2-500J ● DRFD2-1000J	m2	80 160		502.65 1005.31	20	25	23	10	26.33 52.65	150 180	4 6	M6
● DRFD2.5-500J ● DRFD2.5-1000J	m2.5	64 128		502.65 1005.31	25	30	27.5	12	26.33 52.65	150 180	4 6	M8
● DRFD3-500J ● DRFD3-1000J	m3	53 106		499.51 999.03	30	35	32	14	24.76 49.51	150 180	4 6	M10


Counterbore dimensions			Allowable force (N)	Allowable force (kgf)	Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Bending strength			
—	—	4.5	80.7	8.23	0.15~0.36	0.077	● DRFK1-500J
6	10	6	182	18.5	0.18~0.39	0.19 0.38	● DRFD1.5-500J ● DRFD1.5-1000J
7	11	7	323	32.9	0.21~0.42	0.32 0.64	● DRFD2-500J ● DRFD2-1000J
8.6	14	9	504	51.4	0.23~0.46	0.47 0.95	● DRFD2.5-500J ● DRFD2.5-1000J
10.8	17.5	11	726	74.1	0.28~0.52	0.65 1.31	● DRFD3-500J ● DRFD3-1000J

Recommended Mating Pinions




SUS/SUSA Stainless Steel Spur Gears

Please see Page 154 for more details.

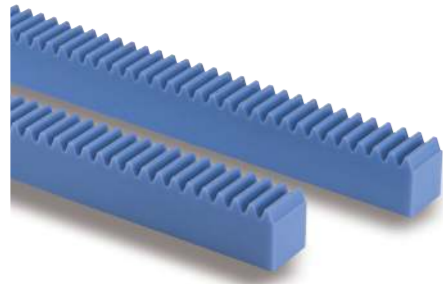

Specifications	
Precision grade	KHK R 001 Grade 5 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	MC901
Heat treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade is equivalent to the value shown in the table.

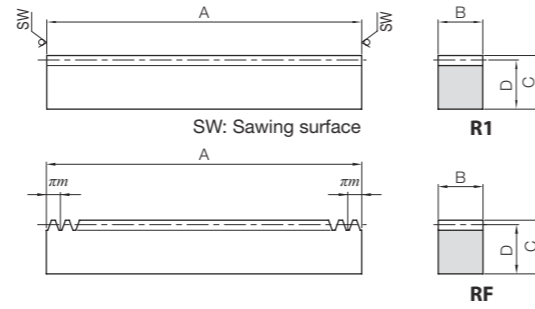

Catalog Number	Module	Effective number of teeth	Shape	Total Length				Allowable force (N)		Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Bending strength		
PR1-500	m1	159	R1	505	10	12	11	92.8	9.46	0.18~0.39	0.064
PR1.5-500	m1.5	105			15	20	18.5	209	21.3	0.21~0.42	0.16
PR2-500	m2	79			20	25	23	371	37.9	0.24~0.45	0.27
PR2.5-500	m2.5	63			25	30	27.5	580	59.2	0.26~0.49	0.40
PR3-500	m3	52			30	35	32	835	85.2	0.32~0.56	0.56

Catalog Number	Module	No. of teeth	Shape	Total Length				Allowable force (N)		Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Bending strength		
PRF1.5-1000	m1.5	212	RF	999.03	15	20	18.5	209	21.3	0.21~0.42	0.32
PRF2-1000	m2	160		1005.31	20	25	23	371	37.9	0.24~0.45	0.54
PRF2.5-1000	m2.5	128		1005.31	25	30	27.5	580	59.2	0.26~0.49	0.80
PRF3-1000	m3	106		999.03	30	35	32	835	85.2	0.32~0.56	1.11

Recommended Mating Pinions




SUS/SUSA Stainless Steel Spur Gears

Please see Page 154 for more details.



Specifications	
Precision grade	KHK R 001 grade 4
Gear teeth	Standard full depth
Pressure angle	20°
Material	Free cutting brass (C3604)
Heat Treatment	—
Tooth hardness	(80HV or more)

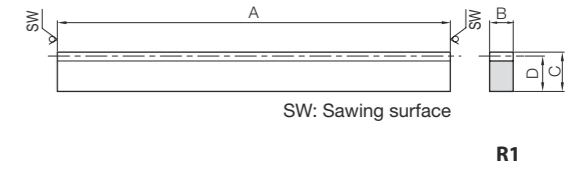

Catalog Number	Module	Effective number of teeth	Shape	Total Length				Allowable force (N)		Backlash (mm)	Weight (kg)		
				A	B	C	D	Bending strength	Surface durability				
BSR0.5-300	m0.5	190	R1	303	3	9	8.5	28.7	—	2.93	—	0.00~0.13	0.066
BSR0.8-300	m0.8	118			4	10	9.2	61.3	—	6.25	—	0.00~0.14	0.095
BSR1-300	m1	94			6	10	9	115	—	11.7	—	0.04~0.21	0.14

Recommended Mating Pinions




BSS Spur Gears

Please see Page 186 for more details.



Specifications	
Precision grade	KHK R 001 grade 4
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

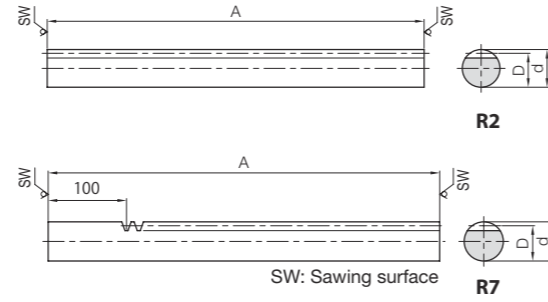

Catalog Number	Module	Effective number of teeth	Shape	Total Length			Allowable force (N)				Backlash (mm)	Weight (kg)
				A	Outside dia. d _{h9}	Height to pitch line D	Bending strength	Surface durability	Bending strength	Surface durability		
SRO1-500	m1	159	R2	505	10	9	800	121	81.6	12.3	0.04~0.21	0.29
SRO1.5-500	m1.5	105		505	15	13.5	1800	288	184	29.3	0.09~0.25	0.65
SRO2-500	m2	79		505	20	18	3200	530	326	54.0	0.11~0.28	1.16
SRO2-1000		159		1010	20	18	3200	530	326	54.0	0.11~0.28	2.31
SRO2.5-500	m2.5	63		505	25	22.5	5000	848	510	86.5	0.13~0.31	1.81
SRO2.5-1000		127		1010	25	22.5	5000	848	510	86.5	0.13~0.31	3.61
SRO3-500	m3	52		505	30	27	7200	1240	735	127	0.14~0.35	2.60
SRO3-1000		105		1010	30	27	7200	1240	735	127	0.14~0.35	5.20
SRO4-500	m4	39		505	40	36	12800	2270	1310	232	0.18~0.42	4.62
SRO4-1000		79		1010	40	36	12800	2270	1310	232	0.18~0.42	9.24
SRO5-1000	m5	63	1010	50	45	20000	3620	2040	369	0.20~0.47	14.4	

Catalog Number	Module	Effective number of teeth	Shape	Total Length			Allowable force (N)				Backlash (mm)	Weight (kg)
				A	Outside dia. d _{h9}	Height to pitch line D	Bending strength	Surface durability	Bending strength	Surface durability		
SROS1-500	m1	128	R7	505	10	9	800	121	81.6	12.3	0.04~0.21	0.29
SROS1.5-500	m1.5	85			15	13.5	1800	288	184	29.3	0.09~0.25	0.66
SROS2-500	m2	64			20	18	3200	530	326	54.0	0.11~0.28	1.17
SROS2.5-500	m2.5	51			25	22.5	5000	848	510	86.5	0.13~0.31	1.83
SROS3-500	m3	42			30	27	7200	1240	735	127	0.14~0.35	2.64

Recommended Mating Pinions




SS Spur Gears

Please see Page 104 for more details.




Specifications	
Precision grade	KHK R 001 grade 5
Gear teeth	Standard full depth
Pressure angle	20°
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)

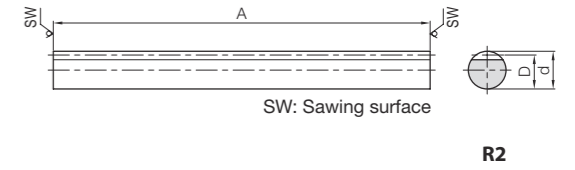

Catalog Number	Module	Effective number of teeth	Shape	Total Length			Allowable force (N)				Backlash (mm)	Weight (kg)
				A	Outside dia. d _{h9}	Height to pitch line D	Bending strength	Surface durability	Bending strength	Surface durability		
SURO1-500	m1	159	R2	505	10	9	382	67.9	39.0	6.93	0.04~0.23	0.29
SURO1.5-500	m1.5	105		505	15	13.5	859	162	87.6	16.5	0.09~0.27	0.66
SURO2-500	m2	79		505	20	18	1530	298	156	30.4	0.11~0.30	1.17
SURO2-1000		159		1010	20	18	1530	298	156	30.4	0.11~0.30	2.33
SURO2.5-500	m2.5	63		505	25	22.5	2390	477	243	48.7	0.13~0.33	1.82
SURO2.5-1000		127		1010	25	22.5	2390	477	243	48.7	0.13~0.33	3.65
SURO3-500	m3	52		505	30	27	3440	700	351	71.4	0.14~0.37	2.63
SURO3-1000		105		1010	30	27	3440	700	351	71.4	0.14~0.37	5.25

Recommended Mating Pinions

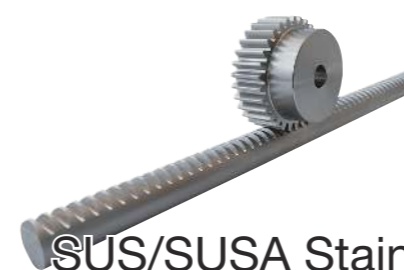


SUS/SUSA Stainless Steel Spur Gears

Please see Page 154 for more details.



Specifications	
Precision grade	KHK R 001 grade 8
Gear teeth	Standard full depth
Pressure angle	20°
Material	Duracon (R) (M25-44)
Heat treatment	—
Tooth hardness	(110 to 120HRR)


* "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.

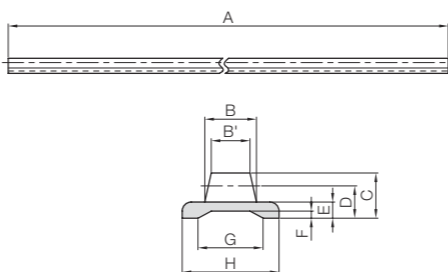

R4

Catalog Number	Module	Shape	Dimensions (mm)									
			Total Length A	Face width B	Face width B'	Height C	Height to pitch line D	Base thickness E	Base groove depth F	Base groove width G	Base width H	
DR0.8-2000	m0.8	R4	2000	3.8	3	3.3	2.5	1.5	0.7	3.7	8	
DR1-2000	m1			5	4	4.3	3.3	2	0.9	4.9	10	
DR1.5-2000	m1.5			6.5	5	5.7	4.2	2.3	1	8	12	
DR2-2000	m2			8	6	7	5	2.5	1.1	10.1	15	

DR dedicated SRS Rack Clamps



T7

Material: SPCC trivalent chromate finish

Catalog Number	Shape	A	B	C	D	E	F	Weight (g)
SRS-1	T7	10.2	8	4.5	2.7	1.2	—	2.24
SRS-2	T7	11.4	8	5.6	3.9	1.4	—	2.52

Dimensional tolerance of DR / molded item (unit: mm)

Dimensional classification	Grade	Rough grade
3 or less	±0.20	
4 to 6	±0.25	
7 to 10	±0.30	
11 to 18	±0.35	
19 to 30	±0.40	
Over 30	±0.50	

SRS/ARL / Normal dimensional tolerance of bending and drawing (unit: mm)


Dimensional classification	Grade	Grade B
6 or less	±0.30	
7 to 30	±0.50	
31 to 120	±0.80	
120 to 400	±1.20	
400 to 1000	±2.00	
1000 to 2000	±3.00	

SSDR Module 0.8, 1, 1.5, 2 DR Pinions



Specifications	
Precision grade	JIS grade N8 (JIS B1702-1:1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

* The precision grade of products with a module of less than 0.8 is equivalent to the value shown in the table.



S1T

Catalog Number	Module	No. of teeth	Shape	Dimensions (mm)									
				Bore AH7	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Socket head screw Size	J	
SSDR0.8-35	m0.8	35	S1T	5	16	28	29.6	3	7	10	M4	3.5	
SSDR1-30	m1	30		6	20	30	32	4	8	12	M4	4	
SSDR1.5-20	m1.5	20		6	20	30	33	5	10	15	M4	5	
SSDR2-15	m2	15		8	22	30	34	6	10	16	M5	5	


List of Products for DR Molded Flexible Racks

Molded Flexible Racks	Rack Clamps	Slide Rails	Dedicated Pinions
DR0.8-2000	SRS-1	ARL-0.8	SSDR0.8-35
DR1-2000	SRS-1	ARL-1	SSDR1-30
DR1.5-2000	SRS-2	ARL-1.5	SSDR1.5-20
DR2-2000	SRS-2	ARL-2	SSDR2-15

Allowable force (N)	Allowable force (kgf)	Weight (kg)	Catalog Number
Bending strength	Bending strength		
112	11.4	0.036	DR0.8-2000
161	16.4	0.060	DR1-2000
161	16.5	0.085	DR1.5-2000
265	27.0	0.12	DR2-2000

* Molded flexible racks of 2 meters or longer are also available by request as custom-made products.
(Only the length can be changed, up to 50 m)

DR dedicated ARL Slide Rails



T6

Material: Aluminum (A6063S-T5) Overall length: 1,000 mm


Catalog Number	Shape	A	B	C	D	E	F	Weight (kg)
ARL-0.8	T6	10.3	4.4	4.7	2	1.7	8.3	0.081
ARL-1		12.3	5.6	5.2	2	2.2	10.3	0.096
ARL-1.5		14.3	7.2	5.5	2	2.5	12.3	0.11
ARL-2		17.3	8.8	6.2	2.5	2.7	15.3	0.15

Steel Spur Gears


Allowable torque (N-m)	Allowable torque (kgf-m)	Weight (g)	Catalog Number
Bending strength	Bending strength		
2.59	0.26	23.5	SSDR0.8-35
4.46	0.45	38.6	SSDR1-30
7.35	0.75	48.4	SSDR1.5-20
10.4	1.06	56.1	SSDR2-15

Applications for DR Molded Flexible Racks


As it is possible to fix the position of the pinion and bend the DR molded flexible racks into any shape, they can be used for special purposes.

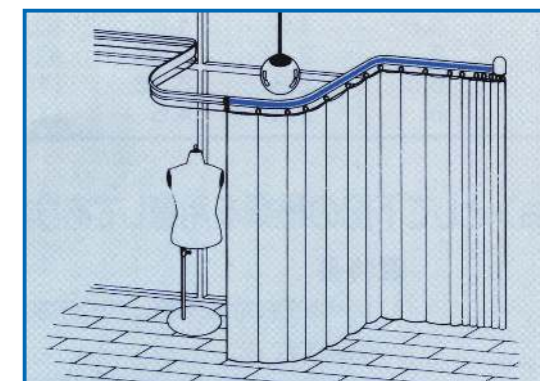


Electric curtain

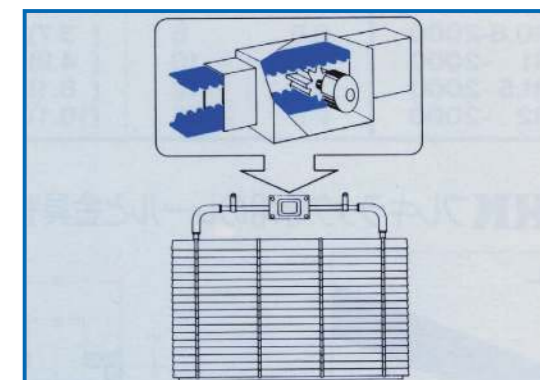

Electric blinds

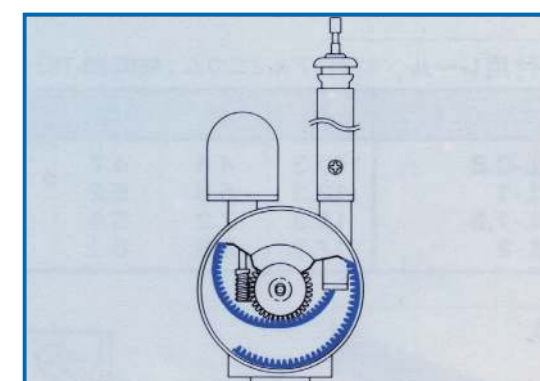

Electric antenna




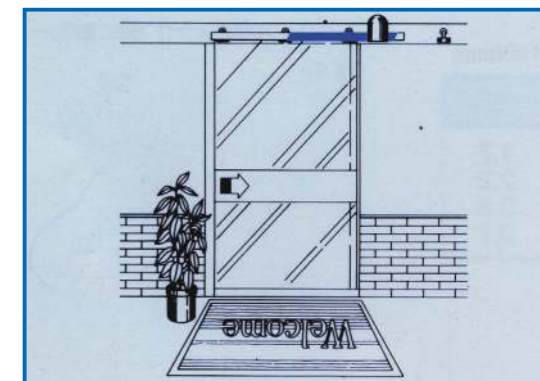


Automatic doors



Specifications	
Precision grade	KHK R 001 Grade 1 *
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Transverse pressure angle	20°
Helix angle	21°30'
Material	SCM440
Heat treatment	Thermal refining only
Tooth hardness	225 to 352HB

* The precision grade of J Series products is equivalent to the value shown in the table.

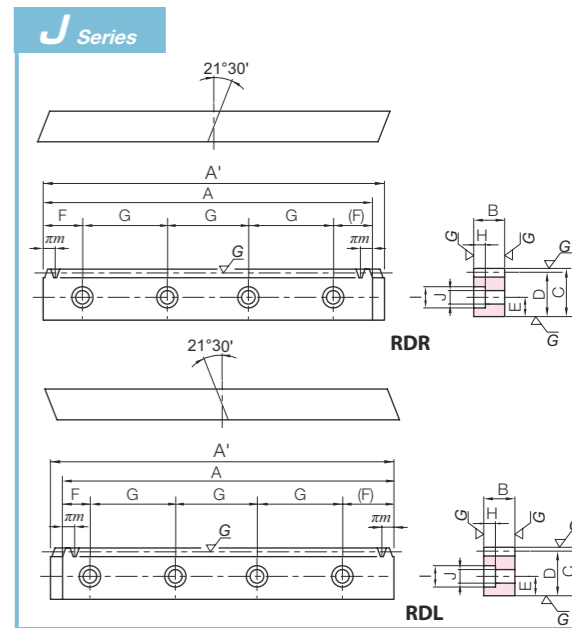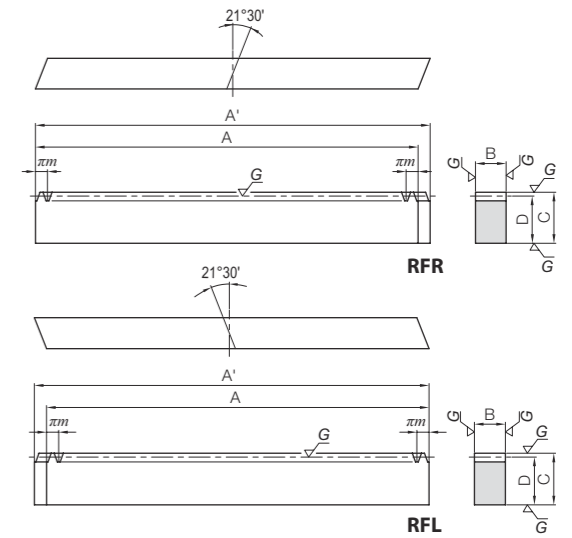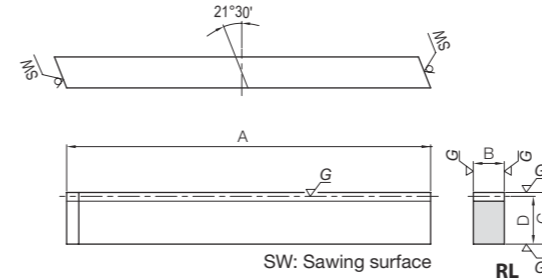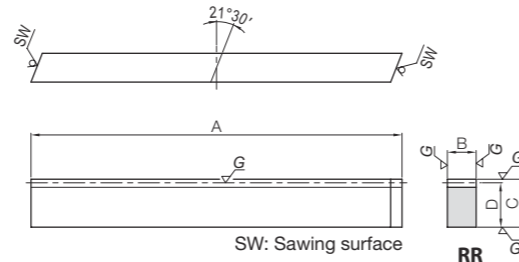

Catalog Number	Module	Effective number of teeth	Direction of spiral	Shape	Total Length		Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
					A	B				C	D	Bending strength	Surface durability
KRHG1-100R KRHG1-100L	m1	28	R L	RR RL	98	8	15	14	1290	955	131	97.4	
KRHG1.5-100R KRHG1.5-100L	m1.5	19	R L	RR RL	101	12	20	18.5	2890	2380	295	243	
KRHG2-100R (Made to Order) KRHG2-100L (Made to Order)	m2	13	R L	RR RL	98	16	25	23	5140	4230	524	432	
KRHG2.5-100R (Made to Order) KRHG2.5-100L (Made to Order)	m2.5	10	R L	RR RL	100	20	30	27.5	8030	6610	819	674	
KRHG3-100R (Made to Order) KRHG3-100L (Made to Order)	m3	8	R L	RR RL	102	25	35	32	12000	9810	1230	1000	

Backlash (mm)	Weight (kg)	Catalog Number
0.05~0.15	0.086	KRHG1-100R KRHG1-100L
0.05~0.15	0.18	KRHG1.5-100R KRHG1.5-100L
0.06~0.17	0.28	KRHG2-100R (Made to Order) KRHG2-100L (Made to Order)
0.06~0.17	0.43	KRHG2.5-100R (Made to Order) KRHG2.5-100L (Made to Order)
0.06~0.17	0.64	KRHG3-100R (Made to Order) KRHG3-100L (Made to Order)

Catalog Number	Module	No. of teeth	Direction of spiral	Shape	Total Length		Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
					A	A'				B	C	D	Bending strength
KRHGF1-500R KRHGF1-500L	m1	159	R L	RFR RFL	499.51	502.66	8	15	14	1290	955	131	97.4
KRHGF1.5-500R KRHGF1.5-500L	m1.5	106	R L	RFR RFL	499.51	504.23	12	20	18.5	2890	2380	295	243
KRHGF2-1000R KRHGF2-1000L	m2	160	R L	RFR RFL	1005.31	1011.61	16	25	23	5140	4230	524	432
KRHGF2.5-1000R KRHGF2.5-1000L	m2.5	128	R L	RFR RFL	1005.31	1013.19	20	30	27.5	8030	6610	819	674
KRHGF3-1000R KRHGF3-1000L	m3	106	R L	RFR RFL	999.03	1008.88	25	35	32	12000	9810	1230	1000

Backlash (mm)	Weight (kg)	Catalog Number
0.05~0.15	0.44	KRHGF1-500R KRHGF1-500L
0.05~0.15	0.87	KRHGF1.5-500R KRHGF1.5-500L
0.06~0.17	2.90	KRHGF2-1000R KRHGF2-1000L
0.06~0.17	4.34	KRHGF2.5-1000R KRHGF2.5-1000L
0.06~0.17	6.27	KRHGF3-1000R KRHGF3-1000L

Catalog Number	Module	No. of teeth	Direction of spiral	Shape	Total Length		Face width	Height	Height to pitch line	Mounting hole dimensions			
					A	A'				B	C	D	E
● KRHGF1-500RJ ● KRHGF1-500LJ	m1	159	R L	RDR RDL	499.51	502.66	8	15	14	6	24.76	150	4
● KRHGF1.5-500RJ ● KRHGF1.5-500LJ	m1.5	106	R L	RDR RDL	499.51	504.23	12	20	18.5	8	24.76	150	4
● KRHGF2-1000RJ ● KRHGF2-1000LJ	m2	160	R L	RDR RDL	1005.31	1011.61	16	25	23	10	52.65	180	6
● KRHGF2.5-1000RJ ● KRHGF2.5-1000LJ	m2.5	128	R L	RDR RDL	1005.31	1013.19	20	30	27.5	12	52.65	180	6
● KRHGF3-1000RJ ● KRHGF3-1000LJ	m3	106	R L	RDR RDL	999.03	1008.88	25	35	32	14	49.51	180	6

[Precautions for Made to Order Products] Prices and lead times for Made to Order products require separate estimates. Contact your dealer.

Screw size	Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
	H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
M4	4.4	8	4.5	1290	955	131	97.4	0.05~0.15	0.43	● KRHGF1-500RJ ● KRHGF1-500LJ
M5	6	10	6	2890	2380	295	243	0.05~0.15	0.85	● KRHGF1.5-500RJ ● KRHGF1.5-500LJ
M6	7	11	7	5140	4230	524	432	0.06~0.17	2.86	● KRHGF2-1000RJ ● KRHGF2-1000LJ
M8	8.6	14	9	8030	6610	819	674	0.06~0.17	4.24	● KRHGF2.5-1000RJ ● KRHGF2.5-1000LJ
M10	10.8	17.5	11	12000	9810	1230	1000	0.06~0.17	6.09	● KRHGF3-1000RJ ● KRHGF3-1000LJ

Recommended Mating Pinions





KHG Ground Helical Gears

Please see Page 194 for more details.




Specifications	
Precision grade	KHK R 001 grade 5
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle	15°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

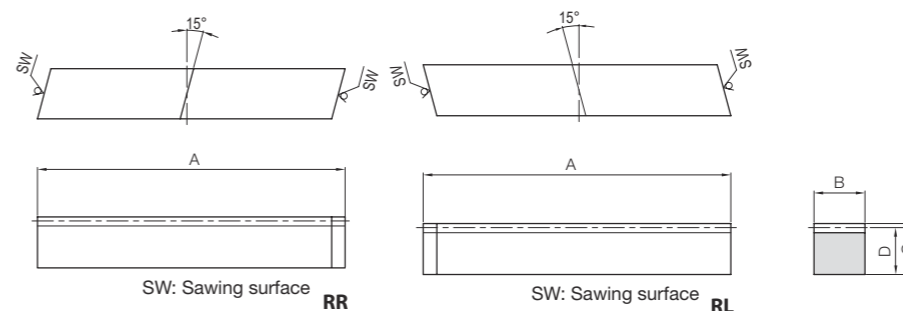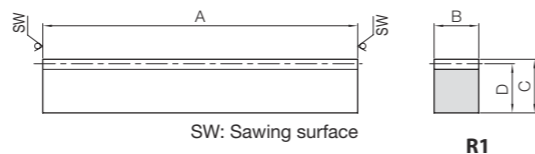

Catalog Number	Module	Effective number of teeth	Direction of spiral	Shape	Total Length		Face width	Height	Height to pitch line	Allowable force (N)				Backlash (mm)	Weight (kg)
					A	B				C	D	Bending strength	Surface durability		
SRH2-100R SRH2-100L	m2	12	R L	RR RL	95									0.43	
SRH2-500R SRH2-500L		75	R L	R1	505	25	25	23	4710	1570	481	160	0.12~0.31	2.28	
SRH2-1000R SRH2-1000L		152	R L		1010										4.56
SRH3-100R SRH3-100L	m3	7	R L	RR RL	95									0.84	
SRH3-500R SRH3-500L		49	R L	R1	505	35	35	32	9910	3520	1010	359	0.15~0.38	4.44	
SRH3-1000R SRH3-1000L		101	R L		1010										8.88

Catalog Number	Module	No. of teeth	Direction of spiral	Shape	Total Length		Face width	Height	Height to pitch line	Allowable force (N)				Allowable force (kgf)		
					A	A'				B	C	D	Bending strength		Surface durability	Bending strength
SRHF2-1000R SRHF2-1000L	m2	153	R L	RFR RFL	995.24	1001.94	25	25	23	4710	1570	481	160	0.12~0.31	4.49	SRHF2-1000R SRHF2-1000L
SRHF3-1000R SRHF3-1000L	m3	102	R L	RFR RFL	995.24	1004.62	35	35	32	9910	3520	1010	359	0.15~0.38	8.75	SRHF3-1000R SRHF3-1000L

Catalog Number	Module	No. of teeth	Direction of spiral	Shape	Total Length		Face width	Height	Height to pitch line	Mounting hole dimensions					
					A	A'				B	C	D	E	F	G
SRHFD2-1000R SRHFD2-1000L	m2	153	R L	RDR RDL	995.24	1001.94	25	25	23	10	47.62	180	6	M6	
SRHFD3-1000R SRHFD3-1000L	m3	102	R L	RDR RDL	995.24	1004.62	35	35	32	14	47.62	180	6	M10	

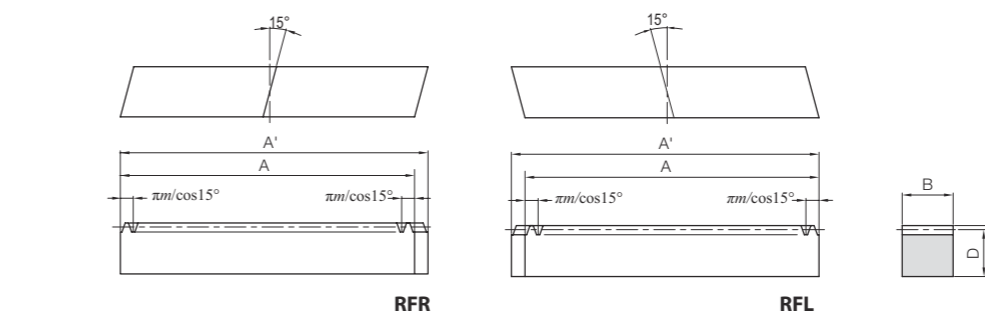

Backlash (mm)	Weight (kg)	Catalog Number
0.12~0.31	4.49	SRHF2-1000R SRHF2-1000L
0.15~0.38	8.75	SRHF3-1000R SRHF3-1000L


Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
7	11	7	4710	1570	481	160	0.12~0.31	4.43	SRHFD2-1000R SRHFD2-1000L
10.8	17.5	11	9910	3520	1010	359	0.15~0.38	8.52	SRHFD3-1000R SRHFD3-1000L

Recommended Mating Pinions




SH Helical Gears

Please see Page 202 for more details.

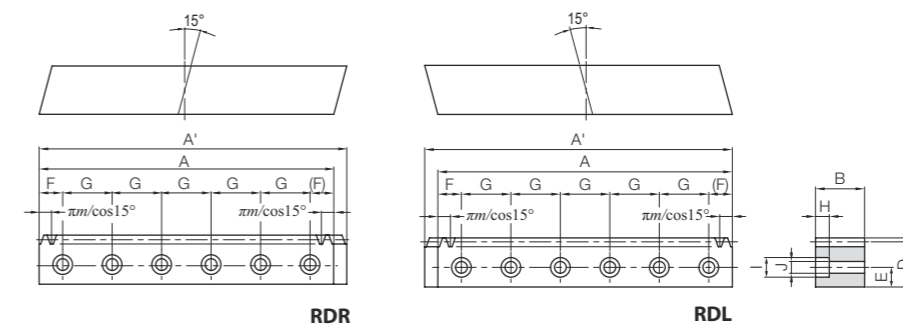



Specifications	
Precision grade	KHK R 001 grade 4
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle/direction	19° 31' 41" right helix
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

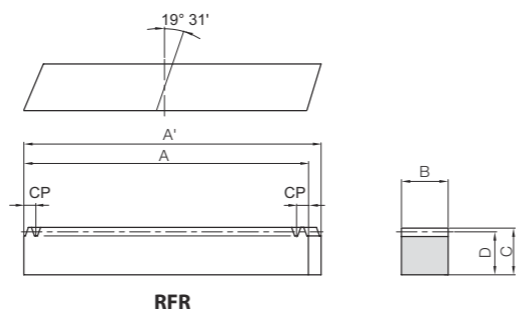

RFR


Catalog Number	Module (front pitch mm)	No. of teeth	Shape	Total Length		Face width	Height	Height to pitch line	
				A	A'			B	C
SRHEF1.5-1000R	m1.5 (CP5)	200	RFR	1000	1006.03	17	17	15.5	
SRHEF2-1000R	m2 (CP6.667)	150			1008.51	24	24	22	
SRHEF3-1000R	m3 (CP10)	100			1010.29	29	29	26	
SRHEF4-1000R	m4 (CP13.333)	75			1013.83	39	39	35	
SRHEF5-1000R	m5 (CP16.667)	60			1017.38	49	39	34	
SRHEF6-1000R	m6 (CP20)	50			1020.93	59	49	43	




Bending strength	Surface durability	Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
		Bending strength	Surface durability			
2410	425	245	43.3	0.10~0.28	2.06	SRHEF1.5-1000R
4410	675	450	68.8	0.12~0.32	4.14	SRHEF2-1000R
8210	1650	837	168	0.15~0.39	5.91	SRHEF3-1000R
15200	2700	1550	275	0.19~0.47	10.7	SRHEF4-1000R
22500	4110	2300	419	0.21~0.52	13.1	SRHEF5-1000R
33400	7240	3410	738	0.23~0.57	19.9	SRHEF6-1000R




Specifications	
Precision grade	JIS grade N8 (JIS B1702-1:1998)
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle/direction	19° 31' 41" left helix
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating



S1

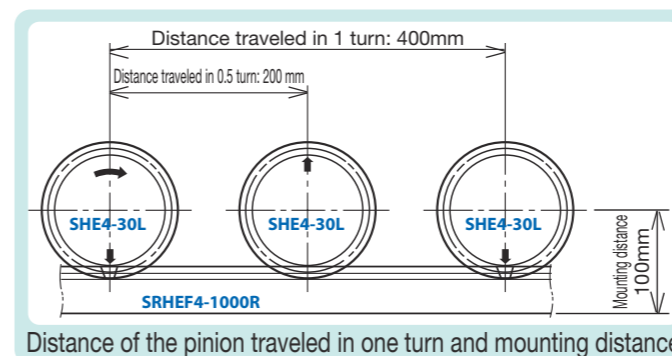

Distance of the pinion traveled in one turn and mounting distance

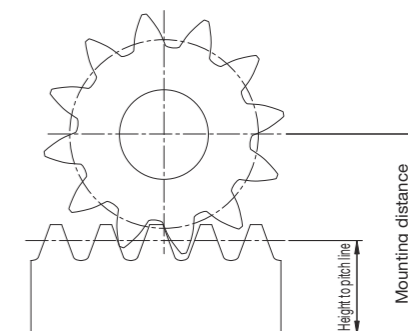

Mounting distance of profile helix gear and meshing rack


Catalog Number	Module (front pitch mm)	No. of teeth	Profile shift coefficient	Mounting distance	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width
						A _{H7}	B	C	D	E	F
SHE1.5-20L	m1.5 (CP5)	20	+0.390	32	S1	10	25	31.83	36	18	14
SHE1.5-25L		25	+0.404	36		12	35	39.79	44	18	14
SHE1.5-30L		30	+0.418	40		15	40	47.75	52	18	14
SHE2-18L	m2 (CP6.667)	18	+0.451	42		12	30	38.20	44	25	16
SHE2-24L		24	+0.268	48		15	45	50.93	56	25	16
SHE2-30L		30	+0.085	54		18	55	63.66	68	25	16
SHE3-20L	m3 (CP10)	20	+0.390	59		20	55	63.66	72	30	20
SHE3-25L		25	+0.404	67		20	70	79.58	88	30	20
SHE3-30L		30	+0.418	75		25	85	95.49	104	30	20
SHE4-18L	m4 (CP13.333)	18	+0.201	74		20	65	76.39	86	40	25
SHE4-24L		24	+0.268	87		20	90	101.86	112	40	25
SHE4-30L		30	+0.335	100		25	110	127.32	138	40	25
SHE5-18L	m5 (CP16.667)	18	+0.451	84	25	85	95.49	110	50	25	
SHE5-24L		24	+0.468	100	25	110	127.32	142	50	25	
SHE6-20L	m6 (CP20)	20	+0.390	109	30	110	127.32	144	60	28	
SHE6-25L		25	+0.404	125	30	140	159.15	176	60	28	

Total Length	Distance traveled in one turn	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
		Bending strength	Surface durability	Bending strength	Surface durability			
G	Distance traveled (mm)							
32	100	35.6	5.89	3.63	0.60	0.10~0.28	0.16	SHE1.5-20L
32	125	46.5	10.3	4.75	1.05		0.26	SHE1.5-25L
32	150	57.6	16.3	5.87	1.66		0.36	SHE1.5-30L
41	120	78.2	11.2	7.98	1.15	0.12~0.32	0.30	SHE2-18L
41	160	107	24.4	10.9	2.48		0.56	SHE2-24L
41	200	136	43.8	13.8	4.46		0.85	SHE2-30L
50	200	238	45.7	24.2	4.66	0.15~0.39	1.06	SHE3-20L
50	250	310	80.1	31.6	8.17		1.72	SHE3-25L
50	300	384	127	39.2	12.9		2.47	SHE3-30L
65	240	474	89.8	48.3	9.16	0.19~0.47	1.99	SHE4-18L
65	320	687	183	70.0	18.6		3.76	SHE4-24L
65	400	902	317	92.0	32.3		5.78	SHE4-30L
75	300	978	171	99.7	17.4	0.21~0.52	3.91	SHE5-18L
75	400	1380	354	141	36.1		6.95	SHE5-24L
88	400	1900	402	194	40.9	0.23~0.57	8.05	SHE6-20L
88	500	2480	705	253	71.9		12.8	SHE6-25L






Specifications	
Precision grade	KHK R 001 grade 2
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle/direction	19° 31' 41" left helix
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

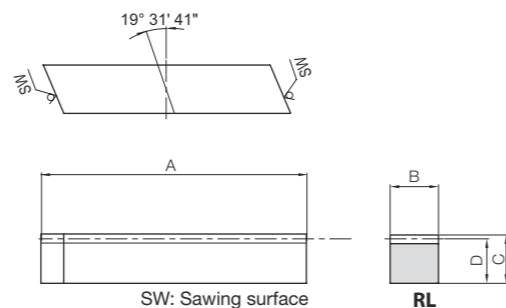

Catalog Number	Normal module (front pitch mm)	Effective No. of teeth	Shape	Total Length				Weight (kg)
				A	B	C	D	
ZST1.5-GL	m1.5 (CP5)	9	RL	59	17	17	15.5	0.11
ZST2-GL	m2 (CP6.667)	7		66	25	25	23	0.26
ZST3-GL	m3 (CP10)	8		108	30	30	27	0.62
ZST4-GL	m4 (CP13.333)	6		118	40	40	36	1.17
ZST5-GL	m5 (CP16.667)	4		115	50	50	45	1.72
ZST6-GL	m6 (CP20)	3		119	60	60	54	2.49


Points of Caution in Assembling

① ZST/ZSTD ground racks are designed to give the proper backlash when assembled using the mounting distance (tolerance of H7 to H8 required) given by the ZSTP Mating Pinion Dimension Table (Page 262). Make sure that the mounting distance stays constant for the length of the rack.




② Machined end type racks such as the ZST and ZSTD Series have pitch tolerance of -0.05 to -0.4mm at the end face. If you try to connect the racks without any space, the pitch will be too small and will cause problems. Please follow the following diagrams, "Connecting the Racks," for assembly.

③ The ZST/ZSTD type of KHK stock ground racks have four surfaces ground parallel with high precision. To maintain true angle, they should be mounted on high precision bases (within 10 μm recommended) as shown below. It is even possible to correct for the angular errors of racks by compensating the mounting base. With recent increases in the requirement for zero backlash linear drives, such accurate assembly as shown is becoming more important. If the racks are not secured properly to the base, they could shift during operation and cause unexpected problems. It is very important to insure firm mounting by the use of dowel pins or similar devices. Please see Page 222 for more details.

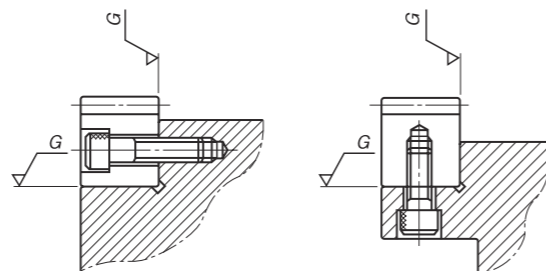

Connecting the Racks

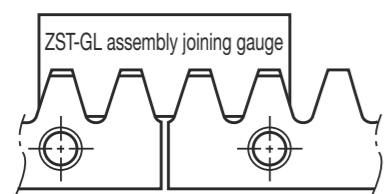


[NOTE] Please use the ZST-GL assembly gauge for the joining rack.



CP Racks & Pinions

KTSCP [CP] Tapered Pinions Material: SCM440 CP5, 10 Page 274	STRCPF/STRCPFD [CP] Tapered Racks Material: S45C CP5, 10 Page 274	MSCP [CP] Ground Spur Gears Material: SCM415 CP5, 10 Page 276	MRGCPF/MRGCPFD [CP] Hardened Ground Racks Material: SCM415 CP5, 10 Page 276	KSCP [CP] Ground Spur Gears Material: SCM440 CP5, 10 Page 278	KRGCPF-H/KRGCPFD-H [CP] Hardened Ground Racks Material: SCM440 CP5, 10 Page 278	KRGCP/KRGCPF/KRGCPFD [CP] Thermal Refined Ground Racks Material: SCM440 CP5, 10 Page 280
SSCPGS [CP] Ground Spur Pinion Shafts Material: S45C CP5, 10 Page 282	SSCPG [CP] Ground Spur Gears Additional Material: S45C CP5~20 Page 282	SRGCP/SRGCPF/SRGCPFD [CP] Hardened Ground Racks Material: S45C CP5~20 Page 284	KRCPF-H/KRCPFD-H [CP] Hardened Racks Material: SCM440 CP5, 10 Page 286	KSSCP [CP] Thermal Refined Spur Gears Material: SCM440 CP5, 10 Page 288	KRCPF/KRCPFD [CP] Thermal Refined Racks Material: SCM440 CP5, 10 Page 288	SSCP [CP] Spur Gears Material: S45C CP2.5~20 Page 290
SRCPF-H/SRCPFD-H [CP] Hardened Racks Material: S45C CP5~20 Page 292	SRCPF-HL/SRCPFD-HL [CP] Laser hardened Material: S45C CP5~20 Page 294	SRCP/SRCPF/SRCPFD/SRCPFK [CP] Racks Material: S45C CP2.5~20 Page 296	SUSCP [CP] Stainless Steel Spur Gears Material: SUS303 CP5, 10 Page 298	SURCPF/SURCPFD [CP] Stainless Steel Racks Material: SUS304 CP5, 10 Page 298	SROCP [CP] Round Racks Material: S45C CP2.5~10 Page 300	FRCP [CP] Metal Flexible Racks Material: SS400 CP5 Page 300


M Includes Made to Order

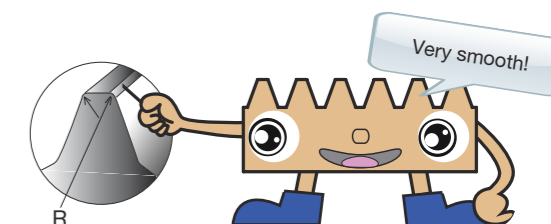

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Racks

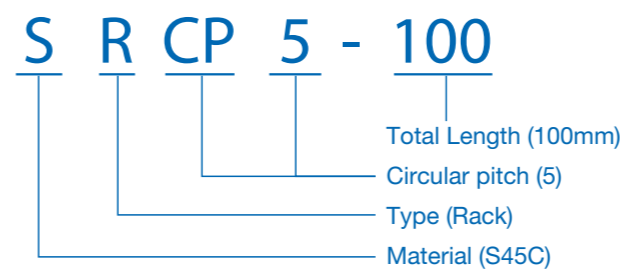

Material		Other Information	
M	SCM415	F	Racks with Machined Ends
K	SCM440	D	Racks with Bolt Holes
S	S45C	K	Racks with Drill Holes
SU	Stainless Steel	G	Ground Gears
F	SS400	H	Gear teeth induction hardened
Type		S	Pinion Shafts
R	Racks	HL	Laser hardened
RO	Round Racks		
S	Spur Gears		
TR(TS)	Tapered Racks (Spur Gears)		

Features



The KHK stock CP racks & pinions are easy-to-use racks with clear pitch. For your convenience, we offer circular pitches of 2.5 to 20 mm and in lengths of up to 2000 mm. (FRCP is available to 4000 mm)

Racks

Catalog Number <small>Note 1</small>	Pitch mm	Total Length mm Parentheses show no. of teeth	Material	Heat Treatment	Tooth Surface Finish	Gear accuracy <small>KHK R 001 Parentheses show JIS B 1702-1</small>	Features
STRCPF STRCPFD	5, 10	1000	S45C	—	Cut	4	Racks with tapered helix with adjustable backlash.
MRGCPF MRGCPFD	5, 10	500	SCM415	Tooth area carburized	Ground	1	CP racks that have been carburized and ground that have excellent accuracy, strength and wear resistance. Secondary operations are possible except for teeth.
KRGCPF-H KRGCPFD-H	5, 10	500, 1000	SCM440	Thermal refined, gear teeth induction hardened	Ground	1	CP racks that have been tempered, hardened and ground that have excellent accuracy, strength and wear resistance. Secondary operations are possible except for teeth.
KRGCP/KRGCPF KRGCPFD	5, 10	100, 500, 1000	SCM440	Thermal refined	Ground	1	CP racks that have been tempered and ground that have excellent accuracy and strength.
SRGCP/SRGCPF SRGCPFD	5, 10, 15, 20	100, 500, 1000	S45C	Gear teeth induction hardened	Ground	3	Racks that have been hardened and ground with a good balance of accuracy, wear resistance and cost. Secondary operations are possible except for teeth.
KRCPF-H KRCPFD-H	5, 10	1000	SCM440	Thermal refined, gear teeth induction hardened	Cut	5	CP racks that have been tempered and hardened that have excellent strength and wear resistance. Secondary operations are possible except for teeth.
SRCPF-H SRCPFD-H	5, 10, 15, 20	1000	S45C	Gear teeth induction hardened	Cut	5	CP racks that have been hardened with excellent wear resistance. Secondary operations are possible except for teeth.
SRCPF-HL SRCPFD-HL	5, 10, 15, 20	1000, 1500, 2000	S45C	Gear teeth laser hardened	Cut	4	CP racks that have been laser hardened with a good balance of wear resistance and cost. Secondary operations are possible except for teeth.
KRCPF/KRCPFD	5, 10	500, 1000	SCM440	Thermal refined	Cut	4	CP racks that have been tempered with excellent strength.
SRCP/SRCPF SRCPFD/SRCPF	2.5, 5, 10, 15, 20	100, 500, 1000, 1500, 2000	S45C	—	Cut	4	Many lineups are available at a low price and excellent usability.
SURCPF SURCPFD	5, 10	500, 1000	SUS304	Solution treated	Cut	5	Stainless steel CP racks with rust resistance.
SROCP	2.5, 5, 10	500, 1000	S45C	—	Cut	4	CP round racks that are suitable when the rack side moves.
FRCP	5	2000, 3000, 4000	SS400	—	Cut	8	Thin CP racks that can be bent.

Pinion

KTSCP	5, 10	(20~40)	SCM440	Thermal refined	Cut	(N8)	STRCPF pinion with adjustable backlash.
KSCPG	5, 10	(20~40)	SCM440	Thermal refined, gear teeth induction hardened	Ground	(N6)	CP gears that have been tempered, hardened and ground that has excellent accuracy, strength and abrasion resistance. Recommended for pinions of ground CP racks. Secondary operations are possible except for teeth.
SSCPGS	5, 10	(10~25)	S45C	Thermal refined, gear teeth induction hardened	Ground	(N7)	CP gears with shafts that have been tempered, hardened and ground. Secondary operations can be given except for the teeth. This product is ideal for the pinion of the SRGCPF rack.
SSCPG	5, 10, 15, 20	(20~40)	S45C	Gear teeth induction hardened	Ground	(N7)	CP gears that have been hardened and ground. Secondary operations can be given except for the teeth. This product is ideal for the pinion of the SRGCPF rack.
KSSCP	5, 10	(20~40)	SCM440	Thermal refined	Cut	(N8)	Tempered gears with excellent bending strength that can be given secondary operations. The teeth can be additionally hardened. This product is ideal for the pinion of the KRCPF rack.
SSCP	2.5, 5, 10, 15, 20	(20~40)	S45C	—	Cut	(N8)	Available at a low price. The teeth can be additionally hardened. This product is ideal for the pinion of the SRCP and SROCP racks.
SUSCP	5, 10	(20~30)	SUS303	—	Cut	(N8)	Stainless steel CP gears with rust resistance. This product is ideal for the pinion of the SURCPF rack.


[NOTE 1] The catalog numbers of the above racks with (F) suffix have both ends machined so that they can be butted against each other. The items with (D) have mounting screw holes for immediate assembly.

- KHK stock CP racks have round semi-topping at the corners of the top land of the gear tooth.
- Black products are KHK stock CP gears that have an applied black oxide coating for rust resistance.


CP racks & pinions are ideal for linear positioning.

CP Racks & Pinions


The design can be made easier by setting the moving length of one rotation of a pinion to an integer (mm). Circular pitch racks solve these problems. This problem is solved by CP racks and pinions where one rotation of a pinion moves it precisely 50, 100, 150, ... 600 mm, etc. The following table lists the main features.

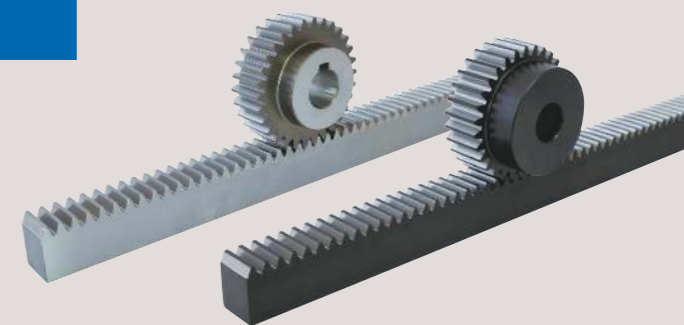

Movement of one cycle of the CP10-30 pinion vs SS3-30.

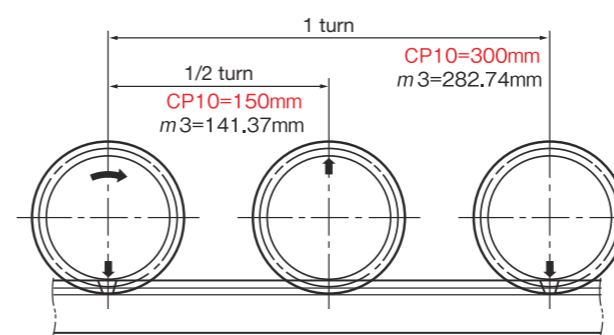

Difference between CP10 and m3

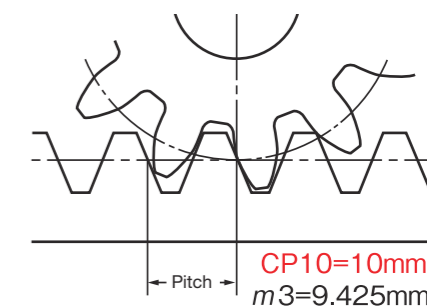

STRCPF/STRCPFD & KTSCP

Taper Racks & Pinions




Features of Tapered Racks & Pinions

- Easy to adjust the backlash
Normally, the backlash is adjusted by the mounting distance (height of pinion shaft), but for KHK Tapered Racks & Pinions, it can simply be adjusted by moving the pinion mounting position in the axial direction.
- Backlash within 0.05 mm
The backlash of the conventional stock racks & pinions (SRCP5-1000 & SSCP 5-30) is 0.09 to 0.25 mm, but KHK Tapered Racks & Pinions (STRCPF5-1000 & KTSCP5-30) are manufactured within 0.05 mm.
- Thrust load is not applied
As with ordinary racks & pinions, KHK Tapered Racks and Pinions can be used without worrying about the thrust load. Pinions are CP spur gears that are continuously shifted in the helix direction.

* For product details, please see Page 274.

Assembly and backlash adjustment method


- Assemble at the mounting distance of the theoretical value at the reference tooth position of the racks & pinions. For the mounting distance and backlash, see the dimension table of the tapered spur gear.
- The backlash can be adjusted by moving the tapered spur gear in the axial direction. Moving it by 1 mm will adjust the backlash by 0.05 mm.
- When the tapered spur gear is pushed to the large end of the rack, the backlash is reduced. Conversely, retracting it will increase the backlash.

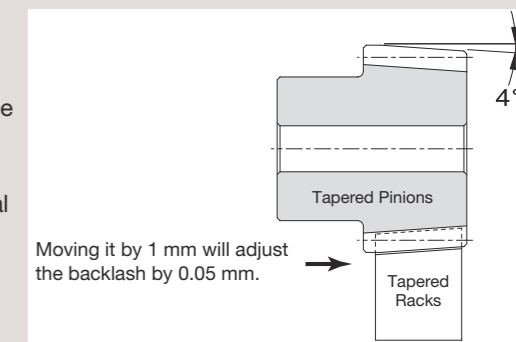


Application Examples

KHK stock CP racks & pinions are adopted in driving devices for all kinds of linear systems, including transport devices.

Rack Rail Assembly

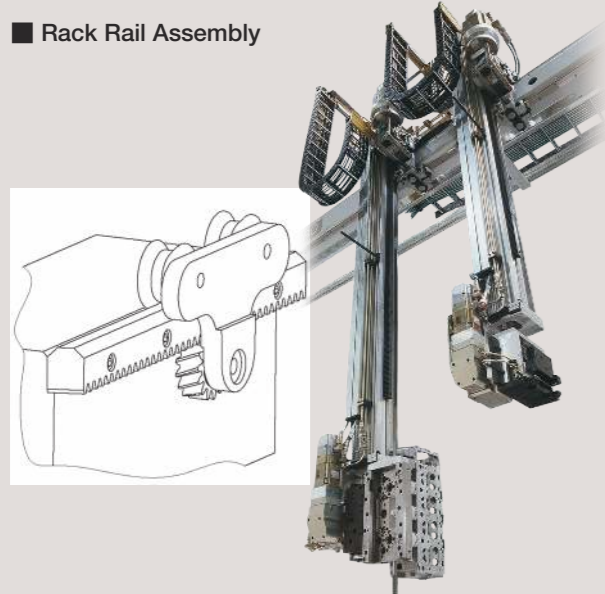

Rack Drive Linear Guide

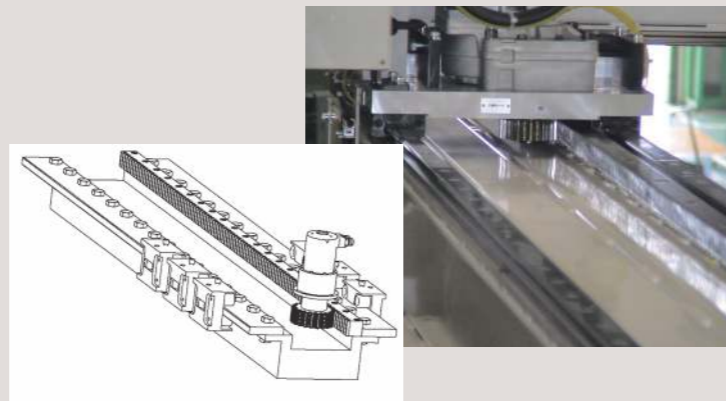


Cleaning machine manufactured by Kan Manufactory Co., Ltd.



SRCPF-H racks and SSCP spur gears used in cleaning device with automatic transport for automobile parts

Examples of using tapered spur gears

Changing the assembly direction of the tapered spur gear or assembling it with a general spur gear will allow it to be used at the axial angle shown below.

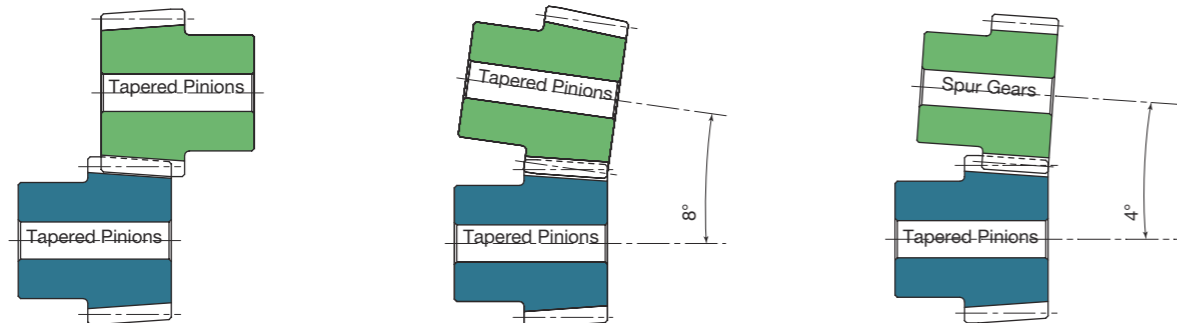

When the boss is set in the opposite direction, the axial angle is 0° (parallel shaft).

When the boss is set in the same direction, the axial angle is 8°.

When the taper spur gear and general spur gear are set, the axial angle is 4°.

Selection Hints

Please select the most suitable products by carefully considering the characteristics of items and contents of the product tables. It is also important to read all applicable notes shown below before the final selection.

1. Caution in Selecting the Mating Gears

- ① KHK stock CP racks are mated with CP spur gears having the same pitch. Since CP2.5 (m0.796), CP5 (m1.592) and CP10 (m3.183) are very close in size to m0.8, m1.5 and m3 respectively, selecting the proper mating gear should be verified to make sure that the items are correct. Otherwise, complications could arise.
- ② STRCPF and STRCPFD Tapered CP Racks are mated with KTSCP Tapered CP Spur Gears having the same pitch.

2. Caution in Selecting Gears Based on Gear Strength

The gear strength values shown in the product pages were computed by assuming the application environment in the table below. Therefore, they should be used as reference only. We recommend that each user computes their own values by applying the actual usage conditions. The table below contains the assumptions established for various products in order to compute gear strengths.

Calculation of Bending Strength of Gears

Item	Racks										Pinion									
	MRGCPF MRGCPFD	KRGCPF-H KRGCPFD-H KRCPF-H KRCPF	KRGCP KRGCPF KRCPF	SRGCP SRGCPF SRCPF-H	SRCPF-HL SRCPF	SRCP/SRCPF SRCPFD SRCPFK SROCP STRCPF STRCPFD	SURCPF SURCPFD	FRCP	MSCPG	KSCPG	SSCPGS	SSCPG	KTSCP	KSSCP	KSSCP-H	SSCP	SSCP-H	SUSCP		
Formula NOTE 1	Formula of spur and helical gears on bending strength (JGMA401-01)																			
No. of teeth of mating gears	30										Racks									
Rotational Speed of Pinion	100rpm																			
Design Life (Durability)	Over 10 ⁷ cycles																			
Impact from motor	Uniform load																			
Impact from load	Uniform load																			
Direction of load	Bidirectional load (calculated with allowable bending stress of 2/3)																			
Allowable bending stress at root σ_{Fim} (kgf/mm ²)	47	32	32	20	20	20	10.5	47	30	24.5	19	28.5	32	32	19	19	10.5			
Safety factor S_F	1.2																			

Calculation of Surface Durability (Except where it is common with bending strength)

Item	Racks																			Pinion									
	MRGCPF MRGCPFD	KRGCPF-H KRGCPFD-H KRCPF-H KRCPF	KRGCP KRGCPF KRCPF	SRGCP SRGCPF SRCPF-H	SRCPF-HL SRCPF	SRCP/SRCPF SRCPFD SRCPFK SROCP STRCPF STRCPFD	SURCPF SURCPFD	FRCP	MSCPG	KSCPG	SSCPGS	SSCPG	KTSCP	KSSCP	KSSCP-H	SSCP	SSCP-H	SUSCP											
Formula NOTE 1	Formula of spur and helical gears on surface durability (JGMA402-01)																												
Kinematic viscosity of lubricant	100cSt (50°C)																												
How to support pinions	Supported on one end.																												
Allowable Hertz stress σ_{Hlim} (kgf/mm ²)	166	112	79	90	80	52.5	41.3	-	166	112	99	90	74.5	79	112	49	90	41.3											
Safety factor S_H	1.15																												

[NOTE 1] The gear strength formula is based on JGMA (Japanese Gear Manufacturers Association) specifications. The units for the rotational speed (rpm) and the stress (kgf/mm²) are adjusted to the units needed in the formula.

3. Cautions on Selecting Racks By Precision

The precision standards of KHK stock racks are established by us. The table below indicates the tolerance ranges of our racks.

- ① Pitch Error of Racks (KHK R 001) → Page 219
- ② Precision of Rack Blanks → Page 220
- ③ Backlash of Rack Teeth → Page 220

When selecting KHK standard gears, glance over the Cautions on Product Characteristics and Cautions on Performing Secondary Operations on Page 270.

- ① Products not listed in this catalog or materials, modules, number of teeth and the like not listed in the dimensional tables can be manufactured as custom items. Please see Page 26 for more details about custom-made orders.
- ② The color and shape of the product images listed on the dimension table page of each product may differ from the actual product. Be sure to confirm the shape in the dimension table before selection.
- ③ The details (specifications, dimensions, etc.) listed in the catalog may be changed without prior notice. Changes are announced on the KHK website.

Website URL: <https://khkgears.net/new/>
 Overseas Sales Department: Phone: +81-48-254-1744 Fax: +81-48-254-1765 E-mail: info@khkgears.net

Product Precautions



CP Rack Common Notes

[Caution on Product Characteristics]

- (1) The allowable forces shown in the table are calculated values according to the assumed usage conditions. Please see Page 269 for more details.
- (2) The backlash values shown in the table are the theoretical values for the backlash in the circumferential direction of recommended pinions with the same pitch.
- (3) There is a decarburized layer on the surface, so 0.5mm or so will not be at the specified hardness.
- (4) After attaching the racks to the base, fasten with dowel pins. Clamping only with mounting screws could possibly cause the screws to be broken, due to a heavy load.

[Caution on Secondary Operations]

- (1) Please read "Cautions on Performing Secondary Operations" on Page 272 when performing modifications and/or secondary operations for safety concerns.
- (2) Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).

[J Series]

- (1) Cancellation is not possible for made-to-order products. For lead time details, see Page 38.
- (2) Black oxide is not re-applied to parts undergoing secondary operations.

CP Spur Gears Common Notes

[Caution on Product Characteristics]

- (1) The allowable torque shown in the table are calculated values according to the assumed usage conditions. Please see Page 269 for more details.
- (2) The backlash values shown in the table are the theoretical values for the backlash in the circumferential direction of recommended mating racks with the same pitch.
- (3) Keyways are made according to JIS B1301 standards, Js9 tolerance. Also note that keyway tooth position alignment is not performed.
- (4) For products having a tapped hole, a set screw is included.
- (5) For hole lengths 3.5x the bore or more, the hole center is out of H7 tolerance.

[Caution on Secondary Operations]

- (1) Please read "Cautions on Performing Secondary Operations" on Page 48 when performing modifications and/or secondary operations for safety concerns.
- (2) Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).
- (3) See Page 22 for more details on Hardened Plus (H Series and HJ Series).

[J Series]

- (1) Cancellation is not possible for made-to-order products. For lead time details, see Page 38.
- (2) Certain products which would otherwise have a very long tapped hole are counterbored. For details, please see the KHK website.
- (3) Black oxide is not re-applied to parts undergoing secondary operations.
- (4) For bores over ϕ 50, the bore tolerance is H8.

STRCPF(D) CP Tapered Racks

[Caution on Product Characteristics]

- (1) When connecting the racks for use, correctly adjust the joint pitch with identical products at hand or with an SRCP □ -100 rack product of the same pitch. See "Points of Caution in Assembling" on Page 272 for details.

[Caution on Secondary Operations]

- (1) Avoid hardening racks with bolt holes, due to mounting hole deformation.

SSCPGS CP Ground Spur Pinion Shafts

[Caution on Product Characteristics]

- (1) For the center distance of the profile shifted gear, please refer to "Center distance of stock spur gear meshing with profile shifted gear" on Pages 56~57.

MRGCPF(D) CP Hardened Ground Racks

[Caution on Secondary Operations]

- (1) In the illustration, the area surrounded with ---- line is masked during the carburization process (max. HRC40 or so) and can be modified.

KRCPF(D)-H CP Hardened Racks

[Caution on Product Characteristics]

- (1) The dimensions may vary widely due to hardening. Therefore, the total composite error is excluded from the rack accuracy table on Page 219.

SRCPF(D)-H CP Hardened Racks

[Caution on Product Characteristics]

- (1) The dimensions may vary widely due to hardening. Therefore, the total composite error is excluded from the rack accuracy table on Page 219.

SRCPF(D)-HL CP Laser Hardened

[Caution on Secondary Operations]

- (1) Due to the gear teeth being laser hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 1 mm).

SRCPFD CP Racks

[Caution on Product Characteristics]

- (1) Avoid hardening racks with bolt holes, due to mounting hole deformation.

SURCPF(D) CP Stainless Steel Racks

[Caution on Product Characteristics]

- (1) The stainless steel material is given solution treatment and passivation.

SROCP CP Round Racks

[Caution on Product Characteristics]

- (1) Because this is extruded material, the outer diameter may be out of H9 tolerance in parts.

[Caution on Secondary Operations]

- (1) Avoid hardening round racks, due to twisting and deformation occurring and the difficulty of straightening the rack after hardening.

FRCP CP Metal Flexible Racks

[Caution on Product Characteristics]

- (1) When using the metal flexible rack in an arc, the minimum bending radius (R) is 150 mm for both the external and internal teeth. This increases the pitch errors and tooth profile errors which prevent the teeth from meshing at the normal center distance, so be sure to make adjustments before use.
- (2) The tolerance of height (size C) is 0 to -0.15, and the tolerance of base width (size F) is 0 to -0.1.
- (3) It cannot be used where positioning accuracy is required.

Application Hints

In order to use KHK stock CP racks safely, carefully read the Application Hints before proceeding. If there are questions or you require clarifications, please contact our technical department or your nearest distributor.


E-mail: info@khkgears.net

1. Cautions on Handling

- ① KHK products are packaged one by one to prevent scratches and dents, but if you find issues such as rust, scratches, or dents when the product is removed from the box after purchase, please contact the supplier.
- ② Depending on the handling method, the product may become deformed or damaged. Long racks and round racks deform particularly easily, so please handle with care.

2. Caution on Performing Secondary Operations

- ① Secondary operations can be performed on all KHK stock CP racks except for the racks with their gear teeth induction hardened. To avoid problems of gear precision, do not reduce the face width.
- ② Height of pitch lines of racks are controlled by the bottom surface as the reference datum and over-pin measurements on tooth thickness. If you machine the bottom surfaces, the precision of the racks may be affected.
- ③ When connecting two racks, the machining of the mating end pitch (CP) requires careful consideration. The meshing will be poor if the pitch straddling the connection has a positive tolerance. We recommend a minus tolerance on pitch of at the connection. The below is an indication of pitch tolerance for each module.



Unit: mm


CP	Tolerance
CP	-0.05 -0.25
CP2.5	-0.1 -0.3
CP5	-0.1 -0.4
CP10	-0.1 -0.4
CP15	-0.1 -0.4
CP20	-0.1 -0.4

- ④ To use dowel pins to secure racks, attach the racks to the base and drill both simultaneously.
- ⑤ KHK stock CP racks made of S45C and SCM440 (except for ground racks) can be induction hardened. However, the precision of pitch is decreased.
- ⑥ To be able to handle parts safely, all burrs and sharp corners should be removed after the secondary operations are done.
- ⑦ If you are going to modify the gear by gripping the teeth, please exercise caution not to crush the teeth by applying too much pressure. Any scarring will cause noise during operation.
- ⑧ There is a decarburized layer (about 0.5 mm) on the surface of the extruded products. The hardness of the decarburized layer does not increase even if it is quenched.

3. Points of Caution during Assembly


- ① The recommended assembly distance tolerance of KHK stock CP racks is H7 for ground racks and H8 for cut racks. The backlash values are given in the table on Page 220. Make sure that the mounting distance stays constant for the length of the rack.

Mounting distance a = Height of pitch line of rack + Pitch radius of pinion




[NOTE] Pinions are assumed to be standard stock spur gears ($x=0$).

- ② The recommended flatness and squareness of the mounting surface of KHK stock CP racks is 0.01 mm for ground racks and 0.05 mm for cut racks.

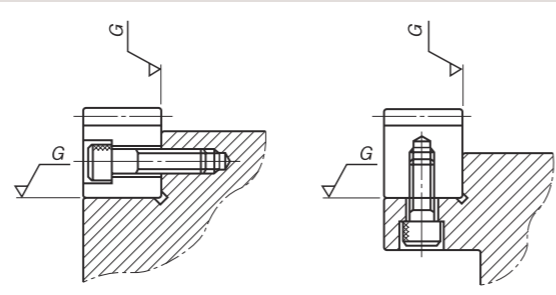

- ③ If the racks are not secured properly to the base, they could shift during operation and cause unexpected problems. It is very important to insure firm mounting by the use of dowel pins or similar devices.
- ④ Machined end type racks such as SRCPF and SRCPFD series have smaller pitch tolerance at the end face. If you try to connect the racks without any space, the pitch at the connection will be too small and will cause problems. Please follow the following diagrams for assembly.
- ⑤ With SRCPFD etc., if using more than 10 racks connected together to form a rack with mounting holes machined along a length of 1 meter, the pitch precision and machining precision may cause the rack and base mounting holes to deviate, leading to set screw interference with the counterbored hole and preventing mounting. When using a rack for long lengths such as 10 meters or 20 meters, have the mounting holes additionally machined into long holes.


As an example of Rack Joining, we recommend the following method.

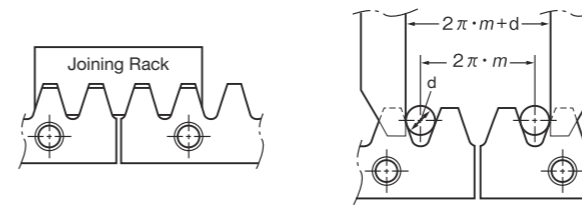

[NOTE] Joining gauge racks for helical racks must have the opposite hand from the racks. Please use 100 mm short racks as a joining gauge rack, or alternatively the rack of the same specifications on hand.


How to mount racks on a mounting base (For SRFD2-1000)

1. Pitch alignment
Place SRFD2-1000 on the mounting base, align SR2-100 and temporarily tighten the bolt.

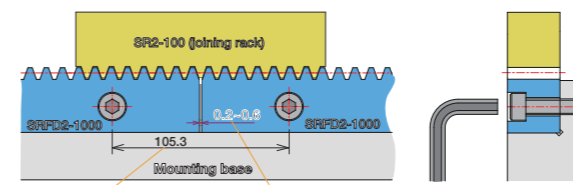


Dimensions Table F Value x 2 SRFD2-1000 is designed to have a gap of 0.2 to 0.6 mm.



2. Securing to the mounting base
Tap with a plastic hammer, bring it into close contact with the mounting base, and further tighten the bolt. (When using a metal hammer, be careful not to damage the gear teeth by using a stiffening plate, etc.)

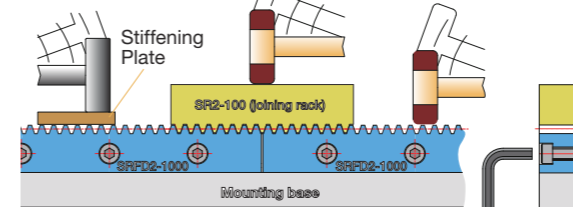

3. Run the pinion and check the following
① Is there abnormal noise or vibration?
② Is the backlash appropriate?
③ Is there poor edge contact of gear teeth?



4. Secure fixation to the mounting base
We recommend that you tap the knock pin so that the rack does not shift due to vibration, etc.
① Simultaneously machine reamer holes

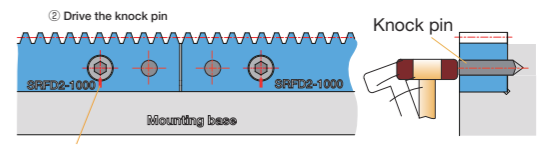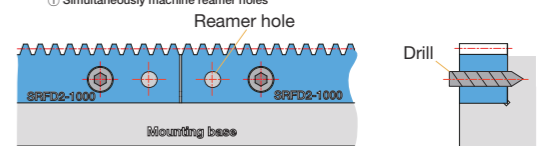

Tighten again after tapping the knock pin. It can be marked with a pen to find looseness.

4. Cautions on Starting

- ① Check the following items before starting.
 - Are the gears installed securely?
 - Is there uneven tooth contact?
 - Is there adequate backlash?
 - Has proper lubrication been supplied?
- ② If gears are exposed, be sure to attach a safety cover to ensure safety. Also, be careful not to touch rotating gears.
- ③ If there is any abnormality such as noise or vibration during startup, stop the operation immediately and check the assembly condition such as tooth contact, eccentricity and looseness.

KHK considers safety a priority in the use of our products.

When handling, adding secondary operations, assembling, and operating KHK products, please be aware of the following issues in order to prevent accidents.

Warning: Precautions for preventing physical and property damage

1. When using KHK products, follow relevant safety regulations (Occupational Safety and Health Regulations, etc.).
2. Pay attention to the following items when installing, removing, or performing maintenance and inspection of the product.
 - ① Turn off the power switch.
 - ② Do not reach or crawl under the product.
 - ③ Wear appropriate clothing and protective equipment for the work.

Caution: Cautions in Preventing Accidents


1. Before using a KHK product, read the precautions in the catalog carefully in order to use it correctly.
2. Avoid use in environments that may adversely affect the product.
3. Our products are manufactured under a superior quality control system based on the ISO9000 quality management system; if you notice any malfunctions upon purchasing a product, please contact the supplier.



KTSCP Circular pitch 5, 10
CP Tapered Pinions




Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refining only
Tooth hardness	225 to 352HB
Surface treatment	Black oxide coating



Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia. (major)	Outside dia. (minor)	Total tooth width	Hub width	Total length
				A _{H7}	B	C	D	D'	E	F	G
KTSCP5-20 KTSCP5-25 KTSCP5-30 KTSCP5-40	CP5 (1.5915)	20 25 30 40	ST	8	25	31.83	36.06	33.97	18	15	33
				10	32	39.79	44.02	41.92			
				10	38	47.75	51.98	49.88			
				12	45	63.66	67.89	65.8			
KTSCP10-20 KTSCP10-25 KTSCP10-30 KTSCP10-40	CP10 (3.1831)	20 25 30 40	ST	15	50	63.66	72.13	67.93	36	20	56
				20	60	79.58	88.04	83.85			
				20	75	95.49	103.96	99.76			
				20	80	127.32	135.79	131.59			

Moving it by 1 mm will adjust the backlash by 0.05 mm.

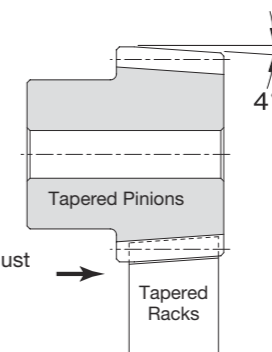


Reference face width	Adjustable width	Position of reference tooth	Distance traveled in one turn (mm)	Allowable torque (N-m)		Allowable torque (kgf-m)		Mounting distance (mm)	Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability				
H	I	J	100	41.2	8.13	4.20	0.83	33.30	0~0.11	0.16	KTSCP5-20 KTSCP5-25 KTSCP5-30 KTSCP5-40
			125	55.6	14.0	5.67	1.43	37.28			
			150	70.3	21.9	7.16	2.23	41.26			
			200	100	43.3	10.2	4.41	49.21			
30	6	21	200	329	71.2	33.6	7.26	62.10	0~0.12	1.13	KTSCP10-20 KTSCP10-25 KTSCP10-30 KTSCP10-40
			250	445	122	45.3	12.4	70.06			
			300	562	189	57.3	19.2	78.02			
			400	801	371	81.7	37.8	93.93			



STRCPF/STRCPFD Circular pitch 5, 10
CP Tapered Racks




Specifications	
Precision grade	KHK R 001 grade 4
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

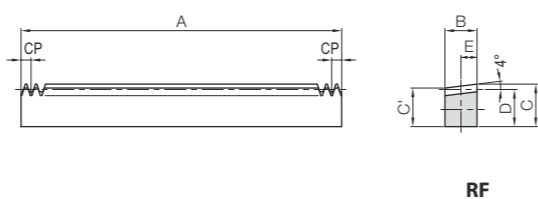

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length	Face width	Height (major)	Height (minor)	Height to pitch line	Position of reference tooth
				A	B	C	C'	D	E
STRCPF5-1000	CP5 (1.5915)	200	RF	1000	15	19.5	18.45	17.38	7.5
STRCPF10-1000	CP10 (3.1831)	100	RF	1000	30	34.5	32.4	30.27	15

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length	Face width	Height (major)	Height (minor)	Height to pitch line	Position of reference tooth	Mounting hole dimensions				
				A	B	C	C'	D	E	F	G	H	No. of holes	Screw size
STRCPFD5-1000	CP5 (1.5915)	200	RD	1000	15	19.5	18.45	17.38	7.5	8	50	180	6	M5
STRCPFD10-1000	CP10 (3.1831)	100	RD	1000	30	34.5	32.4	30.27	15	14	50	180	6	M10



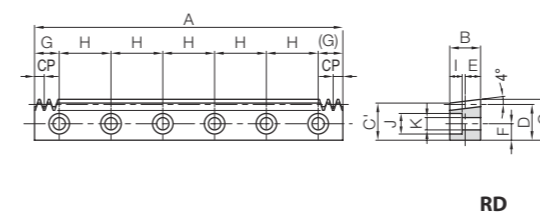


Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
Bending strength	Surface durability	Bending strength	Surface durability			
2290	468	233	47.7	0~0.11	2.05	STRCPF5-1000
9150	1870	933	191	0~0.12	7.13	STRCPF10-1000

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
I	J	K	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	2290	468	233	47.7	0~0.11	2.01	STRCPFD5-1000
10.8	17.5	11	9150	1870	933	191	0~0.12	6.92	STRCPFD10-1000



Specifications	
Precision grade	JIS grade N5 (JIS B1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM415
Heat treatment	Carburized
Tooth hardness	55 to 60HRC

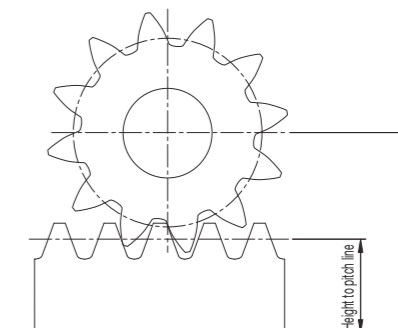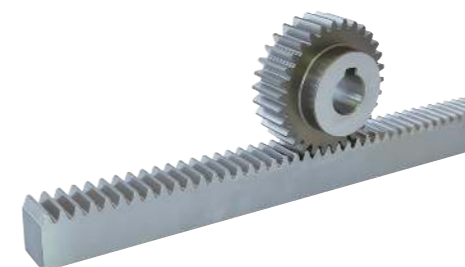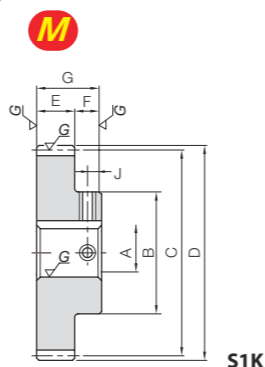

Mounting distance of a profile shifted gear and the meshing rack

Catalog Number	Pitch mm (Module)	No. of teeth	Profile shift coefficient	Mounting distance	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length
						A _{H7}	B					
MSCPG5-20A (Made to Order) MSCPG5-20B (Made to Order)	CP5 (1.5915)	20	+0.425	35	S1K	12	28	31.83	36.37	15	15	30
15												
MSCPG5-25A (Made to Order) MSCPG5-25B (Made to Order)		25	+0.438	39		12	35	39.79	44.37			
15												
MSCPG5-30A (Made to Order) MSCPG5-30B (Made to Order)	30	+0.451	43	15	40	47.75	52.37					
20												
MSCPG5-40A (Made to Order) MSCPG5-40B (Made to Order) MSCPG5-40C (Made to Order)	40	+0.478	51	15	45	63.66	68.37					
20												
MSCPG10-20A (Made to Order) MSCPG10-20B (Made to Order)	CP10 (3.1831)	20	+0.111	64	S1K	20	50	63.66	70.73	30	20	50
25												
MSCPG10-25A (Made to Order) MSCPG10-25B (Made to Order)		25	+0.124	72		25	60	79.58	86.73			
30												
MSCPG10-30A (Made to Order) MSCPG10-30B (Made to Order)	30	+0.137	80	30	70	95.49	102.73					
40												
MSCPG10-40A (Made to Order) MSCPG10-40B (Made to Order)	40	+0.164	96	30	70	127.32	134.73					
40												

[Precautions for Made to Order Products] Prices and lead times for Made to Order products require separate estimates. Contact your dealer.


Keyway Width × Depth	Socket head screw Size	J	Distance traveled in one turn (mm)	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
4x 1.8 5x 2.3	M4	7.5	100	70.0	46.7	7.13	4.76	0.04~0.14	0.14 0.13	MSCPG5-20A (Made to Order) MSCPG5-20B (Made to Order)
4x 1.8 5x 2.3	M4			125	91.8	78.2	9.37		7.97	0.24 0.22
5x 2.3 6x 2.8	M4 M5		150	114	119	11.6	12.2		0.32 0.29	MSCPG5-30A (Made to Order) MSCPG5-30B (Made to Order)
5x 2.3 6x 2.8 8x 3.3	M4 M5 M6			200	159	229	16.2		23.4	0.53 0.50 0.45
6x 2.8 8x 3.3	M5 M6	10	200		514	375	52.4	38.2	0.94 0.87	MSCPG10-20A (Made to Order) MSCPG10-20B (Made to Order)
8x 3.3	M6			250	689	628	70.3	64.1	1.43 1.34	MSCPG10-25A (Made to Order) MSCPG10-25B (Made to Order)
8x 3.3 12x 3.3	M6 M8		300		868	960	88.5	97.9	2.03 1.80	MSCPG10-30A (Made to Order) MSCPG10-30B (Made to Order)
8x 3.3 12x 3.3	M6 M8			400	1230	1850	126	188	3.36 3.13	MSCPG10-40A (Made to Order) MSCPG10-40B (Made to Order)

MRGCPF/MRGCPFD Circular pitch 5, 10
CP Hardened Ground Racks




Specifications	
Precision grade	KHK R 001 Grade 1*
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM415
Heat treatment	Tooth area carburized
Tooth hardness	55 to 60HRC

* The precision grade of J Series products is equivalent to the value shown in the table.

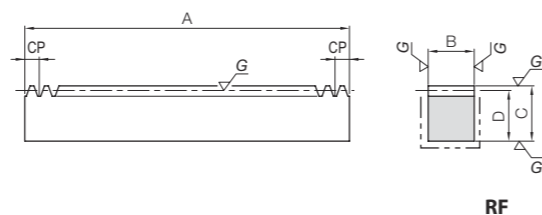

J Series

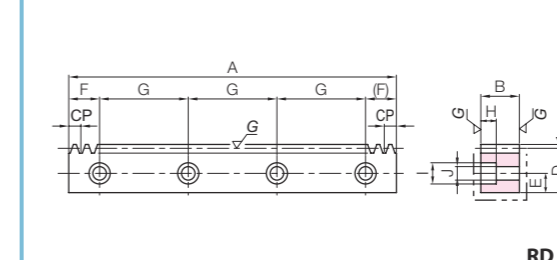

Surface durability is 4 times higher than SRGCP Hardened Ground Racks, 2 times higher than KRGCP-H Hardened Ground Racks.

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length				Allowable force (N)				Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
MRGCPF5-500	CP5 (1.5915)	100	RF	500	15	20	18.41	5380	5000	548	509	0.04~0.14	1.08
MRGCPF10-500	CP10 (3.1831)	50	RF	500	30	35	31.82	21500	20100	2190	2050	0.05~0.16	3.75


Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length				Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● MRGCPFD5-500J	CP5 (1.5915)	100	RD	500	15	20	18.41	8	25	150	4	M5
● MRGCPFD10-500J	CP10 (3.1831)	50	RD	500	30	35	31.82	14	25	150	4	M10

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	5380	5000	548	509	0.04~0.14	1.06	● MRGCPFD5-500J
10.8	17.5	11	21500	20100	2190	2050	0.05~0.16	3.61	● MRGCPFD10-500J




Specifications	
Precision grade	JIS grade N6 (JIS B 1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth
Shape	S1

* The precision grade of J Series products is equivalent to the value shown in the table.



S1

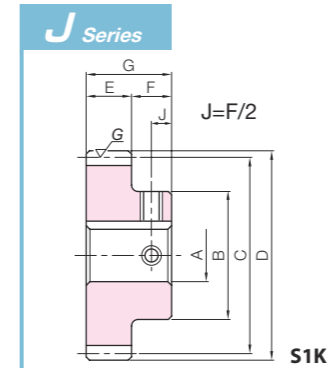

S1K




To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Pitch mm (Module)	No. of teeth	Profile shift coefficient	Mounting distance	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Distance traveled in one turn (mm)	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	
					A _{H7}	B							Bending strength	Surface durability	Bending strength	Surface durability			
KSCPG5-20	CP5 (1.5915)	20	+0.425	35	10	25	31.83	36.37	15	15	30	100	44.7	21.3	4.55	2.17	0.04~0.14	0.14	
KSCPG5-25		25	+0.438	39	10	35	39.79	44.37					125	58.6	35.6	5.98			3.63
KSCPG5-30		30	+0.451	43	15	40	47.75	52.37					150	72.8	54.3	7.42			5.54
KSCPG5-40		40	+0.478	51	15	55	63.66	68.37					200	101	104	10.3			10.6
KSCPG10-20	CP10 (3.1831)	20	+0.111	64	15	50	63.66	70.73	30	20	50	200	328	171	33.4	17.4	0.05~0.16	1.01	
KSCPG10-25		25	+0.124	72	20	70	79.58	86.73					250	440	286	44.9			29.2
KSCPG10-30		30	+0.137	80	20	85	95.49	102.73					300	554	437	56.5			44.5
KSCPG10-40		40	+0.164	96	25	110	127.32	134.73					400	786	841	80.1			85.8


Bore H7	* The product shapes of J Series items are identified by background color.																					
	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50				
Keyway JS9	4x1.8				5x2.3				6x2.8				8x3.3				10x3.3		12x3.3		14x3.8	
Screw size	M4				M5				M6				M8				M10					
Catalog Number																						
KSCPG5-20 J BORE	S1K	S1K																				
KSCPG5-25 J BORE	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K														
KSCPG5-30 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K												
KSCPG5-40 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
KSCPG10-20 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
KSCPG10-25 J BORE									S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
KSCPG10-30 J BORE									S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
KSCPG10-40 J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				

KRGCPF-H/KRGCPFD-H Circular pitch 5, 10
CP Hardened Ground Racks

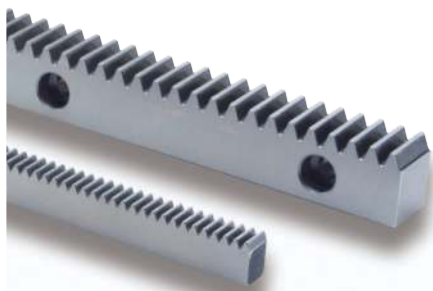


Specifications	
Precision grade	KHK R 001 Grade 1 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC

* The precision grade of J Series products is equivalent to the value shown in the table.

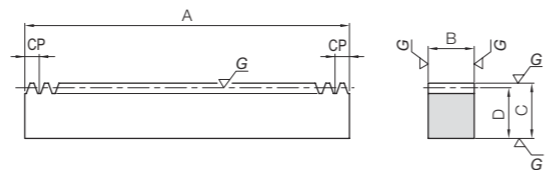

RF

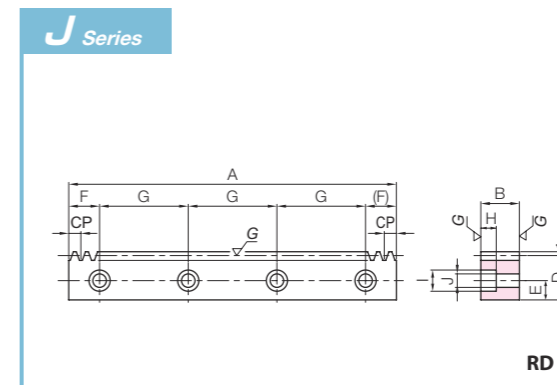

RD


CP Ground Racks

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
KRGCPF5-500H	CP5 (1.5915)	100	RF	500	15	20	18.41	3660	2270	373	232	0.04~0.14	1.08
KRGCPF5-1000H		200											
KRGCPF10-500H	CP10 (3.1831)	50	RF	500	30	35	31.82	14600	9150	1490	933	0.05~0.16	3.75
KRGCPF10-1000H		100											




Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● KRGCPFD5-500HJ	CP5 (1.5915)	100	RD	500	15	20	18.41	8	25	150	4	M5
● KRGCPFD5-1000HJ		200		50					180	6		
● KRGCPFD10-500HJ	CP10 (3.1831)	50	RD	500	30	35	31.82	14	25	150	4	M10
● KRGCPFD10-1000HJ		100		50					180	6		

* CP30 and ground racks with total lengths up to (A) 1500mm and heights up to (C) 120mm are also available by request as custom-made products.

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	3660	2270	373	232	0.04~0.14	1.06 2.13	● KRGCPFD5-500HJ ● KRGCPFD5-1000HJ
10.8	17.5	11	14600	9150	1490	933	0.05~0.16	3.61 7.28	● KRGCPFD10-500HJ ● KRGCPFD10-1000HJ

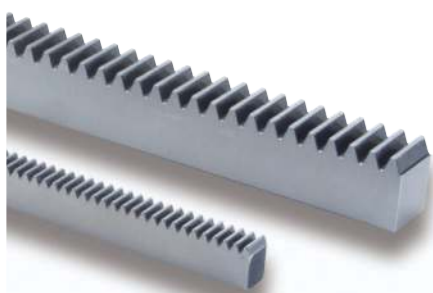

Specifications	
Precision grade	KHK R 001 grade 1
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refining only
Tooth hardness	225 to 352HB

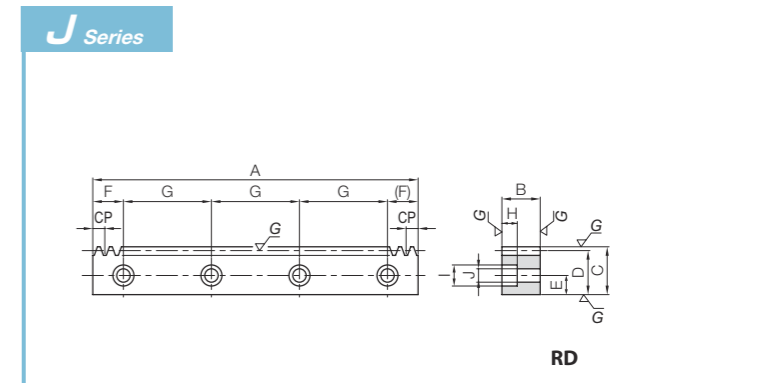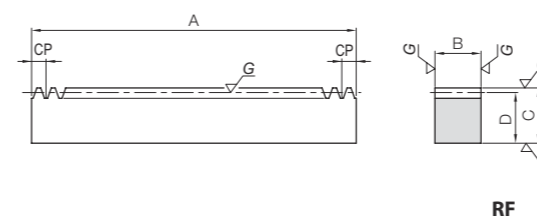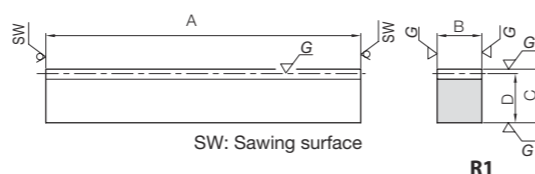

Catalog Number	Pitch mm (Module)	Effective number of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
KRGCP5-100	CP5 (1.5915)	18	R1	98	15	20	18.41	3660	1560	373	159
KRGCP10-100	CP10 (3.1831)	8		98	30	35	31.82	14600	6230	1490	635

Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.14	0.21	KRGCP5-100
0.05~0.16	0.73	KRGCP10-100

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
KRGCPF5-500 KRGCPF5-1000	CP5 (1.5915)	100 200	RF	500 1000	15	20	18.41	3660	1560	373	159
KRGCPF10-500 KRGCPF10-1000	CP10 (3.1831)	50 100		500 1000	30	35	31.82	14600	6230	1490	635


Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.14	1.08 2.17	KRGCPF5-500 KRGCPF5-1000
0.05~0.16	3.75 7.49	KRGCPF10-500 KRGCPF10-1000

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
KRGCPFD5-500J KRGCPFD5-1000J	CP5 (1.5915)	100 200	RD	500 1000	15	20	18.41	8	25.00 50.00	150 180	4 6	M5
KRGCPFD10-500J KRGCPFD10-1000J	CP10 (3.1831)	50 100		500 1000	30	35	31.82	14	25.00 50.00	150 180	4 6	M10

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	3660	1560	373	159	0.04~0.14	1.06 2.13	KRGCPFD5-500J KRGCPFD5-1000J
10.8	17.5	11	14600	6230	1490	635	0.05~0.16	3.61 7.28	KRGCPFD10-500J KRGCPFD10-1000J

* CP30 and ground racks with total lengths up to (A) 1500mm and heights up to (C) 120mm are also available by request as custom-made products.

Recommended Mating Pinions

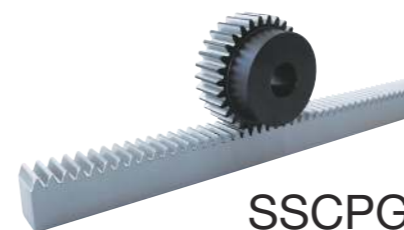

SSCPG


Please see Page 282 for more details.

DLS Schmiersysteme
Rack & Pinion Lubrication System
 PUSCP lubricated spur gear

Page 474



Specifications	
Precision grade	JIS grade N7 (JIS B1702-1:1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part

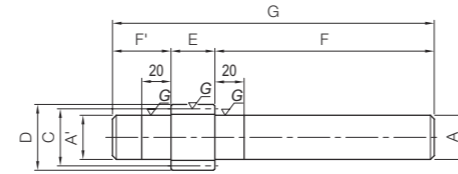
S7

Catalog Number	Pitch mm (Module)	No. of teeth	Profile shift coefficient	Shape	Shaft diameter (L)		Pitch dia.	Outside dia.	Face width	Shaft diameter (R)		Shaft length (R)
					A'	F'				A	F	
SSCPG55-15	CP5 (1.5915)	15	0	S7	19.2		23.87	27.06	15	19.2		100
SSCPG55-20		20	0		27.2	25	31.83	35.01		27.2		
SSCPG55-25		25	0		30.2		39.79	42.97		30.2		
SSCPG10-10	CP10 (3.1831)	10	+0.5	S7	25.2		31.83	41.38	30	25.2		150
SSCPG10-15		15	0		35.2	40	47.75	54.11		35.2		
SSCPG10-20		20	0		40.2		63.66	70.03		40.2		

Recommended mating rack


SRGCP

Please see Page 284 for more details.

Total Length G	Distance traveled in one turn (mm)	Allowable torque (N-m)		Allowable torque (kgf-m)		Backlash (mm)	Weight (kg)	Catalog Number
		Bending strength	Surface durability	Bending strength	Surface durability			
140	75	21.2	8.49	2.16	0.87	0.04~0.19	0.34	SSCPG55-15 SSCPG55-20 SSCPG55-25
	100	32.0	16.6	3.26	1.70			
	125	43.2	27.8	4.40	2.83			
220	100	121	25.9	12.4	2.64	0.05~0.21	0.97	SSCPG10-10 SSCPG10-15 SSCPG10-20
	150	169	67.9	17.3	6.93			
	200	256	133	26.1	13.6			



Specifications	
Precision grade	JIS grade N7 (JIS B 1702-1:1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

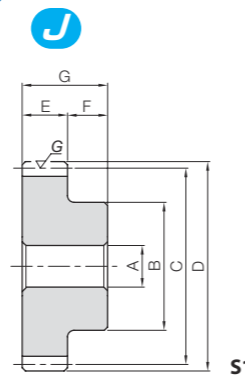
S1



* The precision grade of J Series products is equivalent to the value shown in the table.

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Bore		Pitch dia.		Outside dia.		Face width	Hub width	Total length	Distance traveled in one turn (mm)	Allowable torque (N-m)		Allowable torque (kgf-m)		Backlash (mm)	Weight (kg)				
				AH7	B	C	D	E	F					G	Bending strength	Surface durability	Bending strength			Surface durability			
SSCPG5-20	CP5 (1.5915)	20	S1	8	25	31.83	35.01	15	15	30	100	100	24.8	13.7	2.53	1.40	0.04~0.19	0.14					
SSCPG5-25		25		10	32	39.79	42.97												125	33.5	23.0	3.41	2.34
SSCPG5-30		30		10	38	47.75	50.93												150	42.3	35.0	4.32	3.57
SSCPG5-40		40		12	50	63.66	66.85												200	60.4	66.9	6.16	6.82
SSCPG10-20	CP10 (3.1831)	20	S1	15	50	63.66	70.03	30	20	50	200	198	110	20.2	11.2	0.99	0.05~0.21	1.49					
SSCPG10-25		25		20	60	79.58	85.94												250	268	184	27.3	18.7
SSCPG10-30		30		20	75	95.49	101.86												300	339	280	34.5	28.5
SSCPG10-40		40		25	80	127.32	133.69												400	483	535	49.3	54.6
SSCPG15-20	CP15 (4.7746)	20	S1	25	75	95.49	105.04	50	27	77	300	744	399	75.9	40.7	3.45	0.05~0.22	5.76					
SSCPG15-25		25		25	100	119.37	128.92												375	1005	667	102	68.0
SSCPG15-30		30		25	110	143.24	152.79												450	1270	1020	130	104
SSCPG20-20	CP20 (6.3662)	20	S1	25	100	127.32	140.06	60	30	90	400	1590	880	162	89.7	7.50	0.05~0.22	12.0					
SSCPG20-25		25		30	130	159.15	171.89												500	2140	1470	219	150
SSCPG20-30		30		30	150	190.99	203.72												600	2710	2240	276	228


Recommended mating rack

SRGCP

Please see Page 284 for more details.

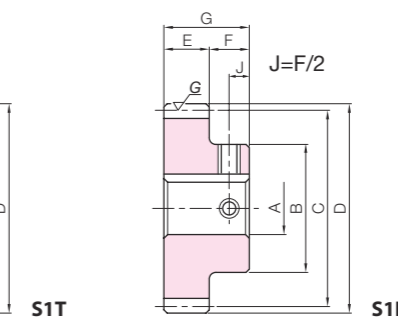
J Series

To order J Series products, please specify: Catalog No. + J + BORE.

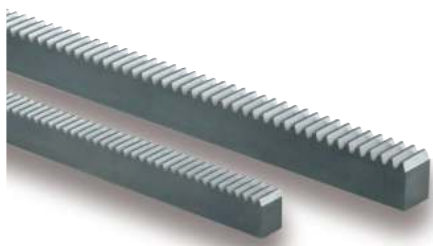Bore H7	* The product shapes of J Series items are identified by background color.																									
	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	55	60	65	70	75	80	
Keyway JS9	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	55	60	65	70	75	80	
Screw size	—	4×1.8	—	5×2.3	—	—	—	6×2.8	—	—	—	—	—	—	—	—	8×3.3	—	—	—	—	—	—	—	—	
Catalog Number	M5	M4	M5	M6	M8	M10	M12	M16																		
SSCPG5-20 J BORE	S1T	S1K	S1K																							
SSCPG5-25 J BORE		S1K	S1K	S1K	S1K	S1K	S1K																			
SSCPG5-30 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K															
SSCPG5-40 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K													
SSCPG10-20 J BORE																										
SSCPG10-25 J BORE																	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSCPG10-30 J BORE																	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSCPG10-40 J BORE																	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSCPG15-20 J BORE																	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSCPG15-25 J BORE																	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSCPG15-30 J BORE																	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSCPG20-20 J BORE																	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSCPG20-25 J BORE																	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SSCPG20-30 J BORE																	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	



Specifications	
Precision grade	KHK R 001 Grade 3 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth


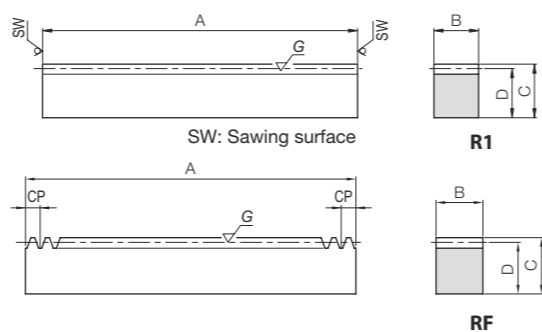
* The precision grade of J Series products is equivalent to the value shown in the table.



Catalog Number	Pitch mm (Module)	Effective number of teeth	Shape	Total Length		Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B				C	D	Bending strength	Surface durability
SRGCP5-100	CP5 (1.5915)	18	R1	98	15	20	18.41	2290	1460	233	149	
SRGCP10-100	CP10 (3.1831)	8		98	30	35	31.82	9150	5860	933	597	
SRGCP15-100	CP15 (4.7746)	5		103	50	50	45.23	22900	14200	2330	1450	
SRGCP20-100	CP20 (6.3662)	3		98	60	60	53.63	36600	23400	3730	2390	

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length		Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B				C	D	Bending strength	Surface durability
SRGCPF5-500	CP5 (1.5915)	100	RF	500	15	20	18.41	2290	1460	233	149	
SRGCPF5-1000		200		1000	30	35	31.82	9150	5860	933	597	
SRGCPF10-500	CP10 (3.1831)	50		500	50	50	45.23	22900	14200	2330	1450	
SRGCPF10-1000		100		1000	60	60	53.63	36600	23400	3730	2390	

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
								A	B	C	D	E
● SRGCPFD5-500J	CP5 (1.5915)	100	RD	500	15	20	18.41	8	25	150	4	M5
● SRGCPFD5-1000J		200		1000	30	35	31.82	14	25	150	4	M10
● SRGCPFD10-500J	CP10 (3.1831)	50		500	50	50	45.23	20	27.5	220	3	M14
● SRGCPFD10-1000J		100		1000	60	60	53.63	23	30	220	3	M16

J Series

RD


Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.19	0.21	SRGCP5-100
0.05~0.21	0.73	SRGCP10-100
0.05~0.22	1.83	SRGCP15-100
0.05~0.22	2.48	SRGCP20-100

Backlash (mm)	Weight (kg)	Catalog Number
0.04~0.19	1.08	SRGCPF5-500
	2.17	SRGCPF5-1000
0.05~0.21	3.75	SRGCPF10-500
	7.49	SRGCPF10-1000
0.05~0.22	8.79	SRGCPF15-500
	17.8	SRGCPF15-1000
0.05~0.22	12.6	SRGCPF20-500
	25.3	SRGCPF20-1000

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	2290	1460	233	149	0.04~0.19	1.06	● SRGCPFD5-500J
								2.13	● SRGCPFD5-1000J
10.8	17.5	11	9150	5860	933	597	0.05~0.21	3.61	● SRGCPFD10-500J
								7.29	● SRGCPFD10-1000J
15.2	23	16	22900	14200	2330	1450	0.05~0.22	8.47	● SRGCPFD15-500J
								17.3	● SRGCPFD15-1000J
17.5	26	18	36600	23400	3730	2390	0.05~0.22	12.2	● SRGCPFD20-500J
								24.5	● SRGCPFD20-1000J

* CP30 and ground racks with total lengths up to (A) 1500mm and heights up to (C) 120mm are also available by request as custom-made products.

Recommended Mating Pinions

SSCPGS

Please see Page 282 for more details.


SSCPG


Please see Page 282 for more details.

DLS Schmiersysteme
Rack & Pinion Lubrication System
 PUSCP lubricated spur gear

Page 474




Specifications	
Precision grade	KHK R 001 grade 5
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating

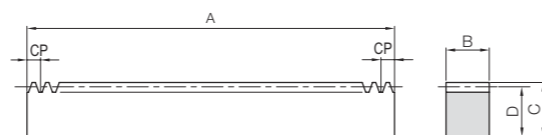

RF

J Series

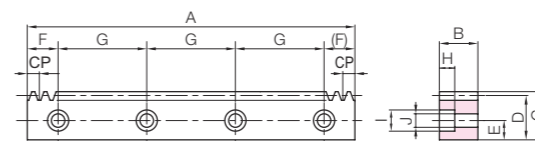

RD



Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
KRCPF5-1000H	CP5 (1.5915)	200	RF	1000	15	20	18.41	3330	1850	339	189
KRCPF10-1000H	CP10 (3.1831)	100									

Backlash (mm)	Weight (kg)	Catalog Number
0.05~0.31	2.17	KRCPF5-1000H
0.10~0.41	7.49	KRCPF10-1000H

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● KRCPFD5-1000HJ	CP5 (1.5915)	200	RD	1000	15	20	18.41	8	50	180	6	M5
● KRCPFD10-1000HJ	CP10 (3.1831)	100						14				

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	3330	1850	339	189	0.05~0.31	2.13	● KRCPFD5-1000HJ
10.8	17.5	11	13300	7710	1360	786	0.10~0.41	7.29	● KRCPFD10-1000HJ

* CP30 and ground racks with total lengths up to (A) 1500mm and heights up to (C) 120mm are also available by request as custom-made products.

Recommended Mating Pinions



KSSCP-H


Please see Page 288 for more details.

Spur Gears
Helical Gears
Internal Gears
Racks
CP Racks & Pinions
Miter Gears
Bevel Gears
Screw Gears
Worm Gears
Gearboxes
Other Products

Spur Gears
Helical Gears
Internal Gears
Racks
CP Racks & Pinions
Miter Gears
Bevel Gears
Screw Gears
Worm Gears
Gearboxes
Other Products




Specifications	
Precision grade	JIS grade N8 (JIS B 1702-1: 1998)
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined
Tooth hardness	225 to 352HB
Surface treatment	Black oxide coating
Shape	S1

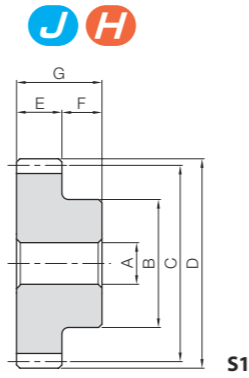

* The precision grade of J Series products is equivalent to the value shown in the table.

To order Hardened Plus, please specify Catalog No. + H. Example: KSSCP5-20H

Catalog Number	Pitch mm (Module)	No. of teeth	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Distance traveled in one turn (mm)	Allowable torque						Backlash (mm)	Weight (kg)	
											Bending strength		Surface durability		Surface durability H				
											N·m	kgf·m	N·m	kgf·m	N·m	kgf·m			
KSSCP5-20	CP5 (1.5915)	20	8	25	31.83	35.01	15	15	30	100	41.8	4.27	12.7	1.30	17.0	1.73	0.09~0.27	0.14	
KSSCP5-25		25	10	32	39.79	42.97					56.5	5.76	20.8	2.12	28.8	2.93			0.22
KSSCP5-30		30	10	38	47.75	50.93					71.4	7.28	30.5	3.11	44.3	4.52			0.33
KSSCP5-40		40	12	50	63.66	66.85					102	10.4	56.1	5.72	86.2	8.79			0.58
KSSCP10-20	CP10 (3.1831)	20	15	50	63.66	70.03	30	20	50	200	335	34.1	110	11.2	141	14.4	0.14~0.37	0.99	
KSSCP10-25		25	20	60	79.58	85.94					452	46.1	180	18.3	239	24.4			1.49
KSSCP10-30		30	20	75	95.49	101.86					571	58.2	265	27.0	368	37.5			2.26
KSSCP10-40		40	20	80	127.32	133.69					814	83.0	487	49.7	718	73.2			3.66

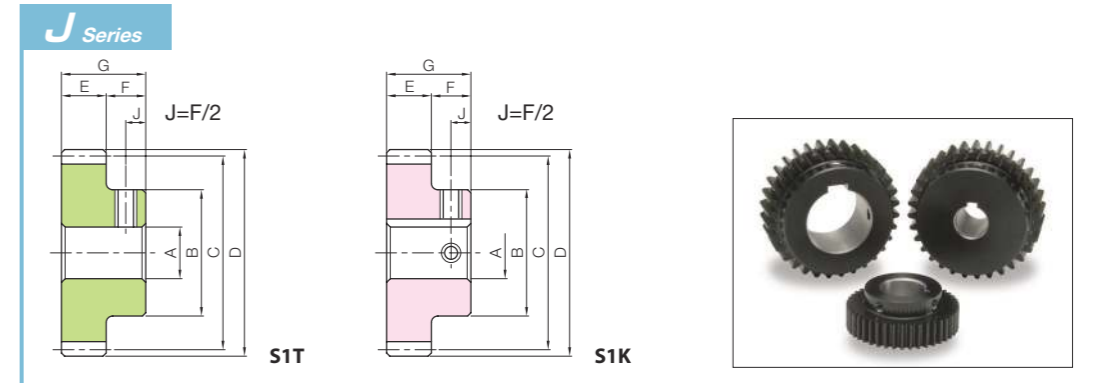

To order J Series products, please specify: Catalog No. + J + BORE. Example: KSSCP5-20J10

Bore H7	* The product shapes of J Series items are identified by background color.																			
	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	
Keyway JS9	-		4x1.8			5x2.3			6x2.8			8x3.3			10x3.3		12x3.3		14x3.8	
Screw size	-			M5			M4			M5			M6			M8		M10		
Catalog Number	M5	M4			M5			M6			M8		M10							
KSSCP5-20 J BORE	S1T	S1K	S1K																	
KSSCP5-25 J BORE		S1K	S1K	S1K	S1K	S1K	S1K													
KSSCP5-30 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
KSSCP5-40 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
KSSCP10-20 J BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
KSSCP10-25 J BORE											S1K	S1K	S1K	S1K	S1K	S1K				
KSSCP10-30 J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K		
KSSCP10-40 J BORE											S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	


To order J Series Hardened Plus products, please specify: Catalog No. + H + J + BORE. Example: KSSCP5-20HJ10

** is a product with the original bore diameter, so Hardened Plus is not available. See Page 22 for more details on Hardened Plus.

CP KRCPF/KRCPFD Circular pitch 5, 10
CP Thermal Refined Racks




Specifications	
Precision grade	KHK R 001 Grade 4 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	SCM440
Heat treatment	Thermal refining only
Tooth hardness	225 to 352HB
Surface treatment	Black oxide coating

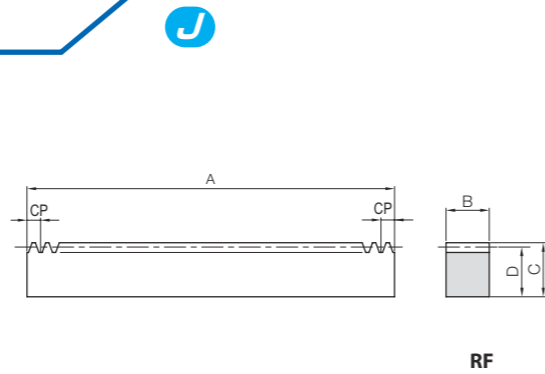

* The precision grade of J Series products is equivalent to the value shown in the table.

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length				Allowable force (N)				Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
KRCPF5-500	CP5 (1.5915)	100	RF	500	15	20	18.41	3660	1040	373	106		
KRCPF5-1000		200		1000									
KRCPF10-500	CP10 (3.1831)	50	RF	500	30	35	31.82	14600	4480	1490	457		
KRCPF10-1000		100		1000									

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length				Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● KRCPFD5-500J	CP5 (1.5915)	100	RD	500	15	20	18.41	8	25	150	4	M5
● KRCPFD5-1000J		200		1000	50	180	6					
● KRCPFD10-500J	CP10 (3.1831)	50	RD	500	30	35	31.82	14	25	150	4	M10
● KRCPFD10-1000J		100		1000	50	180	6					

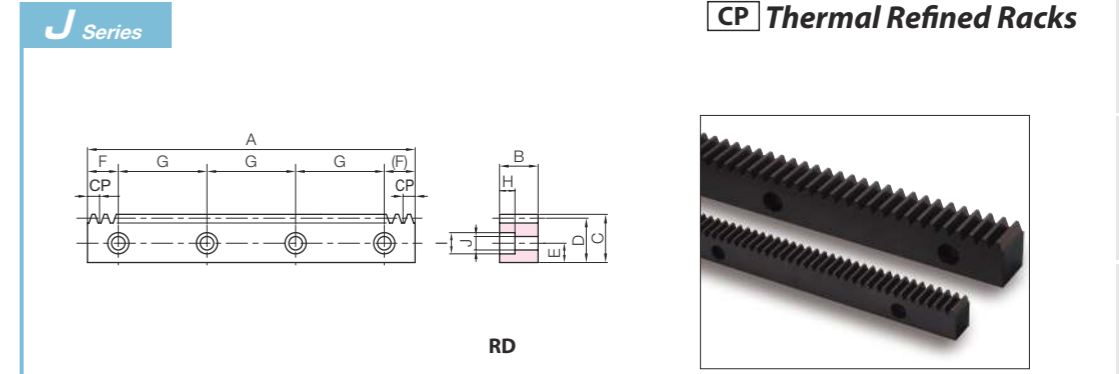


Backlash (mm)	Weight (kg)	Catalog Number
0.09~0.27	1.08 2.17	KRCPF5-500 KRCPF5-1000
0.14~0.37	3.75 7.49	KRCPF10-500 KRCPF10-1000

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	3660	1040	373	106	0.09~0.27	1.06 2.13	● KRCPFD5-500J ● KRCPFD5-1000J
10.8	17.5	11	14600	4480	1490	457	0.14~0.37	3.61 7.29	● KRCPFD10-500J ● KRCPFD10-1000J




Specifications	
Precision grade	JIS grade N8 (JIS B1702-1:1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating
Shape	S1

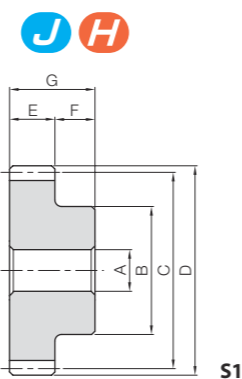

* The precision grade of J Series products is equivalent to the value shown in the table.

To order Hardened Plus, please specify Catalog No. + H. Example: SSCP2.5-20H

Catalog Number	Pitch mm (Module)	No. of teeth	Bore A _{H7}	Hub dia. B	Pitch dia. C	Outside dia. D	Face width E	Hub width F	Total length G	Distance traveled in one turn (mm)	Allowable torque						Backlash (mm)	Weight (kg)	
											Bending strength		Surface durability		Surface durability H				
											N·m	kgf·m	N·m	kgf·m	N·m	kgf·m			
SSCP2.5-20	CP2.5 (0.7958)	20	6	13	15.92	17.51	10	10	20	50	4.14	0.42	0.48	0.049	1.60	0.16	0~0.14	0.022	
SSCP2.5-25		25	8	17	19.89	21.49					62.5	5.58	0.57	0.83	0.085	2.74			0.28
SSCP2.5-30		30	8	21	23.87	25.46					75	7.06	0.72	1.30	0.13	4.20			0.43
SSCP2.5-40		40	10	28	31.83	33.42					100	10.1	1.03	2.64	0.27	8.30			0.85
SSCP5-20	CP5 (1.5915)	20	8	25	31.83	35.01	15	15	30	100	24.8	2.53	3.52	0.36	11.0	1.12	0.09~0.25	0.14	
SSCP5-25		25	10	32	39.79	42.97					125	33.5	3.42	6.06	0.62	18.6			1.89
SSCP5-30		30	10	38	47.75	50.93					150	42.3	4.32	9.45	0.96	28.6			2.92
SSCP5-40		40	12	45	63.66	66.85					200	60.4	6.16	18.7	1.91	55.7			5.68
SSCP10-20	CP10 (3.1831)	20	15	50	63.66	70.03	30	20	50	200	198	20.2	30.8	3.14	91.1	9.29	0.14~0.35	0.99	
SSCP10-25		25	20	60	79.58	85.94					250	268	27.3	52.7	5.37	154			15.7
SSCP10-30		30	20	75	95.49	101.86					300	339	34.5	81.7	8.33	238			24.2
SSCP10-40		40	20	80	127.32	133.69					400	483	49.3	160	16.4	464			47.3
SSCP15-20	CP15 (4.7746)	20	22	75	95.49	105.04	50	27	77	300	744	75.9	116	11.9	338	34.5	0.20~0.47	3.52	
SSCP15-25		25	25	100	119.37	128.92					375	1000	102	199	20.3	573			58.5
SSCP15-30		30	25	110	143.24	152.79					450	1270	130	308	31.4	885			90.2
SSCP20-20		CP20 (6.3662)	20	25	100	127.32					140.06	60	30	90	400	1590			162
SSCP20-25	25		30	130	159.15	171.89	500	2140	219	449	45.8					1290	131		
SSCP20-30	30		30	150	190.99	203.72	600	2710	276	693	70.7					1990	202		

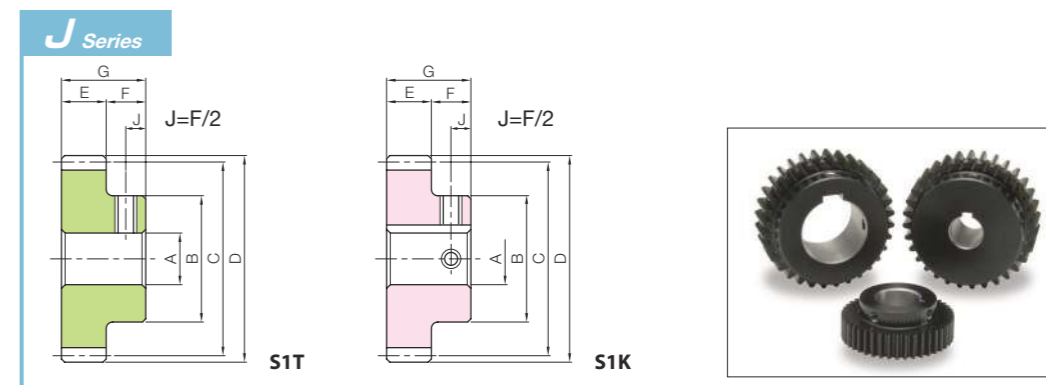

To order J Series products, please specify: Catalog No. + J + BORE. Example: SSCP2.5-20J6

Bore H7	* The product shapes of J Series items are identified by background color.																																	
	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	55	60	65	70	75	80								
Keyway J _{s9}	—		4×1.8				5×2.3				6×2.8				8×3.3				10×3.3				12×3.3		14×3.8		16×4.3		18×4.4		20×4.9		22×5.4	
Screw size	—		4×1.8				5×2.3				6×2.8				8×3.3				10×3.3				12×3.3		14×3.8		16×4.3		18×4.4		20×4.9		22×5.4	
Catalog Number	M4	M5	M4				M5				M6				M8				M10		M12		M14		M16									
SSCP2.5-20 J BORE	S1T																																	
SSCP2.5-25 J BORE	S1T																																	
SSCP2.5-30 J BORE	S1T																																	
SSCP2.5-40 J BORE			S1K	S1K	S1K	S1K																												
SSCP5-20 J BORE	S1T		S1K	S1K																														
SSCP5-25 J BORE			S1K	S1K	S1K	S1K	S1K	S1K																										
SSCP5-30 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																							
SSCP5-40 J BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																						
SSCP10-20 J BORE				S1K	S1K	S1K	S1K	S1K	S1K																									
SSCP10-25 J BORE					S1K	S1K	S1K	S1K	S1K	S1K																								
SSCP10-30 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K																							
SSCP10-40 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																						
SSCP15-20 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																						
SSCP15-25 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																				
SSCP15-30 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																			
SSCP20-20 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																			
SSCP20-25 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																		
SSCP20-30 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K																	

To order J Series Hardened Plus products, please specify: Catalog No. + H + J + BORE. Example: SSCP2.5-40HJ12

"*" is a product with the original bore diameter, so Hardened Plus is not available. See Page 22 for more details on Hardened Plus.

SSCP-CP hardened spur gear recommended mating rack

SSCP-CP spur gear recommended mating rack



SRCPF-H/SRCPFD-H
CP Hardened Racks

Please see Page 292 for more details.




SRCP/SRCPF/SRCPFD(K)
CP Racks

Please see Page 296 for more details.




Specifications	
Precision grade	KHK R 001 grade 5
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating

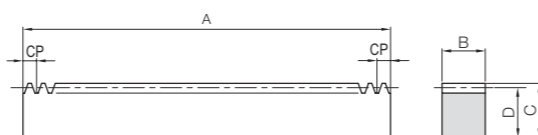

RF

J Series

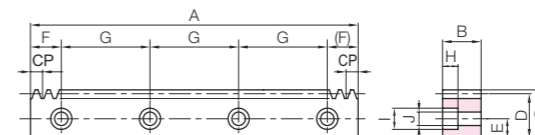

RD



Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length				Allowable force (N)				Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
SRCPF5-1000H	CP5 (1.5915)	200	RF	1000	15	20	18.41	2080	1200	212	122		
SRCPF10-1000H	CP10 (3.1831)	100		1000	30	35	31.82	8320	4980	848	508		
SRCPF15-1000H	CP15 (4.7746)	67		1005	50	50	45.23	20800	12400	2120	1260		
SRCPF20-1000H	CP20 (6.3662)	50		1000	60	60	53.63	33300	20800	3390	2120		

Backlash (mm)	Weight (kg)	Catalog Number
0.05~0.29	2.17	SRCPF5-1000H
0.10~0.39	7.49	SRCPF10-1000H
0.16~0.51	17.8	SRCPF15-1000H
0.18~0.58	25.3	SRCPF20-1000H

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length				Mounting hole dimensions					
				A	B	C	D	E	F	G	No. of holes	Screw size	
SRCPFD5-1000HJ	CP5 (1.5915)	200	RD	1000	15	20	18.41	8	50	180	6	M5	
SRCPFD10-1000HJ	CP10 (3.1831)	100		1000	30	35	31.82	14	50	180	6	M10	
SRCPFD15-1000HJ	CP15 (4.7746)	67		1005	50	50	45.23	20	62.5	220	5	M14	
SRCPFD20-1000HJ	CP20 (6.3662)	50		1000	60	60	53.63	23	60	220	5	M16	

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	2080	1200	212	122	0.05~0.29	2.13	SRCPFD5-1000HJ
10.8	17.5	11	8320	4980	848	508	0.10~0.39	7.29	SRCPFD10-1000HJ
15.2	23	16	20800	12400	2120	1260	0.16~0.51	17.3	SRCPFD15-1000HJ
17.5	26	18	33300	20800	3390	2120	0.18~0.58	24.5	SRCPFD20-1000HJ

* CP30 and ground racks with total lengths up to (A) 1500mm and heights up to (C) 120mm are also available by request as custom-made products.

Recommended Mating Pinions




SSCP-H

Please see Page 290 for more details.




Specifications	
Precision grade	KHK R 001 Grade 4*
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth laser hardened
Tooth hardness	55 to 65HRC
Surface treatment	Black oxide coating

* The precision grade of these products is equivalent to the value shown in the table.

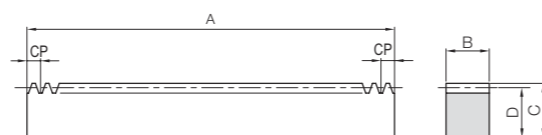

RF

J Series

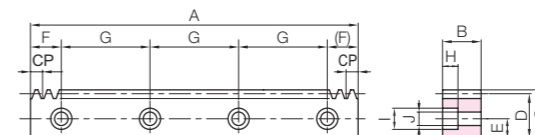

RD



Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length				Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
SRCPF5-1000HL	CP5 (1.5915)	200	RF	1000	15	20	18.41	2290	1040	232	106
SRCPF5-1500HL		300									
SRCPF5-2000HL		410									
SRCPF10-1000HL	CP10 (3.1831)	100		1000	30	35	31.82	9150	4330	933	441
SRCPF10-1500HL		150									
SRCPF10-2000HL		205									
SRCPF15-1000HL	CP15 (4.7746)	67		1005	50	50	45.23	22900	10700	2333	1095
SRCPF15-1500HL		100									
SRCPF15-2000HL		136									
SRCPF20-1000HL	CP20 (6.3662)	50		1000	60	60	53.63	36600	18100	3732	1843
SRCPF20-1500HL		75									
SRCPF20-2000HL		102									

Backlash (mm)	Weight (kg)	Catalog Number	
		Bending strength	Surface durability
0.09~0.25	2.17	SRCPF5-1000HL	SRCPF5-1500HL
	3.25	SRCPF5-1500HL	SRCPF5-2000HL
	4.44	SRCPF5-2000HL	
0.14~0.35	7.49	SRCPF10-1000HL	SRCPF10-1500HL
	11.2	SRCPF10-1500HL	SRCPF10-2000HL
	15.4	SRCPF10-2000HL	
0.20~0.47	17.8	SRCPF15-1000HL	SRCPF15-1500HL
	26.6	SRCPF15-1500HL	SRCPF15-2000HL
	36.2	SRCPF15-2000HL	
0.22~0.54	25.3	SRCPF20-1000HL	SRCPF20-1500HL
	37.9	SRCPF20-1500HL	SRCPF20-2000HL
	51.5	SRCPF20-2000HL	

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length				Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
SRCPFD5-1000HLJ	CP5 (1.5915)	200	RD	1000	15	20	18.41	8	50	180	9	M5
SRCPFD5-1500HLJ		300										
SRCPFD5-2000HLJ		410										
SRCPFD10-1000HLJ	CP10 (3.1831)	100		1000	30	35	31.82	14	50	180	9	M10
SRCPFD10-1500HLJ		150										
SRCPFD10-2000HLJ		205										
SRCPFD15-1000HLJ	CP15 (4.7746)	67		1005	50	50	45.23	20	62.5	220	7	M14
SRCPFD15-1500HLJ		100										
SRCPFD15-2000HLJ		136										
SRCPFD20-1000HLJ	CP20 (6.3662)	50		1000	60	60	53.63	23	60	220	7	M16
SRCPFD20-1500HLJ		75										
SRCPFD20-2000HLJ		102										

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	2290	1040	232	106	0.09~0.25	2.13	SRCPFD5-1000HLJ
								3.20	SRCPFD5-1500HLJ
								4.38	SRCPFD5-2000HLJ
10.8	17.5	11	9150	4330	933	441	0.14~0.35	7.29	SRCPFD10-1000HLJ
								10.9	SRCPFD10-1500HLJ
								14.9	SRCPFD10-2000HLJ
15.2	23	16	22900	10700	2333	1095	0.20~0.47	17.3	SRCPFD15-1000HLJ
								25.9	SRCPFD15-1500HLJ
								35.2	SRCPFD15-2000HLJ
17.5	26	18	36600	18100	3732	1843	0.22~0.54	24.5	SRCPFD20-1000HLJ
								36.8	SRCPFD20-1500HLJ
								50.0	SRCPFD20-2000HLJ

* CP30 and ground racks with total lengths up to (A) 1500mm and heights up to (C) 120mm are also available by request as custom-made products.

Recommended Mating Pinions




Please see Page 290 for more details.



Specifications	
Precision grade	KHK R 001 Grade 4 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating

* The precision grade of J Series products is equivalent to the value shown in the table.

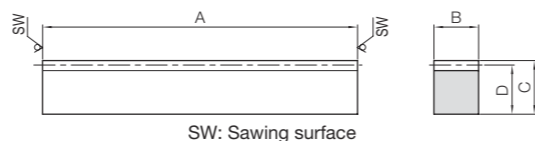

R1

Catalog Number	Pitch mm (Module)	Effective number of teeth	Shape	Total Length				Allowable force (N)				Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
SRCP2.5-100	CP2.5 (0.7958)	38	R1	98	10	12	11.2	763	143	77.8	14.5	0.00~0.14	0.086
SRCP5-100	CP5 (1.5915)	18		98	15	20	18.41	2290	468	233	47.7	0.09~0.25	0.21
SRCP10-100	CP10 (3.1831)	8		98	30	35	31.82	9150	1870	933	191	0.14~0.35	0.73
SRCP15-100	CP15 (4.7746)	5		103	50	50	45.23	22900	4530	2330	462	0.20~0.47	1.83
SRCP20-100	CP20 (6.3662)	3		98	60	60	53.63	36600	7480	3730	763	0.22~0.54	2.48

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length				Allowable force (N)				Backlash (mm)	Weight (kg)
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability		
SRCPF2.5-500	CP2.5 (0.7958)	200	RF	500	10	12	11.2	763	143	77.8	14.5	0.00~0.14	0.44
SRCPF2.5-1000		400		1000	10	12	11.2	763	143	77.8	14.5		0.88
SRCPF5-500	CP5 (1.5915)	100		500	15	20	18.41	2290	468	233	47.7	0.09~0.25	1.08
SRCPF5-1000		200		1000	15	20	18.41	2290	468	233	47.7		2.17
SRCPF5-1500		300		1500	15	20	18.41	2290	468	233	47.7		3.25
SRCPF5-2000		410		2050	15	20	18.41	2290	468	233	47.7		4.44
SRCPF10-500	CP10 (3.1831)	50		500	30	35	31.82	9150	1870	933	191	0.14~0.35	3.75
SRCPF10-1000		100		1000	30	35	31.82	9150	1870	933	191		7.49
SRCPF10-1500		150		1500	30	35	31.82	9150	1870	933	191		11.2
SRCPF10-2000		205		2050	30	35	31.82	9150	1870	933	191		15.4
SRCPF15-500	CP15 (4.7746)	33	495	50	50	45.23	22900	4530	2330	462	0.20~0.47	8.79	
SRCPF15-1000		67	1005	50	50	45.23	22900	4530	2330	462		17.8	
SRCPF15-1500		100	1500	50	50	45.23	22900	4530	2330	462		26.6	
SRCPF15-2000		136	2040	50	50	45.23	22900	4530	2330	462		36.2	
SRCPF20-500	CP20 (6.3662)	25	500	60	60	53.63	36600	7480	3730	763	0.22~0.54	12.6	
SRCPF20-1000		50	1000	60	60	53.63	36600	7480	3730	763		25.3	
SRCPF20-1500		75	1500	60	60	53.63	36600	7480	3730	763		37.9	
SRCPF20-2000		102	2040	60	60	53.63	36600	7480	3730	763		51.5	

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
								A	B	C	D	E
● SRCPFK2.5-500J	CP2.5 (0.7958)	200	RA	500	10	12	11.2	5	25	150	4	M4
● SRCPFD5-500J	CP5 (1.5915)	100	RD	500	15	20	18.41	8	25	150	4	M5
● SRCPFD5-1000		200		50					180	6		
● SRCPFD5-1500		300		30					180	9		
● SRCPFD5-2000		410		35					180	12		
● SRCPFD10-500J	CP10 (3.1831)	50		500	30	35	31.82	14	25	150	4	M10
● SRCPFD10-1000		100		50					180	6		
● SRCPFD10-1500		150		30					180	9		
● SRCPFD10-2000		205		35					180	12		
● SRCPFD15-500J	CP15 (4.7746)	33		495	50	50	45.23	20	27.5	220	3	M14
● SRCPFD15-1000		67		1005					62.5	220	5	
● SRCPFD15-1500		100	1500	90					220	7		
● SRCPFD15-2000		136	2040	30					220	10		
● SRCPFD20-500J	CP20 (6.3662)	25	500	60	60	53.63	23	30	220	3	M16	
● SRCPFD20-1000		50	1000					60	220	5		
● SRCPFD20-1500		75	1500					90	220	7		
● SRCPFD20-2000		102	2040					30	220	10		


Recommended Mating Pinions



SSCP


Please see Page 290 for more details.

J Series

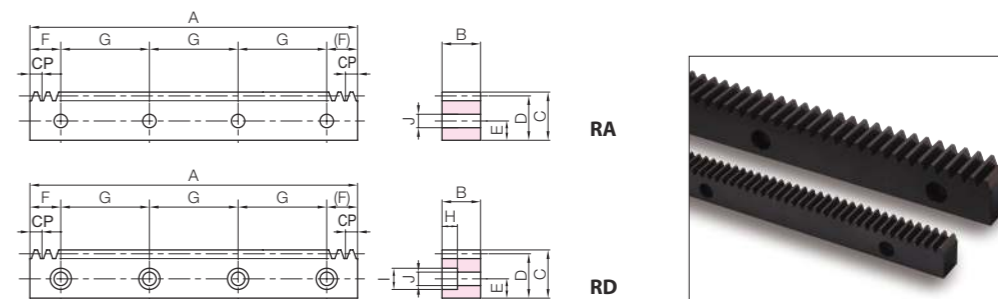

RA

RD

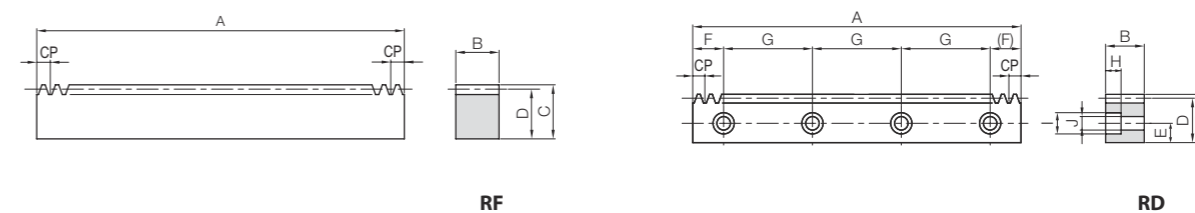

RF


RD

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
-	-	4.5	763	143	77.8	14.5	0.00~0.14	0.43	● SRCPFK2.5-500J
6	10	6	2290	468	233	47.7	0.09~0.25	1.06 2.13 3.20 4.38	● SRCPFD5-500J ● SRCPFD5-1000 ● SRCPFD5-1500 ● SRCPFD5-2000
10.8	17.5	11	9150	1870	933	191	0.14~0.35	3.61 7.29 10.9 14.9	● SRCPFD10-500J ● SRCPFD10-1000 ● SRCPFD10-1500 ● SRCPFD10-2000
15.2	23	16	22900	4530	2330	462	0.20~0.47	8.47 17.3 25.9 35.2	● SRCPFD15-500J ● SRCPFD15-1000 ● SRCPFD15-1500 ● SRCPFD15-2000
17.5	26	18	36600	7480	3730	763	0.22~0.54	12.2 24.5 36.8 50.0	● SRCPFD20-500J ● SRCPFD20-1000 ● SRCPFD20-1500 ● SRCPFD20-2000




Specifications	
Precision grade	JIS grade N8 (JIS B1702-1: 1998)*
Gear teeth	Standard full depth
Pressure angle	20°
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)

* The precision grade of J Series products is equivalent to the value shown in the table.

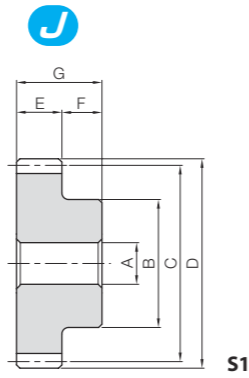

J Series

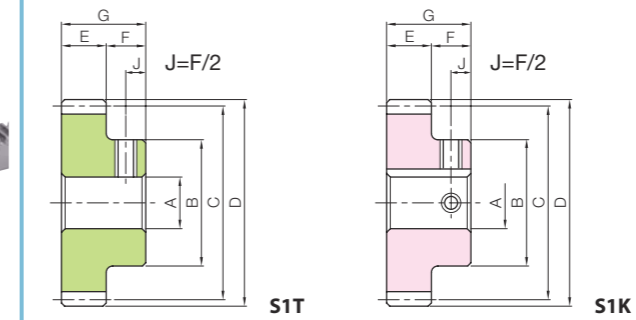

To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Distance traveled in one turn (mm)	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)
				AH7	B							Bending strength	Surface durability	Bending strength	Surface durability		
SUSCP5-20	CP5 (1.5915)	20	S1	8	25	31.83	35.01	15	15	30	100	13.7	2.50	1.40	0.25	0.09~0.27	0.14
SUSCP5-25		25		10	32	39.78	42.97					18.5	4.31	1.89	0.44		
SUSCP5-30		30		10	38	47.74	50.93					23.4	6.72	2.39	0.68		
SUSCP10-20	CP10 (3.1831)	20	S1	15	50	63.66	70.03	30	20	50	200	110	21.9	11.2	2.23	0.14~0.37	1.00
SUSCP10-25		25		20	60	79.57	85.94					148	37.4	15.1	3.82		
SUSCP10-30		30		20	75	95.49	101.86					187	58.0	19.1	5.92		


Bore H7	* The product shapes of J Series items are identified by background color.																		
	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	
Keyway J _{s9}	—																		
Screw size	4×1.8			5×2.3				6×2.8				8×3.3			10×3.3		12×3.3		14×3.8
Catalog Number	M5		M4				M5				M6			M8		M10			
SUSCP5-20 J BORE	S1T	S1K	S1K																
SUSCP5-25 J BORE		S1K	S1K	S1K	S1K	S1K	S1K												
SUSCP5-30 J BORE		S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SUSCP10-20 J BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SUSCP10-25 J BORE												S1K	S1K	S1K	S1K	S1K	S1K	S1K	
SUSCP10-30 J BORE												S1K	S1K	S1K	S1K	S1K	S1K	S1K	

SURCPF/SURCPFD Circular pitch 5, 10
CP Stainless Steel Racks



Specifications	
Precision grade	KHK R 001 Grade 5 *
Gear teeth	Standard full depth
Pressure angle	20°
Material	SUS304
Heat treatment	Solution treated
Tooth hardness	(less than 187HB)



* The precision grade of J Series products is equivalent to the value shown in the table.

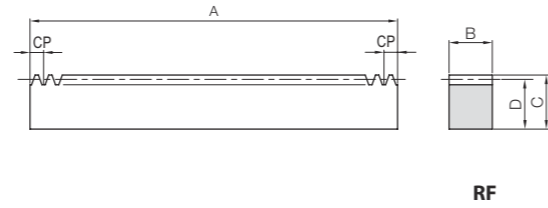

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Allowable force (N)		Allowable force (kgf)	
				A	B	C	D	Bending strength	Surface durability	Bending strength	Surface durability
SURCPF5-500	CP5 (1.5915)	100	RF	500	15	20	18.41	1090	263	111	26.8
SURCPF5-1000		200		1000							
SURCPF10-500	CP10 (3.1831)	50	RF	500	30	35	31.82	4370	1050	445	107
SURCPF10-1000		100		1000							

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Total Length	Face width	Height	Height to pitch line	Mounting hole dimensions				
				A	B	C	D	E	F	G	No. of holes	Screw size
● SURCPFD5-500J SURCPFD5-1000	CP5 (1.5915)	100	RD	500	15	20	18.41	8	25	150	4	M5
		200		1000								
● SURCPFD10-500J SURCPFD10-1000	CP10 (3.1831)	50	RD	500	30	35	31.82	14	25	150	4	M10
		100		1000								

J Series

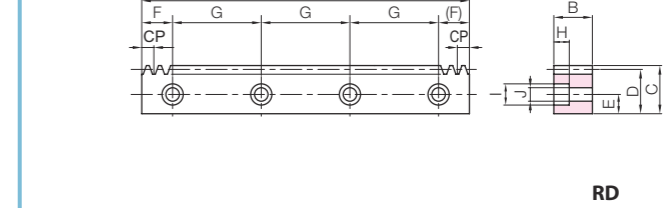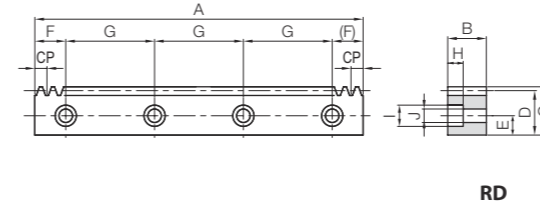

Backlash (mm)	Weight (kg)	Catalog Number
0.09~0.27	1.09 2.19	SURCPF5-500 SURCPF5-1000
0.14~0.37	3.78 7.57	SURCPF10-500 SURCPF10-1000

Counterbore dimensions			Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)	Catalog Number
H	I	J	Bending strength	Surface durability	Bending strength	Surface durability			
6	10	6	1090	263	111	26.8	0.09~0.27	1.07 2.16	● SURCPFD5-500J SURCPFD5-1000
10.8	17.5	11	4370	1050	445	107	0.14~0.37	3.65 7.36	● SURCPFD10-500J SURCPFD10-1000



Specifications	
Precision grade	KHK R 001 grade 4
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than HB210)
Surface treatment	Black oxide coating




R2

Catalog Number	Pitch mm (Module)	Effective number of teeth	Shape	Total Length		Outside dia. d_{h9}	Height to pitch line D	Allowable force (N)		Allowable force (kgf)		Backlash (mm)	Weight (kg)						
				A				Bending strength	Surface durability	Bending strength	Surface durability								
SROCP2.5-500	CP2.5 (0.7958)	200	R2	505	10	9.2	474	91.8	48.3	9.36	0.00~0.14	0.30							
SROCP5-500	CP5 (1.5915)	99		505	15								13.41	1650	324	169	33.1	0.09~0.25	0.65
SROCP10-1000	CP10 (3.1831)	99		1010	30								26.82	6610	1300	674	132	0.14~0.35	5.16




Specifications	
Precision grade	KHK R 001 grade 8
Gear teeth	Standard full depth
Pressure angle	20°
Material	SS400
Heat treatment	—
Tooth hardness	(less than 187HB)
Surface treatment	Black oxide coating

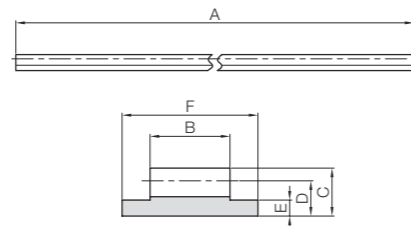

R3

Catalog Number	Pitch mm (Module)	Shape	Total Length		Face width B	Height C	Height to pitch line D	Base thickness E	Base width F	Allowable force (N)		Weight (kg)
			A							Bending strength	Bending strength	
FRCP5-2000	CP5 (1.5915)	R3	2000	10	6	4.41	2	17	801	81.7	0.91	
FRCP5-3000			3000									
FRCP5-4000			4000									

Installation Example of FRCP Metal Flex Rack

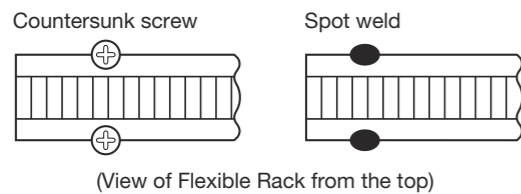

Recommended Mating Pinions



SSCP

Please see Page 290 for more details.

Miter Gears

MMSGQ Ground Spiral Miter Gears	MMSG Ground Spiral Miter Gears	SMSG Ground Spiral Miter Gears	MMSA/MMSB Finished Bore Spiral Miter Gears	MMS Spiral Miter Gears	SMS Spiral Miter Gears	SMA/SMB/SMC Finished Bore Miter Gears
NEW	✓	✓	✓		NEW	✓
Material: SCM415 m2-4 Page 310	Material: SCM415 m2-4 Page 312	Material: S45C m1-5 Page 314	Material: SCM415 m1-10 Page 316	Material: SCM415 m2-5 Page 318	Material: S45C m1-8 Page 320	Material: S45C m1-8 Page 322
MM Miter Gears	LM Sintered Metal Miter Gears	SM Miter Gears	SAM Angular Miter Gears	SUM Stainless Steel Miter Gears	SUMA Finished Bore Stainless Steel Miter Gears	PM Plastic Miter Gears
NEW	✓	NEW	✓			
Material: SCM415 m2-5 Page 324	Material: SMF5040 m0.8-1.5 Page 324	Material: S45C m1-8 Page 326	Material: S45C m1.5-3 Page 328	Material: SUS303 m1-4 Page 330	Material: SUS303 m1-4 Page 330	Material: MC901 m1-4 Page 332
DM Injection Molded Miter Gears	BB Sintered Metal Bushings	Nissei KSP Ground Spiral Miter				
Material: Duracon (R) (M90-44) m0.5-1.5 Page 332	Material: Oil-free copper alloy φ5-8 Page 334	Material: SCM415 m1.5-6 Page 370				

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Miter Gears

M MS G 2 - 20 R



Features



Miter gears are a special class of bevel gears where the shafts intersect at 90° and the gear ratio is 1:1. KHK stock miter gears are available in two types, straight miter and spiral miter, with high precision grade for demanding torques and speeds, and commercial grade for economical applications. The following table lists the main features for easy selection.


Type	Catalog Number	Module	No. of Teeth () Shaft Angle	Material	Heat Treatment	Tooth Surface Finish	Precision JIS B 1704: 1978	Secondary Operations	Features
Spiral Miter Gears	MMSGQ	2~4	20, 30	SCM415	Carburized Note 1	Ground	0	△	Gears that have been hardened and ground that has grade-0 accuracy, strength, abrasion resistance and quietness. Secondary operations can be given except for the teeth.
	MMSG	2~4	20, 25, 30	SCM415	Carburized Note 1	Ground	1	△	Gears that have been hardened and ground that has excellent accuracy, strength and abrasion resistance. Secondary operations can be given except for the teeth.
	SMSG	1~5	20, 25, 30	S45C	Gear teeth induction hardened	Ground	2	△	Gears that have been hardened and ground that has excellent abrasion resistance. Secondary operations can be given except for the teeth.
	KSP	1.5~6	20~30	SCM415	Carburized Note 1	Ground	0	△	Gears that have been hardened and ground that has grade-0 accuracy, strength, abrasion resistance and quietness. Secondary operations can be given except for the teeth.
	MMSA/MMSB	1~10	20	SCM415	Carburized	Cut	4	×	Gears that have been fully hardened that have excellent strength and wear resistance. Can be used in the finished shape.
	MMS	2~5	20, 25, 30	SCM415	Carburized Note 1	Cut	4	△	Gears that have been hardened that have excellent strength and wear resistance. Secondary operations are possible except for the teeth.
	SMS	1~5	20, 25, 30	S45C	Gear teeth induction hardened	Cut	4	△	Gears that have been hardened with excellent wear resistance. Secondary operations are possible except for the teeth.
Straight Miter Gears	SMA/SMB/SMC	1~8	20, 25, 30	S45C	Gear teeth induction hardened	Cut	4	△	Gears that have been hardened with excellent wear resistance. Can be used in the finished shape.
	MM	2~5	20, 25, 30	SCM415	Carburized Note 1	Cut	4	△	Gears that have been hardened that have excellent strength and wear resistance. Secondary operations are possible except for the teeth.
	LM	0.8~1.5	20	SMF5040 (S45C equivalent)	—	Sintered	5	○	Small gears made through sintering.
	SM	1~8	16, 20, 25, 30	S45C	—	Cut	3	○	Many lineups are available. The teeth can be additionally hardened.
	SAM	1.5~3	20 (45°, 60°, 120°)	S45C	—	Cut	3	○	3 types of angular miter are available for shafts at 45°, 60° and 120°.
	SUM	1~4	20, 25, 30	SUS303	—	Cut	3	○	Stainless steel gears with rust resistance.
	SUMA	1~4	20, 25	SUS303	—	Cut	3	△	Stainless steel gears with rust resistance. Keyways and tapping provided.
	PM	1~4	20, 25, 30	MC901	—	Cut	4	○	Nylon gears can be used with no lubrication.
DM	0.5~1.5	20	Duracon (R) (M90-44) NOTE 2	—	Injection Molded	6	△	Low-priced gears made through injection molding. Suitable for light loads.	

[NOTE 1] Although these are carburized products, secondary operations can be performed as the bore and the hub portions are masked during the carburization. However, note that high hardness (HRC40 at maximum) occurs in some cases.
 [NOTE 2] "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.

○ Possible △ Partly possible × Not possible

We use the Crowning method for gear cutting

KHK utilizes Gleason Coniflex No.104 and 114 bevel gear generating machinery, and is equipped for mass production of straight miter gears. You can count on a stable supply of straight miter gears from KHK



Gleason Coniflex No.104

Application Examples



KHK stock bevel gears (miter gears) are adopted in driving devices for all kinds of intersecting axes, including transport devices.

■ Masdac Dorayaki Machine



SM miter gears used for reversing fabrics

■ Carton former



SM and SMB miters used to drive X/Y axes and transmit mechanical power

■ Fish processing machine manufactured by TOYO SUISAN KIKAI CO.,LTD. ■ Angular Miter Gear Box



SMB miter used for filleting fish



Selection Hints

Please select the most suitable products by carefully considering the characteristics of items and contents of the product tables. It is also important to read all applicable "CAUTION" notes shown below before the final selection.

1. Caution in Selecting the Mating Gears

Among KHK stock miter gears, there are products which are not interchangeable even when the module and the number of teeth are the same. Also, spiral miters require additional consideration since the right-hand mates with the left-hand spiral as shown in the table below.



■ Straight Miter (○ Allowable × Not allowable)

Catalog Number	SMA SMB SMC	MM	SM	SUM	SUMA	PM	DM	LM	SAM
SMA/SMB/SMC	○	○	○	○	○	○	×	×	×
MM	○	○	○	○	○	○	×	×	×
SM	○	○	○	○	○	○	×	×	×
SUM	○	○	○	○	○	○	×	×	×
SUMA	○	○	○	○	○	○	×	×	×
PM	○	○	○	○	○	○	×	×	×
DM	×	×	×	×	×	×	○	×	×
LM	×	×	×	×	×	×	×	○	×
SAM	×	×	×	×	×	×	×	×	○

■ Spiral Miter (○ Allowable × Not allowable)

Catalog Number	Series	MMSGQ	MMSG	SMSG	MMSA MMSB	MMS	SMS
Series	Direction of spiral	R	R	R	R	R	R
MMSGQ	L	○	×	×	×	×	×
MMSG	L	×	○	×	×	×	×
SMSG	L	×	×	○	×	×	×
MMSA/MMSB	L	×	×	×	○	×	×
MMS	L	×	×	×	×	○	×
SMS	L	×	×	×	×	×	○

2. Caution in Selecting Gears Based on Gear Strength

The gear strength values shown in the product pages were computed by assuming the application environment in the table below. Therefore, they should be used as reference only. We recommend that each user computes their own values by applying the actual usage conditions.

■ Calculation of Bending Strength of Gears

Item	Catalog Number	MMSGQ, MMSG MMSA, MMSB MMS, MM	SMSG/SMS SMA/SMB/ SMC	SM SAM	SUM SUMA LM NOTE 2	PM	DM
Formula NOTE 1	Formula of bevel gears on bending strength (JGMA403-01)					The Lewis formula	
No. of teeth of mating gears	Same no. of teeth					—	
Rotational Speed	100rpm (600rpm for MMSGQ, MMSG and SMSG)					100rpm	
Design Life (Durability)	Over 10 ⁷ cycles					—	
Impact from motor	Uniform load					Allowable bending stress (kgf/mm ²)	
Impact from load	Uniform load						
Direction of load	Bidirectional load (calculated with allowable bending stress of 2/3)						
Allowable bending stress at root σ_{rim} (kgf/mm ²)	47		21		19		10.5
Safety factor K_R	1.2					1.15 (40°C with No Lubrication) m 0.5 4.0 m 0.8 4.0 m 1.0 3.5 m 1.5 1.8 NOTE 2 (40°C with Grease Lubrication)	

■ Calculation of Surface Durability (Except where it is common with bending strength)

Item	Catalog Number	MMSGQ, MMSG MMSA, MMSB MMS, MM	SMSG/SMS SMA/SMB/ SMC	SM SAM	SUM SUMA LM NOTE 2	PM	DM
Formula NOTE 1	Formula of bevel gears on surface durability (JGMA404-01)						
Kinematic viscosity of lubricant	100cSt (50°C)						
Gear support	Shafts & gear box have normal stiffness, and gears are supported on one end						
Allowable Hertz stress σ_{Hlim} (kgf/mm ²)	166		90		49		41.3
Safety factor C_R	1.15						

[NOTE 1] The gear strength formula is based on JGMA (Japanese Gear Manufacturers Association) specifications, "MC Nylon Technical Data" by Mitsubishi Chemical Advanced Materials and "Duracon (R) Gear" by Polyplastics Co. The units for the rotational speed (rpm) and the stress (kgf/mm²) are adjusted to the units needed in the formula.

[NOTE 2] The values of the allowable bending stresses for DM m1.5 gears and the allowable root bending stress for LM gears are our own estimates.

Selecting the Gears

Step 1

Determine the calculated load torque applied to the gear and the gear type suitable for the purpose.

Step 2

Select provisionally from the allowable torque table in this catalog based on the load torque.

■ For provisional selection from this catalog


Catalog Number	Series	Direction of spiral	MMSGQ	MMSG	SMSG	MMSA MMSB	MMS	SMS		
MMSG2-20R	B3	R	12 35 40	42.7 35	21.98 16.35	12.5 20	9 24.54	17.0 23.5	1.73 2.40	0.04-0
MMSG2-20L	B3	L	14 42 50	53.2 45	28.63 21.6	16 26	11 30.89	32.7 46.1	3.33 4.70	0.05-0
MMSG3-20R	1 20	R	16 52 60	63.99 50	30.78 21.99	16 27	14 34.4	58.5 83.7	5.97 8.54	0.06-0
MMSG3-20L	1 20	L	20 50 70	74.53 55	32.45 22.26	14 29	16 42.75	91.8 133	9.36 13.6	0.07-0
MMSG4-20R	B4	R	20 55 80	84.99 65	39.13 27.5	17 35	18 49.08	136 199	13.8 20.3	0.09-0
MMSG4-20L	B4	L	12 38 50	52.5 40	23.43 16.25	11 21	11 30.89	27.5 47.0	2.80 4.79	0.04-0
MMSG2-25R	1 25	R	16 45 62.5	65.54 50	29.57 20.27	14 26	14 37.4	54.3 94.5	5.54 9.64	0.05-0
MMSG2-25L	1 25	L	20 55 75	78.78 60	35.6 24.39	17 31	17 43.92	94.5 167	9.64 17.0	0.06-0
MMSG3-25R	1 25	R	25 65 87.5	91.81 70	41.65 28.41	19 37	20 52.43	151 270	15.4 27.5	0.07-0
MMSG3-25L	1 25	L	28 75 100	104.7 80	47.8 32.35	22 42	23 58.95	216 392	22.1 40.0	0.09-0

Step 3

Calculate the strength under the actual usage conditions.

Calculate the strength formally using the various gear strength formulas. Please see our separate technical reference book for more details. We recommend using the Website that allows the strength to be easily calculated.

■ Use the strength calculation function on our website.

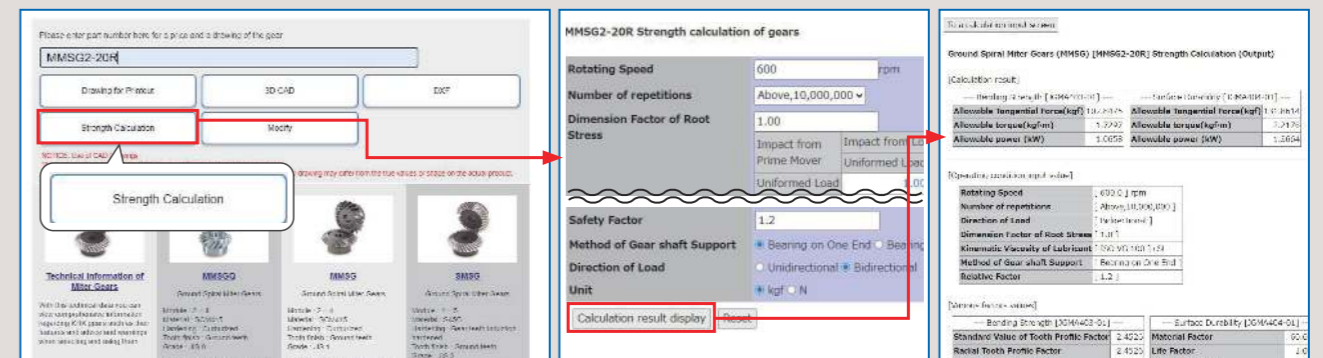

■ Bending strength

Calculated values of the strength at which the gear teeth do not break due to fatigue.

■ Surface durability;

Calculated values of the strength at which the gear teeth do not wear due to surface fatigue damage.

When selecting KHK standard gears, glance over the Cautions on Product Characteristics and Cautions on Performing Secondary Operations on Page 306.

- ① Products not listed in this catalog or materials, modules, number of teeth and the like not listed in the dimensional tables can be manufactured as custom items. Please see Page 26 for more details about custom-made orders.
- ② The color and shape of the product images listed on the dimension table page of each product may differ from the actual product. Be sure to confirm the shape in the dimension table before selection.
- ③ The details (specifications, dimensions, etc.) listed in the catalog may be changed without prior notice. Changes are announced on the KHK website.

Website URL: <https://khkgears.net/new/>
 Overseas Sales Department: Phone: +81-48-254-1744 Fax: +81-48-254-1765 E-mail: info@khkgears.net

Product Precautions

Common Notes
[Caution on Product Characteristics]

- (1) The allowable torque shown in the table are calculated values according to the assumed usage conditions. Please see Page 304 for more details.
- (2) The backlash values shown in the table are the theoretical values for the backlash in the normal direction of a pair of identical gears in mesh.
- (3) A set of spiral miter gears must be identical in module and number of teeth, but opposite in spiral hands.
- (4) Dimensions of the outside diameter, the total length and crown to back length are all theoretical values, and some differences will occur due to the corner chamfering of the gear tips.
- (5) These bevel gears produce axial thrust forces. Please see Page 308 for more details.
- (6) Variations in temperature or humidity can cause dimensional changes in plastic gears, including tooth diameter, bore, and backlash. The accuracy and tolerances shown in the catalog are values obtained when machining is performed.
- (7) Keyways are made according to JIS B1301 standards, Js9 tolerance. Also note that keyway tooth position alignment is not performed.
- (8) For products having a tapped hole, a set screw is included. (excludes B7)

[Caution on Secondary Operations]

- (1) Please read "Cautions on Performing Secondary Operations" on Page 308 when performing modifications and/or secondary operations for safety concerns.
- (2) Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).
- (3) In the illustration, the area surrounded with ---- line is masked during the carburization process (max. HRC40 or so) and can be modified.

[J Series]

- (1) Cancellation is not possible for made-to-order products. For lead time details, see Page 38.
- (2) Certain products which would otherwise have a very long tapped hole are counterbored. For details, please see the KHK website.
- (3) Black oxide is not re-applied to parts undergoing secondary operations.
- (4) For bores over ϕ 50, the bore tolerance is H8.

MMS(A,B) Finished Bore Spiral Miter Gears
[Caution on Product Characteristics]

- (1) The keyway tolerance is the value before hardening.

[Caution on Secondary Operations]

- (1) No secondary operations can be performed on these finished gears due to the applied carburizing process.

SMS Spiral Miter Gears
[Caution on Product Characteristics]

- (1) The bore may slightly vary due to the effect of heat treatment. When using with the indicated hole diameter, provide machining with a reamer or the like before use.

SM(A,B,C) Finished Bore Miter Gears
[Caution on Product Characteristics]

- (1) The dimensions of the keyway marked with * are different from the JIS Standards.

LM Sintered Metal Miter Gears
[Caution on Product Characteristics]

- (1) Steam treatment (where the surface is rusted using steam) is provided.
- (2) The product is not impregnated with lubricating oil.

SAM Angular Miter Gears
[Caution on Product Characteristics]

- (1) The axis angle is where the same products are set together. The axis angle cannot be changed by using it with a different product.

PM Plastic Miter Gears
[Caution on Product Characteristics]

- (1) To reduce heat generation, it is recommended to mate them with steel gears.

DM Plastic Miter Gears
[Caution on Product Characteristics]

- (1) The bore tolerance is -0.05 to -0.30, but it may be slightly higher at the center of the hole.
- (2) For the dimensional accuracy of each part, see the dimensional tolerance of molded items on Page 333.

[Caution on Secondary Operations]

- (1) As it is a molded item, bubbles may form inside the material. Avoid performing secondary operations.

Application Hints



In order to use KHK stock miters safely, carefully read the Application Hints before proceeding. If there are questions or you require clarifications, please contact our technical department or your nearest distributor.


E-mail: info@khkgears.net

1. Cautions on Handling


- ① KHK products are packaged one by one to prevent scratches and dents, but if you find issues such as rust, scratches, or dents when the product is removed from the box after purchase, please contact the supplier.
- ② Depending on the handling method, the product may become deformed or damaged. Resin gears and ring gears deform particularly easily, so please handle with care.

2. Caution on Performing Secondary Operations


- ① If re boring, it is important to pay special attention to locating the center in order to avoid runout.
- ② The reference datum for gear machining is the bore. Therefore, use the bore for locating the center. If it is too difficult to do for small bores, the alternative is to use one spot on the bore and the runout of the side surface.
- ③ If reworking using scroll chucks, we recommend the use of new or rebored jaws for improved precision. Please exercise caution not to crush the teeth.

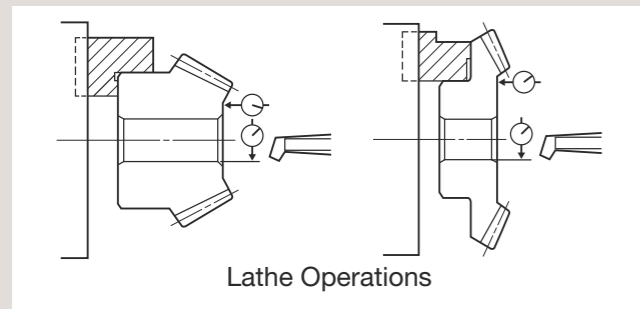

- ④ For items with induction hardened teeth, the hardness is high near the tooth root. When machining the front face, the machined area should be 4 to 6mm smaller than the holding surface diameter dimensions.

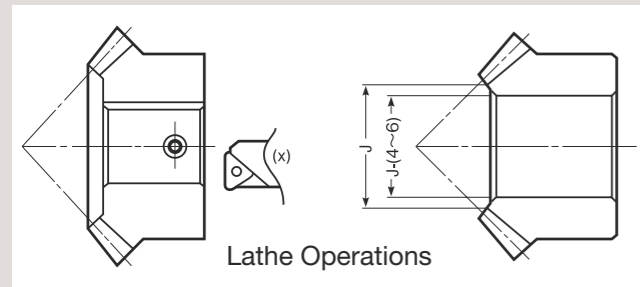


- ⑤ For tapping and keyway operations, see the examples given in "Caution on Performing Secondary Operations" in KHK Stock Spur Gear section. When providing keyway operations, to avoid stress concentration, always round the corners. Make sure that the diameter (O) of the keyway angle is smaller than the diameter of the holding surface.

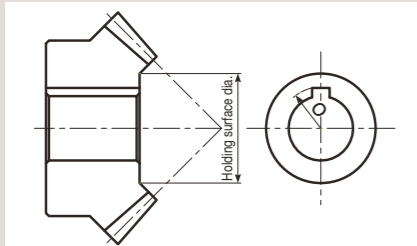


- ⑥ PM plastic miter gears are susceptible to changes due to temperature and humidity. Dimensions may change between, during, and after re-machining operations.
- ⑦ When induction-hardening S45C products, thermal stress cracks may appear. Also, note that the precision grade of the product declines by 1 or 2 grades, as deformation on material may occur. If you require tolerance for bore or other parts, machining is necessary after heat treatment.

3. Points of Caution during Assembly


- ① Since miter gears are cone shaped, they produce axial thrust forces. Specifically with regard to spiral miter gears, the directions of thrust change with the hand of helix and the direction of rotation. This is illustrated below. The bearings must be selected properly to be able to handle these thrust forces. For details, use gear calculation software GCSW.

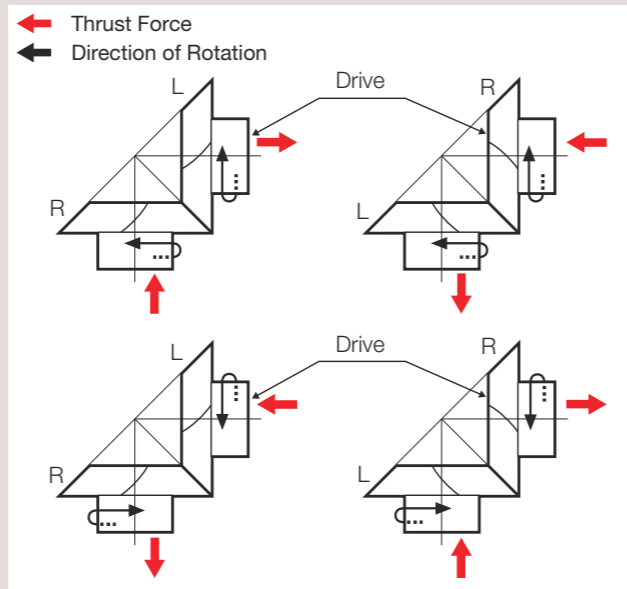

- ② If a gear is mounted on a shaft far from the bearings, the shaft may bend. We recommend designing bevel gears to be as close to the bearings as possible. Design the gear box, shaft and bearing with high rigidity.

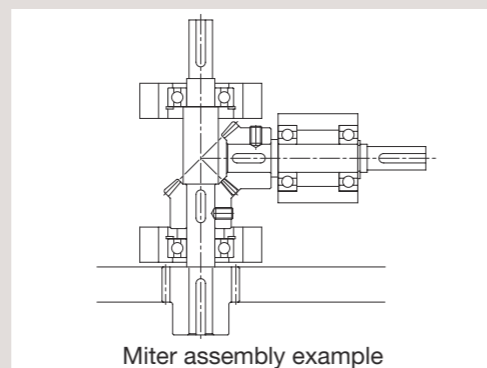

- ③ Be sure to fasten the miter to prevent the gears from moving, as thrust acts on it while rotating.
- ④ When installing MMSA or MMSB finished bore spiral miter gears produced as B7 style (ring gear), always secure the gears onto the mounting base with taper pins to absorb the rotational loads. It is dangerous to secure with bolts only. (See the top of the right page for reference figure)

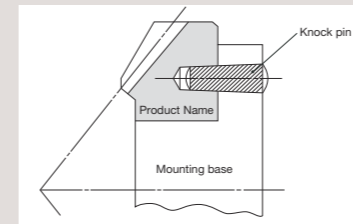


- ⑤ The recommended assemble distance tolerance of KHK stock miters is H7 for ground gears and H8 for cut gears. Mounting distance error, offset error and shaft angle error must be minimized to avoid excessive noise and wear. Inaccurate assembly will lead to irregular noises and uneven wear. Various conditions of tooth contact are shown below. Also, when changing the normal direction backlash, adjust the mounting distance according to the amount of axial movement shown in the table on the right so as not to change the tooth contact.

Shaft angle (°)	Normal direction Backlash	Travel in axial direction	
		Drive gear	Driven gear
90	j_n	$1.03 \times j_n$	$1.03 \times j_n$
60		$1.46 \times j_n$	$1.46 \times j_n$
120		$0.84 \times j_n$	$0.84 \times j_n$

Correct Tooth Contact


- When assembled correctly, the contact will occur on both gears in the middle of the flank and center of face width but somewhat closer to the toe.

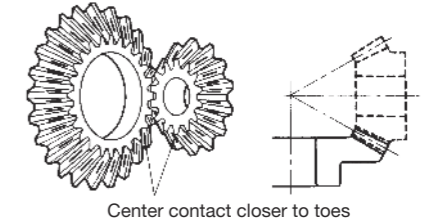

Incorrect Tooth Contact


Mounting Distance Error

- When the mounting distance of the pinion is incorrect, the contact will occur too high on the flank on one gear and too low on the other.

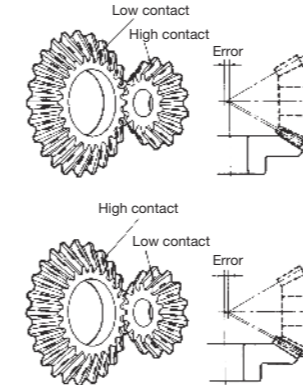


Offset Error

- When the pinion shaft is offset, the contact surface is near the toe of one gear and near the heel of the other.

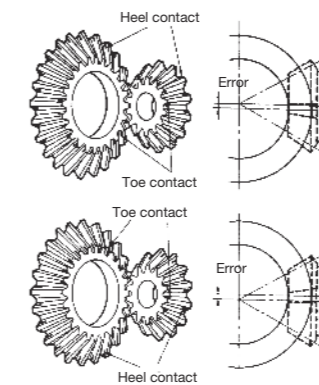

Shaft Angle Error

- When there is an angular error of shafts, the gears will contact at the toes or heels depending on whether the angle is greater or less than 90°.

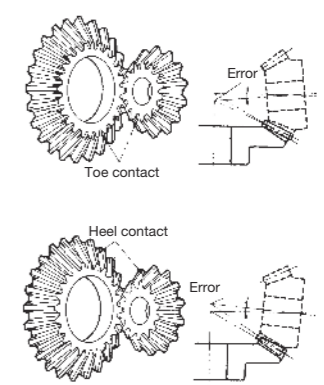

4. Cautions on Starting

- ① Check the following items before starting.
 - Are the gears fastened securely?
 - Is there uneven tooth contact?
 - Is there adequate backlash? (Be sure to avoid zero-backlash.)
 - Has proper lubrication been supplied?
- ② If gears are exposed, be sure to attach a safety cover to ensure safety. Also, be careful not to touch rotating gears.
- ③ If there is any abnormality such as noise or vibration during startup, stop the operation immediately and check the assembly condition such as tooth contact, eccentricity and looseness.

KHK considers safety a priority in the use of our products.

When handling, adding secondary operations, assembling, and operating KHK products, please be aware of the following issues in order to prevent accidents.



Warning: Precautions for preventing physical and property damage

1. When using KHK products, follow relevant safety regulations (Occupational Safety and Health Regulations, etc.).
2. Pay attention to the following items when installing, removing, or performing maintenance and inspection of the product.
 - ① Turn off the power switch.
 - ② Do not reach or crawl under the product.
 - ③ Wear appropriate clothing and protective equipment for the work.




Caution: Cautions in Preventing Accidents

1. Before using a KHK product, read the precautions in the catalog carefully in order to use it correctly.
2. Avoid use in environments that may adversely affect the product.
3. Our products are manufactured under a superior quality control system based on the ISO9000 quality management system; if you notice any malfunctions upon purchasing a product, please contact the supplier.




Specifications	
Precision grade	JIS B 1704: 1978 grade 0*
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	SCM415
Heat treatment	Tooth area carburized
Tooth hardness	55 to 60HRC

* The precision grade of J Series products is equivalent to the value shown in the table.




B3




B4

J Series



B3K



B4K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Gear Ratio	No. of teeth	Shape	Direction of spiral	Bore		Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)
					A-H7	B										Bending strength	Surface durability	Bending strength	Surface durability		
MMSGQ2-20R	1	20	B3	R	12	35	40	40	35	21	16.35	12.5	20	9	24.54	17.0	23.5	1.73	2.40	0~0.05	0.14
MMSGQ2-20L				L	12	35	40	40	35	21	16.35	12.5	20	9	24.54	17.0	23.5	1.73	2.40	0~0.05	0.14
MMSGQ2.5-20R				R	14	42	50	51	45	28	21.6	16	26	11	30.89	32.7	46.1	3.33	4.70	0.05~0.10	0.27
MMSGQ2.5-20L				L	14	42	50	51	45	28	21.6	16	26	11	30.89	32.7	46.1	3.33	4.70	0.05~0.10	0.27
MMSGQ3-20R				R	16	52	60	61	50	30	21.99	16	27	14	34.4	58.5	83.7	5.97	8.54	0.05~0.10	0.43
MMSGQ3-20L				L	16	52	60	61	50	30	21.99	16	27	14	34.4	58.5	83.7	5.97	8.54	0.05~0.10	0.43
MMSGQ3.5-20R				R	20	50	70	71	55	31.5	22.26	14	29	16	42.75	91.8	133	9.36	13.6	0.05~0.10	0.51
MMSGQ3.5-20L				L	20	50	70	71	55	31.5	22.26	14	29	16	42.75	91.8	133	9.36	13.6	0.05~0.10	0.51
MMSGQ4-20R				R	20	55	80	81	65	38	27.5	17	35	18	49.08	136	199	13.8	20.3	0.05~0.10	0.80
MMSGQ4-20L				L	20	55	80	81	65	38	27.5	17	35	18	49.08	136	199	13.8	20.3	0.05~0.10	0.80
MMSGQ2-30R				R	14	45	60	60	50	28.5	21.21	15	26	12	38.06	38.5	78.6	3.93	8.02	0~0.05	0.36
MMSGQ2-30L				L	14	45	60	60	50	28.5	21.21	15	26	12	38.06	38.5	78.6	3.93	8.02	0~0.05	0.36
MMSGQ2.5-30R	R	16	55	75	76	60	33	24.02	16	30	15	47.57	75.3	156	7.68	16.0	0.05~0.10	0.66			
MMSGQ2.5-30L	L	16	55	75	76	60	33	24.02	16	30	15	47.57	75.3	156	7.68	16.0	0.05~0.10	0.66			
MMSGQ3-30R	R	20	65	90	91	70	39.5	26.8	18	36	20	55.43	139	294	14.2	30.0	0.05~0.10	1.11			
MMSGQ3-30L	L	20	65	90	91	70	39.5	26.8	18	36	20	55.43	139	294	14.2	30.0	0.05~0.10	1.11			
MMSGQ3.5-30R	R	25	80	105	106	80	43.5	29.6	20	40	22	67.77	204	436	20.8	44.5	0.05~0.10	1.75			
MMSGQ3.5-30L	L	25	80	105	106	80	43.5	29.6	20	40	22	67.77	204	436	20.8	44.5	0.05~0.10	1.75			
MMSGQ4-30R	R	28	90	120	121	90	48	32.35	22	44	25	77.29	303	657	30.9	67.0	0.05~0.10	2.49			
MMSGQ4-30L	L	28	90	120	121	90	48	32.35	22	44	25	77.29	303	657	30.9	67.0	0.05~0.10	2.49			

* The product shapes of J Series items are identified by background color.


Bore H7	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50		
Keyway Js9	4x1.8																		
Screw size	5x2.3					6x2.8					8x3.3			10x3.3		12x3.3		14x3.8	
Catalog Number	M4					M5					M6			M8		M10			
MMSGQ2-20R J BORE	B3K	B3K	B3K	B3K	B3K	B3K													
MMSGQ2-20L J BORE	B3K	B3K	B3K	B3K	B3K	B3K													
MMSGQ2.5-20R J BORE		B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K										
MMSGQ2.5-20L J BORE		B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K										
MMSGQ3-20R J BORE				B3K	B3K	B3K	B3K	B3K	B3K	B3K									
MMSGQ3-20L J BORE				B3K	B3K	B3K	B3K	B3K	B3K	B3K									
MMSGQ3.5-20R J BORE									B4K	B4K	B4K	B4K	B4K						
MMSGQ3.5-20L J BORE									B4K	B4K	B4K	B4K	B4K						
MMSGQ4-20R J BORE									B4K	B4K	B4K	B4K	B4K	B4K					
MMSGQ4-20L J BORE									B4K	B4K	B4K	B4K	B4K	B4K					
MMSGQ2-30R J BORE		B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K									
MMSGQ2-30L J BORE		B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K									
MMSGQ2.5-30R J BORE				B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K					
MMSGQ2.5-30L J BORE				B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K					
MMSGQ3-30R J BORE									B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K			
MMSGQ3-30L J BORE									B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K			
MMSGQ3.5-30R J BORE											B4K	B4K	B4K	B4K	B4K	B4K	B4K		
MMSGQ3.5-30L J BORE											B4K	B4K	B4K	B4K	B4K	B4K	B4K		
MMSGQ4-30R J BORE												B4K	B4K	B4K	B4K	B4K	B4K		
MMSGQ4-30L J BORE												B4K	B4K	B4K	B4K	B4K	B4K		

Product Precautions → Page 306

Precautions for Standard Machined Products → Pages 38~40

All machining datum planes are cut and locating the center is made easy to maintain accuracy KHK's highest-grade spiral miter with excellent quietness


JIS grade 0 Ground bevel gears
Custom Gears are also available.

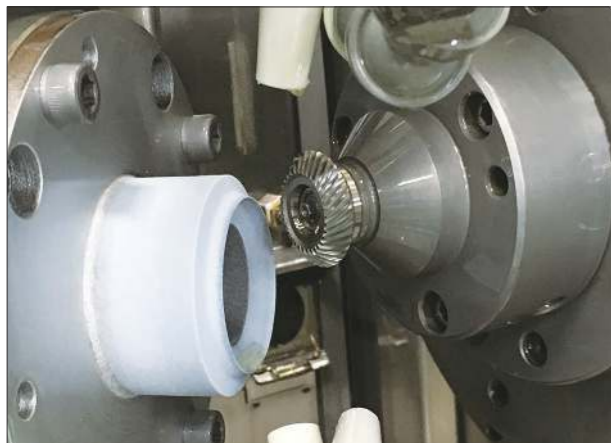

CNC Bevel Gear Grinding Machine (PH-280HG)



Gear Measuring System (350GMS)

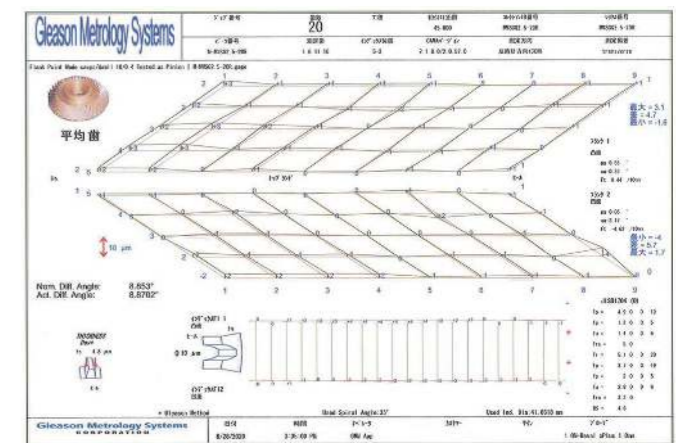


Gear Measurement Data




Specifications	
Precision grade	JIS B 1704: 1978 grade 1*
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	SCM415
Heat treatment	Tooth area carburized
Tooth hardness	55 to 60HRC


* The precision grade of J Series products is equivalent to the value shown in the table.

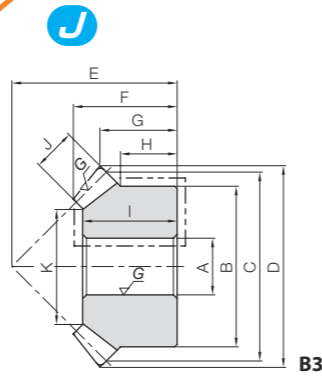


B3



B4

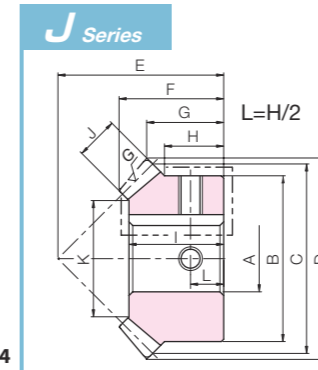

B3K



B4K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Gear Ratio	No. of teeth	Shape	Direction of spiral	Bore AH7	Hub dia. B	Pitch dia. C	Outside dia. D	Mounting distance E	Total length F	Crown to back G	Hub width H	Hole length I	Face width J	Holding surface dia. K	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)
																Bending strength	Surface durability	Bending strength	Surface durability		
MMSG2-20R MMSG2-20L		20	B3	R L	12	35	40	42.7	35	21.98	16.35	12.5	20	9	24.54	17.0	23.5	1.73	2.40	0.04~0.10	0.14
MMSG2.5-20R MMSG2.5-20L		20	B3	R L	14	42	50	53.2	45	28.63	21.6	16	26	11	30.89	32.7	46.1	3.33	4.70	0.05~0.11	0.27
MMSG3-20R MMSG3-20L		20	B3	R L	16	52	60	63.99	50	30.78	21.99	16	27	14	34.4	58.5	83.7	5.97	8.54	0.06~0.12	0.43
MMSG3.5-20R MMSG3.5-20L		20	B4	R L	20	50	70	74.53	55	32.45	22.26	14	29	16	42.75	91.8	133	9.36	13.6	0.07~0.13	0.51
MMSG4-20R MMSG4-20L		20	B4	R L	20	55	80	84.99	65	39.13	27.5	17	35	18	49.08	136	199	13.8	20.3	0.09~0.15	0.80
MMSG2-25R MMSG2-25L		25	B4	R L	12	38	50	52.5	40	23.43	16.25	11	21	11	30.89	27.5	47.0	2.80	4.79	0.04~0.10	0.21
MMSG2.5-25R MMSG2.5-25L		25	B4	R L	16	45	62.5	65.54	50	29.57	20.27	14	26	14	37.4	54.3	94.5	5.54	9.64	0.05~0.11	0.37
MMSG3-25R MMSG3-25L		25	B4	R L	20	55	75	78.78	60	35.6	24.39	17	31	17	43.92	94.5	167	9.64	17.0	0.06~0.12	0.65
MMSG3.5-25R MMSG3.5-25L		25	B4	R L	25	65	87.5	91.81	70	41.65	28.41	19	37	20	52.43	151	270	15.4	27.5	0.07~0.13	1.04
MMSG4-25R MMSG4-25L		25	B4	R L	28	75	100	104.7	80	47.8	32.35	22	42	23	58.95	216	392	22.1	40.0	0.09~0.15	1.57
MMSG2-30R MMSG2-30L		30	B4	R L	14	45	60	62.42	50	29.27	21.21	15	26	12	38.06	38.5	78.6	3.93	8.02	0.04~0.10	0.36
MMSG2.5-30R MMSG2.5-30L		30	B4	R L	16	55	75	78.04	60	34.08	24.02	16	30	15	47.57	75.3	156	7.68	16.0	0.05~0.11	0.66
MMSG3-30R MMSG3-30L		30	B4	R L	20	65	90	93.61	70	40.25	26.8	18	36	20	55.43	139	294	14.2	30.0	0.06~0.12	1.11
MMSG3.5-30R MMSG3.5-30L		30	B4	R L	25	80	105	109.21	80	44.4	29.6	20	40	22	67.77	204	436	20.8	44.5	0.07~0.13	1.75
MMSG4-30R MMSG4-30L		30	B4	R L	28	90	120	124.7	90	49.27	32.35	22	44	25	77.29	303	657	30.9	67.0	0.09~0.15	2.49


Catalog Number	* The product shapes of J Series items are identified by background color.																			
	Bore H7																			
Keyway Jis9	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50			
Screw size	4 × 1.8			5 × 2.3			6 × 2.8			8 × 3.3			10 × 3.3		12 × 3.3		14 × 3.8			
Catalog Number	M4				M5				M6				M8				M10			
MMSG2-20R J BORE	B3K	B3K	B3K	B3K	B3K	B3K														
MMSG2-20L J BORE	B3K	B3K	B3K	B3K	B3K	B3K														
MMSG2.5-20R J BORE		B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K											
MMSG2.5-20L J BORE		B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K											
MMSG3-20R J BORE				B3K	B3K	B3K	B3K	B3K	B3K	B3K										
MMSG3-20L J BORE				B3K	B3K	B3K	B3K	B3K	B3K	B3K										
MMSG3.5-20R J BORE										B4K	B4K	B4K	B4K	B4K						
MMSG3.5-20L J BORE										B4K	B4K	B4K	B4K	B4K						
MMSG4-20R J BORE										B4K	B4K	B4K	B4K	B4K	B4K					
MMSG4-20L J BORE										B4K	B4K	B4K	B4K	B4K	B4K					
MMSG2-25R J BORE	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K											
MMSG2-25L J BORE	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K											
MMSG2.5-25R J BORE				B4K	B4K	B4K	B4K	B4K	B4K	B4K										
MMSG2.5-25L J BORE				B4K	B4K	B4K	B4K	B4K	B4K	B4K										
MMSG3-25R J BORE										B4K	B4K	B4K	B4K	B4K						
MMSG3-25L J BORE										B4K	B4K	B4K	B4K	B4K						
MMSG3.5-25R J BORE											B4K	B4K	B4K	B4K	B4K	B4K				
MMSG3.5-25L J BORE											B4K	B4K	B4K	B4K	B4K	B4K				
MMSG4-25R J BORE												B4K	B4K	B4K	B4K	B4K	B4K			
MMSG4-25L J BORE												B4K	B4K	B4K	B4K	B4K	B4K			
MMSG2-30R J BORE		B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K										
MMSG2-30L J BORE		B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K										
MMSG2.5-30R J BORE				B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K								
MMSG2.5-30L J BORE				B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K	B4K								
MMSG3-30R J BORE										B4K	B4K	B4K	B4K	B4K	B4K					
MMSG3-30L J BORE										B4K	B4K	B4K	B4K	B4K	B4K					
MMSG3.5-30R J BORE											B4K	B4K	B4K	B4K	B4K	B4K	B4K			
MMSG3.5-30L J BORE											B4K	B4K	B4K	B4K	B4K	B4K	B4K			
MMSG4-30R J BORE												B4K	B4K	B4K	B4K	B4K	B4K			
MMSG4-30L J BORE												B4K	B4K	B4K	B4K	B4K	B4K			






Specifications	
Precision grade	JIS B 1704: 1978 grade 2*
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for teeth

* The precision grade of J Series products is equivalent to the value shown in the table.

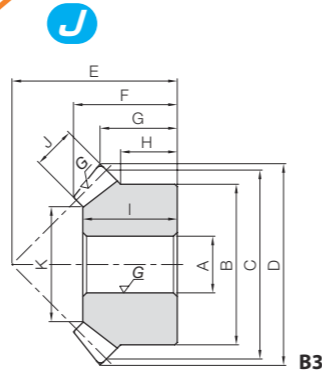

B3

J Series

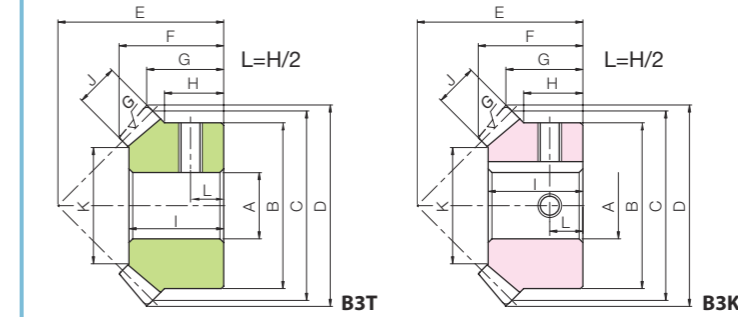

B3T

B3K







To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Gear Ratio	No. of teeth	Shape	Direction of spiral	Bore		Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)																					
					A-H7	B										Bending strength	Surface durability	Bending strength	Surface durability																							
SMSG1-20R	1	20	B3	R	6	16	20	21.30	20	13.84	10.65	8	12	5	9.86	1.17	0.97	0.12	0.099	0.02~0.08	0.019																					
SMSG1-20L																																										
SMSG1.5-20R																																										
SMSG1.5-20L																																										
SMSG2-20R																																										
SMSG2-20L																																										
SMSG2.5-20R																																										
SMSG2.5-20L																																										
SMSG3-20R																																										
SMSG3-20L																																										
SMSG3.5-20R																																										
SMSG3.5-20L																																										
SMSG4-20R																																										
SMSG4-20L																																										
SMSG5-20R																																										
SMSG5-20L																																										
SMSG1-25R																						1	25	B3	R	6	20	25	26.22	23	15.08	11.11	8	14	6	15.03	1.88	1.91	0.19	0.19	0.02~0.08	0.035
SMSG1-25L																																										
SMSG1.5-25R																																										
SMSG1.5-25L																																										
SMSG2-25R																																										
SMSG2-25L																																										
SMSG2.5-25R																																										
SMSG2.5-25L																																										
SMSG3-25R																																										
SMSG3-25L																																										
SMSG3.5-25R																																										
SMSG3.5-25L																																										
SMSG4-25R																																										
SMSG4-25L																																										
SMSG5-25R																																										
SMSG5-25L																																										
SMSG1-30R	1	30	B3	R	8	24	30	31.26	28	17.61	13.63	10	16	6	19.03	2.50	3.02	0.25	0.31	0.02~0.08	0.057																					
SMSG1-30L																																										
SMSG1.5-30R																																										
SMSG1.5-30L																																										
SMSG2-30R																																										
SMSG2-30L																																										
SMSG2.5-30R																																										
SMSG2.5-30L																																										
SMSG3-30R																																										
SMSG3-30L																																										
SMSG3.5-30R																																										
SMSG3.5-30L																																										
SMSG4-30R																																										
SMSG4-30L																																										
SMSG5-30R																																										
SMSG5-30L																																										

Catalog Number	Bore H7		* The product shapes of J Series items are identified by background color.																			
	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50		
SMSG1-20R J BORE	B3T																					
SMSG1-20L J BORE	B3T																					
SMSG1.5-20R J BORE		B3T	B3K																			
SMSG1.5-20L J BORE		B3T	B3K																			
SMSG2-20R J BORE				B3K	B3K	B3K	B3K															
SMSG2-20L J BORE				B3K	B3K	B3K	B3K															
SMSG2.5-20R J BORE					B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K										
SMSG2.5-20L J BORE					B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K										
SMSG3-20R J BORE						B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K									
SMSG3-20L J BORE						B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K									
SMSG3.5-20R J BORE													B3K	B3K	B3K	B3K	B3K					
SMSG3.5-20L J BORE													B3K	B3K	B3K	B3K	B3K					
SMSG4-20R J BORE														B3K	B3K	B3K	B3K	B3K				
SMSG4-20L J BORE														B3K	B3K	B3K	B3K	B3K				
SMSG5-20R J BORE															B3K	B3K	B3K	B3K	B3K	B3K	B3K	
SMSG5-20L J BORE															B3K	B3K	B3K	B3K	B3K	B3K	B3K	
SMSG1-25R J BORE	B3T	B3T																				
SMSG1-25L J BORE	B3T	B3T																				
SMSG1.5-25R J BORE				B3K	B3K	B3K																
SMSG1.5-25L J BORE				B3K	B3K	B3K																
SMSG2-25R J BORE					B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K										
SMSG2-25L J BORE					B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K										
SMSG2.5-25R J BORE									B3K	B3K	B3K	B3K	B3K	B3K								
SMSG2.5-25L J BORE									B3K	B3K	B3K	B3K	B3K	B3K								
SMSG3-25R J BORE													B3K	B3K	B3K	B3K	B3K					
SMSG3-25L J BORE													B3K	B3K	B3K	B3K	B3K					
SMSG3.5-25R J BORE														B3K	B3K	B3K	B3K	B3K				
SMSG3.5-25L J BORE														B3K	B3K	B3K	B3K	B3K				
SMSG4-25R J BORE															B3K	B3K	B3K	B3K	B3K	B3K	B3K	
SMSG4-25L J BORE															B3K	B3K	B3K	B3K	B3K	B3K	B3K	
SMSG5-25R J BORE																B3K	B3K	B3K	B3K	B3K	B3K	
SMSG5-25L J BORE																B3K	B3K	B3K	B3K	B3K	B3K	
SMSG1-30R J BORE		B3T	B3K	B3K																		
SMSG1-30L J BORE		B3T	B3K	B3K																		
SMSG1.5-30R J BORE			B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K										
SMSG1.5-30L J BORE			B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K										
SMSG2-30R J BORE				B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K							
SMSG2-30L J BORE				B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K							
SMSG2.5-30R J BORE									B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K				
SMSG2.5-30L J BORE									B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K				
SMSG3-30R J BORE													B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	
SMSG3-30L J BORE													B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	
SMSG3.5-30R J BORE															B3K	B3K	B3K	B3K	B3K	B3K	B3K	
SMSG3.5-30L J BORE															B3K	B3K	B3K	B3K	B3K	B3K	B3K	
SMSG4-30R J BORE																B3K	B3K	B3K	B3K	B3K	B3K	
SMSG4-30L J BORE																B3K	B3K	B3K	B3K	B3K	B3K	
SMSG5-30R J BORE																	B3K	B3K	B3K	B3K	B3K	
SMSG5-30L J BORE																	B3K	B3K	B3K	B3K	B3K	




Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	SCM415
Heat treatment	Carburized
Tooth hardness	55 to 60HRC

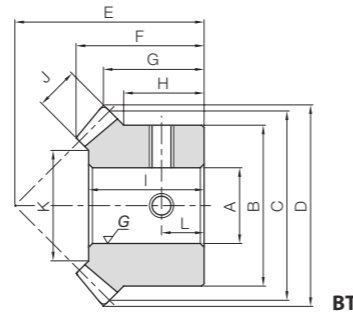

Catalog Number	Gear Ratio	Module	No. of teeth	Direction of spiral	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Hole length
						A _{H7}	B								
MMSA1-20R MMSB1-20R MMSA1-20L MMSB1-20L	1	m1	20	R	BT	8	17	20	21.29	20	13.53	10.64	8.5	12.2	
L				10											
MMSA1.5-20R MMSB1.5-20R MMSA1.5-20L MMSB1.5-20L		m1.5	R	BT BK	10	25	30	31.9	28	18.48	13.95	10.5	16.5		
L			12												
MMSA2-20R MMSB2-20R MMSA2-20L MMSB2-20L		m2	R	BT BK	14	35	40	42.52	35	22.09	16.26	12.5	20		
L			16												
MMSA2.5-20R MMSB2.5-20R MMSA2.5-20L MMSB2.5-20L		m2.5	R	BK	18	42	50	53.2	45	28.63	21.6	16	26		
L			20												
MMSA3-20R MMSB3-20R MMSA3-20L MMSB3-20L		m3	R	BK	20	52	60	63.99	50	30.78	21.99	16	27		
L			22												
MMSA3.5-20R MMSB3.5-20R MMSA3.5-20L MMSB3.5-20L		m3.5	R	BK	25	50	70	74.53	55	32.45	22.26	14	29		
L			28												
MMSA4-20R MMSB4-20R MMSA4-20L MMSB4-20L		m4	R	B4	28	55	80	84.99	65	39.13	27.5	17	35		
L			30												
MMSA5-20R MMSB5-20R MMSA5-20L MMSB5-20L		m5	R	B4	30	70	100	106.25	75	42.99	28.13	17	38		
L			35												
MMSA6-20R MMSB6-20R MMSA6-20L MMSB6-20L		m6	R	B4	40	80	120	127.59	90	51.13	33.8	20	45		
L			45												
MMSA8-20R MMSA8-20L		m8	R	B7	80	—	160	—	100	45	29.16	—	40		
L			80												
MMSA10-20R MMSA10-20L	m10	R	B7	100	—	200	—	125	58	36.48	—	50			


Face width	Holding surface dia.	Keyway	Socket head screw	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
J	K	Width × Depth	Size	L						
4.5	11.67	—	2-M4	4.5	2.24	2.09	0.23	0.21	0.03~0.13	0.018 0.015 0.018 0.015
7	17.2	4 x 1.8								
9	24.54	5 x 2.3	7	18.0	17.3	1.83	1.76	0.06~0.16	0.13 0.12 0.13 0.12	
11	30.89	6 x 2.8								8
14	34.4	8 x 3.3	9	61.9	61.1	6.32	6.23	0.08~0.18	0.40 0.39 0.40 0.39	
16	42.75	8 x 3.3								10
18	49.08	8 x 3.3	11	144	144	14.6	14.7	0.12~0.27	0.70 0.68 0.70 0.68	
23	60.95	10 x 3.3								12
27	73.63	12 x 3.3	13	475	496	48.4	50.6	0.16~0.36	2.11 1.99 2.11 1.99	
35	101	14 x 3.8								14
45	122.72	14 x 3.8	6-M10	130	1660	1840	169	188	0.25~0.50	

When installing products produced in B7 style (ring type), always secure the gears onto the mounting base with taper pins to absorb the rotational loads. It is dangerous to secure with bolts only.

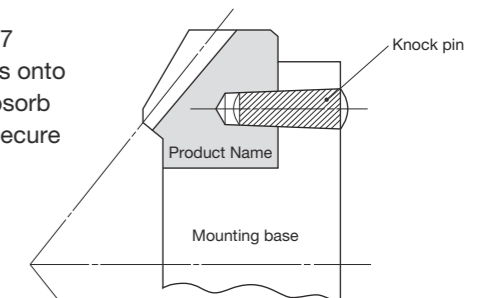



Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	SCM415
Heat treatment	Tooth area carburized
Tooth hardness	55 to 60HRC
Surface treatment	Black oxide coating



Catalog Number	Gear Ratio	Module	No. of teeth	Direction of spiral	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back
						A _{H7}	B	C	D	E	F	G	
MMS2-20R MMS2-20L	1	m2	20	R	B3	12	34	40	42.31	35	22.14	16.15	
MMS2.5-20R MMS2.5-20L		m2.5		L		15	42	50	53.2	45	28.63	21.6	
MMS3-20R MMS3-20L		m3		R		16	52	60	63.99	50	30.78	21.99	
MMS4-20R MMS4-20L		m4		L		20	65	80	84.99	65	39.13	27.5	
MMS5-20R MMS5-20L		m5		R		25	85	100	106.25	75	42.99	28.13	
MMS2-25R MMS2-25L	1	m2	25	R	B3	12	45	50	52.4	40	24.19	16.2	
MMS2.5-25R MMS2.5-25L		m2.5		L		16	55	62.5	65.54	50	30.24	20.27	
MMS3-25R MMS3-25L		m3		R		20	65	75	78.77	60	37.57	24.39	
MMS4-25R MMS4-25L		m4		L		25	85	100	104.7	80	49.14	32.35	
MMS5-25R MMS5-25L		m5		R		28	100	125	130.86	100	60.59	40.43	
MMS2-30R MMS2-30L	1	m2	30	R	B3	12	45	60	62.42	50	29.27	21.21	
MMS2.5-30R MMS2.5-30L		m2.5		L		16	60	75	78.04	62	36.08	26.02	
MMS3-30R MMS3-30L		m3		R		20	70	90	93.61	75	45.25	31.8	
MMS4-30R MMS4-30L		m4		L		28	100	120	124.71	95	54.28	37.35	
MMS5-30R MMS5-30L		m5		R		28	130	150	155.9	120	68.2	47.95	


Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
H	I	J	K							
12	20	9	24.54	17.0	17.3	1.73	1.76	0.06~0.16	0.13	MMS2-20R MMS2-20L
16	26	11	30.89	32.7	33.7	3.34	3.44	0.07~0.17	0.26	MMS2.5-20R MMS2.5-20L
16	27	14	34.4	58.7	61.1	5.98	6.23	0.08~0.18	0.43	MMS3-20R MMS3-20L
17.5	35	18	49.08	136	144	13.9	14.7	0.12~0.27	0.92	MMS4-20R MMS4-20L
17.5	38	23	60.95	269	288	27.5	29.4	0.14~0.34	1.65	MMS5-20R MMS5-20L
12.5	21	12	28.06	29.1	36.3	2.96	3.70	0.06~0.16	0.25	MMS2-25R MMS2-25L
15	27	15	36.57	56.7	71.8	5.79	7.32	0.07~0.17	0.47	MMS2.5-25R MMS2.5-25L
17.5	33	20	39.43	104	133	10.6	13.6	0.08~0.18	0.81	MMS3-25R MMS3-25L
22.5	44	25	57.29	238	309	24.3	31.5	0.12~0.27	1.88	MMS4-25R MMS4-25L
25	50	30	65.15	454	595	46.3	60.7	0.14~0.34	3.39	MMS5-25R MMS5-25L
12.5	25	12	36.06	42.4	57.1	4.32	5.82	0.06~0.16	0.37	MMS2-30R MMS2-30L
17	32	15	47.57	82.8	113	8.44	11.5	0.07~0.17	0.76	MMS2.5-30R MMS2.5-30L
20	40	20	53.43	153	211	15.6	21.5	0.08~0.18	1.32	MMS3-30R MMS3-30L
25	50	25	79.29	348	488	35.5	49.8	0.12~0.27	3.07	MMS4-30R MMS4-30L
35	62	30	99.15	662	941	67.5	96.0	0.14~0.34	6.44	MMS5-30R MMS5-30L






Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating

* The precision grade of J Series products is equivalent to the value shown in the table.



J Series

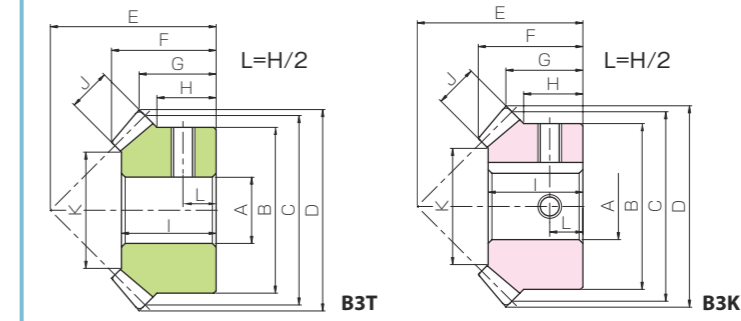



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Gear Ratio	No. of teeth	Shape	Direction of spiral	Dimensions (mm)										Allowable torque (N·m)				Backlash (mm)	Weight (kg)				
					A-H7	B	C	D	E	F	G	H	I	J	K	Bending strength	Surface durability	Bending strength			Surface durability			
SMS1-20R SMS1-20L	1	20	B3	R	6	16	20	21.3	20	13.84	10.65	8	12	5	9.86	1.07	0.65	0.11	0.067	0.03~0.13	0.019			
SMS1.5-20R SMS1.5-20L				R	8	26	30	31.74	30	21.18	15.87	13	19	8	15.37	3.73	2.33	0.38	0.24	0.05~0.15	0.074			
SMS2-20R SMS2-20L				R	12	34	40	42.4	37	24.75	18.2	14	22	10	21.72	8.54	5.40	0.87	0.55	0.06~0.16	0.15			
SMS2.5-20R SMS2.5-20L				R	14	42	50	52.94	48	32.42	24.47	19	29	12	28.06	16.3	10.5	1.66	1.07	0.07~0.17	0.30			
SMS3-20R SMS3-20L				R	16	50	60	63.72	58	39.6	29.86	23	35	15	31.57	28.8	18.7	2.94	1.91	0.08~0.18	0.52			
SMS3.5-20R SMS3.5-20L				R	20	60	70	74.47	65	43.81	32.23	25	40	18	39.09	46.5	30.4	4.74	3.10	0.10~0.25	0.82			
SMS4-20R SMS4-20L				R	20	64	80	84.88	75	50.51	37.44	27	45	20	43.43	68.3	45.0	6.97	4.59	0.12~0.27	1.15			
SMS5-20R SMS5-20L				R	25	80	100	105.9	90	60.16	42.95	30	54	26	54.46	136	90.9	13.9	9.27	0.14~0.34	2.13			
SMS6-20R SMS6-20L				R	28	100	120	127.16	104	67.35	47.58	34	60	30	67.15	226	155	23.0	15.8	0.16~0.36	3.65			
SMS8-20R SMS8-20L				R	30	130	160	169.94	125	72.6	49.97	30	62	35	95	484	344	49.4	35.1	0.20~0.45	7.00			
SMS1-25R SMS1-25L				1	25	B3	R	6	20	25	26.22	23	15.08	11.11	8	14	6	15.03	1.71	1.28	0.17	0.13	0.03~0.13	0.035
SMS1.5-25R SMS1.5-25L							R	10	30	37.5	39.31	34	22.14	16.16	11.5	19	9	19.54	5.78	4.42	0.59	0.45	0.05~0.15	0.11
SMS2-25R SMS2-25L							R	12	40	50	52.38	40	24.2	16.19	10	20	12	26.06	13.7	10.7	1.40	1.09	0.06~0.16	0.21
SMS2.5-25R SMS2.5-25L							R	16	50	62.5	65.54	50	30.24	20.27	12.5	26	15	34.57	26.8	21.1	2.73	2.15	0.07~0.17	0.42
SMS3-25R SMS3-25L	R	20	60				75	78.77	60	37.57	24.39	15	32	20	37.43	49.1	39.1	5.00	3.98	0.08~0.18	0.74			
SMS3.5-25R SMS3.5-25L	R	25	70				87.5	91.81	70	42.98	28.41	17.5	37	22	46.77	75.4	60.6	7.69	6.18	0.10~0.25	1.14			
SMS4-25R SMS4-25L	R	28	80				100	104.7	80	49.14	32.35	20	43	25	55.29	112	90.7	11.5	9.25	0.12~0.27	1.71			
SMS5-25R SMS5-25L	R	28	100				125	130.86	100	60.59	40.43	25	50	30	65.15	214	175	21.8	17.8	0.14~0.34	3.39			
SMS6-25R SMS6-25L	R	28	120				150	157.17	120	71.97	48.58	30	61	35	83	357	300	36.4	30.6	0.16~0.36	5.99			
SMS1-30R SMS1-30L	1	30	B3				R	8	24	30	31.26	28	17.61	13.63	10	16	6	19.03	2.28	2.03	0.23	0.21	0.03~0.13	0.057
SMS1.5-30R SMS1.5-30L							R	10	36	45	46.84	43	28.11	21.42	16	25	10	25.72	8.22	7.48	0.84	0.76	0.05~0.15	0.21
SMS2-30R SMS2-30L							R	12	45	60	62.42	50	29.27	21.21	12.5	25	12	36.06	18.2	16.9	1.86	1.72	0.06~0.16	0.37
SMS2.5-30R SMS2.5-30L							R	16	60	75	78.04	62	36.08	26.02	17	32	15	47.57	35.6	33.4	3.63	3.40	0.07~0.17	0.76
SMS3-30R SMS3-30L							R	20	70	90	93.61	75	45.25	31.8	20	40	20	53.43	65.8	62.3	6.71	6.35	0.08~0.18	1.32
SMS3.5-30R SMS3.5-30L				R	25	90	105	109.21	85	49.4	34.6	25	45	22	67.77	101	96.0	10.3	9.79	0.10~0.25	2.19			
SMS4-30R SMS4-30L				R	28	100	120	124.71	95	54.28	37.35	25	50	25	79.29	150	144	15.3	14.7	0.12~0.27	3.07			
SMS5-30R SMS5-30L				R	28	130	150	155.90	120	68.2	47.95	35	62	30	99.15	284	276	29.0	28.1	0.14~0.34	6.44			

Catalog Number	Bore H7	* The product shapes of J Series items are identified by background color.																									
		8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	55	60	65	70	75	80	85
SMS1-20R J BORE	B3T																										
SMS1.5-20R J BORE	B3K																										
SMS2-20R J BORE					B3K	B3K	B3K																				
SMS2.5-20R J BORE					B3K	B3K	B3K	B3K	B3K	B3K	B3K																
SMS3-20R J BORE								B3K	B3K	B3K	B3K	B3K															
SMS3.5-20R J BORE													B3K	B3K	B3K	B3K											
SMS4-20R J BORE													B3K	B3K	B3K	B3K	B3K										
SMS5-20R J BORE													B3K	B3K	B3K	B3K	B3K	B3K	B3K								
SMS6-20R J BORE													B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K							
SMS8-20R J BORE																		B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K
SMS1-25R J BORE	B3T																										
SMS1.5-25R J BORE	B3K													B3K	B3K												
SMS2-25R J BORE														B3K	B3K	B3K	B3K	B3K	B3K								
SMS2.5-25R J BORE														B3K	B3K	B3K	B3K	B3K	B3K								
SMS3-25R J BORE																		B3K	B3K	B3K							
SMS3.5-25R J BORE																		B3K	B3K	B3K	B3K						
SMS4-25R J BORE																		B3K	B3K	B3K	B3K	B3K					
SMS5-25R J BORE			</																								



Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Helix angle	—
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating



Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Hole length		
					AH7	B	C	D	E	F	G	H	I		
SMA1-20 SMB1-20	1	m1	20	BT	8	16	20	21.41	20	13.95	10.71	8	12		
SMA1.5-20 SMB1.5-20					10	26	30	32.12	30	21.24	16.06	13	19		
SMA2-20 SMB2-20		m2		14	34	40	42.83	37	24.89	18.41	14	22			
SMA2.5-20 SMB2.5-20				18	42	50	53.54	48	32.54	24.77	19	29			
SMA3-20 SMB3-20 SMC3-20		m3		BK	22	50	60	64.24	58	39.84	30.12	23	35		
SMA4-20 SMB4-20 SMC4-20					30	64	80	85.65	75	50.78	37.83	27	45		
SMA5-20 SMB5-20 SMC5-20		m5		BK	40	80	100	107.07	90	60.38	43.54	30	54		
SMA1-25 SMA1.5-25					1	m1	25	BT	10	20	25	26.41	23	15.16	11.21
SMA2-25 SMB2-25		12		30					37.5	39.62	34	22.25	16.31	11.5	19
SMA2.5-25 SMB2.5-25		m2.5		BK		18		40	50	52.83	40	24.33	16.41	10	20
SMA3-25 SMB3-25	20		50			62.5		66.04	50	30.41	20.52	12.5	26		
SMA4-25 SMB4-25	m4	BK	30	60		75		79.24	60	37.81	24.62	15	32		
SMA5-25			35	80		100		105.66	80	49.32	32.83	20	43		
SMA1-30 SMA1.5-30	1	m1	30	BK		12		24	30	31.41	28	17.71	13.71	10	16
SMA2-30 SMB2-30						15		36	45	47.12	43	28.24	21.56	16	25
SMA2.5-30 SMB2.5-30		m2.5				20		45	60	62.83	50	29.42	21.41	12.5	25
SMA3-30 SMB3-30						25		60	75	78.54	62	36.28	26.27	17	32
SMA4-30 SMB4-30		m4			32	70	90	94.24	75	45.47	32.12	20	40		
SMA5-30					40	100	120	125.66	95	54.52	37.83	25	50		
					m5	55	130	150	157.07	120	68.56	48.54	35	62	


Face width	Holding surface dia.	Keyway	Socket head screw	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number	
				Bending strength	Surface durability	Bending strength	Surface durability				
J	K	Width × Depth	Size	L							
5	9.86 10	—	M4	4	0.90	0.37	0.091	0.038	0.03~0.13	0.016 0.014	SMA1-20 SMB1-20
8	15.37	—	M4 M5	6.5	3.13	1.31	0.32	0.13	0.05~0.15	0.069 0.06	SMA1.5-20 SMB1.5-20
10	21.72	5 x 2.3 5 x 2.3	M5	7	7.17	3.05	0.73	0.31	0.06~0.16	0.14 0.13	SMA2-20 SMB2-20
12	28.06	5 x 2.3* 6 x 2.8	M6	9.5	13.7	5.90	1.39	0.60	0.07~0.17	0.27 0.26	SMA2.5-20 SMB2.5-20
15	31.57	7 x 3* 7 x 3* 6 x 2.8	M6 M8 M6	11.5	24.2	10.5	2.47	1.08	0.08~0.18	0.47 0.44 0.49	SMA3-20 SMB3-20 SMC3-20
20	43.43	7 x 3* 10 x 3.3 8 x 3.3	M8	13.5	57.3	25.4	5.85	2.59	0.12~0.27	1.00 0.96 1.07	SMA4-20 SMB4-20 SMC4-20
26	54.46	10 x 3.3* 8 x 3.3 10 x 3.3	M8	15	114	51.3	11.7	5.23	0.14~0.34	1.80 2.04 1.93	SMA5-20 SMB5-20 SMC5-20
6	15.03	—	M4	4	1.48	0.71	0.15	0.072	0.03~0.13	0.029	SMA1-25
9	19.54	4 x 1.8	M5	5.75	4.98	2.44	0.51	0.25	0.05~0.15	0.10	SMA1.5-25
12	26.06	6 x 2.8 5 x 2.3	M6 M5	5	11.8	5.90	1.20	0.60	0.06~0.16	0.19 0.20	SMA2-25 SMB2-25
15	34.57	5 x 2.3* 6 x 2.8	M6	6	23.1	11.7	2.35	1.19	0.07~0.17	0.39 0.40	SMA2.5-25 SMB2.5-25
20	37.43	7 x 3* 8 x 3.3	M8	7.5	42.3	21.6	4.31	2.20	0.08~0.18	0.63 0.69	SMA3-25 SMB3-25
25	55.29	10 x 3.3 8 x 3.3	M8	10	96.8	50.2	9.87	5.12	0.12~0.27	1.59 1.68	SMA4-25 SMB4-25
30	65.15	12 x 3.3*	M8	12.5	185	96.8	18.8	9.87	0.14~0.34	2.86	SMA5-25
6	19.03	4 x 1.8	M5	5	2.00	1.11	0.20	0.11	0.03~0.13	0.047	SMA1-30
10	25.71	5 x 2.3	M5	8	7.22	4.08	0.74	0.42	0.05~0.15	0.19	SMA1.5-30
12	36.06	6 x 2.8 5 x 2.3	M6 M5	6.25	16.0	9.20	1.63	0.94	0.06~0.16	0.32 0.35	SMA2-30 SMB2-30
15	47.57	8 x 3.3 6 x 2.8	M8 M6	8.5	31.2	18.2	3.19	1.86	0.07~0.17	0.68 0.73	SMA2.5-30 SMB2.5-30
20	53.43	10 x 3.3 8 x 3.3	M8	10	57.8	34.0	5.89	3.46	0.08~0.18	1.15 1.25	SMA3-30 SMB3-30
25	79.29	12 x 3.3 8 x 3.3	M8	12.5	131	78.3	13.4	7.99	0.12~0.27	2.81 3.03	SMA4-30 SMB4-30
30	99.15	16 x 4.3	M10	17.5	250	150	25.5	15.3	0.14~0.34	5.56	SMA5-30






Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Material	SCM415
Heat treatment	Tooth area carburized
Tooth hardness	55 to 60HRC
Surface treatment	Black oxide coating

* The precision grade of J Series products is equivalent to the value shown in the table.

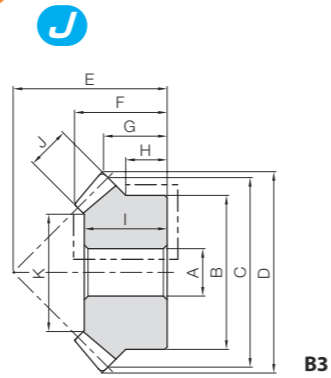

B3

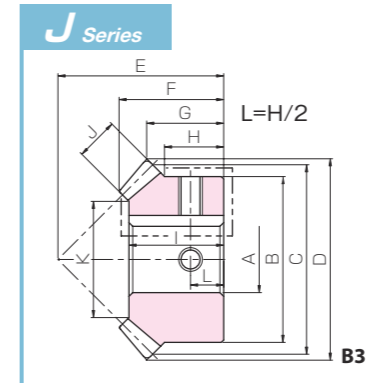

B3K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Gear Ratio	No. of teeth	Shape	Specifications													Backlash (mm)	Weight (kg)		
				Bore A _{H7}	Hub dia. B	Pitch dia. C	Outside dia. D	Mounting distance E	Total length F	Crown to back G	Hub width H	Hole length I	Face width J	Holding surface dia. K	Allowable torque (N·m) Bending strength	Allowable torque (kgf·m) Surface durability				
MM2-20	1	20	B3	12	34	40	42.83	35	22.24	16.41	12	20	9	24.54	15.1	9.74	1.54	0.99	0.06~0.16	0.13
MM2.5-20				15	42	50	53.54	45	28.89	21.77	16	26	11	30.89	29.0	19.0	2.96	1.94	0.07~0.17	0.27
MM3-20				16	52	60	64.24	50	31.19	22.12	16	27	14	34.4	52.0	34.5	5.30	3.52	0.08~0.18	0.43
MM4-20				20	65	80	85.66	65	39.49	27.83	17.5	35	18	49.09	121	81.2	12.3	8.28	0.12~0.27	0.93
MM5-20				25	80	100	107.07	90	60.38	43.54	30	54	26	54.46	256	175	26.1	17.8	0.14~0.34	2.15
MM2-25	1	25	B3	12	45	50	52.83	40	24.33	16.41	12.5	21	12	28.06	26.4	20.1	2.70	2.05	0.06~0.16	0.25
MM2.5-25				16	55	62.5	66.03	50	30.41	20.52	15	27	15	36.57	51.6	39.7	5.27	4.05	0.07~0.17	0.47
MM3-25				20	65	75	79.24	60	37.81	24.62	17.5	33	20	39.43	94.7	73.5	9.66	7.49	0.08~0.18	0.81
MM4-25				25	85	100	105.66	80	49.32	32.83	22.5	44	25	57.29	217	171	22.1	17.4	0.12~0.27	1.89
MM5-25				28	100	125	132.07	100	60.82	41.04	25	50	30	65.15	413	329	42.1	33.6	0.14~0.34	3.41
MM2-30	1	30	B3	12	45	60	62.83	50	29.43	21.41	12.5	25	12	36.06	35.7	31.1	3.64	3.17	0.06~0.16	0.37
MM2.5-30				16	60	75	78.54	62	36.28	26.27	17	32	15	47.57	69.7	61.5	7.11	6.27	0.07~0.17	0.76
MM3-30				20	70	90	94.24	75	45.47	32.12	20	40	20	53.43	129	115	13.2	11.7	0.08~0.18	1.32
MM4-30				28	100	120	125.66	95	54.52	37.83	25	50	25	79.29	293	266	29.9	27.1	0.12~0.27	3.09
MM5-30				28	130	150	157.07	120	68.56	48.54	35	62	30	99.15	558	513	56.9	52.3	0.14~0.34	6.47


Bore H7	* The product shapes of J Series items are identified by background color.																											
	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	55	60	65	70	75	80	85				
Keyway J _{S9}	4x1.8	5x2.3				6x2.8				8x3.3				10x3.3				12x3.3	14x3.8	16x4.3	18x4.4	20x4.9	22x5.4					
Screw size	M4				M5				M6				M8				M10				M12				M16			
Catalog Number	MM2-20 J BORE	MM2.5-20 J BORE	MM3-20 J BORE	MM4-20 J BORE	MM5-20 J BORE	MM2-25 J BORE	MM2.5-25 J BORE	MM3-25 J BORE	MM4-25 J BORE	MM5-25 J BORE	MM2-30 J BORE	MM2.5-30 J BORE	MM3-30 J BORE	MM4-30 J BORE	MM5-30 J BORE													

LM Module 0.8~1.5
Sintered Metal Miter Gears

Sintered Metal Miter Gears



Specifications	
Precision grade	JIS B 1704: 1978 grade 5
Gear teeth	Gleason
Pressure angle	20°
Material	SMF5040
Heat treatment	—
Tooth hardness	(70 to 95HRB)



B1


Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Specifications							
					Bore A _{H8}	Hub dia. B	Pitch dia. C	Outside dia. D	Mounting distance E	Total length F	Crown to back G	Hub width H
LM0.8-20	1	m0.8	20	B1	4	12	16	17.13	16	11	8.57	5.5
LM1-20		m1			5	16	20	21.41	20	13.5	10.71	6
LM1.25-20		m1.25			6	22	25	26.77	23	15	11.38	6
LM1.5-20		m1.5			6	26	30	32.12	30	21	16.06	9

Hole length I	Face width J	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (g)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
11	4.24	—	0.22	0.027	0.022	0.0027	0~0.16	9.67	LM0.8-20
13.5	4.95		0.41	0.050	0.042	0.0051	0~0.18	20.7	LM1-20
15	6.36		0.81	0.099	0.083	0.010	0~0.20	38.8	LM1.25-20
21	8.48		1.48	0.19	0.15	0.019	0~0.22	78.6	LM1.5-20




Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	S45C
Heat treatment	-
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

* The precision grade of J Series products is equivalent to the value shown in the table.

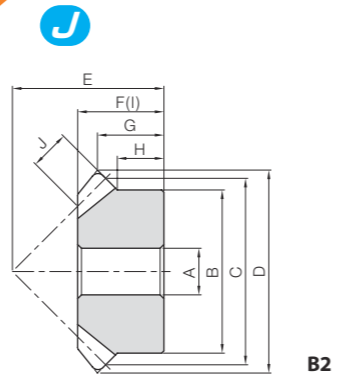


B2




B3


J Series



B2K



B3T



B3K

To order J Series products, please specify: **Catalog No. + J + BORE.**


Catalog Number	Gear Ratio	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Total length	Crown to back	Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N-m)		Allowable torque (kgf-m)		Backlash (mm)	Weight (kg)	
				A _{H7}	B									Bending strength	Surface durability	Bending strength	Surface durability			
SM2-16	1	16	B2	10	27	32	34.83	30	19	15.41	11.5	19	7	3.84	0.33	0.39	0.034	0.06~0.16	0.076	
SM2.5-16				12	34	40	43.53	35	21	16.77	12	21	9	7.63	0.68	0.78	0.069	0.07~0.17	0.14	
SM3-16				14	42	48	52.24	40	23	18.12	13	23	11	—	13.3	1.21	1.36	0.12	0.08~0.18	0.22
SM4-16				16	55	64	69.66	50	28	20.83	13.5	28	14	—	30.7	2.87	3.13	0.29	0.12~0.27	0.49
SM5-16				20	70	80	87.07	65	37	28.54	20	37	17	—	58.9	5.62	6.00	0.57	0.14~0.34	1.03
SM1-20	1	20	B3	6	16	20	21.41	20	13.94	10.71	8	12	5	9.86	0.89	0.084	0.091	0.0086	0.03~0.13	0.019
SM1.25-20				8	22	25	26.77	23	15.27	11.38	9	13	6	13.03	1.70	0.16	0.17	0.017	0.04~0.14	0.036
SM1.5-20				8	26	30	32.12	30	21.24	16.06	13	19	8	15.37	3.12	0.30	0.32	0.031	0.05~0.15	0.074
SM2-20				12	34	40	42.83	37	24.89	18.41	14	22	10	21.72	7.13	0.72	0.73	0.073	0.06~0.16	0.15
SM2.5-20				14	42	50	53.54	48	32.54	24.77	19	29	12	28.06	13.6	1.41	1.39	0.14	0.07~0.17	0.30
SM3-20	1	20	B3	16	50	60	64.24	58	39.84	30.12	23	35	15	31.57	24.1	2.54	2.45	0.26	0.08~0.18	0.53
SM3.5-20				20	60	70	74.95	65	44.13	32.47	25	40	18	39.09	38.8	4.15	3.96	0.42	0.10~0.25	0.82
SM4-20				20	64	80	85.65	75	50.78	37.83	27	45	20	43.43	57.0	6.19	5.82	0.63	0.12~0.27	1.15
SM5-20				25	80	100	107.07	90	60.38	43.54	30	54	26	54.46	114	12.6	11.6	1.29	0.14~0.34	2.15
SM6-20				28	100	120	128.48	104	67.67	48.24	34	60	30	67.15	191	21.8	19.4	2.22	0.16~0.36	3.68
SM8-20	30	130	160	171.31	125	73.33	50.66	30	62	35	95	413	49.6	42.1	5.06	0.20~0.45	7.05			
SM1-25	1	25	B3	6	20	25	26.41	23	15.16	11.21	8	14	6	15.03	1.47	0.16	0.15	0.017	0.03~0.13	0.035
SM1.25-25				8	25	31.25	33.02	28	17.88	13.26	9.25	16	7	18.7	2.75	0.31	0.28	0.032	0.04~0.14	0.063
SM1.5-25				10	30	37.5	39.62	34	22.25	16.31	11.5	19	9	19.54	4.96	0.57	0.51	0.059	0.05~0.15	0.11
SM2-25				12	40	50	52.83	40	24.33	16.41	10	20	12	26.06	11.8	1.41	1.20	0.14	0.06~0.16	0.22
SM2.5-25				16	50	62.5	66.04	50	30.41	20.52	12.5	26	15	34.57	23.0	2.81	2.34	0.29	0.07~0.17	0.42
SM3-25	1	25	B3	20	60	75	79.24	60	37.81	24.62	15	32	20	37.43	42.1	5.24	4.29	0.53	0.08~0.18	0.74
SM3.5-25				25	70	87.5	92.45	70	43.23	28.72	17.5	37	22	46.77	64.7	8.19	6.60	0.83	0.10~0.25	1.15
SM4-25				28	80	100	105.66	80	49.32	32.83	20	43	25	55.29	96.3	12.4	9.82	1.26	0.12~0.27	1.73
SM5-25				28	100	125	132.07	100	60.82	41.04	25	50	30	65.15	184	24.2	18.7	2.47	0.14~0.34	3.41
SM6-25				28	120	150	158.48	120	72.32	49.24	30	61	35	83	309	42.1	31.5	4.29	0.16~0.36	6.03
SM1-30	1	30	B3	8	24	30	31.41	28	17.71	13.71	10	16	6	19.03	1.99	0.26	0.20	0.026	0.03~0.13	0.057
SM1.25-30				10	30	37.5	39.27	36	23.47	18.13	13.5	21	8	22.37	4.05	0.54	0.41	0.055	0.04~0.14	0.12
SM1.5-30				10	36	45	47.12	43	28.24	21.56	16	25	10	25.71	7.19	0.97	0.73	0.099	0.05~0.15	0.21
SM2-30				12	45	60	62.83	50	29.42	21.41	12.5	25	12	36.06	15.9	2.22	1.62	0.23	0.06~0.16	0.37
SM2.5-30				16	60	75	78.54	62	36.28	26.27	17	32	15	47.57	31.1	4.43	3.17	0.45	0.07~0.17	0.76
SM3-30	1	30	B3	20	70	90	94.24	75	45.47	32.12	20	40	20	53.43	57.5	8.33	5.87	0.85	0.08~0.18	1.32
SM3.5-30				25	90	105	109.95	85	49.66	34.97	25	45	22	67.77	88.0	13.0	8.97	1.32	0.10~0.25	2.20
SM4-30				28	100	120	125.66	95	54.52	37.83	25	50	25	79.29	131	19.6	13.3	2.00	0.12~0.27	3.09
SM5-30				28	130	150	157.07	120	68.56	48.54	35	62	30	99.15	249	38.3	25.4	3.91	0.14~0.34	6.47

Catalog Number	Bore H7		* The product shapes of J Series items are identified by background color.																											
	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50	55	60	65	70	75	80	85			
SM2-16 J BORE			B2K	B2K																										
SM2.5-16 J BORE			B2K	B2K	B2K	B2K	B2K																							
SM3-16 J BORE				B2K	B2K	B2K	B2K	B2K	B2K	B2K	B2K																			
SM4-16 J BORE					B2K	B2K	B2K	B2K	B2K	B2K	B2K	B2K	B2K																	
SM5-16 J BORE											B2K	B2K	B2K	B2K	B2K	B2K	B2K													
SM1-20 J BORE		B3T																												
SM1.25-20 J BORE			B3T																											
SM1.5-20 J BORE				B3T	B3K																									
SM2-20 J BORE					B3K	B3K	B3K	B3K																						
SM2.5-20 J BORE						B3K	B3K	B3K	B3K	B3K	B3K	B3K																		
SM3-20 J BORE							B3K	B3K	B3K	B3K	B3K	B3K	B3K																	
SM3.5-20 J BORE											B3K	B3K	B3K	B3K	B3K															
SM4-20 J BORE												B3K	B3K	B3K	B3K	B3K	B3K													
SM5-20 J BORE													B3K	B3K	B3K	B3K	B3K	B3K	B3K											
SM6-20 J BORE														B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K		
SM8-20 J BORE															B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K	B3K		
SM1-25 J BORE		B3T																												
SM1.25-25 J BORE			B3T	B3K	B3K																									
SM1.5-25 J BORE				B3K	B3K	B3K																								
SM2-25 J BORE					B3K	B3K	B3K	B3K	B3K	B3K	B3K																			
SM2.5-25 J BORE											B3K	B3K	B3K	B3K	B3K	B3K														
SM3-25 J BORE																														




Shaft angle 45°


Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

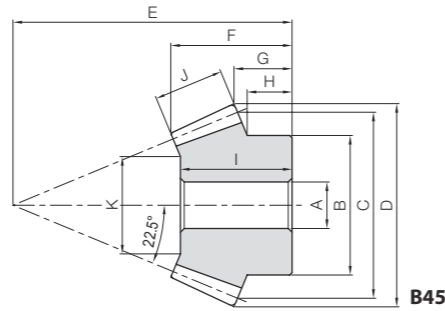

B45

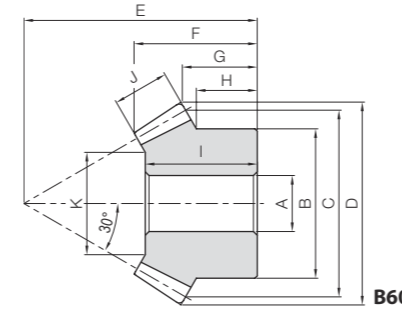

B60

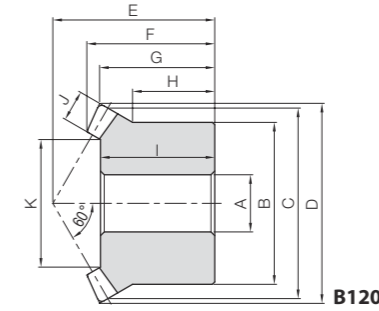

B120

Catalog Number	Gear Ratio	Module	No. of teeth	Shaft angle	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length		Crown to back
						A _{H7}	B					C	D	
SAM1.5-20045	1	m1.5	20	45°	B45	8	25	30	32.77	45	19.33	9.36		
SAM2-20045		m2				10	30	40	43.69	60	26.08	12.48		
SAM2.5-20045		m2.5				12	40	50	54.62	75	31.92	15.6		
SAM3-20045		m3				14	50	60	65.54	90	38.66	18.72		
SAM1.5-20060	1	m1.5	20	60°	B60	8	25	30	32.59	40	22.3	14.77		
SAM2-20060		m2				12	32	40	43.46	50	26.39	16.36		
SAM2.5-20060		m2.5				14	40	50	54.33	60	30.49	17.94		
SAM3-20060		m3				16	50	60	65.19	70	34.59	19.54		
SAM1.5-20120	1	m1.5	20	120°	B120	8	26	30	31.5	26	20.69	18.64		
SAM2-20120		m2				12	34	40	42	34	26.86	24.18		
SAM2.5-20120		m2.5				14	42	50	52.5	42	33.22	29.73		
SAM3-20120		m3				16	50	60	63	50	39.39	35.28		

Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
H	I	J	K							
7.75	18	11	17	4.30	0.38	0.44	0.039	0.05~0.15	0.067	SAM1.5-20045
9.65	24	15	20.92	10.3	0.95	1.05	0.097	0.06~0.16	0.15	SAM2-20045
12.58	30	18	30.07	19.6	1.85	2.00	0.19	0.07~0.17	0.31	SAM2.5-20045
15.51	36	22	34	34.4	3.30	3.51	0.34	0.08~0.18	0.55	SAM3-20045
12.58	21	9	18.18	3.54	0.32	0.36	0.033	0.05~0.15	0.077	SAM1.5-20060
13.05	24	12	21.93	8.39	0.78	0.86	0.080	0.06~0.16	0.15	SAM2-20060
13.82	28	15	29.15	16.4	1.56	1.67	0.16	0.07~0.17	0.27	SAM2.5-20060
15.16	32	18	36.36	28.3	2.74	2.89	0.28	0.08~0.18	0.47	SAM3-20060
13.88	18	5	19.22	2.43	0.29	0.25	0.030	0.05~0.15	0.073	SAM1.5-20120
17.26	24	6.5	26.78	5.66	0.70	0.58	0.072	0.06~0.16	0.16	SAM2-20120
20.64	29	8.5	32.03	11.4	1.45	1.16	0.15	0.07~0.17	0.31	SAM2.5-20120
24.02	35	10	39.59	19.4	2.53	1.98	0.26	0.08~0.18	0.53	SAM3-20120

Product Precautions



Page 306



Shaft angle 60°




Shaft angle 120°

Angular Miter Gear Box Example



Angular miter

The axis angle of a normal miter is set to 90°, but the angle is set arbitrarily for the angular miter. The SAM Angular Miters are products with standardized axial angles of 45°, 60° and 120°. Be sure to pair products with the same model number. Custom items of other shaft angles are available, but may not be manufacturable due to the capabilities of the machine.

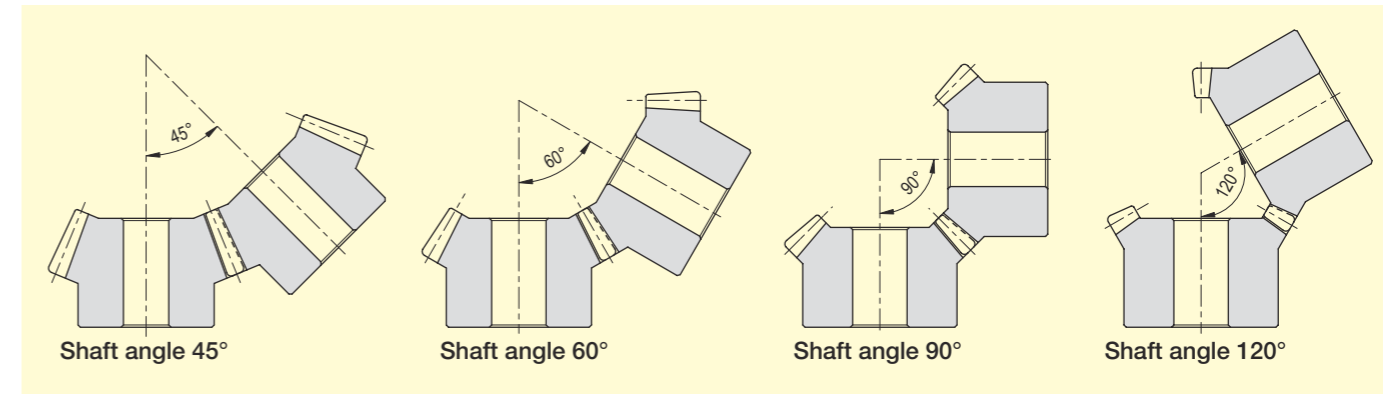




Stainless Steel Miter Gears



Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)



Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width
					A _{H7}	B	C	D	E	F	G	H
SUM1-20	1	m1	20	B3	6	16	20	21.41	20	13.95	10.71	8
SUM1.5-20		m1.5			8	26	30	32.12	30	21.24	16.06	13
SUM2-20		m2			12	34	40	42.83	37	24.89	18.41	14
SUM2.5-20		m2.5			14	42	50	53.54	48	32.54	24.77	19
SUM3-20		m3			16	50	60	64.24	58	39.84	30.12	23
SUM4-20	m4	20	64	80	85.65	75	50.78	37.83	27			
SUM1-25	1	m1	25	B3	6	20	25	26.41	23	15.16	11.21	8
SUM1.5-25		m1.5			10	30	37.5	39.62	34	22.25	16.31	11.5
SUM2-25		m2			12	45	50	52.83	40	24.33	16.41	12.5
SUM2.5-25		m2.5			16	55	62.5	66.04	50	30.41	20.52	15
SUM3-25		m3			20	65	75	79.24	60	37.81	24.62	17.5
SUM4-25	m4	28	80	100	105.66	80	49.32	32.83	20			
SUM1-30	1	m1	30	B3	8	24	30	31.41	28	17.71	13.71	10
SUM1.5-30		m1.5			10	36	45	47.12	43	28.24	21.56	16
SUM2-30		m2			12	45	60	62.83	50	29.43	21.41	12.5
SUM2.5-30		m2.5			16	60	75	78.54	62	36.28	26.27	17
SUM3-30		m3			20	70	90	94.24	75	45.47	32.12	20



Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
12	5	9.86	0.49	0.060	0.050	0.0061	0.03~0.13	0.019	SUM1-20
19	8	15.37	1.72	0.22	0.18	0.022	0.05~0.15	0.075	SUM1.5-20
22	10	21.72	3.94	0.51	0.40	0.052	0.06~0.16	0.15	SUM2-20
29	12	28.06	7.52	1.00	0.77	0.10	0.07~0.17	0.30	SUM2.5-20
35	15	31.57	13.3	1.80	1.36	0.18	0.08~0.18	0.53	SUM3-20
45	20	43.43	31.5	4.39	3.22	0.45	0.12~0.27	1.17	SUM4-20
14	6	15.03	0.81	0.12	0.083	0.012	0.03~0.13	0.035	SUM1-25
19	9	19.54	2.74	0.41	0.28	0.042	0.05~0.15	0.11	SUM1.5-25
20	12	26.06	6.50	1.00	0.66	0.10	0.06~0.16	0.25	SUM2-25
26	15	34.57	12.7	2.00	1.29	0.20	0.07~0.17	0.47	SUM2.5-25
32	20	37.43	23.3	3.73	2.37	0.38	0.08~0.18	0.81	SUM3-25
43	25	55.29	53.2	8.79	5.43	0.90	0.12~0.27	1.75	SUM4-25
16	6	19.03	1.10	0.18	0.11	0.02	0.03~0.13	0.058	SUM1-30
25	10	25.72	3.96	0.68	0.40	0.07	0.05~0.15	0.21	SUM1.5-30
25	12	36.06	8.77	1.55	0.89	0.16	0.06~0.16	0.37	SUM2-30
32	15	47.57	17.1	3.10	1.75	0.32	0.07~0.17	0.77	SUM2.5-30
40	20	53.43	31.7	5.86	3.23	0.60	0.08~0.18	1.34	SUM3-30



Finished Bore Stainless Steel Miter Gears



Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)




Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Hole length
					A _{H7}	B	C	D	E	F	G	H	I
SUMA1-20	1	m1	20	BT	6	16	20	21.41	20	13.95	10.71	8	12
SUMA1.5-20		m1.5		BT	8	26	30	32.12	30	21.24	16.06	13	19
SUMA2-20		m2		BK	12	34	40	42.83	37	24.89	18.41	14	22
SUMA2.5-20		m2.5		BK	14	42	50	53.54	48	32.54	24.77	19	29
SUMA3-20		m3		BK	16	50	60	64.24	58	39.84	30.12	23	35
SUMA4-20	m4	BK	20	64	80	85.65	75	50.78	37.83	27	45		
SUMA1-25	1	m1	25	BT	6	20	25	26.41	23	15.16	11.21	8	14
SUMA1.5-25		m1.5		BT	10	30	37.5	39.62	34	22.25	16.31	11.5	19
SUMA2-25		m2		BK	12	45	50	52.83	40	24.33	16.41	12.5	20
SUMA2.5-25		m2.5		BK	16	55	62.5	66.04	50	30.41	20.52	15	26
SUMA3-25		m3		BK	20	65	75	79.24	60	37.81	24.62	17.5	32
SUMA4-25	m4	BK	30	80	100	105.66	80	49.32	32.83	20	43		

Face width	Holding surface dia.	Keyway	Socket head screw	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
5	9.86	—	M4	4	0.49	0.060	0.050	0.0061	0.018	SUMA1-20
8	15.37	—	M4	6.5	1.72	0.22	0.18	0.022	0.074	SUMA1.5-20
10	21.72	4 x 1.8	M4	7	3.94	0.51	0.40	0.052	0.15	SUMA2-20
12	28.06	5 x 2.3	M5	9.5	7.52	1.00	0.77	0.10	0.30	SUMA2.5-20
15	31.57	5 x 2.3	M5	11.5	13.3	1.80	1.36	0.18	0.53	SUMA3-20
20	43.43	6 x 2.8	M5	13.5	31.5	4.39	3.22	0.45	1.16	SUMA4-20
6	15.03	—	M4	4	0.81	0.12	0.083	0.012	0.034	SUMA1-25
9	19.54	—	M4	6	2.74	0.41	0.28	0.042	0.11	SUMA1.5-25
12	26.06	4 x 1.8	M4	6.5	6.50	1.00	0.66	0.10	0.25	SUMA2-25
15	34.57	5 x 2.3	M5	7.5	12.7	2.00	1.29	0.20	0.47	SUMA2.5-25
20	37.43	6 x 2.8	M5	9	23.3	3.73	2.37	0.38	0.81	SUMA3-25
25	55.29	8 x 3.3	M6	10	53.2	8.79	5.43	0.90	1.70	SUMA4-25



Specifications	
Precision grade	JIS B 1704: 1978 grade 4*
Gear teeth	Gleason
Pressure angle	20°
Material	MC901
Heat treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade is equivalent to the value shown in the table.



Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width			
					A _{H8}	B	C	D	E	F	G	H			
PM1-20	1	m1	20	B3	6	16	20	21.41	20	13.95	10.71	8			
PM1.25-20		m1.25			8	22	25	26.77	23	15.27	11.38	9			
PM1.5-20		m1.5			8	26	30	32.12	30	21.24	16.06	13			
PM2-20		m2			10	34	40	42.83	37	24.89	18.41	14			
PM2.5-20		m2.5			12	42	50	53.54	48	32.54	24.77	19			
PM3-20		m3			14	50	60	64.24	58	39.84	30.12	23			
PM3.5-20		m3.5			20	60	70	74.95	65	44.13	32.47	25			
PM4-20		m4			20	64	80	85.66	75	50.78	37.83	27			
PM1-25		1			m1	25	B3	6	20	25	26.41	23	15.16	11.21	8
PM1.25-25					m1.25			8	25	31.25	28	17.88	13.26	9.25	
PM1.5-25	m1.5		8	30	37.5			34	22.25	16.31	11.5				
PM2-25	m2		10	40	50			52.83	40	24.33	16.41	10			
PM2.5-25	m2.5		14	50	62.5			66.04	50	30.41	20.52	12.5			
PM3-25	m3	15	60	75	79.24	60	37.81	24.62	15						
PM1-30	1	m1	30	B3	8	24	30	31.41	28	17.71	13.71	10			
PM1.5-30		m1.5			10	36	45	47.12	43	28.24	21.56	16			
PM2-30		m2			12	45	60	62.83	50	29.43	21.41	12.5			
PM2.5-30		m2.5			16	60	75	78.54	62	36.28	26.27	17			
PM3-30		m3			20	70	90	94.24	75	45.47	32.12	20			


* In regard to MC Nylon gears, other materials are available for plastic gears, including Ultra High Molecular Weight Polyethylene (U-PE), which has excellent abrasion resistance and resin conforming to the Plastic Implementation Measure (PIM). A single piece order is acceptable and will be produced as a custom-made gear. Please see Page 26 for more details on quotations and orders.

Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (g)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
12	5	9.86	0.22	—	0.022	—	0~0.23	2.77	PM1-20
13	6	13.03	0.42	—	0.043	—	0~0.24	5.31	PM1.25-20
19	8	15.37	0.76	—	0.077	—	0~0.25	11.0	PM1.5-20
22	10	21.72	1.74	—	0.18	—	0~0.26	22.5	PM2-20
29	12	28.06	3.34	—	0.34	—	0~0.27	45.9	PM2.5-20
35	15	31.57	5.89	—	0.60	—	0~0.28	79.8	PM3-20
40	18	39.09	9.47	—	0.97	—	0~0.30	121	PM3.5-20
45	20	43.43	14.0	—	1.42	—	0~0.32	170	PM4-20
14	6	15.03	0.36	—	0.036	—	0~0.23	5.13	PM1-25
16	7	18.7	0.67	—	0.068	—	0~0.24	9.27	PM1.25-25
19	9	19.54	1.20	—	0.12	—	0~0.25	17.0	PM1.5-25
20	12	26.06	2.84	—	0.29	—	0~0.26	32.7	PM2-25
26	15	34.57	5.55	—	0.57	—	0~0.27	63.9	PM2.5-25
32	20	37.43	10.0	—	1.02	—	0~0.28	115	PM3-25
16	6	19.03	0.48	—	0.049	—	0.13~0.23	8.44	PM1-30
25	10	25.72	1.74	—	0.18	—	0.15~0.25	30.9	PM1.5-30
25	12	36.06	3.88	—	0.40	—	0.16~0.26	54.5	PM2-30
32	15	47.57	7.57	—	0.77	—	0.17~0.27	113	PM2.5-30
40	20	53.43	13.9	—	1.42	—	0.18~0.28	196	PM3-30



Specifications	
Precision grade	JIS B 1704: 1978 grade 6
Gear teeth	Gleason
Pressure angle	20°
Material	Duracon (R) (M90-44)
Heat treatment	—
Tooth hardness	(110 to 120HRR)

* "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.



Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back
					A	B	D	E	F	G	
DM0.5-20	1	m0.5	20	B1	3	8	10	10.71	11	7.97	6.35
DM0.8-20		m0.8			5	12	16	17.13	16	10.83	8.56
DM1-20		m1			6	16	20	21.41	21	14.62	11.71
DM1.5-20		m1.5			8	20	30	32.12	30	20.59	16.06



When using the injection molded bevel gear as an idler gear and a shaft diameter smaller than the inside diameter of the molded gear, please press fit one of the standard bushings. For details on bushings, please see Page 334.

■ Dimensional tolerance of molded item (unit: mm)

Dimensional classification	Grade	Rough grade
	3 or less	±0.20
4 to 6	±0.25	±0.30
7 to 10	±0.30	±0.35
11 to 18	±0.35	±0.40
19 to 30	±0.40	±0.50
Over 30	±0.50	±0.50

Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Backlash (mm)	Weight (g)	Catalog Number
				Bending strength	Bending strength			
4	7	2.5	4.93	0.082	0.0083	0~0.30	0.57	DM0.5-20
5	10	3.5	10.1	0.31	0.032	0~0.48	1.93	DM0.8-20
7	13	4.5	11.27	0.54	0.055	0~0.60	4.28	DM1-20
10	19	7	18.2	0.96	0.098	0~0.60	11.8	DM1.5-20



BB Sintered Metal Bushings




When using the injection molded bevel gear as an idler gear and a shaft diameter smaller than the inside diameter of the molded gear, please press fit one of the following standard bushings.

Catalog Number	Inner dia.	Outside dia.	Length	Gear example
	$d^{+0.02}_0$	$D^{+0.02}_{-0.01}$	$L^0_{-0.3}$	
BB30507	3	5	7	DM0.8
BB30608	3	6	8	DM1
BB40609	4	6	9	DM1
BB50814	5	8	14	DM1.5

Material: Oil-free copper alloy

Sintered Metal Bushings



T8



Bevel Gears

MHP	MBSG	SBSG	MBSA/MBSB	SBS	SB	SBY
High-Ratio Hypoid Gears	Ground Spiral Bevel Gears	Ground Spiral Bevel Gears	Finished Bore Spiral Bevel Gears	Spiral Bevel Gears	Bevel Gears	Bevel Gears
Gear Ratio 15-60	Gear Ratio 2	Gear Ratio 1.5-3	Gear Ratio 1.5-3	Gear Ratio 1.5-4	Gear Ratio 1.5-4	Gear Ratio 2-4
Material: SCM415	Material: SCM415	Material: S45C	Material: SCM415	Material: S45C	Material: S45C	Material: S45C
m1, 1.5 Page 342	m2-4 Page 346	m2-4 Page 348	m2-6 Page 350	m1-5 Page 354	m1-6 Page 358	m5-8 Page 358
SB	SUB	PB	DB	BB	Nissei KSP	
Steel Bevel Gears & Pinion Shafts	Stainless Steel Bevel Gears	Plastic Bevel Gears	Injection Molded Bevel Gears	Sintered Metal Bushings	Ground Spiral Bevel Gears	
Gear Ratio 5	Gear Ratio 1.5-3	Gear Ratio 1.5-3	Gear Ratio 2		Gear Ratio 1-2	
Material: S45C	Material: SUS303	Material: MC901	Material: Duracon (R) (M90-44)	Material: Oil-free copper alloy	Material: SCM415	
m1.5-3 Page 362	m1.5-3 Page 364	m1-3 Page 366	m0.5-1 Page 368	φ5-6 Page 368	m1.5-6 Page 370	

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Bevel Gears

MBSG 2-40 20 R



Spur Gears

Helical Gears

Internal Gears

Racks

CP Racks & Pinions

Miter Gears

Bevel Gears

Screw Gears

Worm Gears

Gearboxes

Other Products

Spur Gears

Helical Gears

Internal Gears

Racks

CP Racks & Pinions

Miter Gears

Bevel Gears

Screw Gears

Worm Gears

Gearboxes

Other Products

Features



KHK stock bevel gears are available in two types, spiral bevel gears and straight bevel gears, in gear ratios of 1.5 through 5, and are offered in a large variety of modules, numbers of teeth, materials and styles. The following table lists the main features for easy selection.

Type	Catalog Number	Module	Gear Ratio	Material	Heat Treatment	Tooth Surface Finish	Precision JIS B 1704: 1978	Secondary Operations	Features
Hypoid Gear	MHP	1, 1.5	15~60	SCM415	Carburized Note 1	Cut	3	△	Hypoid gears that have been tempered and hardened that are capable of rapid deceleration.
Spiral Bevel Gears	MBSG	2~4	2	SCM415	Carburized Note 1	Ground	1	△	Gears that have been hardened and ground that has excellent accuracy, strength and abrasion resistance. Secondary operations are possible except for the teeth.
	SBSG	2~4	1.5~3	S45C	Gear teeth induction hardened	Ground	2	△	Gears that has been hardened and ground with a good balance of accuracy, wear resistance and cost. Secondary operations are possible except for the teeth.
	KSP	1.5~6	1~2	SCM415	Carburized Note 1	Ground	0	△	Gears that have been hardened and ground that has grade-0 accuracy, strength, abrasion resistance and quietness. Secondary operations can be given except for the teeth.
	MBSA/MBSB	2~6	1.5~3	SCM415	Carburized	Cut	4	×	Gears that have been fully hardened that have excellent strength and wear resistance. Can be used in the finished shape.
	SBS	1~5	1.5~4	S45C	Gear teeth induction hardened	Cut	4	△	Gears that have been hardened with excellent wear resistance. Secondary operations are possible except for the teeth.
Straight Bevel Gears	SB/SBY	1~8	1.5~5	S45C	—	Cut	3	○	Many lineups are available at a low price. The teeth can be additionally hardened.
	SUB	1.5~3	1.5~3	SUS303	—	Cut	3	○	Stainless steel gears with rust resistance.
	PB	1~3	1.5~3	MC901	—	Cut	4	○	Nylon gears can be used with no lubrication.
	DB	0.5~1	2	Duracon (R) (M90-44) NOTE 2	—	Injection Molded	6	△	Low-priced gears made through injection molding. Suitable for light loads.

[NOTE 1] Although these are carburized products, secondary operations can be performed as the bore and the hub portions are masked during the carburization. However, note that high hardness (HRC40 at maximum) occurs in some cases.
 [NOTE 2] "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.

Application Examples



KHK stock bevel gears are used as gears for power transmission of intersecting axes in various devices.

Differential Gear Mechanism Example



Image provided by: PK Design

SHESCO 2WD Bike



SB Bevel Gears are used in the driving components in both the front and rear wheels


Selection Hints



Please select the most suitable products by carefully considering the characteristics of items and contents of the product tables. It is also important to read all applicable "CAUTION" notes shown below before the final selection.

1. Caution in Selecting the Mating Gears

Basically, KHK stock bevel gears should be selected as shown in the catalog in pairs (e.g. MBSG2-4020R should mate with MBSG2-2040L). But, for straight tooth bevel gears, there is some interchangeability with different series. For plastic bevel gears, we recommend metal mating gears for good heat conductivity.

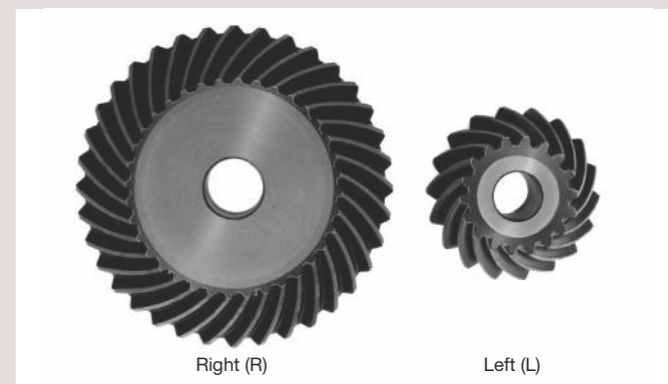

Selection Chart for Straight Bevel Gears (○ Allowable × Not allowable)

Pinion \ Gears	SB SBY	SUB	PB	DB
SB-SBY	○	○	○	×
SUB	○	○	○	×
PB	○	○	○	×
DB	×	×	×	○

Selection Chart for Spiral Bevel Gears (○ Allowable × Not allowable)

Pinion \ Gears	MBSG	SBSG	MBSA MBSB	SBS
MBSG	○	×	×	×
SBSG	×	○	×	×
MBSA/MBSB	×	×	○	×
SBS	×	×	×	○

2. Caution in Selecting Gears Based on Gear Strength

The gear strength values shown in the product pages were computed by assuming the application environment in the table below. Therefore, they should be used as reference only. We recommend that each user computes their own values by applying the actual usage conditions.

Calculation of Bending Strength of Gears

Item	Catalog Number	MBSG MBSA MBSB	SBSG/SBS	SB NOTE 2 SBY	SUB	PB	DB
Formula NOTE 1	Formula of bevel gears on bending strength (JGMA403-01)					The Lewis formula	
No. of teeth of mating gears	No. of teeth of the mating gear of the set					—	
Rotational Speed of Pinion	100rpm (600rpm for MBSG and SBSG)					100rpm	
Design Life (Durability)	Over 10 ⁷ cycles					—	
Impact from motor	Uniform load					Allowable bending stress (kgf/mm ²)	
Impact from load	Uniform load					1.15	
Direction of load	Bidirectional load (calculated with allowable bending stress of 2/3)					(40°C with No Lubrication)	
Allowable bending stress at root σ_{Hlim} (kgf/mm ²)	47	21	19 (24.5)	10.5	m 0.5 4.0 m 0.8 4.0 m 1.0 3.5 (40°C with Grease Lubrication)		
Safety factor K_R	1.2						

Calculation of Surface Durability (Except where it is common with bending strength)

Item	Catalog Number	MBSG MBSA MBSB	SBSG/SBS	SB NOTE 2 SBY	SUB	PB	DB
Formula NOTE 1	Formula of bevel gears on surface durability (JGMA404-01)						
Kinematic viscosity of lubricant	100cSt (50°C)						
Gear support	Shafts & gear box have normal stiffness, and gears are supported on one end						
Allowable Hertz stress σ_{Hlim} (kgf/mm ²)	166	90	49 (62.5)	41.3			
Safety factor C_R	1.15						

[NOTE 1] The gear strength formula is based on JGMA (Japanese Gear Manufacturers Association) specifications, "MC Nylon Technical Data" by Mitsubishi Chemical Advanced Materials and "Duracon (R) Gear" by Polyplastics Co. The units for the rotational speed (rpm) and the stress (kgf/mm²) are adjusted to the units needed in the formula.

[NOTE 2] Since SB Bevel Pinion Shafts are thermally refined, the allowable tooth-root bending stress and allowable hertz stress are the value shown in parentheses.

Product Precautions

Common Notes
[Caution on Product Characteristics]

- (1) The allowable torque shown in the table are calculated values according to the assumed usage conditions. Please see Page 337 for more details.
- (2) Dimensions of the outside diameter, the total length and crown to back length are all theoretical values, and some differences will occur due to the corner chamfering of the gear tips.
- (3) These bevel gears produce axial thrust forces. Please see Page 340 for more details.
- (4) Variations in temperature or humidity can cause dimensional changes in plastic gears, including tooth diameter, bore, and backlash. The accuracy and tolerances shown in the catalog are values obtained when machining is performed.
- (5) Keyways are made according to JIS B1301 standards, Js9 tolerance. Also note that keyway tooth position alignment is not performed.
- (6) For products having a tapped hole, a set screw is included. (excludes B7)

[Caution on Secondary Operations]

- (1) Please read "Cautions on Performing Secondary Operations" (Page 340) when performing modifications and/or secondary operations for safety concerns.
- (2) Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).
- (3) In the illustration, the area surrounded with ---- line is masked during the carburization process (max. HRC40 or so) and can be modified.

MHP High Ratio Hypoid Gears
[Caution on Product Characteristics]

- (1) Radial and thrust load coefficients are the factors used for calculation of those loads.
As shown in the figure B8, CW and CCW stand for clockwise and counterclockwise rotation. A plus sign means that the two gears in a set move away each other when load is applied. A minus sign means that two gears in a set approach each other when load is applied.
Use gear calculation software GCSW.

MBS(A,B) Finished Bore Spiral Bevel Gears
[Caution on Product Characteristics]

- (1) The keyway tolerance is the value before hardening.

[Caution on Secondary Operations]

- (1) No secondary operations can be performed on these finished gears due to the applied carburizing process.

SBS Spiral Bevel Gears
[Caution on Product Characteristics]

- (1) The bore may slightly vary due to the effect of heat treatment. When using with the indicated hole diameter, provide machining with a reamer or the like before use.

SB Bevel Gears
[Caution on Product Characteristics]

- (1) For the handling conveniences, the BT series has the tapped holes on the holding surface. Please see Page 340 for L and tap sizes.

SBY Spiral Bevel Gears
[Caution on Product Characteristics]

- (1) For the handling conveniences, the BT series has the tapped holes on the holding surface. Please see Page 340 for L and tap sizes.

PB Plastic Bevel Gears
[Caution on Product Characteristics]

- (1) To reduce heat generation, it is recommended to mate them with steel gears.

DB Injection Molded Bevel Gears
[Caution on Product Characteristics]

- (1) The bore tolerance is -0.05 to -0.30, but it may be slightly higher at the center of the hole.
- (2) For the dimensional accuracy of each part, see the dimensional tolerance of molded items on Page 369.

[Caution on Secondary Operations]

- (1) As it is a molded item, bubbles may form inside the material. Avoid performing secondary operations.

KSP_U Nissei Ground Spiral Bevel Gears
[Caution on Product Characteristics]

- (1) The allowable torque is the value at RPM 600. For other data, see the Transmission Capacity Table.

Application Hints


In order to use KHK stock bevel gears safely, carefully read the Application Hints before proceeding. If there are questions or you require clarifications, please contact our technical department or your nearest distributor.
E-mail: info@khkgears.net

1. Cautions on Handling


- ① KHK products are packaged one by one to prevent scratches and dents, but if you find issues such as rust, scratches, or dents when the product is removed from the box after purchase, please contact the supplier.
- ② Depending on the handling method, the product may become deformed or damaged. Plastic gears and ring gears deform particularly easily, so please handle with care.

2. Caution on Performing Secondary Operations

- ① If reboring, it is important to pay special attention to locating the center in order to avoid runout.
- ② The reference datum for gear machining is the bore. Therefore, use the bore for locating the center. If it is too difficult to do for small bores, the alternative is to use one spot on the bore and the runout of the side surface.
- ③ If reworking using scroll chucks, we recommend the use of new or rebored jaws for improved precision. Please exercise caution not to crush the teeth.

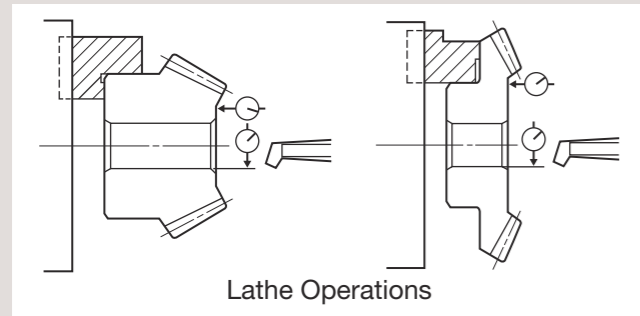


- ④ For items with induction hardened teeth, the hardness is high near the tooth root. When machining the front face, the machined area should be 4 to 6mm smaller than the holding surface diameter dimensions.

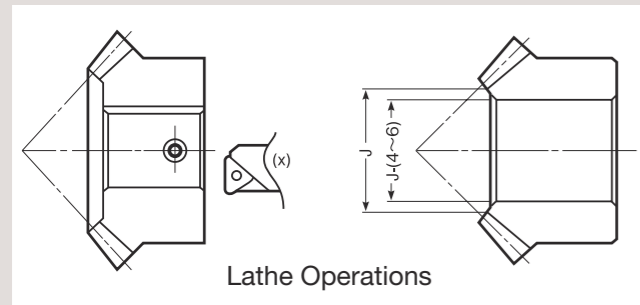

- ⑤ For tapping and keyway operations, see the examples given in "Caution on Performing Secondary Operations" in KHK Stock Spur Gear section. When cutting keyways, to avoid stress concentration, always round the corners.
- ⑥ PB plastic bevel gears are susceptible to changes due to temperature and humidity. Dimensions may change between, during, and after re-machining operations.


- ⑦ When induction-hardening S45C products, thermal stress cracks may appear. Also, note that the precision grade of the product declines by 1 or 2 grades, as deformation on material may occur. If you require tolerance for bore or other parts, machining is necessary after heat treatment.
- ⑧ For the handling conveniences, the SB and SBY series listed below have the tapped holes (180° apart, 2 places) on the holding surface. We appreciate your understanding. Please pay attention to the machining position.



Catalog Number	L(mm)	Tap Size
SB6-4515	130	M10 deep 20
SBY8-4020	160	M10 deep 20
SBY8-4515	210	M10 deep 20
SBY5-6015	160	M10 deep 20
SBY6-6015	220	M10 deep 20


3. Points of Caution during Assembly

- ① Since bevel gears are cone shaped, they produce axial thrust forces. Especially for spiral bevel gears, the directions of thrust change with the hand of helix and the direction of rotation. This is illustrated below. The bearings must be selected properly to be able to handle these thrust forces. For details, use gear calculation software GCSW.

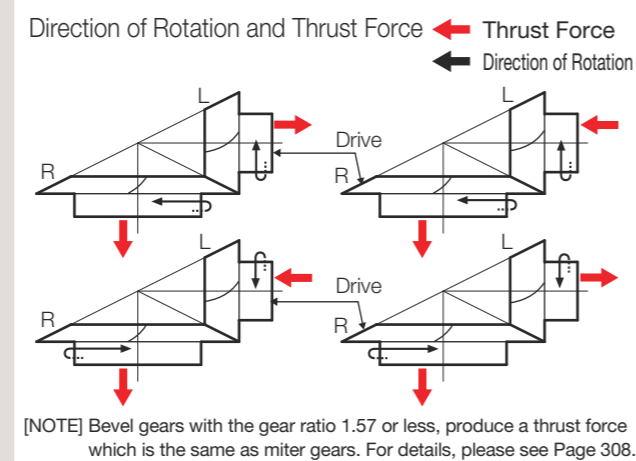

- ② If a gear is mounted on a shaft far from the bearings, the shaft may bend. We recommend designing bevel gears to be as close to the bearings as possible. Design the gear box, shaft and bearing with high rigidity.
- ③ Be sure to fasten the bevel gear to prevent the gears from moving, as thrust acts on it while rotating.

- ④ When installing MBSA or MBSB spiral bevel gears produced in B7 style (ring gear), always secure the gears onto the mounting base with taper pins to absorb the rotational loads. It is dangerous to secure with bolts only.

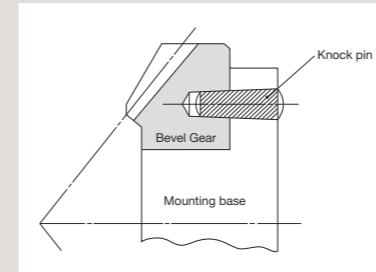

- ⑤ The recommended assemble distance tolerance of KHK stock bevel gears is H7 for ground gears and H8 for cut gears. Mounting distance error, offset error and shaft angle error must be minimized to avoid excessive noise and wear. Inaccurate assembly will lead to irregular noises and uneven wear. Various conditions of tooth contact are shown below. Also, when changing the normal direction backlash, adjust the mounting distance according to the amount of axial movement shown in the table below so as not to change the tooth contact.


Gear Ratio (Reduction Ratio)	Normal direction backlash	Travel in axial direction	
		Pinion	Gears
1.5	J_n	$0.81 \times J_n$	$1.22 \times J_n$
2		$0.65 \times J_n$	$1.31 \times J_n$
2.5		$0.54 \times J_n$	$1.36 \times J_n$
3		$0.46 \times J_n$	$1.39 \times J_n$
4		$0.35 \times J_n$	$1.42 \times J_n$
5		$0.29 \times J_n$	$1.43 \times J_n$
15 or more		$1.4 \times J_n \div \text{Gear Ratio}$	$1.4 \times J_n$

4. Cautions on Starting

- ① Check the following items before starting.
 - Are the gears fastened securely?
 - Is there uneven tooth contact?
 - Is there adequate backlash? (Be sure to avoid zero-backlash.)
 - Has proper lubrication been supplied?
- ② If gears are exposed, be sure to attach a safety cover to ensure safety. Also, be careful not to touch rotating gears.
- ③ If there is any abnormality such as noise or vibration during startup, stop the operation immediately and check the assembly condition such as tooth contact, eccentricity and looseness.

Correct Tooth Contact


- When assembled correctly, the contact will occur on both gears in the middle of the flank and center of face width but somewhat closer to the toe.

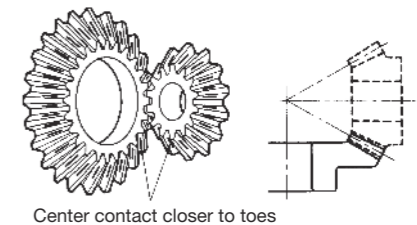

Incorrect Tooth Contact


Mounting Distance Error

- When the mounting distance of the pinion is incorrect, the contact will occur too high on the flank on one gear and too low on the other.

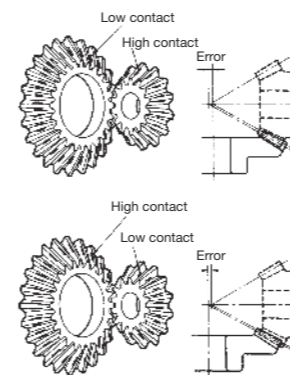


Offset Error

- When the pinion shaft is offset, the contact surface is near the toe of one gear and near the heel of the other.

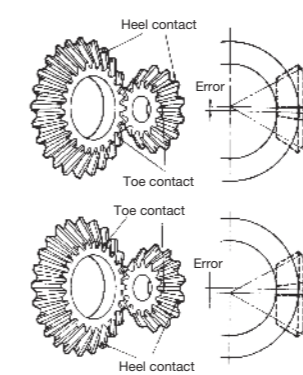

Shaft Angle Error


- When there is an angular error of shafts, the gears will contact at the toes or heels depending on whether the angle is greater or less than 90°.

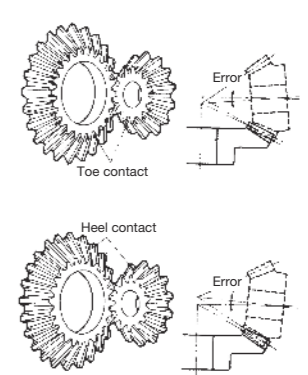

Features of MHP High Ratio Hypoid Gears

A pair of MHP high-ratio hypoid gears are able to produce an amazing reduction of speed of 60:1 in one stage.


- Total-cost reduction**
The MHP provides a compact gearing body replacing several stages of reduction gears. This reduces the cost sharply.
- High efficiency**
Compared to worm gear drives, the MHP has less sliding contact. The resulting higher efficiency allows the use of smaller motors. (See graph on the right)
- High rigidity**
The carburized hypoid gears lead to smaller size than comparable worms gears.
- Compact gear assembly**
The size of the gear housing is nearly the same as outer diameter of the large gear. (See the diagrams below)

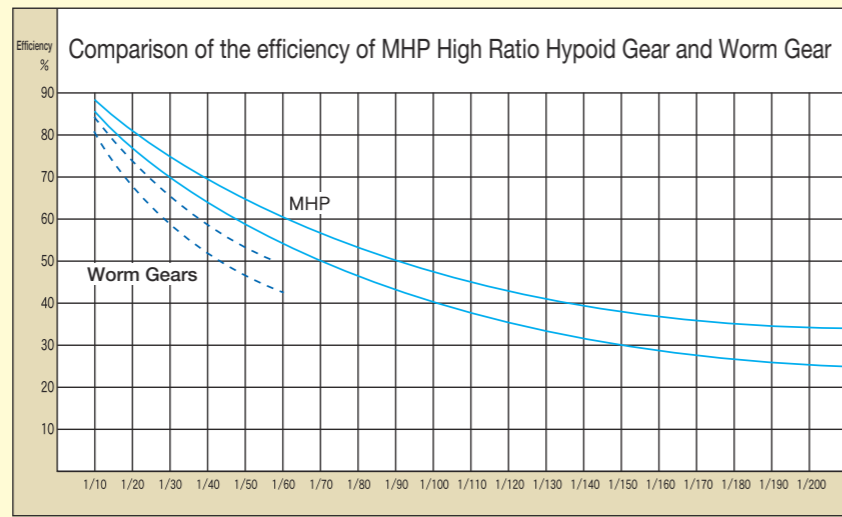

How to determine the radial and thrust loads

Before using the MHP high-ratio hypoid gears, be sure to confirm the direction of radial and thrust loads. Following equations are used to compute these loads. The radial and thrust load coefficients are given on the product pages.

Comparison of MHP and Worm Gear

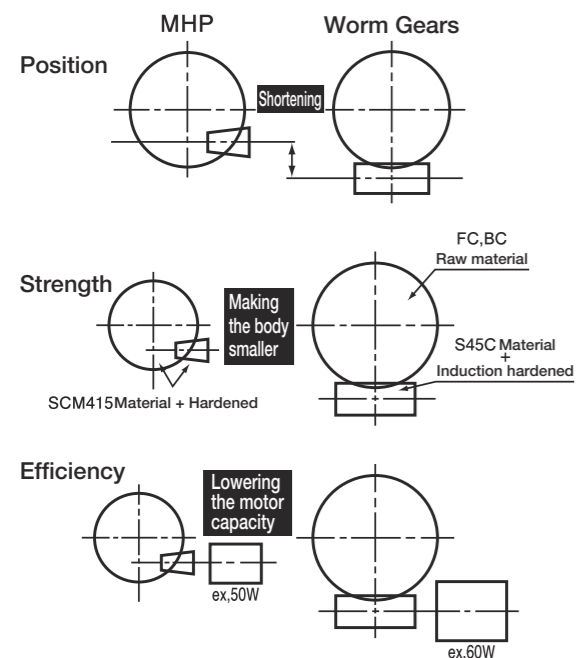

Radial load calculation

W_{RP} : Radial load on the pinion or L(N)

$$W_{RP} = W_{KP} \times T_G \times \frac{n}{z}$$

W_{KP} : Radial load coefficient of pinion or L (given on the product pages)

T_G : Torque of gear or R(N-m)

n : Number of teeth of pinion or L

z : Number of teeth of gear or R

W_{RG} : Radial load on the gear or R(N)

$$W_{RG} = W_{KG} \times T_G$$

W_{KG} : Radial load coefficient of gear or R (given on the product pages)

T_G : Torque of gear or R(N-m)

Thrust load

W_{XP} : Thrust load on the pinion or L(N)

$$W_{XP} = W_{NP} \times T_G \times \frac{n}{z}$$

W_{NP} : Thrust load coefficient of pinion or L (given on the product page)

T_G : Torque of gear or R(N-m)

n : Number of teeth of pinion or L

z : Number of teeth of gear or R

W_{XG} : Thrust load of gear or R(N)


$$W_{XG} = W_{NG} \times T_G$$

W_{NG} : Thrust load coefficient of gear or R (given on the product pages)

T_G : Torque of gear or R(N-m)



Variations in tooth contact due to poor alignment of gears

If the gear engagement position is out of the normal position, variations in tooth contact, as illustrated below, may appear.

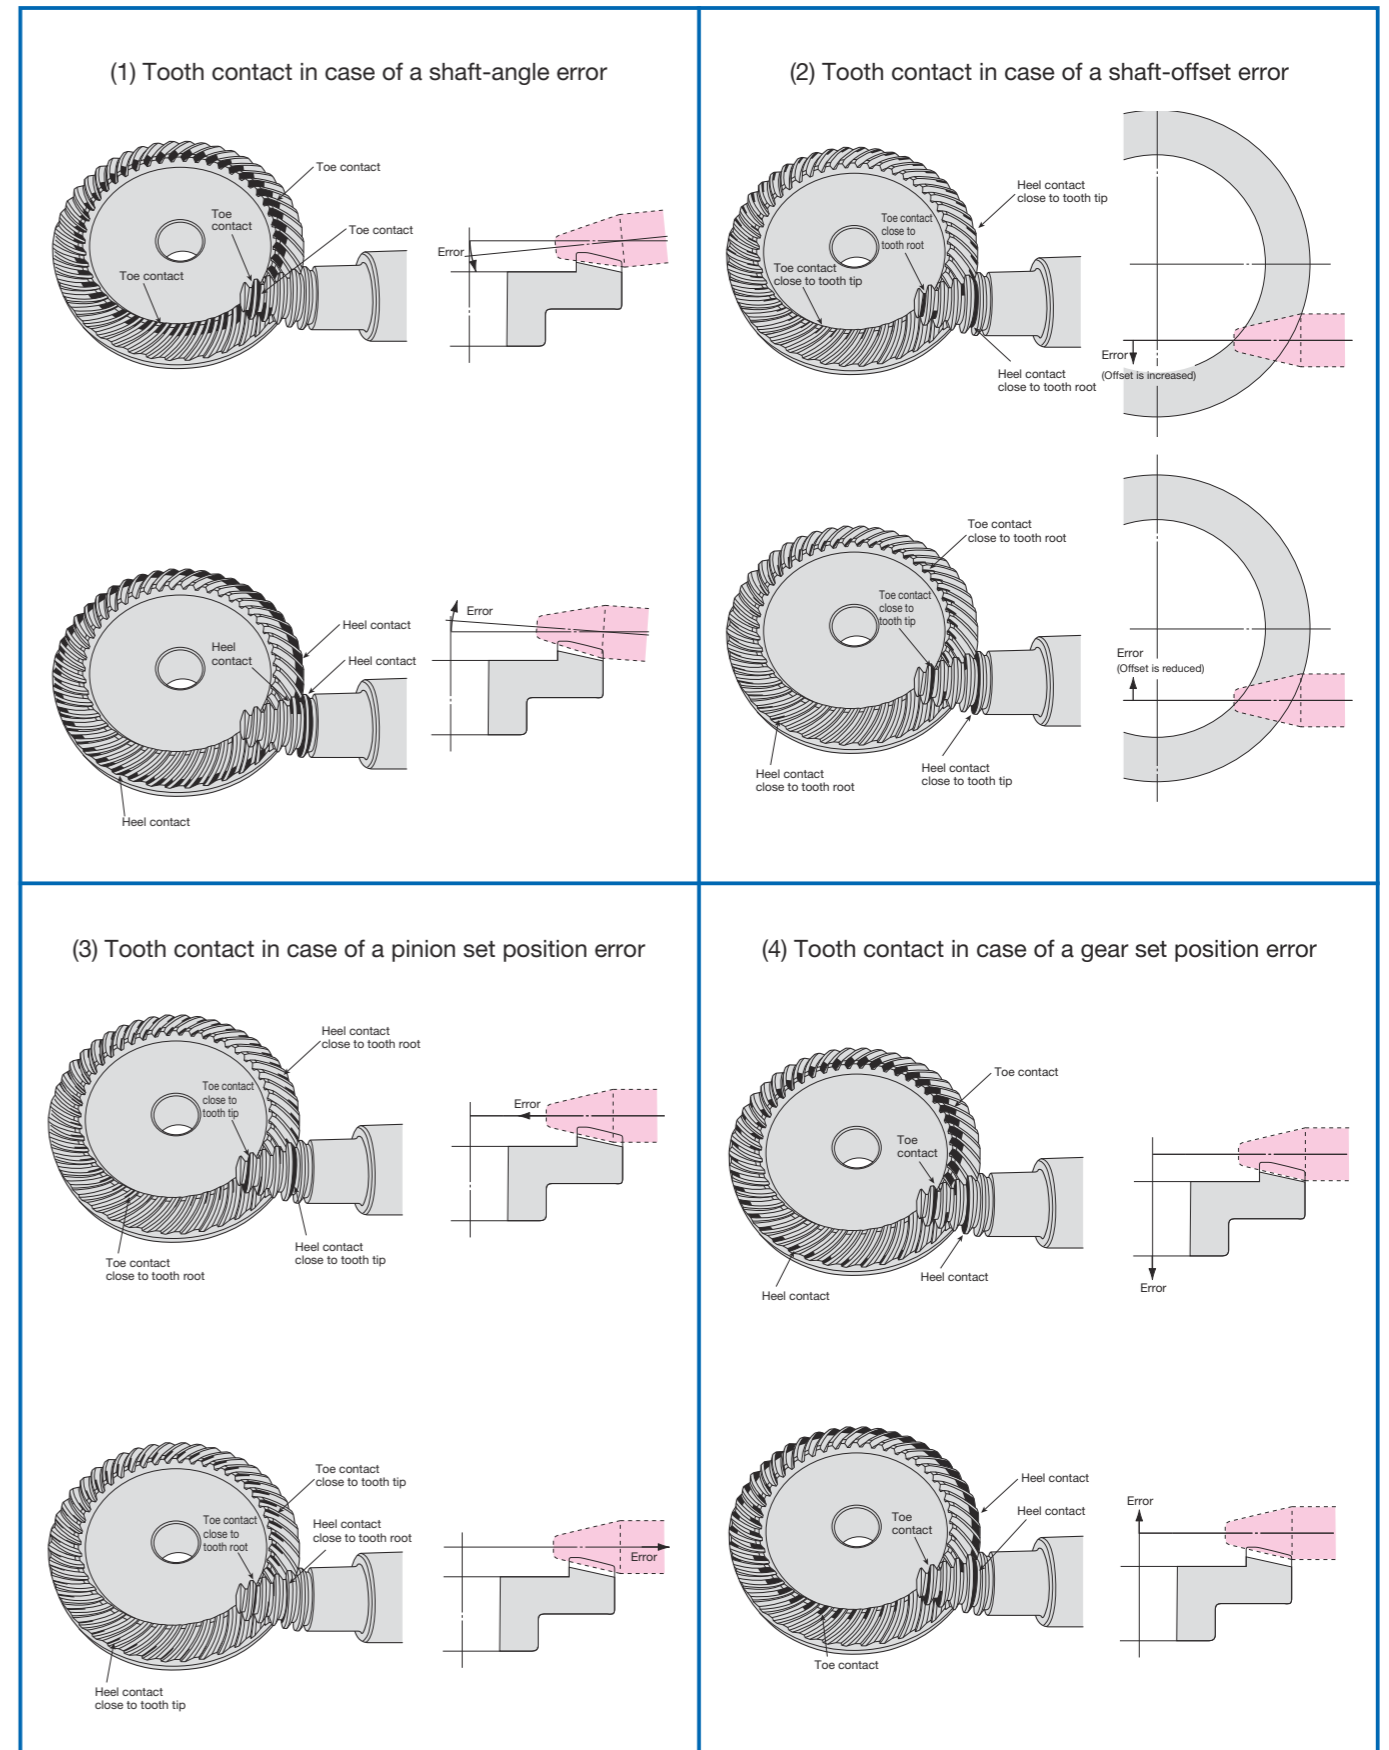



Specifications	
Precision grade	JIS B 1704: 1978 grade 1
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	SCM415
Heat treatment	Tooth area carburized
Tooth hardness	55 to 60HRC

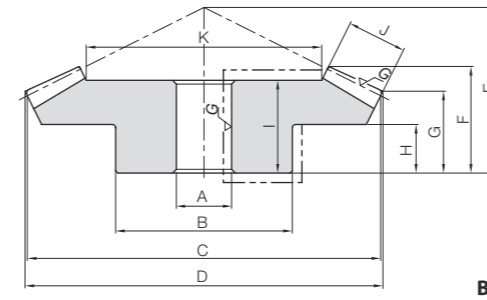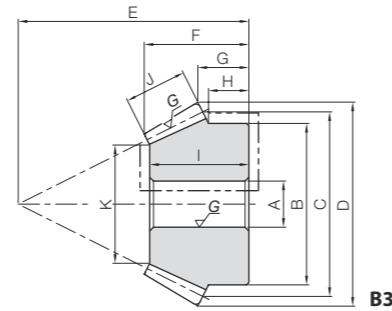


Catalog Number	Gear Ratio	Module	No. of teeth	Direction of spiral	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length		Crown to back
						A _{H7}	B					C	D	
MBSG2-4020R	2	m2	40	R	B4	15	45	80	81.1	45	31.78	26.1		
MBSG2-2040L			L	B3	12	35	40	44.1	55	28.16	16.02			
MBSG2.5-4020R		m2.5	40	R	B4	16	55	100	101.29	50	33.35	26.29		
MBSG2.5-2040L			L	B3	12	43	50	55.12	65	31.01	16.28			
MBSG3-4020R		m3	40	R	B4	20	65	120	121.57	60	39.81	31.57		
MBSG3-2040L			L	B3	16	52	60	66.03	80	38.9	21.51			
MBSG4-4020R	m4	40	R	B4	25	80	160	162.06	75	48.27	37.06			
MBSG4-2040L		L	B3	20	70	80	88.46	100	45.38	22.12				

Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
H	I	J	K							
18	29	14	52.7	56.5	94.2	5.76	9.61	0.04~0.10	0.57	MBSG2-4020R MBSG2-2040L
13.75	27		25.39	28.2	47.1	2.88	4.80			
16	30	17	66.99	108	184	11.0	18.7	0.05~0.11	1.01	MBSG2.5-4020R MBSG2.5-2040L
13.25	29		29.97	54.1	91.8	5.52	9.37			
20	35	20	80.28	185	318	18.8	32.4	0.06~0.12	1.64	MBSG3-4020R MBSG3-2040L
18	36.5		36.56	92.4	159	9.42	16.2			
22	42	27	106.63	441	778	45.0	79.3	0.09~0.15	3.55	MBSG4-4020R MBSG4-2040L
17.5	43		51.25	221	389	22.5	39.7			

Product Precautions → Page 338

Mating surface of spiral bevel gears

Spiral bevel gears have convex and concave tooth surfaces. If the direction of rotation of the drive gear differs, the meshing tooth surface will also change. The table on the right shows how to view the convex and concave tooth surfaces and the meshing tooth surface with respect to the direction of rotation of the drive gear.

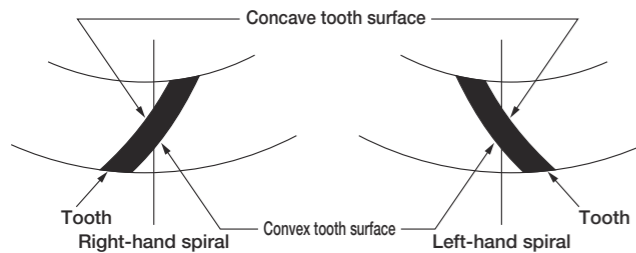

For right-hand drive gear

Direction of rotation of drive gear <small>NOTE 1</small>	Meshing tooth surface	
	Right-hand drive gear	Left-hand driven gear
Clockwise	Convex tooth surface	Concave tooth surface
Counterclockwise	Concave tooth surface	Convex tooth surface

For left-hand drive gear

Direction of rotation of drive gear <small>NOTE 1</small>	Meshing tooth surface	
	Left-hand drive gear	Right-hand driven gear
Clockwise	Concave tooth surface	Convex tooth surface
Counterclockwise	Convex tooth surface	Concave tooth surface

[NOTE 1] The direction of rotation in the table is as seen from the hub of the gear.

The force applied to the teeth of the spiral bevel gear

The table below shows, for spiral bevel gears with an axis angle of $\Sigma = 90^\circ$, pressure angle of $an = 20^\circ$ and spiral angle of $\beta m = 35^\circ$, the magnitudes of the axial force F_x and radial force F_r where the tangential force F_t at the center of the tooth width is 100.

Thrust force F_x
Radial force F_r value

(1) Force applied to pinion


Meshing tooth surface	Gear Ratio z_2/z_1						
	1.0	1.5	2.0	2.5	3.0	4.0	5.0
Concave tooth surface	80.9	82.9	82.5	81.5	80.5	78.7	77.4
Convex tooth surface	-18.1	-1.9	8.4	15.2	20.0	26.1	29.8
Concave tooth surface	80.9	82.9	82.5	81.5	80.5	78.7	77.4
Convex tooth surface	-18.1	-33.6	-42.8	-48.5	-52.4	-57.2	-59.9
Convex tooth surface	80.9	75.8	71.1	67.3	64.3	60.1	57.3

(2) Force applied to gear


Meshing tooth surface	Gear Ratio z_2/z_1						
	1.0	1.5	2.0	2.5	3.0	4.0	5.0
Concave tooth surface	80.9	75.8	71.1	67.3	64.3	60.1	57.3
Convex tooth surface	-18.1	-33.6	-42.8	-48.5	-52.4	-57.2	-59.9
Concave tooth surface	80.9	82.9	82.5	81.5	80.5	78.7	77.4
Convex tooth surface	-18.1	-1.9	8.4	15.2	20.0	26.1	29.8
Convex tooth surface	80.9	75.8	71.1	67.3	64.3	60.1	57.3



Specifications	
Precision grade	JIS B 1704: 1978 grade 2
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part

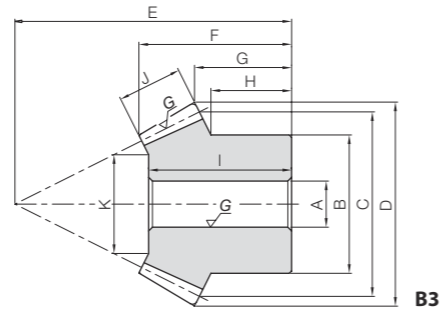

B3

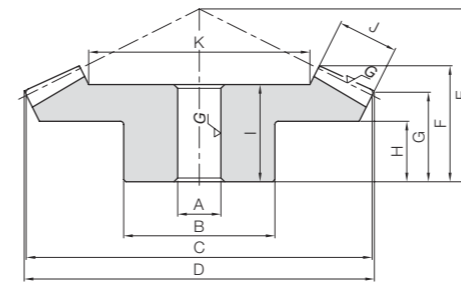

B4


Catalog Number	Gear Ratio	Module	No. of teeth	Direction of spiral	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length		Crown to back
						A _{H7}	B					C	D	
SBSG2-3020R SBSG2-2030L	1.5	m2	30	R	B4	12	35	60	61.6	40	26.6	21.2		
20			L	B3	10	30	40	43.55	45	24.91	16.18			
SBSG2.5-3020R SBSG2.5-2030L		m2.5	30	R	B4	15	45	75	77.09	50	33.86	26.56		
20			L	B3	12	40	50	54.43	55	30.88	18.98			
SBSG3-3020R SBSG3-2030L		m3	30	R	B4	16	50	90	92.21	55	35.34	26.66		
20			L	B3	16	45	60	65.58	70	40.17	26.86			
SBSG4-3020R SBSG4-2030L	m4	30	R	B4	20	70	120	122.85	75	47.49	37.14			
20		L	B3	20	60	80	87.34	90	48.17	32.45				
SBSG2-4020R SBSG2-2040L	2	m2	40	R	B4	12	40	80	80.99	45	32.26	25.99		
20			L	B3	12	32	40	44.1	60	34.04	21.02			
SBSG2.5-4020R SBSG2.5-2040L		m2.5	40	R	B4	15	50	100	101.27	55	39.65	31.27		
20			L	B3	12	40	50	55.21	75	43.61	26.3			
SBSG3-4020R SBSG3-2040L		m3	40	R	B4	20	60	120	121.48	65	45.76	36.48		
20			L	B3	16	50	60	66.06	90	50.63	31.52			
SBSG4-4020R SBSG4-2040L	m4	40	R	B4	20	70	160	162.07	80	53.69	42.07			
20		L	B3	20	60	80	88.5	120	66.24	42.12				
SBSG2-4515R SBSG2-1545L	3	m2	45	R	B4	12	40	90	90.67	40	30.29	26.01		
15			L	B3	10	24	30	34.78	60	29.66	15.8			
SBSG2.5-4515R SBSG2.5-1545L		m2.5	45	R	B4	15	50	112.5	113.32	50	38.25	32.47		
15			L	B3	12	30	37.5	43.36	75	38.27	19.73			
SBSG3-4515R SBSG3-1545L		m3	45	R	B4	20	60	135	135.99	55	40.59	33.98		
15			L	B3	15	38	45	52.08	90	44.98	23.68			

Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
H	I	J	K							
15	23	11	37.56	14.1	14.2	1.44	1.44	0.05~0.11	0.26	SBSG2-3020R SBSG2-2030L
11.67	22		21.34	9.61	9.44	0.98	0.96			
18	30	15	45.61	29.0	29.7	2.96	3.03	0.06~0.12	0.55	SBSG2.5-3020R SBSG2.5-2030L
14.17	28		27.42	19.8	19.8	2.02	2.02			
17	31	17	57.14	48.4	50.4	4.94	5.14	0.07~0.13	0.82	SBSG3-3020R SBSG3-2030L
20	37		34.71	33.1	33.6	3.37	3.42			
25	40	20	78.59	106	113	10.8	11.5	0.10~0.16	1.90	SBSG4-3020R SBSG4-2030L
23.33	43		46.89	72.2	75.3	7.36	7.68			
18	27	15	48.46	25.5	26.7	2.60	2.73	0.05~0.11	0.51	SBSG2-4020R SBSG2-2040L
18	32		20.92	12.8	13.4	1.30	1.36			
20	34	20	59.28	51.7	55.1	5.27	5.62	0.06~0.12	1.06	SBSG2.5-4020R SBSG2.5-2040L
22.5	40		20.56	25.9	27.6	2.64	2.81			
24	38	22	73.81	84.8	91.9	8.65	9.38	0.07~0.13	1.67	SBSG3-4020R SBSG3-2040L
27.5	47		29.61	42.5	46.0	4.33	4.69			
28	45	28	102.39	195	217	19.9	22.2	0.10~0.16	3.33	SBSG4-4020R SBSG4-2040L
35	62		42.78	97.9	109	9.98	11.1			
17	26	15	59.04	34.8	28.1	3.55	2.87	0.05~0.11	0.60	SBSG2-4515R SBSG2-1545L
14	29		19.13	11.2	9.38	1.14	0.96			
22	35	20	72.84	59.0	48.3	6.01	4.93	0.06~0.12	1.21	SBSG2.5-4515R SBSG2.5-1545L
17.5	37		20.51	18.9	16.1	1.93	1.64			
20	35	23	88.18	99.3	82.5	10.1	8.41	0.07~0.13	1.99	SBSG3-4515R SBSG3-1545L
21.33	44		28.54	31.8	27.5	3.24	2.80			

Product Precautions → Page 338

■ Mating surface of spiral bevel gears

Spiral bevel gears have convex and concave tooth surfaces. If the direction of rotation of the drive gear differs, the meshing tooth surface will also change. The table on the right shows how to view the convex and concave tooth surfaces and the meshing tooth surface with respect to the direction of rotation of the drive gear.

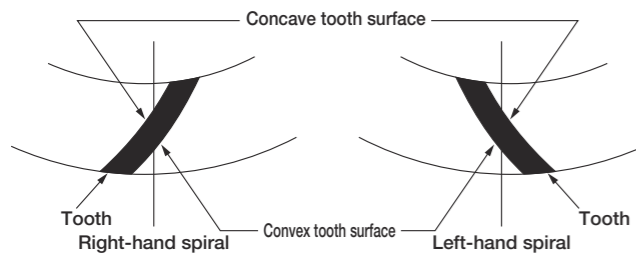

For right-hand drive gear

Direction of rotation of drive gear NOTE 1	Meshing tooth surface	
	Right-hand drive gear	Left-hand driven gear
Clockwise	Convex tooth surface	Concave tooth surface
Counterclockwise	Concave tooth surface	Convex tooth surface

For left-hand drive gear

Direction of rotation of drive gear NOTE 1	Meshing tooth surface	
	Left-hand drive gear	Right-hand driven gear
Clockwise	Concave tooth surface	Convex tooth surface
Counterclockwise	Convex tooth surface	Concave tooth surface

[NOTE 1] The direction of rotation in the table is as seen from the hub of the gear.

■ The force applied to the teeth of the spiral bevel gear

The table below shows, for spiral bevel gears with an axis angle of $\Sigma = 90^\circ$, pressure angle of $\alpha_n = 20^\circ$ and spiral angle of $\beta_m = 35^\circ$, the magnitudes of the axial force F_x and radial force F_r where the tangential force F_t at the center of the tooth width is 100.

Thrust force F_x
Radial force F_r value

(1) Force applied to pinion


Meshing tooth surface	Gear Ratio z_2/z_1						
	1.0	1.5	2.0	2.5	3.0	4.0	5.0
Concave tooth surface	80.9	82.9	82.5	81.5	80.5	78.7	77.4
	-18.1	-1.9	8.4	15.2	20.0	26.1	29.8
Convex tooth surface	-18.1	-33.6	-42.8	-48.5	-52.4	-57.2	-59.9
	80.9	75.8	71.1	67.3	64.3	60.1	57.3

(2) Force applied to gear


Meshing tooth surface	Gear Ratio z_2/z_1						
	1.0	1.5	2.0	2.5	3.0	4.0	5.0
Concave tooth surface	80.9	75.8	71.1	67.3	64.3	60.1	57.3
	-18.1	-33.6	-42.8	-48.5	-52.4	-57.2	-59.9
Convex tooth surface	-18.1	-1.9	8.4	15.2	20.0	26.1	29.8
	80.9	82.9	82.5	81.5	80.5	78.7	77.4




Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	SCM415
Heat treatment	Carburized
Tooth hardness	55 to 60HRC



BK

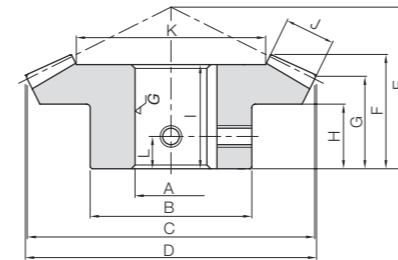

B4

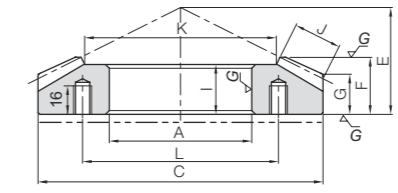


B7

Catalog Number	Gear Ratio	Module	No. of teeth	Direction of spiral	Shape	Bore		Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Hole length
						A _{H7}	B							
MBSA2-3020R MBSB2-3020R	1.5	m2	30	R	B4	20 22	40	60	61.36	40	26.8	21.02	14	23
MBSA2-2030L MBSB2-2030L		m2	20	L	BK	15 18	35	40	43.49	45	24.96	16.16	13.33	23
MBSA2.5-3020R MBSB2.5-3020R		m2.5	30	R	B4	22 25	48	75	76.74	50	33.6	26.31	18	30
MBSA2.5-2030L MBSB2.5-2030L		m2.5	20	L	BK	18 20	43	50	54.43	55	30.08	18.98	15.17	28
MBSA3-3020R MBSB3-3020R		m3	30	R	B4	25 30	60	90	92.21	60	40.34	31.66	21	36
MBSA3-2030L MBSB3-2030L		m3	20	L	BK	22 25	53	60	65.58	65	35.17	21.86	17.67	32.5
MBSA4-3020R MBSB4-3020R		m4	30	R	B4	35 40	75	120	122.91	70	43.99	32.18	21	39
MBSA4-2030L MBSB4-2030L		m4	20	L	BK	30 35	70	80	87.34	85	45.53	27.45	21.67	42
MBSA5-3020R MBSA5-2030L MBSB5-2030L		m5	30	R	B7	80	—	150	—	70	35.53	23.8	—	31
MBSA5-2030L MBSB5-2030L		m5	20	L	BK	35 40	87	100	109.2	105	55.05	33.07	25.67	51
MBSA6-3020R MBSA6-2030L MBSB6-2030L		m6	30	R	B7	90	—	180	—	80	38.86	24.37	—	33
MBSA6-2030L MBSB6-2030L		m6	20	L	BK	45 50	105	120	130.48	125	65.57	38.49	30	60
MBSA2-4020R MBSB2-4020R	2	m2	40	R	B4	20 22	45	80	81.06	45	31.83	26.06	18	29
MBSA2-2040L MBSB2-2040L		m2	20	L	BK	15 18	35	40	44.2	55	28.16	16.05	13.75	27
MBSA2.5-4020R MBSB2.5-4020R		m2.5	40	R	B4	25 28	55	100	101.29	50	33.35	26.29	16	30
MBSA2.5-2040L MBSB2.5-2040L		m2.5	20	L	BK	20 22	43	50	55.12	65	31.01	16.28	13.25	29
MBSA3-4020R MBSB3-4020R		m3	40	R	B4	30 35	65	120	121.57	60	39.81	31.57	21	35
MBSA3-2040L MBSB3-2040L		m3	20	L	BK	22 25	53	60	66.03	80	38.9	21.51	18.25	36.5
MBSA4-4020R MBSA4-2040L MBSB4-2040L		m4	40	R	B7	80	—	160	—	60	32.08	22.53	—	28
MBSA4-2040L MBSB4-2040L		m4	20	L	BK	30 35	70	80	88.46	100	45.38	22.12	17.5	43
MBSA5-4020R MBSA5-2040L MBSB5-2040L		m5	40	R	B7	90	—	200	—	70	35.2	22.98	—	30
MBSA5-2040L MBSB5-2040L		m5	20	L	BK	40 45	87	100	109.91	125	57.11	27.48	21.75	53.5
MBSA6-4020R MBSA6-2040L MBSB6-2040L		m6	40	R	B7	110	—	240	—	80	37.89	23.62	—	32
MBSA6-2040L MBSB6-2040L		m6	20	L	BK	50 55	105	120	132.04	150	67.8	33.01	26.25	64


Face width	Holding surface dia.	Keyway	Socket head screw	Allowable torque (N-m)		Allowable torque (kgf-m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
J	K	Width × Depth	Size	L						
11	37.56	6 x 2.8 6 x 2.8	2-M5 2-M5	7	34.4	38.4	3.51	3.91	0.06~0.16	0.26 0.24
11	24.34	5 x 2.3 6 x 2.8	2-M4 2-M5	6.5	23.5	25.6	2.39	2.61	0.06~0.16	0.14 0.13
14	48.01	6 x 2.8 8 x 2.8	2-M5 2-M6	9	68.0	76.8	6.93	7.84	0.07~0.17	0.52 0.49
14	31.02	6 x 2.8 6 x 2.8	2-M5 2-M5	7.5	46.4	51.2	4.73	5.22	0.07~0.17	0.26 0.25
17	57.14	8 x 3.3 8 x 3.3	2-M6 2-M6	11	118	135	12.1	13.8	0.08~0.18	0.96 0.90
17	36.2	6 x 2.8 8 x 3.3	2-M5 2-M6	9	80.7	90.1	8.23	9.19	0.08~0.18	0.46 0.43
23	76.72	10 x 3.3 12 x 3.3	2-M8 2-M8	10	283	328	28.9	33.5	0.12~0.27	1.77 1.68
23	48.07	8 x 3.3 10 x 3.3	2-M6 2-M8	11	193	219	19.7	22.3	0.12~0.27	1.03 0.95
28	97.36	—	6-M10	110	544	637	55.4	64.9	0.14~0.34	2.80
28	62.04	10 x 3.3 12 x 3.3	2-M8 2-M8	13	371	425	37.8	43.3	0.14~0.34	2.01 1.89
34	115.61	—	6-M10	120	927	1120	94.6	114	0.16~0.36	4.55
34	72.41	14 x 3.8 14 x 3.8	2-M10 2-M10	15	633	745	64.5	76.0	0.16~0.36	3.56 3.38
14	52.7	6 x 2.8 6 x 2.8	2-M5 2-M5	9	59.6	69.6	6.08	7.09	0.06~0.16	0.53 0.51
14	25.39	5 x 2.3 6 x 2.8	2-M4 2-M5	7	29.9	34.8	3.05	3.55	0.06~0.16	0.16 0.14
17	66.99	8 x 3.3 8 x 3.3	2-M6 2-M6	8	114	135	11.7	13.8	0.07~0.17	0.93 0.90
17	29.97	6 x 2.8 6 x 2.8	2-M5 2-M5	7	57.3	67.6	5.84	6.89	0.07~0.17	0.26 0.25
20	80.28	8 x 3.3 10 x 3.3	2-M6 2-M8	11	195	233	19.9	23.7	0.08~0.18	1.47 1.40
20	36.56	6 x 2.8 8 x 3.3	2-M5 2-M6	9.5	97.7	116	9.97	11.9	0.08~0.18	0.51 0.48
27	107.63	—	6-M10	110	466	564	47.5	57.5	0.12~0.27	3.11
27	51.25	8 x 3.3 10 x 3.3	2-M6 2-M8	9	234	282	23.8	28.8	0.12~0.27	1.05 0.96
34	133.97	—	6-M10	120	915	1120	93.3	114	0.14~0.34	5.59
34	61.95	12 x 3.3 14 x 3.8	2-M8 2-M10	11	458	559	46.7	57.0	0.14~0.34	1.96 1.82
40	162.56	—	6-M10	140	1530	1920	156	196	0.16~0.36	8.48
40	77.11	14 x 3.8 16 x 4.3	2-M10 2-M10	14	766	961	78.1	97.9	0.16~0.36	3.33 3.11

When installing products produced in B7 style (ring type), always secure the gears onto the mounting base with taper pins to absorb the rotational loads. It is dangerous to secure with bolts only.

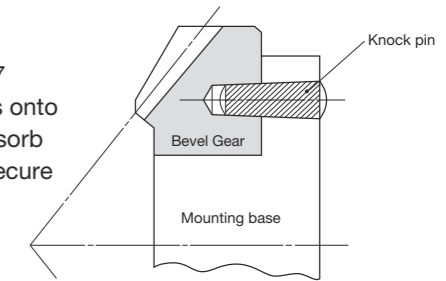





Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	SCM415
Heat treatment	Carburized
Tooth hardness	55 to 60HRC




BK



BT

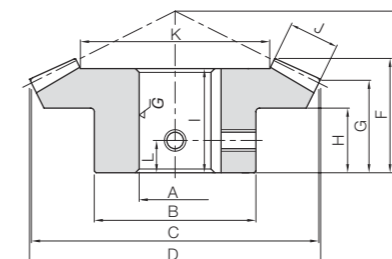

B4




B7

Catalog Number	Gear Ratio	Module	No. of teeth	Direction of spiral	Shape	Bore		Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Hole length
						A _{H7}	B							
MBSA2-4515R MBSB2-4515R	3	m2	45	R	B4	20	48	90	90.66	40	30.01	25.99	18	27
22														
MBSA2-1545L MBSB2-1545L		m2	15	L	BT BK	10	26	30	34.59	55	23.78	10.77	9.33	22.5
12														
MBSA2.5-4515R MBSB2.5-4515R		m2.5	45	R	B4	22	55	112.5	113.28	45	32.43	27.42	18	28
25														
MBSA2.5-1545L MBSB2.5-1545L		m2.5	15	L	BK	12	32	37.5	43.06	70	30.51	14.68	12.84	29
15														
MBSA3-4515R MBSB3-4515R		m3	45	R	B4	30	65	135	136.03	55	39.94	34.05	22	35
32														
MBSA3-1545L MBSB3-1545L		m3	15	L	BK	18	38	45	52	85	38.12	18.67	16.33	36.5
20														
MBSA4-4515R		m4	45	R	B7	80	—	180	—	50	28.85	22.14	—	25
MBSA4-1545L MBSB4-1545L														
MBSA5-4515R MBSA5-1545L MBSB5-1545L		m5	45	R	B7	90	—	225	—	60	33.57	25.16	—	28
						28								
MBSA6-4515R MBSA6-1545L MBSB6-1545L		m6	45	R	B7	110	—	270	—	70	38.28	28.05	—	32
						32								
MBSA6-4515R MBSA6-1545L MBSB6-1545L		m6	15	L	BK	35	78	90	103.13	160	66.39	27.19	23	63
						40								


Face width	Holding surface dia.	Keyway	Socket head screw	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
J	K	Width × Depth	Size	L						
14	61.82	6 × 2.8 6 × 2.8	2-M5 2-M5	9	67.8	61.3	6.91	6.25	0.06~0.16	0.61 0.60
14	16.46	— 4 × 1.8	2-M4 2-M4	5	21.7	20.4	2.22	2.08		
17	77.83	6 × 2.8 8 × 3.3	2-M5 2-M6	9	130	119	13.3	12.1	0.07~0.17	1.01 0.98
17	21.48	4 × 1.8 5 × 2.3	2-M4 2-M4	7	41.6	39.6	4.24	4.04		
21	92.39	8 × 3.3 10 × 3.3	2-M6 2-M8	11	229	211	23.3	21.6	0.08~0.18	1.78 1.75
21	26.18	6 × 2.8 6 × 2.8	2-M5 2-M5	9	73.3	70.5	7.48	7.18		
28	124.3	—	6-M10	110	542	508	55.3	51.8	0.12~0.27	3.93
28	35.91	6 × 2.8 8 × 3.3	2-M5 2-M6	10	174	169	17.7	17.3		
35	154.88	—	6-M10	120	1060	1000	108	102	0.14~0.34	7.38
35	42.64	8 × 3.3 10 × 3.3	2-M6 2-M8	11	339	334	34.6	34.1		
42	186.12	—	6-M10	140	1790	1740	183	178	0.16~0.36	12.0
42	52.37	10 × 3.3 12 × 3.3	2-M8 2-M8	12	575	581	58.6	59.3		

When installing products produced in B7 style (ring type), always secure the gears onto the mounting base with taper pins to absorb the rotational loads. It is dangerous to secure with bolts only.

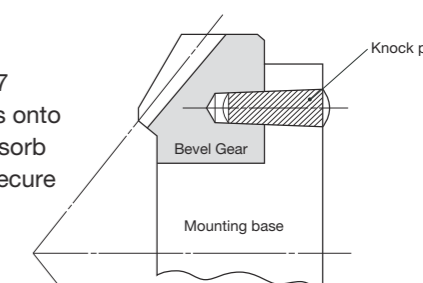





Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating



B3

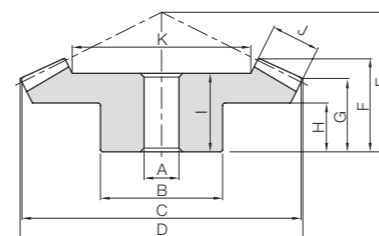

B4

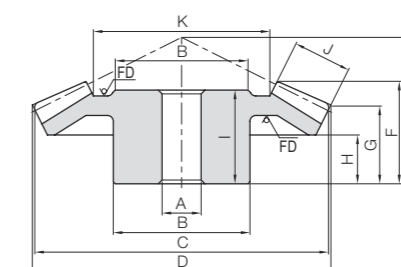

B5


* FD has a forged finish surface.

Catalog Number	Gear Ratio	Module	No. of teeth	Direction of spiral	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length		Crown to back
						A	B					C	D	
SBS2-3020R SBS2-2030L	1.5	m2	30	R	B4	12	35	60	61.36	40	26.8	21.02		
			20	L	B3	10	30	40	43.49	45	24.96	16.16		
SBS2.5-3020R SBS2.5-2030L		m2.5	30	R	B4	15	45	75	77.09	50	33.86	26.56		
			20	L	B3	12	40	50	54.43	55	30.88	18.98		
SBS3-3020R SBS3-2030L		m3	30	R	B4	16	50	90	92.21	55	35.34	26.66		
			20	L	B3	16	45	60	65.58	70	40.17	26.86		
SBS4-3020R SBS4-2030L		m4	30	R	B4	20	70	120	122.85	75	47.49	37.14		
			20	L	B3	20	60	80	87.34	90	48.17	32.45		
SBS5-3020R SBS5-2030L		m5	30	R	B4	25	90	150	153.67	90	58.08	42.75		
			20	L	B3	22	80	100	109.2	110	61.62	38.07		
SBS1-4020R SBS1-2040L		2	m1	40	R	B4	8	25	40	40.52	22	15.02	12.52	
				20	L	B3	6	16	20	22.08	28	13.73	8.52	
SBS1.5-4020R SBS1.5-2040L	m1.5		40	R	B4	10	38	60	60.75	35	24.93	20.75		
			20	L	B3	8	25	30	33.08	46	25.45	16.77		
SBS2-4020R SBS2-2040L	m2		40	R	B4	12	40	80	81	45	32.27	26		
			20	L	B3	12	32	40	44.1	60	34.04	21.02		
SBS2.5-4020R SBS2.5-2040L	m2.5		40	R	B4	15	50	100	101.27	55	39.65	31.27		
			20	L	B3	12	40	50	55.2	75	43.61	26.3		
SBS3-4020R SBS3-2040L	m3		40	R	B4	20	60	120	121.48	65	45.76	36.47		
			20	L	B3	16	50	60	66.07	90	50.63	31.52		
SBS4-4020R SBS4-2040L	m4		40	R	B4	20	70	160	162.07	80	53.69	42.07		
			20	L	B3	20	60	80	88.5	120	66.24	42.12		
SBS5-4020R SBS5-2040L	m5	40	R	B5	25	100	200	202.54	90	55.02	42.54			
		20	L	B3	22	80	100	110.45	140	68.48	42.61			
SBS2.5-3618R SBS2.5-1836L	2	m2.5	36	R	B4	15	55	90	91.29	43	28.38	21.79		
			18	L	B3	12	38	45	50.3	64	34.06	20.32		
SBS3-3618R SBS3-1836L		m3	36	R	B4	20	60	108	109.53	52	34.82	26.53		
	18		L	B3	16	46	54	60.28	75	39.78	22.57			
SBS4-3618R SBS4-1836L	m4	36	R	B4	20	70	144	145.99	72	48.84	37.99			
		18	L	B3	20	60	72	80.19	100	52.51	30.05			
SBS2-4518R SBS2-1845L	2.5	m2	45	R	B4	12	48	90	90.79	40	27.67	22.98		
			18	L	B3	10	32	36	40.42	60	28.54	15.88		
SBS2.5-4518R SBS2.5-1845L		m2.5	45	R	B4	15	55	112.5	113.49	50	34.94	28.74		
			18	L	B3	12	40	45	50.35	72	33.19	16.82		
SBS3-4518R SBS3-1845L		m3	45	R	B4	20	65	135	136.24	60	41.65	34.55		
			18	L	B3	16	48	54	60.69	85	37.82	18.84		
SBS4-4518R SBS4-1845L		m4	45	R	B4	25	80	180	181.57	75	50.98	40.96		
			18	L	B3	20	62	72	80.86	110	48.03	21.77		
SBS5-4518R SBS5-1845L		m5	45	R	B4	30	100	225	225.81	90	57.9	46.01		
			18	L	B3	22	80	90	103.87	135	56.02	25.27		


Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
H	I	J	K							
15 11.67	23 22	11	37.56 21.34	15.4 10.5	11.3 7.52	1.57 1.07	1.15 0.77	0.06~0.16	0.26 0.13	SBS2-3020R SBS2-2030L
18 14.17	30 28	15	45.61 27.42	31.7 21.6	23.6 15.7	3.23 2.20	2.40 1.60	0.07~0.17	0.55 0.28	SBS2.5-3020R SBS2.5-2030L
17 20	31 37	17	57.14 34.71	52.9 36.1	39.7 26.5	5.39 3.68	4.05 2.70	0.08~0.18	0.82 0.49	SBS3-3020R SBS3-2030L
25 23.33	40 43	20	78.59 46.89	115 78.7	88.1 58.8	11.8 8.03	8.99 5.99	0.12~0.27	1.90 1.05	SBS4-3020R SBS4-2030L
24 28.33	50 56	30	91.22 54.83	253 173	195 130	25.8 17.6	19.9 13.3	0.14~0.34	4.11 2.29	SBS5-3020R SBS5-2030L
8 7	12 12	6	26.58 9.17	3.01 1.51	2.22 1.11	0.31 0.15	0.23 0.11	0.03~0.13	0.068 0.019	SBS1-4020R SBS1-2040L
15 14.75	22 24	10	39.64 17.28	10.9 5.46	8.22 4.11	1.11 0.56	0.84 0.42	0.05~0.15	0.27 0.088	SBS1.5-4020R SBS1.5-2040L
18 18	27 32	15	48.46 20.92	27.8 13.9	21.3 10.7	2.83 1.42	2.17 1.09	0.06~0.16	0.51 0.19	SBS2-4020R SBS2-2040L
20 22.5	34 40	20	59.28 20.56	56.4 28.2	43.7 21.9	5.75 2.88	4.46 2.23	0.07~0.17	1.06 0.40	SBS2.5-4020R SBS2.5-2040L
24 27.5	38 47	22	73.81 29.61	92.5 46.4	72.6 36.3	9.44 4.73	7.40 3.70	0.08~0.18	1.67 0.69	SBS3-4020R SBS3-2040L
28 35	45 62	28	102.39 42.78	213 107	170 84.8	21.7 10.9	17.3 8.65	0.12~0.27	3.33 1.46	SBS4-4020R SBS4-2040L
26 35	50 63	30	138.92 57.84	376 188	302 151	38.3 19.2	30.8 15.4	0.14~0.34	5.67 2.61	SBS5-4020R SBS5-2040L
13 17.25	24 32	16	57.72 25.45	41.7 20.9	29.3 14.7	4.26 2.13	2.99 1.49	0.07~0.17	0.72 0.27	SBS2.5-3618R SBS2.5-1836L
17 19	30 37	20	68.27 28.56	74.0 37.0	52.4 26.2	7.54 3.78	5.35 2.67	0.08~0.18	1.15 0.44	SBS3-3618R SBS3-1836L
25 25	42 49	26	91.87 39.72	173 86.4	124 62.1	17.6 8.81	12.7 6.33	0.12~0.27	2.65 1.03	SBS4-3618R SBS4-1836L
15 14.2	25 27.5	14	62.24 23.11	31.0 12.2	21.9 8.74	3.16 1.24	2.23 0.89	0.06~0.16	0.65 0.15	SBS2-4518R SBS2-1845L
18 14.75	31 31.5	18	76.53 26.82	61.6 24.2	44.0 17.6	6.28 2.47	4.49 1.80	0.07~0.17	1.23 0.28	SBS2.5-4518R SBS2.5-1845L
22 16.3	37 36	21	92.96 33.41	104 41.0	75.4 30.2	10.7 4.18	7.69 3.07	0.08~0.18	2.05 0.45	SBS3-4518R SBS3-1845L
24 18	45 46	29	122.33 45.83	253 99.5	185 74.1	25.8 10.2	18.9 7.56	0.12~0.27	4.62 1.00	SBS4-4518R SBS4-1845L
28 20.5	51 52.5	34	156.56 56.9	474 186	350 140	48.4 19.0	35.7 14.3	0.14~0.34	8.11 1.94	SBS5-4518R SBS5-1845L




Specifications	
Precision grade	JIS B 1704: 1978 grade 4
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°*
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating



B3

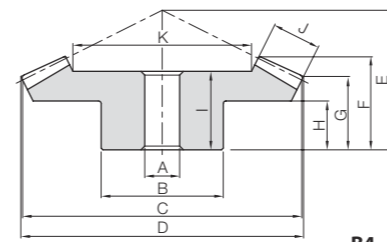

B4

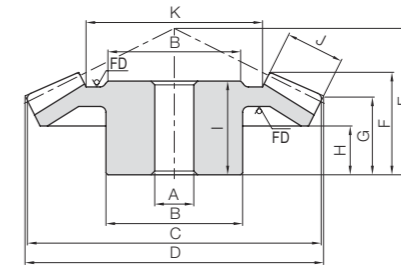

B5

* FD has a forged finish surface.

Catalog Number	Gear Ratio	Module	No. of teeth	Direction of spiral	Shape	Bore		Pitch dia.	Outside dia.	Mounting distance	Total length		Crown to back
						A	B				F	G	
SBS2-4515R SBS2-1545L	3	m2	45	R	B4	12	40	90	90.67	40	30.29	26.01	
15			L	B3	10	24	30	34.78	60	29.66	15.8		
SBS2.5-4515R SBS2.5-1545L		m2.5	45	R	B4	15	50	112.5	113.32	50	38.25	32.47	
15			L	B3	12	30	37.5	43.36	75	38.27	19.73		
SBS3-4515R SBS3-1545L		m3	45	R	B4	20	60	135	135.99	55	40.59	33.98	
15			L	B3	15	38	45	52.08	90	44.98	23.68		
SBS4-4515R SBS4-1545L	m4	45	R	B5	20	80	180	181.3	70	50.62	41.95		
15		L	B3	16	50	60	69.3	115	54.37	26.55			
SBS5-4515R SBS5-1545L	m5	45	R	B5	30	90	225	226.61	75	50.05	39.92		
15		L	B3	20	60	75	86.55	145	66.89	34.43			
SBS1.5-6015R SBS1.5-1560L	4	m1.5	60	R	B4	12	60	90	90.36	32	24.08	21.48	
15			L	B3	8	18	22.5	26.09	56	22.95	11.45		
SBS2-6015R SBS2-1560L		m2	60	R	B4	15	80	120	120.46	42	31.5	27.91	
15			L	B3	10	24	30	34.68	75	30.94	15.58		
SBS2.5-6015R SBS2.5-1560L		m2.5	60	R	B4	20	100	150	150.5	53	39.68	35.24	
15			L	B3	12	30	37.5	44.16	94	38.9	19.83		
SBS3-6015R SBS3-1560L	m3	60	R	B4	20	120	180	180.57	64	47.61	42.64		
15		L	B3	15	38	45	52.64	112	44.01	22.96			


* 6015R and 1560L of SBS1.5 and 2 are 39°.

Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
H	I	J	K							
17 14	26 29	15	59.04 19.13	31.7 10.1	18.8 6.27	3.23 1.03	1.92 0.64	0.06~0.16	0.60 0.095	SBS2-4515R SBS2-1545L
22 17.5	35 37	20	72.82 20.51	64.3 20.6	38.7 12.9	6.56 2.10	3.94 1.31	0.07~0.17	1.21 0.19	SBS2.5-4515R SBS2.5-1545L
20 21.33	35 44	23	88.18 28.54	108 34.7	65.8 21.9	11.1 3.54	6.71 2.24	0.08~0.18	1.99 0.34	SBS3-4515R SBS3-1545L
24 23.33	45 52	30	118.08 32.26	253 81.1	156 52.0	25.8 8.27	15.9 5.30	0.12~0.27	4.04 0.76	SBS4-4515R SBS4-1545L
20 30	44 65	35	152.88 48.64	473 152	295 98.2	48.3 15.5	30.0 10.0	0.14~0.34	6.08 1.44	SBS5-4515R SBS5-1545L
12 10.43	21 22.5	12	65.39 15.55	17.9 4.22	12.9 3.21	1.83 0.43	1.31 0.33	0.05~0.15	0.70 0.042	SBS1.5-6015R SBS1.5-1560L
16 14.25	27 30	16	87.02 18.06	42.5 10.0	30.9 7.73	4.33 1.02	3.15 0.79	0.06~0.16	1.59 0.10	SBS2-6015R SBS2-1560L
20 18.06	34 37.5	20	108.64 20.58	96.1 22.6	58.4 14.6	9.79 2.31	5.95 1.49	0.07~0.17	3.13 0.20	SBS2.5-6015R SBS2.5-1560L
25 21.12	41 43	22	134.4 31.58	156 36.8	95.7 23.9	15.9 3.75	9.76 2.44	0.08~0.18	5.38 0.35	SBS3-6015R SBS3-1560L

Product Precautions → Page 338

Mating surface of spiral bevel gears

Spiral bevel gears have convex and concave tooth surfaces. If the direction of rotation of the drive gear differs, the meshing tooth surface will also change. The table on the right shows how to view the convex and concave tooth surfaces and the meshing tooth surface with respect to the direction of rotation of the drive gear.

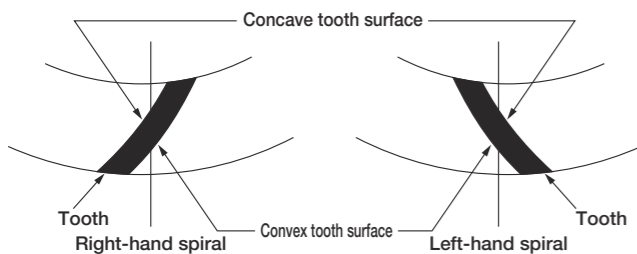

For right-hand drive gear

Direction of rotation of drive gear NOTE 1	Meshing tooth surface	
	Right-hand drive gear	Left-hand driven gear
Clockwise	Convex tooth surface	Concave tooth surface
Counterclockwise	Concave tooth surface	Convex tooth surface

For left-hand drive gear

Direction of rotation of drive gear NOTE 1	Meshing tooth surface	
	Left-hand drive gear	Right-hand driven gear
Clockwise	Concave tooth surface	Convex tooth surface
Counterclockwise	Convex tooth surface	Concave tooth surface

[NOTE 1] The direction of rotation in the table is as seen from the hub of the gear.

The force applied to the teeth of the spiral bevel gear

The table below shows, for spiral bevel gears with an axis angle of $\Sigma = 90^\circ$, pressure angle of $\alpha_n = 20^\circ$ and spiral angle of $\beta_m = 35^\circ$, the magnitudes of the axial force F_x and radial force F_r where the tangential force F_t at the center of the tooth width is 100.

Thrust force F_x
Radial force F_r value

(1) Force applied to pinion


Meshing tooth surface	Gear Ratio z_2/z_1						
	1.0	1.5	2.0	2.5	3.0	4.0	5.0
Concave tooth surface	80.9 -18.1	82.9 -1.9	82.5 8.4	81.5 15.2	80.5 20.0	78.7 26.1	77.4 29.8
Convex tooth surface	-18.1 80.9	-33.6 75.8	-42.8 71.1	-48.5 67.3	-52.4 64.3	-57.2 60.1	-59.9 57.3

(2) Force applied to gear


Meshing tooth surface	Gear Ratio z_2/z_1						
	1.0	1.5	2.0	2.5	3.0	4.0	5.0
Concave tooth surface	80.9 -18.1	75.8 -33.6	71.1 -42.8	67.3 -48.5	64.3 -52.4	60.1 -57.2	57.3 -59.9
Convex tooth surface	-18.1 80.9	-1.9 82.9	8.4 82.5	15.2 81.5	20.0 80.5	26.1 78.7	29.8 77.4




Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating




B3

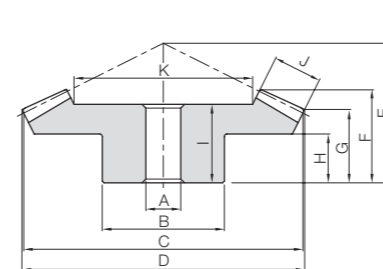

B4

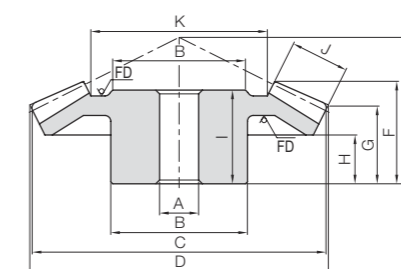

B5

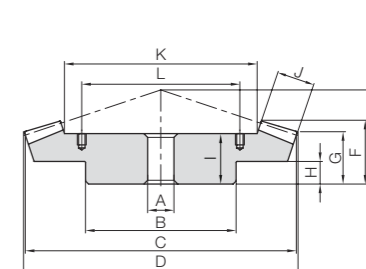

BT


* FD has a forged finish surface.

Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back		Hub width
					A _{H7}	B					C	D	
SB1.5-3020 SB1.5-2030	1.5	m1.5	30	B4	10	30	45	46.24	28	18.53	13.93	8	
20			B3	8	25	30	33.13	33	18.63	11.54	8.83		
SB2-3020 SB2-2030		m2	30	B4	10	35	60	61.65	40	26.87	21.24	15	
20			B3	10	30	40	44.18	45	25.06	16.39	11.67		
SB2.5-3020 SB2.5-2030		m2.5	30	B4	15	45	75	77.07	50	34.22	26.55	18	
20			B3	12	35	50	55.22	55	31.06	19.24	12.5		
SB3-3020 SB3-2030		m3	30	B4	15	50	90	92.48	55	35.56	26.86	17	
20			B3	15	45	60	66.27	70	40.48	27.09	20		
SB4-3020 SB4-2030		m4	30	B4	20	70	120	123.3	75	47.71	37.48	25	
20			B3	15	60	80	88.32	90	48.53	32.77	23.33		
SB5-3020 SB5-2030	m5	30	B4	25	90	150	154.13	90	58.45	43.1	24		
20		B3	20	80	100	110.45	110	62.11	38.48	28.33			
SB1.5-3015 SB1.5-1530	2	m1.5	30	B4	8	25	45	45.88	25	17.85	14.63	9	
15			B3	6	16	22.5	26.11	32	17.23	10.4	7.88		
SB2-3015 SB2-1530		m2	30	B4	10	30	60	61.17	31	21.6	17.17	10	
15			B3	8	22	30	34.81	40	20.59	11.2	8		
SB2.5-3015 SB2.5-1530		m2.5	30	B4	15	40	75	76.46	40	28.75	22.71	15	
15			B3	12	30	37.5	43.51	55	31.81	19	15.63		
SB3-3015 SB3-1530		m3	30	B4	16	50	90	91.76	50	37.31	29.26	18	
15			B3	12	35	45	52.22	70	43.88	26.8	22.5		
SB4-3015 SB4-1530		m4	30	B4	20	60	120	122.34	60	42.4	32.34	20	
15			B3	16	50	60	69.62	85	48.74	27.41	22.5		
SB5-3015 SB5-1530		m5	30	B5	20	70	150	152.93	75	52.5	40.43	25	
15			B3	20	60	75	87.03	110	63.61	38.01	31.25		
SB6-3015 SB6-1530	m6	30	B5	25	80	180	183.5	90	62.56	48.49	28		
15		B3	25	70	90	104.44	125	68.48	38.6	30			
SB2.5-3618 SB2.5-1836	2	m2.5	36	B4	15	55	90	91.46	43	28.52	21.96	13	
18			B3	12	38	45	51.01	64	34.27	20.5	17.25		
SB3-3618 SB3-1836		m3	36	B4	20	60	108	109.76	52	34.95	26.76	17	
18			B3	16	46	54	61.22	75	40.01	22.8	19		
SB4-3618 SB4-1836	m4	36	B4	20	70	144	146.34	72	49	38.34	25		
18		B3	20	60	72	81.62	100	52.77	30.41	25			
SB1-4020 SB1-2040	2	m1	40	B4	8	25	40	40.59	22	15.07	12.59	8	
20			B3	6	16	20	22.41	28	13.78	8.6	7		
SB1.25-4020 SB1.25-2040		m1.25	40	B4	10	32	50	50.73	27	18.54	15.23	10	
20			B3	8	22	25	28.01	36	18.66	11.75	10.25		
SB1.5-4020 SB1.5-2040		m1.5	40	B4	10	38	60	60.88	35	25.01	20.88	15	
20			B3	8	25	30	33.61	46	25.54	16.9	14.75		
SB2-4020 SB2-2040		m2	40	B4	12	40	80	81.17	45	32.37	26.17	18	
20			B3	12	32	40	44.81	60	34.16	21.2	18		
SB2.5-4020 SB2.5-2040		m2.5	40	B4	15	50	100	101.46	55	39.73	31.46	20	
20			B3	12	40	50	56.01	75	43.78	26.5	22.5		
SB3-4020 SB3-2040		m3	40	B4	20	60	120	121.76	65	45.85	36.76	24	
20			B3	16	50	60	67.22	90	50.81	31.8	27.5		
SB4-4020 SB4-2040		m4	40	B4	20	70	160	162.34	80	53.92	42.34	28	
20			B3	20	60	80	89.62	120	66.59	42.41	35		
SB5-4020 SB5-2040		m5	40	B5	25	100	200	202.93	90	55.33	42.93	26	
20			B3	20	80	100	112.03	140	68.92	43.01	35		
SB6-4020 SB6-2040		m6	40	B5	25	85	240	243.52	105	65.05	48.52	28	
20			B3	25	90	120	134.44	160	78.16	43.6	32.5		
SBY8-4020 SBY8-2040	m8	40	BT	35	180	320	324.69	130	75.36	54.69	25		
20		B3	30	120	160	179.25	210	98	54.81	40			


Hole length	Face width	Holding surface dia.	Allowable torque (N-m)		Allowable torque (kgf-m)		Backlash (mm)	Weight (kg)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
16	9	27.37	5.82	0.65	0.59	0.07	0.05~0.15	0.12	SB1.5-3020 SB1.5-2030
17		17.05	4.04	0.44	0.41	0.04			
23	11	37.56	13.1	1.52	1.33	0.16	0.07~0.17	0.55	SB2.5-3020 SB2.5-2030
22		21.34	9.07	1.01	0.92	0.10			
30	15	45.61	26.9	3.21	2.75	0.33	0.12~0.27	1.91	SB4-3020 SB4-2030
28		27.42	18.7	2.14	1.91	0.22			
31	17	57.14	44.9	5.45	4.58	0.56	0.05~0.15	0.10	SB1.5-3015 SB1.5-1530
37		34.71	31.2	3.63	3.18	0.37			
40	20	78.59	98.2	12.3	10.0	1.25	0.07~0.17	0.41	SB2.5-3015 SB2.5-1530
43		46.89	68.1	8.20	6.95	0.84			
50	30	91.22	215	27.6	22.0	2.81	0.12~0.27	1.64	SB4-3015 SB4-1530
56		54.83	150	18.4	15.3	1.87			
15	8	28.36	5.02	0.47	0.51	0.05	0.16~0.36	4.75	SB6-3015 SB6-1530
15.5		10.72	2.60	0.24	0.26	0.02			
18	11	37.4	12.1	1.18	1.24	0.12	0.08~0.18	1.15	SB3-3618 SB3-1836
19		16.81	6.28	0.59	0.64	0.06			
24	15	44.21	24.9	2.48	2.54	0.25	0.03~0.13	0.068	SB1-4020 SB1-2040
29		16.42	12.9	1.24	1.32	0.13			
30	20	47.78	45.6	4.60	4.65	0.47	0.05~0.15	0.27	SB1.5-4020 SB1.5-2040
41		19.56	23.6	2.30	2.41	0.23			
36	25	70.1	104	10.9	10.7	1.11	0.07~0.17	1.09	SB2.5-4020 SB2.5-2040
46		32.2	54.0	5.43	5.51	0.55			
48	30	90.41	199	21.3	20.3	2.17	0.12~0.27	2.66	SB4-3618 SB4-1836
58		32.83	103	10.6	10.5	1.09			
57	35	109.74	336	36.9	34.2	3.77	0.07~0.17	0.40	SB2.5-4020 SB2.5-2040
63		45.47	174	18.5	17.7	1.88			
24	16	57.72	35.9	4.08	3.66	0.42	0.12~0.27	1.04	SB4-3618 SB4-1836
32		25.44	18.1	2.04	1.84	0.21			
30	20	68.28	63.7	7.34	6.49	0.75	0.20~0.45	25.75	SBY8-4020 SBY8-2040
37		28.56	32.0	3.67	3.27	0.37			
42	26	91.86	149	17.7	15.2	1.80	0.04~0.14	0.14	SB1.25-4020 SB1.25-2040
49		39.72	74.8	8.85	7.62	0.90			
12	6	26.58	2.61	0.29	0.27	0.03	0.06~0.16	0.19	SB2-4020 SB2-2040
12		9.17	1.32	0.15	0.13	0.02			
16	8	33.61	5.33	0.61	0.54	0.06	0.08~0.18	0.70	SB3-4020 SB3-2040
17		13.22	2.69	0.31	0.27	0.03			




Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating




B3

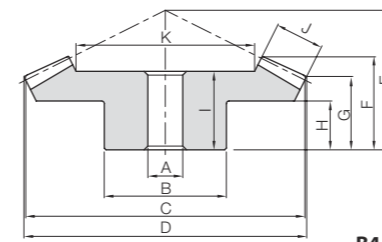

B4

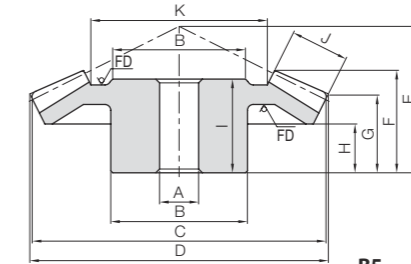

B5

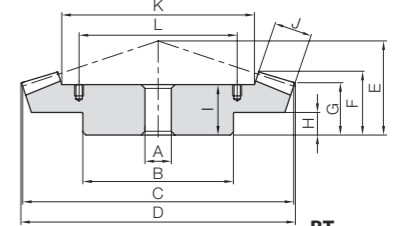

BT


* FD has a forged finish surface.

Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back		Hub width
					A _{H7}	B						C	D	
SB1-4518 SB1-1845	2.5	m1	45	B4	8	30	45	45.46	23	16.95	14.57	10		
18			B3	6	15	18	20.57	32	16.34	10.02	8.9			
SB1.25-4518 SB1.25-1845		m1.25	45	B4	10	34	56.25	56.82	26	18.53	15.46	10		
18			B3	8	19	22.5	25.72	40	20.66	12.52	11.17			
SB1.5-4518 SB1.5-1845		m1.5	45	B4	10	36	67.5	68.18	30	21.1	17.35	10		
18			B3	8	23	27	30.86	45	21.97	12.02	10.45			
SB2-4518 SB2-1845		m2	45	B4	12	48	90	90.91	40	27.91	23.14	15		
18			B3	10	32	36	41.15	60	28.69	16.03	14.2			
SB2.5-4518 SB2.5-1845		m2.5	45	B4	15	55	112.5	113.64	50	35.06	28.92	18		
18			B3	12	40	45	51.44	72	33.31	17.04	14.75			
SB3-4518 SB3-1845		m3	45	B4	20	65	135	136.37	60	41.86	34.71	22		
18			B3	16	48	54	61.72	85	38.04	19.05	16.3			
SB4-4518 SB4-1845		m4	45	B4	20	80	180	181.82	75	51.16	41.28	24		
18			B3	20	62	72	82.3	110	48.28	22.06	18			
SB5-4518 SB5-1845		m5	45	B4	25	100	225	227.28	90	59.43	47.85	28		
18			B3	20	80	90	102.87	135	55.82	25.07	20.5			
SB1-4515 SB1-1545	3	m1	45	B4	8	30	45	45.37	17	11.77	10.06	5		
15			B3	6	12	15	17.67	29	12.51	6.95	6			
SB1.25-4515 SB1.25-1545		m1.25	45	B4	10	34	56.25	56.72	21	14.61	12.33	6		
15			B3	8	15	18.75	22.09	36	15.85	8.43	7.25			
SB1.5-4515 SB1.5-1545		m1.5	45	B4	10	36	67.5	68.06	28	20.44	17.59	11		
15			B3	8	18	22.5	26.54	47	23.19	13.92	12.5			
SB2-4515 SB2-1545		m2	45	B4	12	40	90	90.75	40	30.4	26.12	17		
15			B3	10	24	30	35.35	60	29.8	15.89	14			
SB2.5-4515 SB2.5-1545		m2.5	45	B4	15	50	112.5	113.43	50	38.35	32.65	22		
15			B3	12	30	37.5	44.18	75	38.41	19.86	17.5			
SB3-4515 SB3-1545		m3	45	B4	20	60	135	136.12	55	40.74	34.18	20		
15			B3	15	38	45	53.02	90	45.17	23.84	21.33			
SB4-4515 SB4-1545		m4	45	B5	20	80	180	181.5	70	50.79	42.24	24		
15			B3	16	50	60	70.69	115	54.6	26.78	23.33			
SB5-4515 SB5-1545		m5	45	B5	25	90	225	226.87	75	50.28	40.3	20		
15			B3	20	60	75	88.37	145	67.19	34.73	30			
SB6-4515 SB6-1545	m6	45	BT	30	160	270	272.24	100	72.62	58.36	30			
15		B3	25	70	90	106.03	175	89.04	42.67	36.67				
SBY8-4515 SBY8-1545	m8	45	BT	35	200	360	362.99	125	83.74	69.49	30			
15		B3	30	100	120	141.39	230	99.93	53.56	46.67				


Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
I	J	K							
15	7	30.73	3.35	0.35	0.34	0.04	0.03~0.13	0.11	SB1-4518 SB1-1845
15.5		10.31	1.33	0.14	0.14	0.01			
16	9	37.86	6.67	0.72	0.68	0.07	0.04~0.14	0.17	SB1.25-4518 SB1.25-1845
19.5		12.16	2.65	0.29	0.27	0.03			
18	11	45	11.7	1.29	1.19	0.13	0.05~0.15	0.28	SB1.5-4518 SB1.5-1845
21		16.51	4.64	0.51	0.47	0.05			
25	14	62.24	26.8	3.05	2.74	0.31	0.06~0.16	0.65	SB2-4518 SB2-1845
27.5		23.11	10.7	1.22	1.09	0.12			
31	18	76.53	53.4	6.20	5.44	0.63	0.07~0.17	1.23	SB2.5-4518 SB2.5-1845
31.5		26.82	21.2	2.48	2.16	0.25			
37	21	92.96	90.5	10.7	9.23	1.09	0.08~0.18	2.05	SB3-4518 SB3-1845
36		33.41	36.0	4.29	3.67	0.44			
45	29	122.33	220	26.8	22.4	2.73	0.12~0.27	4.69	SB4-4518 SB4-1845
46		45.83	87.3	10.7	8.91	1.09			
51	34	156.56	411	51.8	41.9	5.28	0.14~0.34	8.31	SB5-4518 SB5-1845
52.5		56.9	164	20.7	16.7	2.11			
9	6	32.02	2.84	0.27	0.29	0.027	0.03~0.13	0.078	SB1-4515 SB1-1545
12		10.05	0.98	0.09	0.10	0.0091			
12	8	39.63	5.80	0.56	0.59	0.057	0.04~0.14	0.15	SB1.25-4515 SB1.25-1545
15		10.9	2.00	0.19	0.20	0.019			
17	10	46.58	10.3	1.02	1.05	0.10	0.05~0.15	0.25	SB1.5-4515 SB1.5-1545
22.5		14.75	3.56	0.34	0.36	0.035			
26	15	59.04	26.4	2.68	2.69	0.27	0.06~0.16	0.60	SB2-4515 SB2-1545
29		19.13	9.10	0.89	0.93	0.091			
35	20	72.84	53.6	5.55	5.46	0.57	0.07~0.17	1.22	SB2.5-4515 SB2.5-1545
37		20.51	18.5	1.85	1.89	0.19			
35	23	88.18	90.2	9.53	9.20	0.97	0.08~0.18	1.99	SB3-4515 SB3-1545
43		22.53	31.2	3.18	3.18	0.32			
45	30	118.09	211	23.0	21.5	2.35	0.12~0.27	3.89	SB4-4515 SB4-1545
52		32.26	72.8	7.67	7.43	0.78			
44	35	152.88	394	44.3	40.2	4.52	0.14~0.34	6.10	SB5-4515 SB5-1545
65		48.64	136	14.8	13.9	1.51			
62	50	169.26	751	87.0	76.6	8.87	0.16~0.36	18.0	SB6-4515 SB6-1545
86		49.77	259	39.9	26.4	4.06			
67	50	255.92	1470	179	150	18.3	0.20~0.45	36.4	SBY8-4515 SBY8-1545
93		61.77	506	59.7	51.6	6.09			




Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating




B3

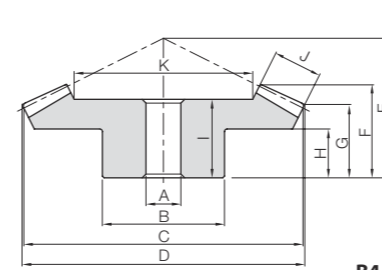

B4

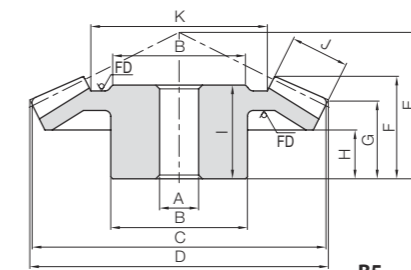

B5

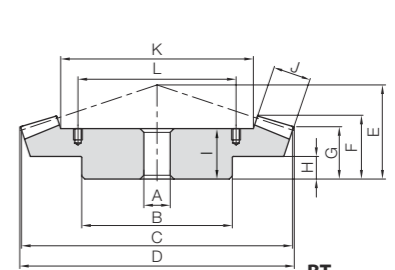

BT

* FD has a forged finish surface.

Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back		Hub width
					A _{H7}	B					C	D	
SB1.5-6015 SB1.5-1560	4	m1.5	60	B4	12	50	90	90.41	32	24.2	21.58	12	12
15			B3	8	18	22.5	26.66	56	23.01	11.52	10.43		
SB2-6015 SB2-1560		m2	60	B4	15	60	120	120.55	42	31.6	28.1	16	16
15			B3	10	24	30	35.55	75	31.01	15.69	14.25		
SB2.5-6015 SB2.5-1560		m2.5	60	B4	20	70	150	150.69	53	40	35.63	20	20
15			B3	12	30	37.5	44.44	94	39.02	19.87	18.06		
SB3-6015 SB3-1560		m3	60	B4	20	80	180	180.83	64	47.97	43.15	25	25
15			B3	15	38	45	53.33	112	44.1	23.04	21.12		
SB4-6015 SB4-1560		m4	60	B5	25	85	240	241.1	80	59.2	52.2	36	36
15			B3	16	50	60	71.1	150	62.03	31.4	28.75		
SBY5-6015 SBY5-1560		m5	60	BT	30	180	300	301.36	80	53.97	45.22	20	20
15			B3	25	60	75	88.9	185	75.03	36.74	33.13		
SBY6-6015 SBY6-1560	m6	60	BT	35	200	360	361.66	100	68.16	58.31	25	25	
15		B3	25	75	90	106.66	220	85.17	42.08	38.13			


Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
21	12	65.38	17.3	1.75	1.77	0.18	0.05~0.15	0.62	SB1.5-6015 SB1.5-1560
22.5			4.46	0.44	0.45	0.045			
27	16	87.02	41.3	4.30	4.21	0.44	0.06~0.16	1.35	SB2-6015 SB2-1560
30			10.6	1.07	1.08	0.11			
34	20	108.64	80.2	8.54	8.18	0.87	0.07~0.17	2.51	SB2.5-6015 SB2.5-1560
37.5			20.6	2.13	2.10	0.22			
41	22	134.4	130	14.2	13.3	1.44	0.08~0.18	4.16	SB3-6015 SB3-1560
43			33.5	3.54	3.42	0.36			
53	32	174.03	328	37.0	33.5	3.77	0.12~0.27	6.00	SB4-6015 SB4-1560
60			84.5	9.24	8.62	0.94			
45	40	218.79	642	74.4	65.4	7.59	0.14~0.34	17.5	SBY5-6015 SBY5-1560
73			165	18.6	16.8	1.90			
56	45	267.73	1050	126	107	12.8	0.16~0.36	30.7	SBY6-6015 SBY6-1560
82			270	31.5	27.5	3.21			

SB Module 1.5~3
Steel Bevel Gears & Pinion Shafts




Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	S45C
Heat treatment	—*
Tooth hardness	(less than 194HB)*
Surface treatment	Black oxide coating

* The pinion is tempered and has the teeth hardness of 200 to 270 HB.

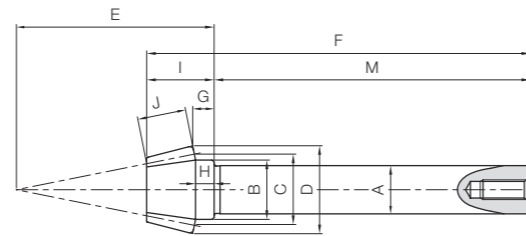

B8

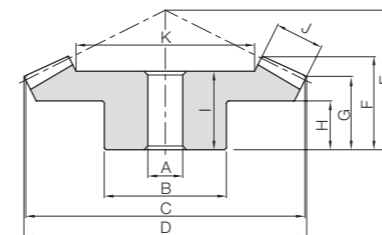


B4

Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore/Shaft Dia.		Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back	Hub width	Length of bore and shaft
					A _{H7} (bore)	A _{H7} (shaft)							
SB1.5-6012 SB1.5-1260	5	m1.5	60	B4	12	50	90	90.33	30	23.89	21.82	12	21
12			B8	12.2	15	18	22.24	50	97.06	5.42	4.7	17.06	
SB2-6012 SB2-1260		m2	60	B4	15	60	120	120.43	40	31.85	29.09	16	27
12			B8	15.2	20	24	29.65	66	117.08	6.56	5.6	22.08	
SB2.5-6012 SB2.5-1260		m2.5	60	B4	20	70	150	150.54	50	39.81	36.36	20	34
12			B8	20.2	25	30	37.06	83	143.1	8.7	7.5	28.1	
SB3-6012 SB3-1260		m3	60	B4	20	80	180	180.65	60	47.43	43.64	25	41
12			B8	25.25	30	36	44.48	100	172.19	10.85	9.4	32.19	


Face width	Holding surface dia.	Length of shaft	Socket head screw Size	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
				Bending strength	Surface durability	Bending strength	Surface durability			
12	65.52	80	M5	18.0	1.41	1.83	0.14	0.05~0.15	0.62	SB1.5-6012 SB1.5-1260
				4.01	0.46	0.41	0.047			
16	86.96	95	M6	42.6	3.43	4.34	0.35	0.06~0.16	1.34	SB2-6012 SB2-1260
				9.50	1.12	0.97	0.11			
20	108.8	115	M8	83.2	6.85	8.48	0.70	0.07~0.17	2.54	SB2.5-6012 SB2.5-1260
				18.5	2.23	1.89	0.23			
22	134.73	140	M8	135	11.4	13.8	1.16	0.08~0.18	4.18	SB3-6012 SB3-1260
				30.1	3.70	3.07	0.38			



Specifications	
Precision grade	JIS B 1704: 1978 grade 3
Gear teeth	Gleason
Pressure angle	20°
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)



B3

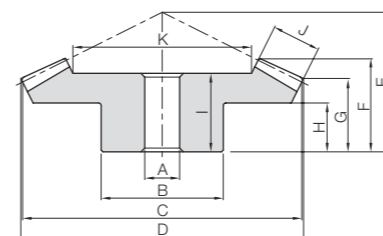

B4

Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Mounting distance	Total length		Hub width
					A _{H7}	B					C	D	
SUB1.5-3020 SUB1.5-2030	1.5	m1.5	30	B4	10	30	45	46.24	28	18.53	13.93	8	
20			B3	8	25	30	33.13	33	18.63	11.54	8.83		
SUB2-3020 SUB2-2030		m2	30	B4	10	35	60	61.65	40	26.87	21.24	15	
20			B3	10	35	40	44.18	45	25.06	16.39	13.33		
SUB2.5-3020 SUB2.5-2030		m2.5	30	B4	15	45	75	77.07	50	34.22	26.55	18	
20			B3	12	40	50	55.22	55	31.06	19.24	14.16		
SUB3-3020 SUB3-2030	m3	30	B4	15	60	90	92.48	55	35.56	26.86	17		
20		B3	15	50	60	66.27	70	40.48	27.09	21.66			
SUB1.5-4020 SUB1.5-2040	2	m1.5	40	B4	10	38	60	60.88	35	25.01	20.88	15	
20			B3	8	25	30	33.61	46	25.54	16.9	14.75		
SUB2-4020 SUB2-2040		m2	40	B4	12	50	80	81.17	45	32.37	26.17	18	
20			B3	12	32	40	44.81	60	34.16	21.2	18		
SUB2.5-4020 SUB2.5-2040		m2.5	40	B4	15	60	100	101.46	55	39.73	31.46	20	
20			B3	12	40	50	56.01	75	43.78	26.5	22.5		
SUB3-4020 SUB3-2040	m3	40	B4	20	70	120	121.76	65	45.85	36.76	24		
20		B3	16	50	60	67.22	90	50.81	31.8	27.5			
SUB1.5-4515 SUB1.5-1545	3	m1.5	45	B4	10	36	67.5	68.06	28	20.44	17.59	11	
15			B3	8	18	22.5	26.54	47	23.19	13.92	12.5		
SUB2-4515 SUB2-1545		m2	45	B4	12	60	90	90.75	40	30.4	26.12	17	
15			B3	10	24	30	35.35	60	29.8	15.89	14		
SUB2.5-4515 SUB2.5-1545		m2.5	45	B4	15	60	112.5	113.43	50	38.35	32.65	22	
15			B3	12	30	37.5	44.18	75	38.41	19.86	17.5		
SUB3-4515 SUB3-1545	m3	45	B4	20	80	135	136.12	55	40.74	34.18	20		
15		B3	15	38	45	53.02	90	45.17	23.84	21.33			


Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
16 17	9	27.37	3.22	0.46	0.33	0.047	0.05~0.15	0.12 0.064	SUB1.5-3020 SUB1.5-2030
23 22		17.05	2.23	0.31	0.23	0.032			
30 28	11	37.56	7.22	1.08	0.74	0.11	0.06~0.16	0.27 0.16	SUB2-3020 SUB2-2030
31 37		21.34	5.01	0.72	0.51	0.074			
30 28	15	45.61	14.9	2.28	1.52	0.23	0.07~0.17	0.55 0.29	SUB2.5-3020 SUB2.5-2030
31 37		27.42	10.3	1.52	1.05	0.15			
22 24	10	39.64	5.23	0.79	0.53	0.081	0.05~0.15	0.27 0.090	SUB1.5-4020 SUB1.5-2040
27 32		17.28	2.64	0.40	0.27	0.040			
27 32	15	48.46	13.4	2.07	1.36	0.21	0.06~0.16	0.62 0.19	SUB2-4020 SUB2-2040
35 41		20.92	6.72	1.04	0.69	0.11			
38 47	20	60.28	27.1	4.29	2.76	0.44	0.07~0.17	1.24 0.41	SUB2.5-4020 SUB2.5-2040
38 47		24.56	13.6	2.15	1.39	0.22			
38 47	22	73.81	44.4	7.19	4.53	0.73	0.08~0.18	1.89 0.70	SUB3-4020 SUB3-2040
22.5		29.61	14.75	3.60	2.28	0.37			
17 22.5	10	46.58	5.70	0.72	0.58	0.074	0.05~0.15	0.25 0.041	SUB1.5-4515 SUB1.5-1545
26 29		14.75	1.97	0.24	0.20	0.025			
26 29	15	59.04	14.6	1.90	1.49	0.19	0.06~0.16	0.82 0.097	SUB2-4515 SUB2-1545
35 37		19.13	5.03	0.63	0.51	0.065			
35 37	20	72.84	29.6	3.94	3.02	0.40	0.07~0.17	1.38 0.19	SUB2.5-4515 SUB2.5-1545
35 43		20.51	10.2	1.31	1.04	0.13			
35 43	23	88.18	49.9	6.77	5.09	0.69	0.08~0.18	2.36 0.34	SUB3-4515 SUB3-1545
22.5		22.53	17.2	2.26	1.76	0.23			






Specifications	
Precision grade	JIS B 1704: 1978 grade 4*
Gear teeth	Gleason
Pressure angle	20°
Material	MC901
Heat treatment	—
Tooth hardness	(115 to 120HRR)

* The precision grade is equivalent to the value shown in the table.



B3

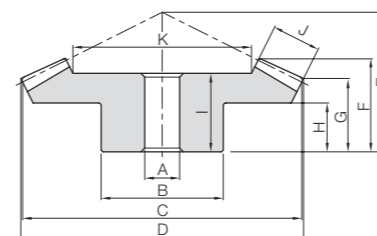

B4

Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Mounting distance	Total length	Crown to back		Hub width
					A	B					C	D	
PB1.5-3020	1.5	m1.5	30	B4	10	30	45	46.24	28	18.53	13.93	8	
PB1.5-2030			20	B3	8	25	30	33.13	33	18.63	11.54	8.83	
PB2-3020		m2	30	B4	10	35	60	61.65	40	26.87	21.24	15	
PB2-2030			20	B3	10	35	40	44.18	45	25.06	16.39	13.33	
PB2.5-3020		m2.5	30	B4	15	45	75	77.07	50	34.22	26.55	18	
PB2.5-2030			20	B3	12	40	50	55.22	55	31.06	19.24	14.16	
PB3-3020		m3	30	B4	15	60	90	92.48	55	35.56	26.86	17	
PB3-2030			20	B3	15	50	60	66.27	70	40.48	27.09	21.66	
PB1-4020		2	m1	40	B4	8	25	40	40.59	22	15.07	12.59	8
PB1-2040				20	B3	6	16	20	22.41	28	13.78	8.6	7
PB1.25-4020			m1.25	40	B4	10	32	50	50.73	27	18.54	15.23	10
PB1.25-2040				20	B3	8	22	25	28.01	36	18.66	11.75	10.25
PB1.5-4020	m1.5		40	B4	10	38	60	60.88	35	25.01	20.88	15	
PB1.5-2040			20	B3	8	25	30	33.61	46	25.54	16.9	14.75	
PB2-4020	m2		40	B4	12	40	80	81.17	45	32.37	26.17	18	
PB2-2040			20	B3	12	32	40	44.81	60	34.16	21.2	18	
PB2.5-4020	m2.5		40	B4	15	50	100	101.47	55	39.73	31.47	20	
PB2.5-2040			20	B3	12	40	50	56.01	75	43.78	26.5	22.5	
PB3-4020	m3		40	B4	20	60	120	121.76	65	45.85	36.76	24	
PB3-2040			20	B3	16	50	60	67.22	90	50.81	31.8	27.5	
PB1.5-4515	3	m1.5	45	B4	10	40	67.5	68.06	28	20.44	17.59	11	
PB1.5-1545			15	B3	8	18	22.5	26.54	47	23.19	13.92	12.5	
PB2-4515		m2	45	B4	12	60	90	90.75	40	30.4	26.12	17	
PB2-1545			15	B3	10	24	30	35.35	60	29.8	15.89	14	
PB2.5-4515		m2.5	45	B4	15	60	112.5	113.43	50	38.35	32.65	22	
PB2.5-1545			15	B3	12	30	37.5	44.18	75	38.41	19.86	17.5	
PB3-4515		m3	45	B4	20	80	135	136.12	55	40.74	34.18	20	
PB3-1545			15	B3	15	38	45	53.02	90	45.17	23.84	21.33	

Hole length	Face width	Holding surface dia.	Allowable torque (N·m)		Allowable torque (kgf·m)		Backlash (mm)	Weight (kg)	Catalog Number
			Bending strength	Surface durability	Bending strength	Surface durability			
16	9	27.37	1.61	—	0.16	—	0~0.25	0.018	PB1.5-3020
17		17.05	0.87		0.089				
23	11	37.56	3.65	—	0.37	—	0~0.26	0.039	PB2-3020
22		21.34	1.97		0.20				
30	15	45.61	7.46	—	0.76	—	0~0.27	0.081	PB2.5-3020
28		27.42	4.04		0.41				
31	17	57.14	12.5	—	1.28	—	0~0.28	0.14	PB3-3020
37		34.71	6.77		0.69				
12	6	26.58	0.74	—	0.075	—	0~0.23	0.010	PB1-4020
12		9.17	0.28		0.028				
16	8	33.61	1.50	—	0.15	—	0~0.24	0.021	PB1.25-4020
17		13.22	0.56		0.058				
22	10	39.64	2.66	—	0.27	—	0~0.25	0.039	PB1.5-4020
24		17.28	1.00		0.10				
27	15	48.46	6.72	—	0.69	—	0~0.26	0.076	PB2-4020
32		20.92	2.52		0.26				
35	20	60.28	13.5	—	1.38	—	0~0.27	0.16	PB2.5-4020
41		24.56	5.08		0.52				
38	22	73.81	22.4	—	2.29	—	0~0.28	0.25	PB3-4020
47		29.61	8.42		0.86				
17	10	46.58	3.18	—	0.32	—	0~0.25	0.040	PB1.5-4515
22.5		14.75	0.68		0.070				
26	15	59.04	8.07	—	0.82	—	0~0.26	0.12	PB2-4515
29		19.13	1.73		0.18				
35	20	72.84	16.3	—	1.66	—	0~0.27	0.20	PB2.5-4515
37		20.51	3.50		0.36				
35	23	88.18	27.6	—	2.81	—	0~0.28	0.35	PB3-4515
43		22.54	5.92		0.60				


* In regard to MC Nylon gears, other materials are available for plastic gears, including Ultra High Molecular Weight Polyethylene (U-PE), which has excellent abrasion resistance and resin conforming to the Plastic Implementation Measure (PIM). A single piece order is acceptable and will be produced as a custom-made gear. Please see Page 26 for more details on quotations and orders.






Specifications	
Precision grade	JIS B 1704: 1978 grade 6
Gear teeth	Gleason
Pressure angle	20°
Material	Duracon (R) (M90-44)
Heat treatment	—
Tooth hardness	(110 to 120HRR)

* "Duracon (R)" is a registered trademark of Polyplastics Co., Ltd. in Japan as well as other countries.



B1

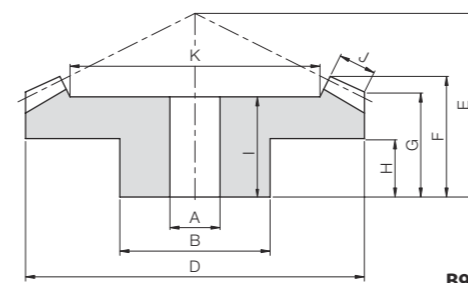

B9

Catalog Number	Gear Ratio	Module	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Mounting distance	Total length		Crown to back
					A	B				F	G	
DB0.5-4020 DB0.5-2040	2	m0.5	40	B9	4	12	20	20.29	12	8.33	7.29	
20			B1	3	8	10	11.2	16	8.46	6.3		
DB0.8-4020 DB0.8-2040		m0.8	40	B9	5	15	32	32.47	18	11.91	10.47	
20			B1	4	12	16	17.92	24	11.5	8.48		
DB1-4020 DB1-2040		m1	40	B9	6	18	40	40.59	22	14.45	12.59	
20			B1	5	15	20	22.4	30	14.49	10.6		

Hub width	Hole length	Face width	Holding surface dia.	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (g)	Catalog Number
H	I	J	K	Bending strength	Bending strength			
4	7	2.5	14.41	0.24	0.025	0~0.30	2.00	DB0.5-4020
4	—	—	—	0.092	0.0094		0.54	DB0.5-2040
6	10	3.5	24.17	0.91	0.093	0~0.48	6.26	DB0.8-4020
5	—	—	—	0.34	0.035		1.87	DB0.8-2040
7.5	12.5	4.5	30.44	1.59	0.16	0~0.60	11.9	DB1-4020
7	—	—	—	0.60	0.061		3.54	DB1-2040

Dimensional tolerance of molded item (unit: mm)


Dimensional classification	Grade	Rough grade
	3 or less	
4 to 6		±0.25
7 to 10		±0.30
11 to 18		±0.35
19 to 30		±0.40
Over 30		±0.50



Sintered Metal Bushings



When using the injection molded bevel gear as an idler gear and a shaft diameter smaller than the inside diameter of the molded gear, please press fit one of the following standard bushings.



T8

Catalog Number	Inner dia.	Outside dia.	Length	Gear example
	$d \begin{smallmatrix} +0.02 \\ 0 \end{smallmatrix}$	$D \begin{smallmatrix} +0.02 \\ -0.01 \end{smallmatrix}$	$L \begin{smallmatrix} 0 \\ -0.3 \end{smallmatrix}$	
BB30507	3	5	7	DB0.8
BB40612	4	6	12	DB1

Material: Oil-free copper alloy






■ Catalog number

Note that the catalog numbers for KSP ground spiral bevel gears have a different configuration compared to other miters and bevel gears.

KSP 031 001 G U L

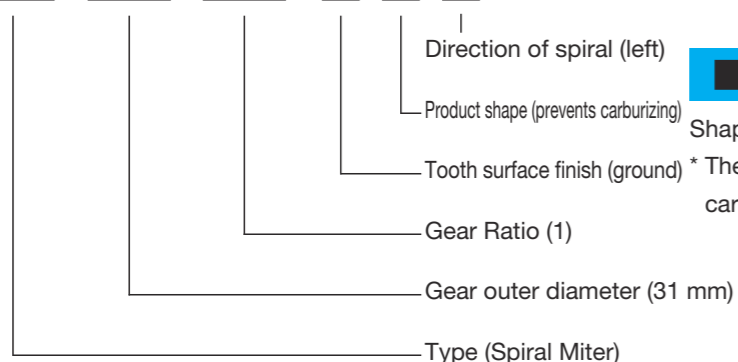


■ Features of KSP spiral bevel gears

1. High-strength, high-precision product of JIS grade 0.
2. Superior performance with regard to high speed, low noise, and low vibration.
3. Module is 1.5 to 6
4. Gear ratio types are 1, 1.5 and 2

■ Shape

Shape for secondary operations (with margin)
* The parts ---- in the figure below are protected from carburizing.

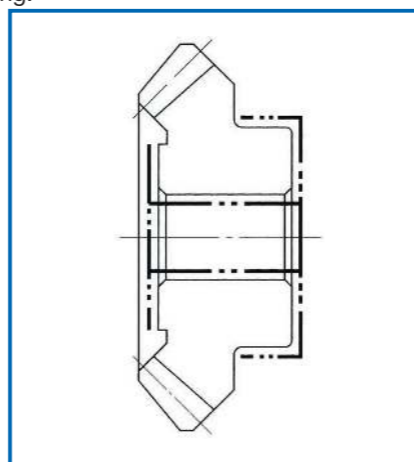

■ Transmission capacity table

1. The values in the transmission capacity table below are where the service factor is 1. Be sure to correct the load torque according to the table on the right. The corrected load torque is calculated by multiplying the load torque applied to the output shaft by service factor (Sf).
2. When using at increased speed (where gear is drive and pinion is driven), the torque of the pinion is the value obtained by multiplying the value shown in the transmission capacity table by the speed ratio.

NOTE 1: When the speed ratio is 1/1.5, the pinion torque is 1/1.5 of the value shown in the transmission capacity table.

■ Service factor (Sf)

Impact from motor	Impact from load		
	Uniform load	Moderate impact	Severe impact
Uniform load (electric motor, turbine, hydraulic motor, etc.)	1.0	1.25	1.75
Mild impact (multi-cylinder engine)	1.25	1.5	2.0
Moderate impact (single-cylinder engine)	1.5	1.75	2.25

■ Transmission capacity table (speed ratio 1/1)

Upper transmission capacity (kw) Lower output torque (N·m)

Figure number	Rotational speed (rpm)							
	50	100	300	600	900	1200	1800	3000
KSP031001	0.035	0.068	0.195	0.375	0.548	0.716	1.04	1.65
	6.65	6.51	6.20	5.98	5.82	5.69	5.51	5.25
KSP040001	0.092	0.179	0.511	0.980	1.43	1.86	2.69	4.25
	17.6	17.2	16.3	15.6	15.2	14.8	14.3	13.5
KSP053001	0.211	0.412	1.17	2.23	3.25	4.22	6.08	9.55
	40.4	39.3	37.3	35.6	34.5	33.6	32.3	30.4
KSP066001	0.367	0.715	2.02	3.85	5.59	7.26	10.4	16.3
	70.2	68.3	64.4	61.4	59.3	57.8	55.4	52.0
KSP078001	0.577	1.12	3.16	6.00	8.68	11.2	16.1	25.1
	109.8	106.9	101.0	95.5	92.2	89.5	85.5	79.8
KSP092001	0.901	1.75	4.91	9.31	13.5	17.4	24.9	38.6
	172.6	166.7	156.9	148.1	143.2	138.3	132.4	122.6
KSP105001	1.44	2.78	7.80	14.7	21.2	27.4	39.1	60.3
	274.6	265.8	248.1	234.4	225.6	218.7	207.9	192.2
KSP132001	2.33	4.50	12.6	23.6	34.0	43.7	62.0	95.0
	445.2	430.5	400.1	376.6	360.9	348.1	329.5	302.0
KSP157001	3.68	7.10	19.7	37.0	53.0	68.1	96.2	146
	704.1	678.6	628.6	589.4	562.9	542.3	510.9	466.8
KSP184001	5.31	10.2	28.3	52.8	75.5	96.8	136	206
	1010	976.7	901.2	841.4	801.2	770.8	722.8	656.1

■ Transmission capacity table (speed ratio 1/1.5)

Upper transmission capacity (kw) Lower output torque (N·m)

Figure number	Rotational Speed of Pinion (rpm)							
	50	100	300	600	900	1200	1800	3000
KSP0481.5	0.077	0.151	0.432	0.830	1.21	1.58	2.29	3.64
	22.2	21.6	20.6	19.8	19.3	18.9	18.2	17.4
KSP0611.5	0.159	0.309	0.882	1.69	2.46	3.21	4.64	7.33
	45.4	44.3	42.2	40.4	39.2	38.3	37.0	35.0
KSP0741.5	0.277	0.540	1.53	2.93	4.27	5.55	8.00	12.6
	79.4	77.4	73.4	70.1	68.0	66.3	63.7	60.1
KSP0901.5	0.466	0.908	2.57	4.90	7.12	9.24	13.3	20.8
	133.4	130.4	122.6	116.7	113.8	110.8	105.9	99.0
KSP1051.5	0.700	1.36	3.84	7.31	10.6	13.7	19.7	30.7
	201.0	195.2	183.4	174.6	168.7	163.8	156.9	147.1
KSP1241.5	1.03	2.00	5.63	10.7	15.5	20.0	28.6	44.5
	295.2	286.4	268.7	255.0	246.1	239.3	227.5	212.8
KSP1411.5	1.56	3.03	8.51	16.1	23.2	30.1	42.9	66.4
	448.2	434.4	406.0	384.4	370.7	358.9	341.3	317.7
KSP1631.5	2.27	4.39	12.3	23.2	33.4	43.1	61.4	94.6
	650.2	628.6	587.4	554.1	532.5	514.8	489.4	452.1
KSP1811.5	2.92	5.64	15.8	29.7	42.7	55.1	78.3	120
	836.5	809.0	754.1	710.0	680.6	658.0	623.7	574.7

■ Transmission capacity table (speed ratio 1/2)

Upper transmission capacity (kw) Lower output torque (N·m)

Figure number	Rotational Speed of Pinion (rpm)							
	50	100	300	600	900	1200	1800	3000
KSP039002	0.025	0.049	0.142	0.275	0.404	0.528	0.770	1.23
	9.63	9.45	9.07	8.76	8.57	8.41	8.17	7.83
KSP056002	0.075	0.147	0.423	0.814	1.19	1.55	2.26	3.59
	28.8	28.1	27.0	26.0	25.3	24.8	23.9	22.8
KSP075002	0.185	0.361	1.03	1.98	2.89	3.76	5.45	8.61
	70.7	69.0	65.7	63.1	61.3	59.9	57.9	54.8
KSP096002	0.364	0.710	2.02	3.86	5.62	7.31	10.5	16.6
	139.3	135.3	128.5	122.6	119.6	116.7	111.8	105.9
KSP119002	0.649	1.26	3.58	6.82	9.90	12.9	18.5	29.0
	248.1	241.2	227.5	217.7	209.9	205.0	196.1	184.4
KSP145002	1.07	2.08	5.87	11.2	16.2	21.0	30.1	46.9
	408.9	397.2	373.6	356.0	343.2	333.4	319.7	298.1
KSP172002	1.78	3.45	9.72	18.4	26.6	34.5	49.3	76.5
	680.6	660.0	618.8	587.4	565.8	549.2	523.7	487.4




Ground Spiral Bevel Gears




Specifications	
Precision grade	JIS B 1704: 1978 grade 0
Gear teeth	Gleason
Pressure angle	20°
Helix angle	35°
Material	SCM415*
Heat treatment	Carburized (Bore and hub are carburized)
Tooth hardness	60 to 63HRC**


* The material of module 3.5 and above is SCM420.
** Modules 1.5 and 2 have the tooth hardness of 80 to 83 HRA.




A



A'



B



C

Catalog Number	Gear Ratio	Module	No. of teeth	Direction of spiral	Pitch dia.	Face width	Shape	Outside dia.	Holder surface dia.	Bore	Hub dia.	Hole length
								A	B	CH7	D	E
KSP031001GU L KSP031001GU R	1	m1.5	20	L R	30	7	A	30.5	16.5	10	22	13
KSP040001GU L KSP040001GU R		m2	20	L R	40	9	B	40	22.5	12	31	14
KSP078001GU L KSP078001GU R		m3.5	22	L R	77	18	B	78	43	20	54	27
KSP105001GU L KSP105001GU R		m4.5	23	L R	103.5	25	C	105	50	26	70	35
KSP132001GU L KSP132001GU R		m5	26	L R	130	29	C	132	64	30	82	41
KSP157001GU L KSP157001GU R		m5.5	28	L R	154	34	C	157	76	32	92	47
KSP184001GU L KSP184001GU R		m6	30	L R	180	38	C	184	84	40	101	51
KSP0481.5GU P KSP0481.5GU G		1.5	m2	16 24	L R	32 48	9	A' B	34 48	17.5 30	10 12	24 30
KSP0741.5GU P KSP0741.5GU G	m2.75		18 27	L R	49.5 74.25	15	A' B	52 74	27 44.5	14 20	40 50	20 25
KSP075002GU P KSP075002GU G	2	m2.5	15 30	L R	37.5 75	14	A' C	40 75	20 36	12 16	30 44	17 24
KSP096002GU P KSP096002GU G			m3	16 32	L R	48 96	18	B C	53 96	23.5 46	12 20	36 56
KSP119002GU P KSP119002GU G		m3.5		17 34	L R	59.5 119	22	A C	65 119	34 54	16 26	44 63

Hub width	Total length	Mounting distance	Machinable MAX bore	Allowable torque (kgf-m)	Backlash (mm)	Weight (kg)	Catalog Number
F	G	H					
6	15	25	12	0.61	0 ~0.05	0.04	KSP031001GU L KSP031001GU R
7	16.5	30	16	1.59	0 ~0.05	0.09	KSP040001GU L KSP040001GU R
12	32	57	32	9.74	0.05~0.10	0.59	KSP078001GU L KSP078001GU R
14	39	72	40	23.9	0.05~0.10	1.33	KSP105001GU L KSP105001GU R
14	45	88	48	38.4	0.05~0.10	2.49	KSP132001GU L KSP132001GU R
20	53.5	105	55	60.1	0.05~0.10	3.90	KSP157001GU L KSP157001GU R
17	56.5	118	62	85.8	0.05~0.10	5.79	KSP184001GU L KSP184001GU R
4.5 7	14.5 19	31 30	— 20	2.02	0 ~0.05	0.05 0.14	KSP0481.5GU P KSP0481.5GU G
6 12	22 29	46 45	20 35	7.15	0.05~0.10	0.20 0.49	KSP0741.5GU P KSP0741.5GU G
4.5 11	19.5 25.5	44 38	14 25	6.43	0.05~0.10	0.10 0.44	KSP075002GU P KSP075002GU G
2.5 12	21.5 31	53 47	19 32	12.5	0.05~0.10	0.20 0.91	KSP096002GU P KSP096002GU G
3.6 15	27.5 35.5	67 55	25 40	22.2	0.05~0.10	0.36 1.45	KSP119002GU P KSP119002GU G

Spur Gears
Helical Gears
Internal Gears
Racks
CP Racks & Pinions
Miter Gears
Bevel Gears
Screw Gears
Worm Gears
Gearboxes
Other Products

Spur Gears
Helical Gears
Internal Gears
Racks
CP Racks & Pinions
Miter Gears
Bevel Gears
Screw Gears
Worm Gears
Gearboxes
Other Products




Adjustment of tooth contact

<Center of tooth contact>



- (1) Near the center of the tooth length for the length direction
- (2) Ideally, the tooth width direction should be at the center of the width or slightly closer to the toe.

When adjusting the backlash and mounting the gear in the case, adjust the case in order to achieve the tooth contact as shown in the figure below.



Deviation of the tooth contact from the normal position may adversely affect the strength and quietness.

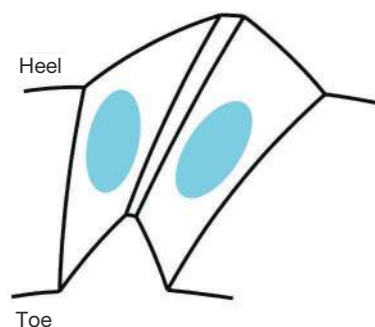



(1) Tooth contact in case of a shaft-angle error

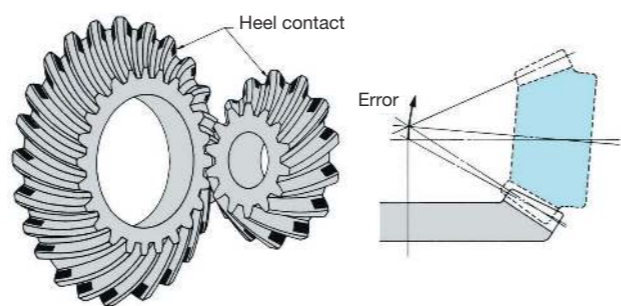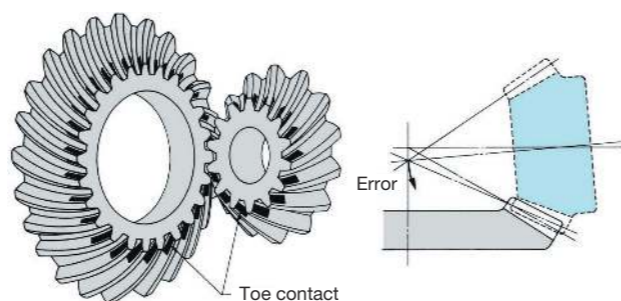

(2) Tooth contact in case of a shaft-offset error

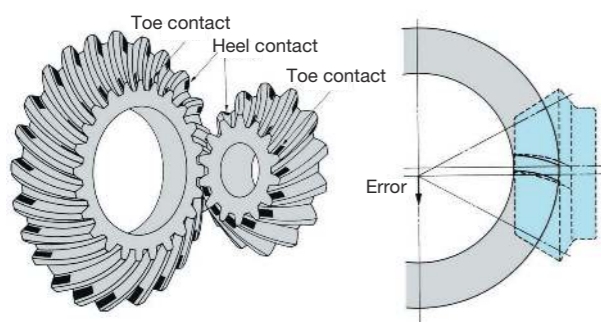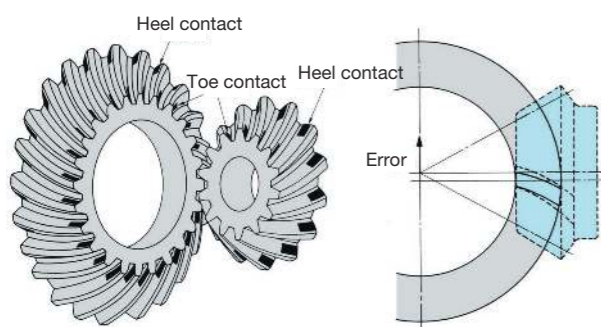


(3) Tooth contact in case of a pinion set position error

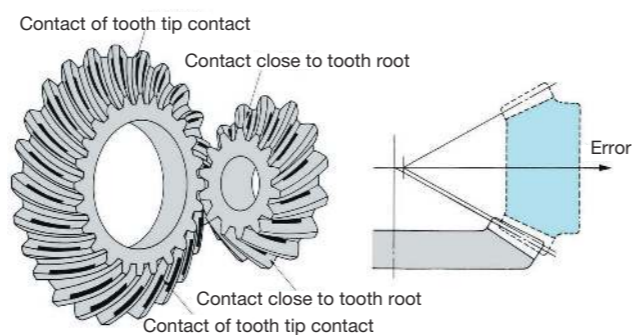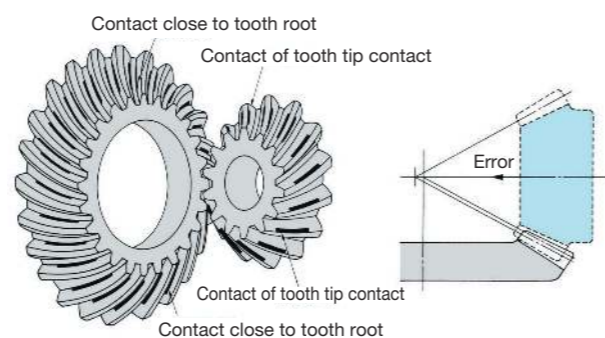

Screw Gears

SN-H Hardened Screw Gears	SN Screw Gears	SUN Stainless Steel Screw Gears	AN Screw Gears	PN Plastic Screw Gears
NEW				
Material: S45C m1-4 Page 380	Material: S45C m1-4 Page 380	Material: SUS303 m1-3 Page 384	Material: CAC702 (A & BC2) m1-3 Page 386	Material: MC901 m1-3 Page 388

Includes Made to Order

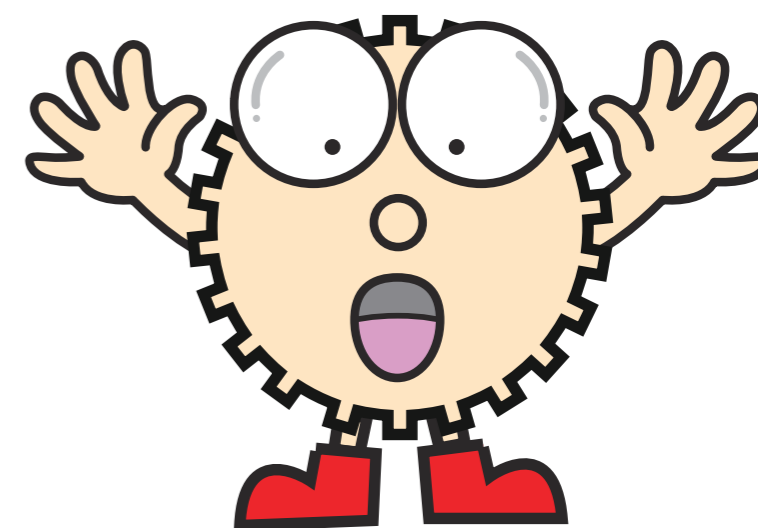

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Screw Gears



Spur Gears
Helical Gears
Internal Gears
Racks
CP Racks & Pinions
Miter Gears
Bevel Gears
Screw Gears
Worm Gears
Gearboxes
Other Products

Spur Gears
Helical Gears
Internal Gears
Racks
CP Racks & Pinions
Miter Gears
Bevel Gears
Screw Gears
Worm Gears
Gearboxes
Other Products

Features

KHK stock screw gears come in four materials, S45C, SUS303, CAC702 (old JIS A & BC2) and MC nylon, in modules 1~4 and numbers of teeth from 10 to 30.


Catalog Number	Module	Material	Heat Treatment	Tooth Surface Finish	Precision JIS B 1702-1:1998	Secondary Operations	Features
SN	1~4	S45C	—	Cut	N9	○	Many lineups are available at a low price. The teeth can be hardened.
SUN	1~3	SUS303	—	Cut	N9	○	Stainless steel gears with rust resistance.
AN	1~3	CAC702 (A & BC2)	—	Cut	N9	○	Aluminum bronze made gears with excellent wear resistance.
PN	1~3	MC901	—	Cut	N10	○	Nylon gears can be used with no lubrication.

○ Possible △ Partly possible × Not possible

Application Examples

KHK stock screw gears are used in various labor-saving machines including conveyor machine and transport.

■ Design example of feeding device (not a design for machinery or a device in actual use)

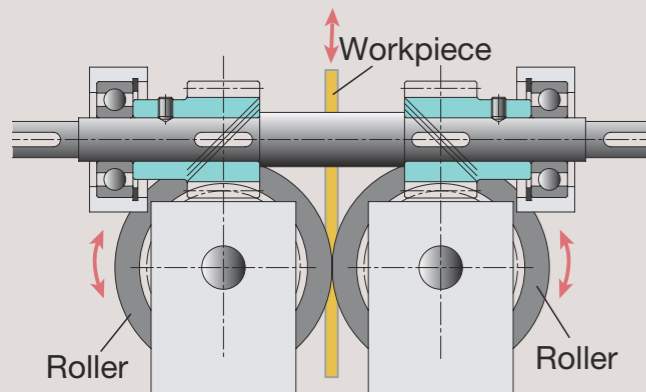

Rotate the roller in reverse with one input shaft and move the pinched workpiece vertically

Selection Hints

Please select the most suitable products by carefully considering the characteristics of items and contents of the product tables. Since screw gears come in right- or left-hand helix, make sure to include the letter "R" or "L" in the catalog number when you order.

1. Caution in Selecting the Mating Gears

Screw gears are used for offset shafts. Whether the shafts are paralleled offset or skewed offset depends on the helix directions of the mating gears.

Direction of shaft	Arrangement of helix hands
Skewed Axes	RH-RH or LH-LH
Parallel Axes	RH-LH



Right (R)



Left (L)

Arrangements of helix directions of screw gears

2. Caution in Selecting Gears Based on Gear Strength

The allowable surface strengths listed in the product pages were derived using the Niemann formula as reference values. (Used with skewed shafts) There is a paucity of data on the strength of screw gears. The values of constant K_0 used in the calculations, which depend on the material of the mating gears, are our estimates. The mathematic expression below shows the Niemann formula to determine allowable tangential force F_t (kgf) and allowable torque T (kgf·m) on a basic circle.

$$F_t = 1.43d_1^2 f_z K_s$$

$$T = \frac{F_t d_1}{2000}$$

Here, d_1 : standard pitch diameter of pinion (mm)
 f_z : coefficient based on no. of teeth combination
 K_s : coefficient based on materials and sliding speed

$$K_s = K_0 \frac{2}{2 + V_s}$$

Here, K_0 : coefficient based on material selection
 V_s : sliding speed (m/s)

$$V_s = \frac{\pi n d_1}{60000 \cos \beta}$$

Here, n : rotational speed (rpm)
 β : helix angle (45°)

■ f_z value

Z ₂ \ Z ₁	10	13	15	20	26	30
10	1.538					
13	2.005	1.538				
15	2.279	1.786	1.538			
20	2.963	2.329	2.053	1.538		
26	3.695	2.963	2.588	2.005	1.538	
30	4.161	3.350	2.963	2.279	1.786	1.538

■ Setting values depending on usage conditions

Catalog Number	Mating gear	K_0 value	Maximum allowable sliding speed m/s	No. of teeth of mating gears	Rotational Speed
SN	SN	0.0030	2.5	Same no. of teeth	100rpm
SUN	SN	0.0030 Note 1	2.5 Note 1		
AN	SN	0.0050	5		
PN	SN	0.0030 Note 1 (0.0021)	2.5 Note 1 (1.0)		


[NOTE 1] K_0 values and the maximum allowable sliding speed of SUN & PN products are set by KHK. Screw gears are basically used with lubrication. In case of using PN products without lubrication, the parenthetical values shown in the table are applied.

Application Hints

In order to use KHK stock screw gears safely, read the Application Hints carefully before proceeding. Please refer to Page 48 for "Cautions on Handling" and Page 49 for "Cautions on Starting".

1. Caution on Performing Secondary Operations


- ① If re boring, it is important to pay special attention to locating the center in order to avoid runout.
- ② The reference datum for gear machining is the bore. Therefore, use the bore for locating the center. If it is too difficult to do for small bores, the alternative is to use one spot on the bore and the runout of the side surface.
- ③ If reworking using scroll chucks, we recommend the use of new or re bored jaws for improved precision. Please exercise caution not to crush the teeth.

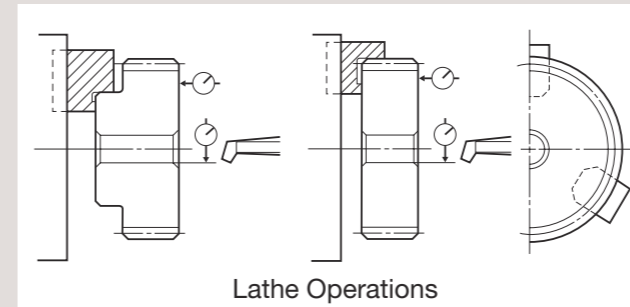

Lathe Operations

- ④ The maximum bore size is dictated by the requirement that the strength of the hub is to be higher than that of the gear teeth. The maximum bore size should be 60% to 70% of the hub diameter (or tooth root diameter), and 50% to 60% for keyway applied modifications.
- ⑤ In order to avoid stress concentration, round the keyway corners.

Tapping & Keyway Slotting

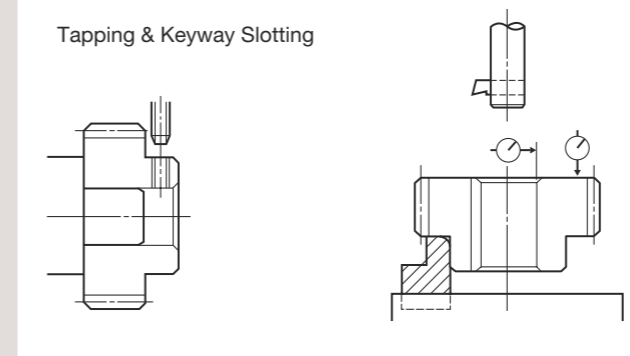

2. Points of Caution during Assembly

- ① The recommended center distance tolerance of KHK stock screw gears is H7 for ground gears and H8 for cut gears. The amount of backlash is given in the product table for each gear.


$$a = \frac{d_1 + d_2}{2}$$

Where

a : Center distance

d_1 : Pitch diameter of pinion

d_2 : Pitch diameter of gear




- ② Total Length Tolerance for Screw Gears

Total Length (mm)	Tolerance
30 or less	0 -0.10
31 to 100	0 -0.15

[NOTE] PN Plastic Screw Gears are excluded.

- ③ Due to the helix of screw gears, they produce axial thrust forces. The bearings must be selected properly to be able to handle these thrust forces. The directions of thrust change with the direction of helix and the direction of rotation as illustrated below. For details, use gear calculation software GCSW.

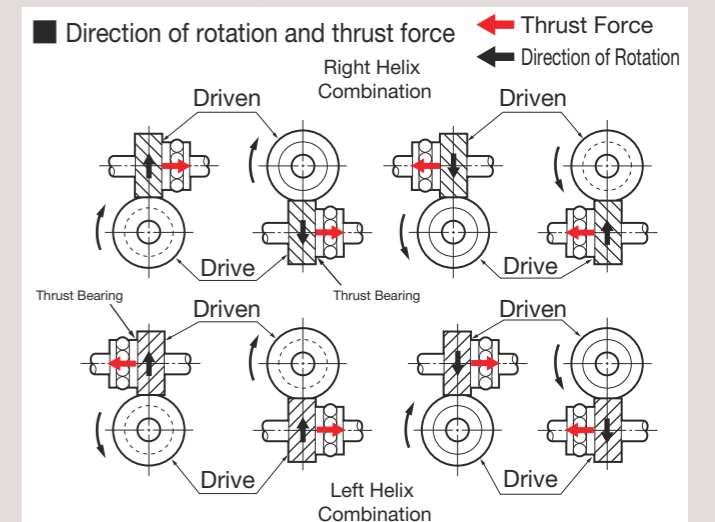

[NOTE] For parallel shaft applications, see the Application Hints for KHK Helical Gears (Page 193).

KHK considers safety a priority in the use of our products.

When handling, adding secondary operations, assembling, and operating KHK products, please be aware of the following issues in order to prevent accidents.

⚠ Warning: Precautions for preventing physical and property damage

1. When using KHK products, follow relevant safety regulations (Occupational Safety and Health Regulations, etc.).
2. Pay attention to the following items when installing, removing, or performing maintenance and inspection of the product.
 - ① Turn off the power switch.
 - ② Do not reach or crawl under the product.
 - ③ Wear appropriate clothing and protective equipment for the work.

⚠ Caution: Cautions in Preventing Accidents

1. Before using a KHK product, read the precautions in the catalog carefully in order to use it correctly.
2. Avoid use in environments that may adversely affect the product.
3. Our products are manufactured under a superior quality control system based on the ISO9000 quality management system; if you notice any malfunctions upon purchasing a product, please contact the supplier.

Selecting the Gears

Step 1 Determine the calculated load torque applied to the gear and the gear type suitable for the purpose.

Step 2 Select provisionally from the allowable torque table in this catalog based on the load torque.

■ For provisional selection from this catalog

カタログ記号	モジュール	歯数	形状	内径	外径	基準外径	歯厚	全長	許容トルク			バックラッシュ (mm)	質量 (kg)
									許容トルク	許容トルク	許容トルク		
SN1-13R	13	R	L	15	18.38	20.38			0.19	0.019	0.41	0.04	0.030
SN1-13L	13	R	L	15	18.38	20.38			0.19	0.019	0.41	0.04	0.030
SN1-15R	15	R	L	18	21.21	23.21			0.29	0.029	0.62	0.06	0.043
SN1-15L	15	R	L	18	21.21	23.21			0.29	0.029	0.62	0.06	0.043
SN1-20R	20	R	L	25	28.28	30.28	10	10	0.66	0.066	1.44	0.15	0.08-0.16
SN1-20L	20	R	L	25	28.28	30.28	10	10	0.66	0.066	1.44	0.15	0.08-0.16
SN1-26R	26	R	L	30	36.77	38.77			1.42	0.14	3.08	0.31	0.13
SN1-26L	26	R	L	30	36.77	38.77			1.42	0.14	3.08	0.31	0.13
SN1-30R	30	R	L	35	42.43	44.43			2.14	0.22	4.64	0.47	0.17
SN1-30L	30	R	L	35	42.43	44.43			2.14	0.22	4.64	0.47	0.17
SN1-S-10R	10	R	L	8	16	21.21	24.21		0.29	0.029	0.62	0.06	0.048
SN1-S-10L	10	R	L	8	16	21.21	24.21		0.29	0.029	0.62	0.06	0.048
SN1-S-13R	13	R	L	10	23	27.58	30.58		0.62	0.063	1.34	0.14	0.088
SN1-S-13L	13	R	L	10	23	27.58	30.58		0.62	0.063	1.34	0.14	0.088
SN1-S-15R	15	R	L	12	25	31.82	34.82	15	0.93	0.095	2.03	0.21	0.12
SN1-S-15L	15	R	L	12	25	31.82	34.82	15	0.93	0.095	2.03	0.21	0.12
SN1-S-20R	20	R	L	15	30	42.43	45.43		2.14	0.22	4.64	0.47	0.20
SN1-S-20L	20	R	L	15	30	42.43	45.43		2.14	0.22	4.64	0.47	0.20
SN1-S-26R	26	R	L	18	40	55.15	58.15		4.51	0.46	9.80	1.00	0.36
SN1-S-26L	26	R	L	18	40	55.15	58.15		4.51	0.46	9.80	1.00	0.36
SN1-S-30R	30	R	L	20	45	62.50	65.50		6.25	0.63	13.50	1.35	0.45
SN1-S-30L	30	R	L	20	45	62.50	65.50		6.25	0.63	13.50	1.35	0.45


Step 3 Calculate the strength under the actual usage conditions.

Calculate the strength formally using the various gear strength formulas. We recommend using the simple strength calculation available on our website.

■ Use the strength calculation function on our website.

Surface durability

Calculated values of the strength at which the gear teeth do not wear due to surface fatigue damage.



Example of wear due to insufficient surface durability

Product Precautions



Common Notes

[Caution on Product Characteristics]

- (1) The allowable torque shown in the table are calculated values according to the assumed usage conditions. Please see Page 376 for more details.
- (2) The backlash values shown in the table are the theoretical values for the backlash in the normal direction of a pair of identical gears in mesh.
- (3) Variations in temperature or humidity can cause dimensional changes in plastic gears, including tooth diameter, bore, and backlash. The accuracy and tolerances shown in the catalog are values obtained when machining is performed.
- (4) When mating screw gears are made of the same material, they may cause abrasion and scoring. It is recommended to mate screw gears composed of different materials.
- (5) For offset shaft applications, match a RH with a RH, or LH with a LH, to make a set of screw gears. For parallel shaft applications, mesh opposite hands (RH and LH) of helical gear sets. See Page 376 for more details on selection precautions.
- (6) For bores of ϕ 4 or below, the bore tolerance is H8. As well, the tolerance is H8 for ϕ 5 or ϕ 6 bores with hole length (total length) 3x the bore or more.
- (7) Keyways are made according to JIS B1301 standards, Js9 tolerance. Also note that keyway tooth position alignment is not performed.
- (8) For products having a tapped hole, a set screw is included.
- (9) These bevel gears produce axial thrust forces. Please see Page 377 for more details.

[Caution on Secondary Operations]

- (1) Please read "Cautions on Performing Secondary Operations" (Page 377) when performing modifications and/or secondary operations for safety concerns.
- (2) Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).
- (3) See Page 22 for more details on Hardened Plus (H Series and HJ Series).

[J Series]

- (1) Cancellation is not possible for made-to-order products. For lead time details, see Page 38.
- (2) Certain products which would otherwise have a very long tapped hole are counterbored. For details, see the KHK website.
- (3) Black oxide is not re-applied to parts undergoing secondary operations.

When selecting KHK standard gears, glance over the Cautions on Product Characteristics and Cautions on Performing Secondary Operations above.


- ① Products not listed in this catalog or materials, modules, number of teeth and the like not listed in the dimensional tables can be manufactured as custom items. Please see Page 26 for more details.
- ② The color and shape of the product images listed on the dimension table page of each product may differ from the actual product. Be sure to confirm the shape in the dimension table before selection.
- ③ The details (specifications, dimensions, etc.) listed in the catalog may be changed without prior notice. Changes are announced on the KHK website.

Website URL: <https://khkgears.net/new/>
 Overseas Sales Department: Phone: +81-48-254-1744 Fax: +81-48-254-1765
 E-mail: info@khkgears.net




Specifications	
Precision grade	JIS grade N9 (JIS B1702-1:1998)*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle	45°
Material	S45C
Heat treatment	—
Surface treatment	Black oxide coating


* The precision grade of J Series products is equivalent to the value shown in the table.



S1



S1T



S1K



H To order Hardened Plus, please specify **Catalog No. + H**. Example: **SN1-13RH**

Catalog Number	Module	No. of teeth	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length	Allowable torque				Backlash (mm)	Weight (kg)				
												Surface durability	Surface durability H	Surface durability	Surface durability H						
A _{H7}	B	C	D	E	F	G	N·m	kgf·m	N·m	kgf·m											
SN1-13R SN1-13L	m1	13	R	S1	6	15	18.38	20.38	10	10	20	0.19	0.019	0.41	0.04	0.08~0.18	0.030				
SN1-15R SN1-15L			L									0.29	0.029	0.62	0.06						
SN1-20R SN1-20L		20	R									8	25	28.28	30.28			0.66	0.068	1.44	0.15
SN1-26R SN1-26L			L									10	30	36.77	38.77			1.42	0.14	3.08	0.31
SN1-30R SN1-30L		30	R									10	35	42.43	44.43			2.14	0.22	4.64	0.47
SN1-5-10R SN1-5-10L			L									8	16	21.21	24.21			0.29	0.029	0.62	0.06
SN1-5-13R SN1-5-13L	m1.5	13	R	S1	10	23	27.58	30.58	15	10	25	0.62	0.063	1.34	0.14	0.10~0.22	0.048				
SN1-5-15R SN1-5-15L			L									0.93	0.095	2.03	0.21						
SN1-5-20R SN1-5-20L		20	R									12	40	55.15	58.15			4.51	0.46	9.80	1.00
SN1-5-26R SN1-5-26L			L									10	30	42.43	45.43			2.14	0.22	4.64	0.47
SN1-5-30R SN1-5-30L		30	R									12	45	63.64	66.64			6.75	0.69	14.7	1.50
SN2-10R SN2-10L			L									8	16	21.21	24.21			0.29	0.029	0.62	0.06
SN2-13R SN2-13L	m2	13	R	S1	12	30	36.77	40.77	20	15	35	1.42	0.14	3.08	0.31	0.12~0.26	0.22				
SN2-15R SN2-15L			L									2.14	0.22	4.64	0.47						
SN2-20R SN2-20L		20	R									15	45	56.57	60.57			4.84	0.49	10.5	1.07
SN2-26R SN2-26L			L									12	40	55.15	58.15			4.51	0.46	9.80	1.00
SN2-30R SN2-30L		30	R									12	45	63.64	66.64			6.75	0.69	14.7	1.50
SN2-10R SN2-10L			L									8	16	21.21	24.21			0.29	0.029	0.62	0.06

To order J Series products, please specify: **Catalog No. + J + BORE**. Example: **SN1-13RJ**

Catalog Number	Bore H7		* The product shapes of J Series items are identified by background color.																
	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35		
Keyway J _{s9}	—		4×1.8			5×2.3				6×2.8				8×3.3			10×3.3		
Screw size	—		M4			M5				M6				M8					
SN1-13R J BORE	*S1T																		
SN1-13L J BORE	*S1T																		
SN1-15R J BORE	*S1T	*S1T																	
SN1-15L J BORE	*S1T	*S1T																	
SN1-20R J BORE		*S1T	S1K	S1K															
SN1-20L J BORE		*S1T	S1K	S1K															
SN1-26R J BORE			*S1K	S1K	S1K	S1K	S1K	S1K											
SN1-26L J BORE			*S1K	S1K	S1K	S1K	S1K	S1K											
SN1-30R J BORE			*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SN1-30L J BORE			*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SN1-5-10R J BORE		*S1T																	
SN1-5-10L J BORE		*S1T																	
SN1-5-13R J BORE			*S1K																
SN1-5-13L J BORE			*S1K																
SN1-5-15R J BORE			*S1K	S1K															
SN1-5-15L J BORE			*S1K	S1K															
SN1-5-20R J BORE			*S1K	S1K	S1K	S1K	S1K	S1K											
SN1-5-20L J BORE			*S1K	S1K	S1K	S1K	S1K	S1K											
SN1-5-26R J BORE			*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SN1-5-26L J BORE			*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K								
SN1-5-30R J BORE			*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
SN1-5-30L J BORE			*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K						
SN2-10R J BORE			*S1K																
SN2-10L J BORE			*S1K																
SN2-13R J BORE			*S1K	S1K	S1K	S1K	S1K												
SN2-13L J BORE			*S1K	S1K	S1K	S1K	S1K												
SN2-15R J BORE			*S1K	S1K	S1K	S1K	S1K	S1K	S1K										
SN2-15L J BORE			*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SN2-20R J BORE					*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
SN2-20L J BORE					*S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K				
SN2-26R J BORE													*S1K	S1K	S1K	S1K	S1K		
SN2-26L J BORE													*S1K	S1K	S1K	S1K	S1K		
SN2-30R J BORE													*S1K	S1K	S1K	S1K	S1K		
SN2-30L J BORE													*S1K	S1K	S1K	S1K	S1K		


To order J Series Hardened Plus products, please specify: **Catalog No. + H + J + BORE**. Example: **SN1-15RHJ8**

*** is a product with the original bore diameter, so Hardened Plus is not available. See Page 22 for more details on Hardened Plus.




Specifications	
Precision grade	JIS grade N9 (JIS B1702-1: 1998)
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle	45°
Material	SUS303
Heat treatment	—


* The precision grade of J Series products is equivalent to the value shown in the table.



S1



S1T



S1K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Module	No. of teeth	Direction of helix	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (kg)		
					AH7	B											
SUN1-13R SUN1-13L	m1	13	R L	S1	6	15	18.38	20.38	10	10	20	0.19	0.019	0.08~0.18	0.031		
SUN1-15R SUN1-15L		15	R L			18	21.21	23.21								0.29	0.029
SUN1-20R SUN1-20L		20	R L			8	25	28.28								30.28	0.66
SUN1.5-10R SUN1.5-10L	m1.5	10	R L	S1	8	16	21.21	24.21	15	10	25	0.29	0.029	0.10~0.22	0.048		
SUN1.5-13R SUN1.5-13L		13	R L			23	27.58	30.58								0.62	0.063
SUN1.5-15R SUN1.5-15L		15	R L			25	31.82	34.82								0.93	0.095
SUN1.5-20R SUN1.5-20L		20	R L			12	30	42.43								45.43	2.14
SUN2-10R SUN2-10L	m2	10	R L	S1	12	22	28.28	32.28	20	15	35	0.66	0.068	0.12~0.26	0.11		
SUN2-13R SUN2-13L		13	R L			30	36.77	40.77								1.42	0.14
SUN2-15R SUN2-15L		15	R L			35	42.43	46.43								2.14	0.22
SUN2-20R SUN2-20L		20	R L			15	45	56.57								60.57	4.84
SUN2.5-10R SUN2.5-10L	m2.5	10	R L	S1	12	26	35.36	40.36	22	16	38	1.27	0.13	0.14~0.28	0.20		
SUN2.5-13R SUN2.5-13L		13	R L			35	45.96	50.96								2.68	0.27
SUN2.5-15R SUN2.5-15L		15	R L			40	53.03	58.03								4.03	0.41
SUN2.5-20R SUN2.5-20L		20	R L			20	60	70.71								75.71	9.07
SUN3-10R SUN3-10L	m3	10	R L	S1	15	34	42.43	48.43	25	18	43	2.14	0.22	0.14~0.32	0.35		
SUN3-13R SUN3-13L		13	R L			45	55.15	61.15								4.51	0.46
SUN3-15R SUN3-15L		15	R L			50	63.64	69.64								6.75	0.69
SUN3-20R SUN3-20L		20	R L			60	84.85	90.85								15.04	1.53


Bore H7	* The product shapes of J Series items are identified by background color.																			
	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35			
Keyway JS9	—																			
Screw size	4x1.8				5x2.3				6x2.8				8x3.3				10x3.3			
Catalog Number	M4	M5	M4				M5				M6				M8					
SUN1-13RJ BORE	S1T																			
SUN1-13LJ BORE	S1T																			
SUN1-15RJ BORE	S1T	S1T																		
SUN1-15LJ BORE	S1T	S1T																		
SUN1-20RJ BORE		S1T	S1K	S1K																
SUN1-20LJ BORE		S1T	S1K	S1K																
SUN1.5-10RJ BORE		S1T																		
SUN1.5-10LJ BORE		S1T																		
SUN1.5-13RJ BORE			S1K																	
SUN1.5-13LJ BORE			S1K																	
SUN1.5-15RJ BORE			S1K	S1K																
SUN1.5-15LJ BORE			S1K	S1K																
SUN1.5-20RJ BORE			S1K	S1K	S1K	S1K	S1K													
SUN1.5-20LJ BORE			S1K	S1K	S1K	S1K	S1K													
SUN2-10RJ BORE			S1K																	
SUN2-10LJ BORE			S1K																	
SUN2-13RJ BORE			S1K	S1K	S1K	S1K	S1K													
SUN2-13LJ BORE			S1K	S1K	S1K	S1K	S1K													
SUN2-15RJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K											
SUN2-15LJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K											
SUN2-20RJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SUN2-20LJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K									
SUN2.5-10RJ BORE			S1K																	
SUN2.5-10LJ BORE			S1K																	
SUN2.5-13RJ BORE			S1K	S1K	S1K	S1K	S1K													
SUN2.5-13LJ BORE			S1K	S1K	S1K	S1K	S1K													
SUN2.5-15RJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
SUN2.5-15LJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K										
SUN2.5-20RJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SUN2.5-20LJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SUN3-10RJ BORE			S1K	S1K	S1K															
SUN3-10LJ BORE			S1K	S1K	S1K															
SUN3-13RJ BORE			S1K	S1K	S1K							S1K	S1K	S1K						
SUN3-13LJ BORE			S1K	S1K	S1K							S1K	S1K	S1K						
SUN3-15RJ BORE			S1K	S1K	S1K	S1K	S1K					S1K	S1K	S1K						
SUN3-15LJ BORE			S1K	S1K	S1K	S1K	S1K					S1K	S1K	S1K						
SUN3-20RJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
SUN3-20LJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			






Specifications	
Precision grade	JIS grade N9 (JIS B1702-1: 1998)
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle	45°
Material	CAC702 (old JIS A & BC2)
Heat Treatment	—

* The precision grade of J Series products is equivalent to the value shown in the table.




S1

J Series



S1T



S1K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Module	No. of teeth	Direction of helix	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (kg)		
					AH7	B											
AN1-13R AN1-13L	m1	13	R L	S1	6	15	18.38	20.38	10	10	20	0.31	0.032	0.08~0.18	0.029		
AN1-15R AN1-15L		15	R L			18	21.21	23.21								0.48	0.049
AN1.5-10R AN1.5-10L	m1.5	10	R L	S1	8	16	21.21	24.21	15	10	25	0.48	0.049	0.10~0.22	0.046		
AN1.5-13R AN1.5-13L		13	R L			23	27.58	30.58								1.03	0.10
AN1.5-15R AN1.5-15L		15	R L			25	31.82	34.82								1.55	0.16
AN2-10R AN2-10L	m2	10	R L	S1	12	22	28.28	32.28	20	15	35	1.10	0.11	0.12~0.26	0.11		
AN2-13R AN2-13L		13	R L			30	36.77	40.77								2.36	0.24
AN2-15R AN2-15L		15	R L			35	42.43	46.43								3.56	0.36
AN2.5-10R (Made to Order) AN2.5-10L (Made to Order)	m2.5	10	R L	S1	12	26	35.36	40.36	22	16	38	2.11	0.22	0.14~0.28	0.20		
AN2.5-13R (Made to Order) AN2.5-13L (Made to Order)		13	R L			35	45.96	50.96								4.47	0.46
AN2.5-15R (Made to Order) AN2.5-15L (Made to Order)		15	R L			40	53.03	58.03								6.72	0.69
AN3-10R (Made to Order) AN3-10L (Made to Order)	m3	10	R L	S1	15	34	42.43	48.43	25	18	43	3.56	0.36	0.14~0.32	0.34		
AN3-13R (Made to Order) AN3-13L (Made to Order)		13	R L			45	55.15	61.15								7.51	0.77
AN3-15R (Made to Order) AN3-15L (Made to Order)		15	R L			50	63.64	69.64								11.3	1.15


*** is a product with the original bore diameter, so Hardened Plus is not available. See Page 22 for more details on Hardened Plus.

Bore H7	* The product shapes of J Series items are identified by background color.														
	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30
Keyway JS9	—		4x1.8		5x2.3				6x2.8				8x3.3		
Screw size	—		4x1.8		5x2.3				6x2.8				8x3.3		
Catalog Number	M4	M5	M4				M5				M6				
AN1-13RJ BORE	S1T														
AN1-13LJ BORE	S1T														
AN1-15RJ BORE	S1T	S1T													
AN1-15LJ BORE	S1T	S1T													
AN1.5-10RJ BORE		S1T													
AN1.5-10LJ BORE		S1T													
AN1.5-13RJ BORE			S1K												
AN1.5-13LJ BORE			S1K												
AN1.5-15RJ BORE			S1K	S1K											
AN1.5-15LJ BORE			S1K	S1K											
AN2-10RJ BORE				S1K											
AN2-10LJ BORE				S1K											
AN2-13RJ BORE				S1K	S1K	S1K	S1K	S1K							
AN2-13LJ BORE				S1K	S1K	S1K	S1K	S1K							
AN2-15RJ BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K					
AN2-15LJ BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K					




Specifications	
Precision grade	JIS grade N10 (JIS B1702-1: 1998)*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Helix angle	45°
Material	MC901
Heat treatment	—


* The precision grade is equivalent to the value shown in the table.



S1



S1T



S1K



To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Module	No. of teeth	Direction of helix	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (kg)				
					A _{H8}	B													
PN1-13R PN1-13L	m1	13	R L	S1	6	15	18.38	20.38	10	10	20	0.19	0.019	0.18~0.32	0.0045				
PN1-15R PN1-15L		15	R L			18	21.21	23.21								0.29	0.029	0.20~0.34	
PN1-20R PN1-20L		20	R L			8	25	28.28											30.28
PN1.5-10R PN1.5-10L	m1.5	10	R L	S1	6	16	21.21	24.21	15	10	25	0.29	0.029	0~0.38	0.0077				
PN1.5-13R PN1.5-13L		13	R L			8	23	27.58								30.58	0.62	0.063	
PN1.5-15R PN1.5-15L		15	R L			8	25	31.82								34.82			0.93
PN1.5-20R PN1.5-20L		20	R L			10	30	42.43								45.43	2.14	0.22	
PN2-10R PN2-10L	m2	10	R L	S1	10	22	28.28	32.28	20	15	35	0.66	0.068	0~0.42	0.018				
PN2-13R PN2-13L		13	R L			30	36.77	40.77								1.42	0.14		
PN2-15R PN2-15L		15	R L			35	42.43	46.43										2.14	0.22
PN2-20R PN2-20L		20	R L			12	45	56.57								60.57	4.84		
PN2.5-10R PN2.5-10L	m2.5	10	R L	S1	10	26	35.36	40.36	22	16	38	1.27	0.13	0~0.44	0.031				
PN2.5-13R PN2.5-13L		13	R L			35	45.96	50.96								2.68	0.27		
PN2.5-15R PN2.5-15L		15	R L			12	40	53.03										58.03	4.03
PN2.5-20R PN2.5-20L		20	R L			60	70.71	75.71								9.07	0.92	0~0.46	
PN3-10R PN3-10L		m3	10			R L	S1	12								34	42.43	48.43	25
PN3-13R PN3-13L	13		R L	45	55.15	61.15			4.51	0.46									
PN3-15R PN3-15L	15		R L	50	63.64	69.64					6.75	0.69							
PN3-20R PN3-20L	20		R L	60	84.85	90.85			15.0	1.53			0~0.54	0.12					

Bore H8	* The product shapes of J Series items are identified by background color.																
	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35
Keyway J _{S9}	—		4x1.8		5x2.3				6x2.8				8x3.3		10x3.3		
Screw size	—		M4		M5				M6				M8				
Catalog Number	M4	M5	M4				M5				M6		M8				
PN1-13RJ BORE	S1T																
PN1-13LJ BORE	S1T																
PN1-15RJ BORE	S1T	S1T															
PN1-15LJ BORE	S1T	S1T															
PN1-20RJ BORE		S1T	S1K	S1K													
PN1-20LJ BORE		S1T	S1K	S1K													
PN1.5-10RJ BORE	S1T																
PN1.5-10LJ BORE	S1T																
PN1.5-13RJ BORE		S1T	S1K														
PN1.5-13LJ BORE		S1T	S1K														
PN1.5-15RJ BORE		S1T	S1K	S1K													
PN1.5-15LJ BORE		S1T	S1K	S1K													
PN1.5-20RJ BORE			S1K	S1K	S1K	S1K	S1K	S1K									
PN1.5-20LJ BORE			S1K	S1K	S1K	S1K	S1K	S1K									
PN2-10RJ BORE			S1K														
PN2-10LJ BORE			S1K														
PN2-13RJ BORE			S1K	S1K	S1K	S1K	S1K	S1K									
PN2-13LJ BORE			S1K	S1K	S1K	S1K	S1K	S1K									
PN2-15RJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
PN2-15LJ BORE			S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K							
PN2-20RJ BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
PN2-20LJ BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
PN2.5-10RJ BORE			S1K	S1K													
PN2.5-10LJ BORE			S1K	S1K													
PN2.5-13RJ BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K							
PN2.5-13LJ BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K							
PN2.5-15RJ BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
PN2.5-15LJ BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K					
PN2.5-20RJ BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
PN2.5-20LJ BORE				S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
PN3-10RJ BORE				S1K	S1K	S1K	S1K	S1K									
PN3-10LJ BORE				S1K	S1K	S1K	S1K	S1K									
PN3-13RJ BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K						
PN3-13LJ BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K						
PN3-15RJ BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
PN3-15LJ BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K			
PN3-20RJ BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K
PN3-20LJ BORE					S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K	S1K

* In regard to MC Nylon gears, other materials are available for plastic gears, including Ultra High Molecular Weight Polyethylene (U-PE), which has excellent abrasion resistance and resin conforming to the Plastic Implementation Measure (PIM). A single piece order is acceptable and will be produced as a custom-made gear. Please see Page 26 for more details on quotations and orders.


GCU-N Screw Gear Kit



Installation : Nonparallel and nonintersecting gears
 Gear Type : Screw Gears
 Gears : SN2.5-10R
 PN2.5-10R
 Gear Ratio : 1
 Weight : Approx. 1kg

Screw Gears are helical gears used in nonparallel and nonintersecting situations. Applications include devices like conveyers with light loads.

* This is not a gear box for actual use to transmit power. Please use only as representations of gear systems.

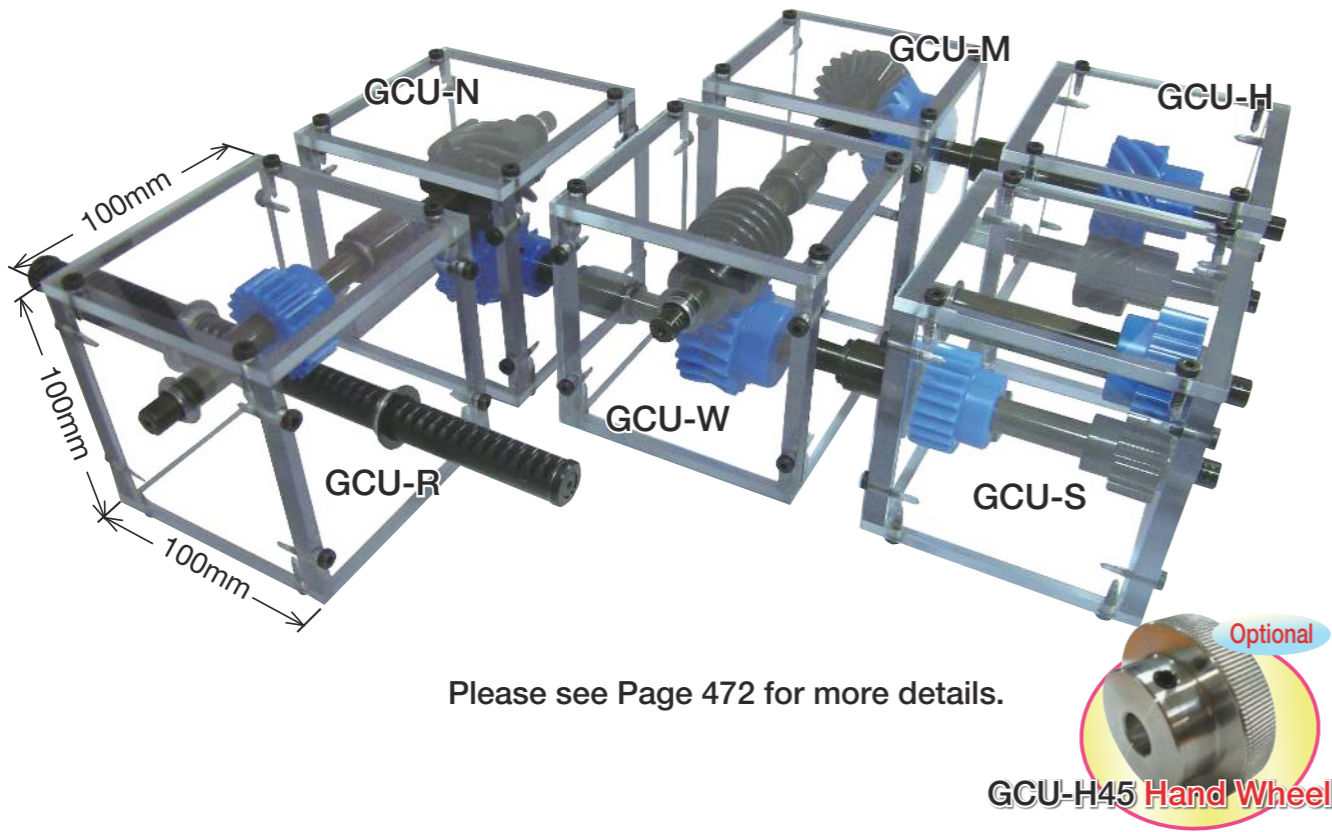

Please see Page 472 for more details.

GCU-H45 Hand Wheel



Worm Gears

KWGD/L/KWGDLS Duplex Worms Material: SCM440 m1.5-4 Page 402	AGDL Duplex Worm Wheels Reduction Ratio 20-60 Material: CAC702 (A & BC2) m1.5-4 Page 402	KWG Ground Worm Shafts Material: SCM440 m0.5-6 Page 410	AG Worm Wheels Reduction Ratio 10-60 Material: CAC702 (A & BC2) m0.5-1.5 Page 410	AGF Worm Wheels Reduction Ratio 10-60 Material: CAC702 (A & BC2) m2-6 Page 414	SWG Ground Worms Material: S45C m1-6 Page 420	AG Worm Wheels Reduction Ratio 10-60 Material: CAC702 (A & BC2) m1-6 Page 420
SW Worms Material: S45C m0.5-6 Page 428	BG Worm Wheels Reduction Ratio 10-60 Material: CAC502 (PBC2) m0.5-6 Page 428	CG Worm Wheels Reduction Ratio 10-120 Material: FC200 m1-6 Page 430	SUW Stainless Steel Worms Material: SUS303 m0.5-3 Page 444	PG Worm Wheels Reduction Ratio 10-50 Material: MC901 m1-3 Page 444		


M Includes Made to Order

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Worm Gear Pair
Worms

K W G DL 2 - R1

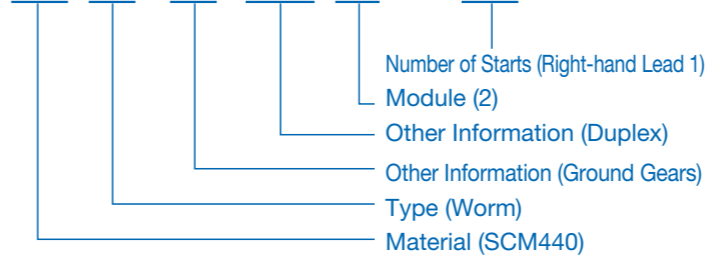


Material
 K SCM440
 S S45C
 SU Stainless Steel

Type
 W Worms
Other Information
 DL Duplex
 G Ground Gears
 S Pinion Shafts

Worm Wheels

A G DL 2 - 20 R1

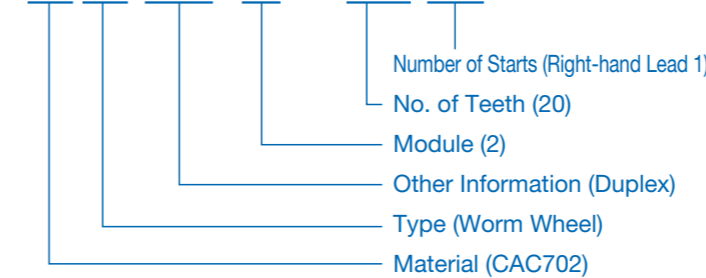

Material
 A CAC702
 B CAC502
 C FC200
 P MC901

Type
 G Worm Wheels
Other Information
 DL Duplex
 F Double Hubs or Ring Gears

Features

KHK stock worm gears are available in modules 0.5 to 6, reduction ratios of 1/10 to 1/120, and a wide range of materials and shapes. Duplex worm gears with adjustable backlash and highly accurate rotation are also available. The following table lists the main features.

Type	Catalog Number	Module	Number of Starts or Reduction Ratio	Material Old JIS in parentheses	Heat treatment	Tooth Surface Finish	Precision Grade KHK W 001 KHK W 002 Note 2	Features
Duplex Worm Gears	Worms KWGDL	2~4	Single Start	SCM440	Thermal refined, gear teeth induction hardened	Ground	1	Duplex worms that have been tempered, hardened and ground that has excellent accuracy, strength and abrasion resistance. Secondary operations can be given except for the teeth. Moving it in axial direction will adjust the backlash.
	Worms KWGDLs	1.5~4	Single Start	SCM440	Thermal refined, gear teeth induction hardened	Ground	1	Duplex worms with shafts that have been tempered, hardened and ground that has excellent accuracy, strength and abrasion resistance. Secondary operations can be given except for the teeth. Moving it in axial direction will adjust the backlash.
	Wheels AGDL	1.5~4	20~60	CAC702 (A & BC2)	—	Cut	1	Duplex worm wheels made of aluminum bronze with excellent accuracy and a good balance between machinability and wear resistance. Used in combination with KWGDL or KWGDLs.
Worm Gears	Worms KWG	0.5~6	Single or Double Start	SCM440	Thermal refined, gear teeth induction hardened	Ground	2	Worms with shafts that have been tempered, hardened and ground that has excellent accuracy, strength and abrasion resistance. Secondary operations can be performed except for the teeth.
	Wheels AGF NOTE 1	2~6	10~60	CAC702 (A & BC2)	—	Cut	2	Worm wheels made of aluminum bronze with a good balance between machinability and wear resistance. Used in combination with KWG.
	Worms SWG	1~6	Single or Double or Triple Start	S45C	Gear teeth induction hardened	Ground	2	Worms that have been hardened and ground with a good balance of accuracy, wear resistance and cost. Secondary operations are possible except for the teeth.
	Wheels AG NOTE 1	1~6	10~60	CAC702 (A & BC2)	—	Cut	2	Worm wheels made of aluminum bronze with a good balance between machinability and wear resistance. Used in combination with SWG. Note 1
	Worms SW	0.5~6	Single or Double Start	S45C	—	Cut (Rolling)	4	Many lineups are available at a low price and excellent usability.
	Worms SUW	0.5~3	Single or Double Start	SUS303	—	Cut	4	Stainless steel worms with rust resistance.
	Wheels BG	0.5~6	10~60	CAC502 (PBC2)	—	Cut	4	Worm wheels made of phosphorus bronze with excellent wear resistance. Used in combination with SW and SUW.
	Wheels CG	1~6	10~120	FC200	—	Cut	4	Cast iron worm wheels that are inexpensive and suitable for light loads. Used in combination with SW and SUW.
	Wheels PG	0.5~3	10~50	MC901	—	Cut	5	Worm wheels made of MC nylon. Can be used with no lubrication. Used in combination with SW and SUW.

[Note 1] FC200 is the material for the hubs of AGF and AG worm wheels. The AG worm wheels are normally combined with the SWG worms, but are also compatible with the KWG worms with module 1.5 and below.

[Note 2] The precision grade of KHK stock worm gears controls the product quality based on the KHK standards. Please see "Precision of Worm Gears" on Page 396 in the Selection Hints section for details.

High-precision ground gear worms are available.

We use screw grinding machines manufactured by DRAKE, USA, to manufacture high-precision ground worms of module 0.5 to 8.




CNC Screw Grinding Machine (TE-LM200)

Worm ground gear machining range	
Maximum gear accuracy	KHK Grade 1
Maximum module	m8
Maximum nominal lead angle	±35°
Maximum outer diameter	φ200mm
Maximum length	330mm

Application Examples

KHK stock worm gears are used in a wide range of fields, including reduction gears and positioning mechanisms.

Wiper Drive Device

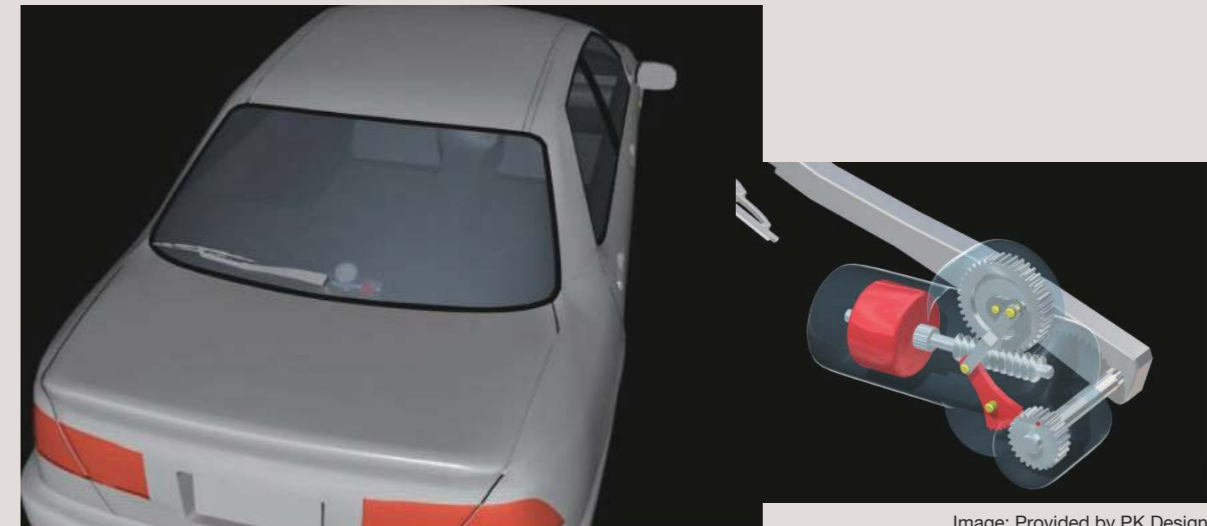

Worm gear used for the oscillating mechanism of wipers

Image: Provided by PK Design

Yaesu Steam Kettle




SW worm and CG worm wheel used for rotating large pans

Masdac Food Filling Device



KWGDL Duplex Worm Wheels and AGDL Worm Wheels used for indexing and driving, for accurate filling of a fixed amount of ingredients

Gonio Stage Design Example

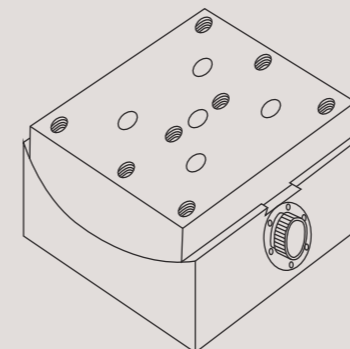

Worm gear used for rotating tables (design example)

Fabric Feeding Device



SW worm and BG worm wheel used for adjusting height

Selection Hints

Please select the most suitable products by carefully considering the characteristics of items and contents of the product tables. It is also important to read all applicable "CAUTION" notes shown below before the final selection.

1. Caution in Selecting the Mating Gears

Worm gears are available in right-hand helix and left-hand helix. Worms and worm wheels of the same helix direction are combined. However, combination may not be possible due to the difference in the number of starts of the worm and the difference in pitch being normal and transverse (axial direction). Below is the Mating Helical Gear Selection Chart for KHK worm gears.

Mating Worm Wheel Selection Chart

Worms	Mating Wheel Note 1	Hand Number of Starts	KWGDL		KWG			SWG			SW		SUW	
			R1	R2	R1	R2	R3	R1	R2	L1	L2	R1	R2	
AGDL		R1	○											
AG0.5~1.5		R1		○										
		R2			○									
AG		R1				○								
		R2					○							
		R3						○						
BG		R1						○						○
		R2							○					
		L1								○				
CG		R1									○			○
		R2										○		
		L1											○	
PG		R1												○
		R2												

[Note 1] The mating wheel must have the same module as the worm.

Helix direction of worm gears



2. Caution in Selecting Gears Based on Gear Strength

The gear strength values shown in the product pages were computed by assuming the application environment in the table below. Therefore, they should be used as reference only. We recommend that each user computes their own values by applying the actual usage conditions.

Calculation of Surface Durability

Calculation of Bending Strength of Gears

Item	Catalog Number	KWGDL/KWGDLS/AGDL KWG/AGF, SWG/AG	SW/BG	SW/CG	SUW/PG
Formula NOTE 1	Formula of cylindrical worm gear strength (JGMA405-01)				The Lewis formula
Lubricating Oil	Lubricating oil with appropriate viscosity that contains extreme pressure additive for gears				Allowable bending stress (kgf/mm ²)
Lubrication Method	Oil Bath Lubrication (Oil Bath)				1.15 (40°C with No Lubrication)
Startup Status	The starting torque is 200% or less of the rated torque, and the number of starts per hour is under 2.				
Expected Service Life	26,000 hours				
Impact from motor	Uniform load				
Impact from load	Uniform load				
Allowable Stress Coefficient Scilm	0.67	0.70	0.42		

[NOTE 1] The gear strength formula is based on JGMA (Japanese Gear Manufacturers Association) specifications, "MC Nylon Technical Data" by Mitsubishi Chemical Advanced Materials. The units for the rotational speed (rpm) and the stress (kgf/mm²) are adjusted to the units needed in the formula.

When selecting KHK standard gears, glance over the Cautions on Product Characteristics and Cautions on Performing Secondary Operations on Page 398.

- Products not listed in this catalog or materials, modules, number of teeth and the like not listed in the dimensional tables can be manufactured as custom items. Please see Page 26 for more details about custom-made orders.
- The color and shape of the product images listed on the dimension table page of each product may differ from the actual product. Be sure to confirm the shape in the dimension table before selection.
- The details (specifications, dimensions, etc.) listed in the catalog may be changed without prior notice. Changes are announced on the KHK website.

Website URL : <https://khkgears.net/new/>
 Overseas Sales Department: Phone : +81-48-254-1744 Fax: +81-48-254-1765 E-mail: info@khkgears.net

The most important factor in selecting gears is the gear strength.

Step 1

Use the calculation of load torque applied to the gear and the sliding speed to determine the worm gear suitable for the purpose.

Maximum allowable sliding speed due to friction

Surface durability

The maximum allowable sliding speed of each worm gear is shown in the table below. Sliding speed should be calculated when making a selection.

Calculated values of the strength at which the worm wheel teeth do not wear due to surface fatigue damage. If the tooth surface is not sufficiently lubricated, the surface may be damaged even if the load is less than the tooth surface durability.

Sliding speed v_s (m/s)

$$v_s = \frac{dn}{19100 \cos \gamma}$$

d : Worm pitch dia.
 n : Worm rotational speed
 γ : Worm nominal lead angle

Catalog Number	Maximum allowable sliding speed (m/s)
AGDL	* 15
AGF	* 15
AG	* 15
BG	* 10
CG	* 2.5
PG	1 (No Lubrication)

* From JGMA405-01

Step 2

Select provisionally from the allowable torque table in this catalog based on the load torque.

For provisional selection from this catalog

Catalog Number	Module (mm)	Pitch Diameter (mm)	Number of Teeth	Face Width (mm)	Pitch Circle Diameter (mm)	Allowable torque (N·m)						Backlash (mm)	Weight (kg)				
						30	100	300	500	1000	2000						
AG1-20R1	20	200	1	3750	616	20	22	23	18	3.33	2.79	2.23	1.83	1.63	1.30	0.038	
AG1-20R2	10	200	2	7500	616	20	22	23	18	3.33	2.79	2.23	1.83	1.63	1.30	0.038	
AG1-30R1	30	300	1	7500	620	30	32	33	23	7.00	5.98	4.98	4.00	3.63	3.31	2.92	0.078
AG1-30R2	15	300	2	7500	620	30	32	33	23	7.00	5.98	4.98	4.00	3.63	3.31	2.92	0.078
AG1-40R1	40	400	1	7500	826	40	42	43	28	12.1	10.2	8.43	7.12	6.38	5.86	5.13	0.13
AG1-50R1	50	500	1	7500	830	50	52	53	33	18.3	15.5	12.9	10.9	9.87	9.08	7.95	0.20
AG1-60R1	60	600	1	7500	1035	60	62	63	38	25.6	21.8	18.1	15.4	14.1	12.9	11.4	0.29
AG1.5-20R1	20	200	1	7500	822	30	33	34.5	27.5	9.84	8.18	6.40	5.30	4.68	4.25	3.68	0.10
AG1.5-20R2	10	200	2	7511	822	30	33	34.5	27.5	9.72	7.87	5.92	4.87	4.25	3.83	3.27	0.10
AG1.5-30R1	30	300	1	7500	1030	45	48	49.5	35	20.8	17.5	13.9	11.7	10.4	9.40	8.28	0.22
AG1.5-30R2	15	300	2	7511	1030	45	48	49.5	35	20.7	17.1	13.1	10.8	9.56	8.58	7.46	0.10-0.21
AG1.5-40R1	40	400	1	7500	1235	60	63	64.5	42.5	35.6	30.0	24.2	20.6	18.3	16.6	14.6	0.37
AG1.5-50R1	50	500	1	7500	1245	75	78	79.5	50	33.8	28.4	22.9	19.6	17.6	16.0	14.2	0.39
AG1.5-60R1	60	600	1	7500	1520	90	93	94.5	57.5	45.3	38.8	31.9	26.9	24.0	21.8	19.4	0.43

Step 3

Calculate the strength under the actual usage conditions.

Calculate the strength formally using the various gear strength formulas. We recommend using the simple strength calculation available on our website.

Use the strength calculation function on our website.

3. Cautions on Selecting Racks By Precision

The precision standards of KHK stock worm gears are established by us. Check the precision table below.

① Worm Precision (KHK W 001)

For the pitch error and lead error of the worm, the allowable values of 1 to 4 grades are set for each module with reference to the JIS standards. The lead error is the allowable value of the tooth trace error in one lead.

■ Worm Precision KHK W 001 (Unit: μ m)

Grade	Error	Module				
		Over m0.4 to 1	Over m1 to 1.6	Over m1.6 to 2.5	Over m2.5 to 4	Over m4 to 6
1	Pitch Error	8	12	16	20	25
	Lead Error	7	9	11	13	16
2	Pitch Error	12	16	20	24	29
	Lead Error	15	18	21	25	28
3	Pitch Error	16	23	30	37	50
	Lead Error	20	23	27	33	37
4	Pitch Error	20	30	40	50	70
	Lead Error	30	32	38	46	52

② Worm Wheel Accuracy (KHK W 002)

Our precision grades for pitch errors are established by referring to old JIS Standards. The precision grades are set from 1 to 5, in accordance with the tolerance of a single pitch error (S.P.E.), adjacent tooth-to-tooth error (T.T.E.), and the total composite error (T.C.E.) for each module and pitch diameter.

■ Worm Wheel Accuracy KHK W 002

Unit: μ m

Grade	Error	Pitch dia. (mm)																								
		Over m0.4 to 1					Over m1 to 1.6					Over m1.6 to 2.5					Over m2.5 to 4					Over m4 to 6				
		6 to 12	12 to 25	25 to 50	51 to 100	100 to 200	12 to 25	25 to 50	51 to 100	100 to 200	200 to 400	12 to 25	25 to 50	51 to 100	100 to 200	200 to 400	25 to 50	51 to 100	100 to 200	200 to 400	400 to 800	25 to 50	51 to 100	100 to 200	200 to 400	400 to 800
1	Single Pitch Error	5	6	7	7	9	6	7	8	9	10	7	7	8	9	11	8	9	10	11	13	9	10	11	13	14
	Total Pitch Error	21	24	26	30	34	25	28	31	35	41	27	30	33	37	43	33	36	40	46	53	37	40	45	50	57
2	Single Pitch Error	8	8	9	10	12	9	10	11	12	14	9	10	12	13	15	11	13	14	16	18	13	14	16	18	20
	Total Pitch Error	30	33	37	42	48	35	39	44	50	57	38	42	46	52	60	46	51	57	64	74	52	57	63	71	80
3	Single Pitch Error	11	12	13	15	17	12	14	16	18	20	13	15	16	19	21	16	18	20	23	26	19	20	22	25	29
	Total Pitch Error	43	47	53	60	68	50	55	62	71	81	53	59	66	74	85	65	72	81	91	105	74	81	90	100	115
4	Single Pitch Error	15	17	19	21	24	18	19	22	25	29	19	21	23	26	30	23	25	28	32	37	26	28	32	35	40
	Total Pitch Error	60	66	74	83	95	70	77	87	99	115	75	83	92	105	120	91	100	115	130	145	105	115	125	140	160
5	Single Pitch Error	21	24	26	30	34	25	28	31	35	41	27	30	33	37	43	33	36	40	46	53	37	40	45	50	57
	Total Pitch Error	86	94	105	120	135	100	110	125	140	165	105	120	130	150	170	130	145	160	185	210	150	160	180	200	230

③ Total Length Tolerance for Worm Gears

■ Total Length Tolerance for Worms

Series	Total Length (mm)	Tolerance
KWGDL	Uniform	0
		-0.10
SWG SW SUW	100 or less	0
		-0.15
KWGDLs KWG	Uniform	0
		-0.20
		Normal Tolerance

■ Total Length Tolerance for Worm Wheels

Total Length (mm)	Tolerance
30 or less	0
	-0.10
31 to 100	0
	-0.15
Over 100	0
	-0.20

[NOTE] PG Plastic Wheels are excluded.

4. Cautions in Selecting Worm Gears Based on Efficiency

The transmission efficiency of worm gears varies slightly depending on the assembled state, lubricating oil and the like, but the transmission efficiency (excludes bearing loss and loss of lubricating oil due to stirring) of worm wheels when driven from the worm is approximately 30% to 90%. The transmission efficiency table of the KHK stock worm gears is shown below (reference values).

① Efficiency of Various Worms

■ KWGDL/KWGDLS/AGDL Worm Gear Efficiency (%)

(rpm = Worm Rotational Speed)

Worm Rotational Speed Catalog Number	100	300	600	900	1200	1800
KWGDLS1.5-R1	35	42	47	51	53	57
KWGDLS2-R1	38	45	51	55	56	61
KWGDLS2.5-R1	40	48	54	57	60	63
KWGDLS3-R1	41	49	55	58	62	65
KWGDLS3.5-R1	42	50	56	61	62	65
KWGDLS4-R1	42	51	56	61	63	67

■ KWG/AG/AGF Worm Gear Efficiency (%)

(rpm = Worm Rotational Speed)

Worm Rotational Speed Catalog Number	100	300	600	900	1200	1800
KWG0.5-R1	30	34	38	41	43	46
KWG0.8-R1	35	40	44	47	49	53
KWG1-R1	34	40	45	48	51	54
KWG1.5-R1	35	42	47	51	53	57
KWG2-R1	45	51	56	60	62	65
KWG2.5-R1	44	51	57	61	62	67
KWG3-R1	44	52	58	61	64	67
KWG4-R1	50	58	64	66	70	72
KWG5-R1	51	60	66	69	71	73
KWG6-R1	53	61	66	70	72	75
KWG0.5-R2	46	50	54	58	60	63
KWG0.8-R2	51	56	61	64	66	69
KWG1-R2	51	56	62	64	67	70
KWG1.5-R2	52	59	64	67	69	73
KWG2-R2	61	67	71	74	76	78
KWG2.5-R2	60	67	72	75	76	80
KWG3-R2	61	68	73	75	78	80
KWG4-R2	66	73	77	79	82	84

■ SWG/AG Worm Gear Efficiency (%)

(rpm = Worm Rotational Speed)

Worm Rotational Speed Catalog Number	100	300	600	900	1200	1800
SWG1-R1	34	40	45	48	51	54
SWG1.5-R1	35	42	47	51	53	57
SWG2-R1	38	45	51	55	56	61
SWG2.5-R1	40	48	54	57	60	63
SWG3-R1	41	49	55	58	62	65
SWG4-R1	42	51	56	61	63	67
SWG5-R1	46	54	60	64	66	70
SWG6-R1	48	57	64	66	68	73
SWG1-R2	51	56	62	64	67	70
SWG1.5-R2	52	59	64	67	69	73
SWG2-R2	55	62	67	70	72	75
SWG2.5-R2	57	64	69	72	75	77
SWG3-R2	58	66	71	73	76	78
SWG4-R2	59	67	72	75	77	80
SWG5-R2	62	70	75	78	79	82
SWG6-R2	65	72	77	80	81	84
SWG3-R3	67	74	78	80	82	84
SWG4-R3	68	75	79	82	83	86

■ SW, SUW/CG, BG, PG Worm Gear Efficiency


The values shown in the table below are estimates and may vary slightly according to conditions such as assembled state, load, lubrication and rotation speed.

Catalog Number	Number of Starts	Efficiency (%)
SW/SUW	1 Start	30~50%
	2 Starts	50~60%

② Self-locking of worm gears

The state of the worm not being able to be rotated from the worm wheel is called self-locking. Self-locking happens due to the worm gear's material, lead angle, machining accuracy, bearing type, lubricating oil, etc.

There are various factors, so self-lock is not always determined only by the lead angle, but usually a single-start worm self-locks at a lead angle of 4° or less. If complete reverse prevention is required, use another braking mechanism or the like in combination.

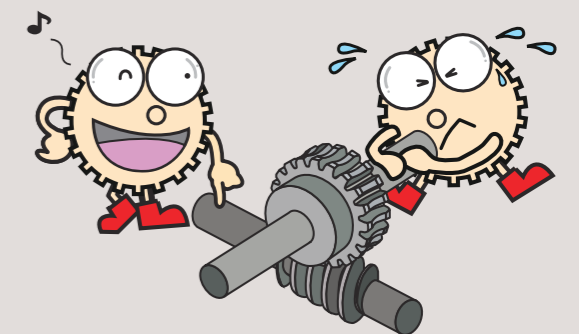

Product Precautions

Worm Common Notes
[Caution on Product Characteristics]

- (1) These worm gears produce axial thrust forces. Please see Page 400 for more details.
- (2) For bores of ϕ 4 or below, the bore tolerance is H8. As well, the tolerance is H8 for ϕ 5 or ϕ 6 bores with hole length (total length) 3x the bore or more.
- (3) For hole lengths 3.5x the bore or more, the hole center is out of H7 tolerance.
- (4) Keyways are made according to JIS B1301 standards, Js9 tolerance. Also note that keyway tooth position alignment is not performed.
- (5) For products having a tapped hole, a set screw is included.

[Caution on Secondary Operations]

- (1) Please read "Cautions on Performing Secondary Operations" on Page 400 when performing modifications and/or secondary operations for safety concerns.
- (2) Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).

[J Series]

- (1) Cancellation is not possible for made-to-order products. For lead time details, see Page 38.
- (2) Black oxide is not re-applied to parts undergoing secondary operations.

Worm Wheel Common Notes
[Caution on Product Characteristics]

- (1) The allowable torque shown in the table are calculated values according to the assumed usage conditions. Please see Page 394 for more details.
- (2) These worm gears produce axial thrust forces. Please see Page 400 for more details.
- (3) Variations in temperature or humidity can cause dimensional changes in plastic gears, including tooth diameter, bore, and backlash. The accuracy and tolerances shown in the catalog are values obtained when machining is performed.
- (4) For bores of ϕ 4 or below, the bore tolerance is H8. As well, the tolerance is H8 for ϕ 5 or ϕ 6 bores with hole length (total length) 3x the bore or more.
- (5) Some products have a slight gap in the casted section, but this does not affect the holding strength.
- (6) Keyways are made according to JIS B1301 standards, Js9 tolerance. Also note that keyway tooth position alignment is not performed.
- (7) For products having a tapped hole, a set screw is included.

[Caution on Secondary Operations]

- (1) Please read "Cautions on Performing Secondary Operations" on Page 400 when performing modifications and/or secondary operations for safety concerns.
- (2) Because it affects the cast portion, there is no additional modification other than to the boss part.
- (3) As the worm wheel is casted, bubbles may form inside the material.
If the air bubbles found in secondary operations are problematic, contact the supplier.

[J Series]

- (1) Cancellation is not possible for made-to-order products. For lead time details, see Page 38.
- (2) Certain products which would otherwise have a very long tapped hole are counterbored. For details, please see the KHK website.
- (3) For bores over ϕ 50, the bore tolerance is H8.

KWGD(L) Duplex Worms
[Caution on Product Characteristics]

- (1) When the center distance is moved to reduce the backlash, the V max is the maximum amount of distance that you may shift without causing problems with the gear mesh. The V max is not a recommended value to use for adjustment when assembling.

AGDL Duplex Worm Wheels
[Caution on Product Characteristics]

- (1) Duplex worms and worm wheels must be mated in a predetermined orientation, which is indicated by the arrows. Therefore, the arrow on the wheel does not indicate the mounting direction, but the rotating direction. See "Points of Caution in Assembling" on Page 400.

AGF Worm Wheels
[Caution on Product Characteristics]

- (1) For H0 products with bore of ϕ 190 or larger, the bore tolerance is H8.

BG Worm Wheels
[Caution on Product Characteristics]

- (1) The worm wheel is shifted to fit the mounting distance.

CG Worm Wheels
[Caution on Product Characteristics]

- (1) The worm wheel is shifted to fit the mounting distance.
- (2) H2 has a long cast hole in the web (H) section.

PG Worm Wheels
[Caution on Product Characteristics]

- (1) The worm wheel is shifted to fit the mounting distance.

Application Hints


In order to use KHK stock worm gears safely, carefully read the Application Hints before proceeding.
If there are questions or you require clarifications, please contact our technical department or your nearest distributor.
E-mail: info@khkgears.net

1. Cautions on Handling

- ① KHK products are packaged one by one to prevent scratches and dents, but if you find issues such as rust, scratches, or dents when the product is removed from the box after purchase, please contact the supplier.
- ② Depending on the handling method, the product may become deformed or damaged. Resin gears and ring gears deform particularly easily, so please handle with care.

2. Caution on Performing Secondary Operations


- ① Gears are machined based on the ground section of the hole or shaft. If machining, it is important to pay special attention to locating the center in order to avoid runout. (Fig.1)
If it is too difficult to do for small bores, the alternative is to use one spot on the bore and the runout of the hub end surface.

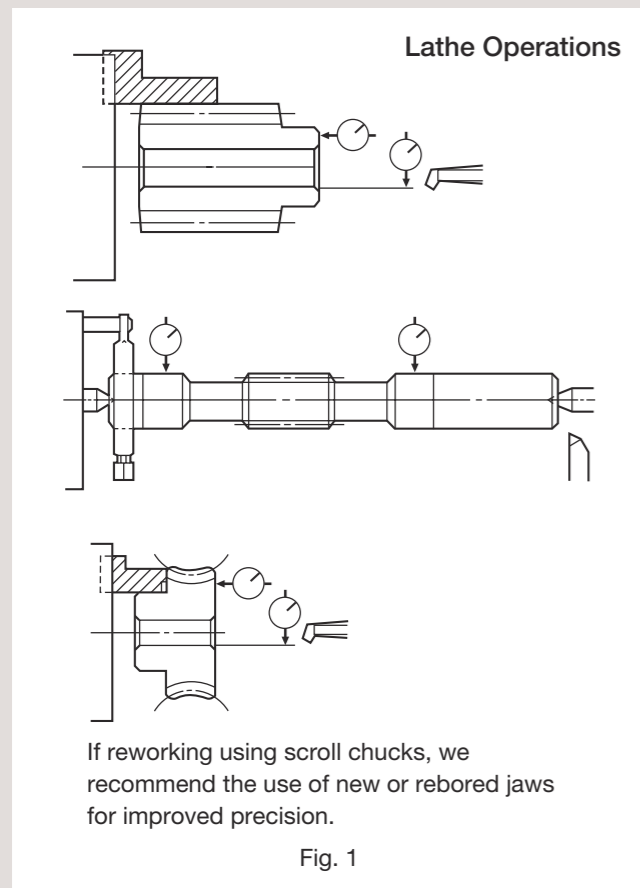


- ② If enlarging the bore diameter, the wall strength of the hub must be higher than that of the gear teeth. The maximum bore size should be 60% to 70% of the hub diameter (or tooth root diameter), and 50% to 60% for keyway applied modifications. Also, because the cast FC200 hub is weaker and more brittle than other steels, we recommend using a maximum bore diameter about 10% smaller.
- ③ As the worm wheel is casted, bubbles may form inside the material. If the air bubbles found in secondary operations are problematic, contact the supplier.

3. Points of Caution during Assembly

- ① The recommended center distance tolerance of KHK stock worm gears is H7 for ground gears and H8 for cut gears. The amount of backlash is given in the product table for each gear.
- ② The mounting reference surface of the worm wheel is as shown in the figure below.
Assemble the worm wheel so that the center of the worm shaft is at the center of its tooth width.

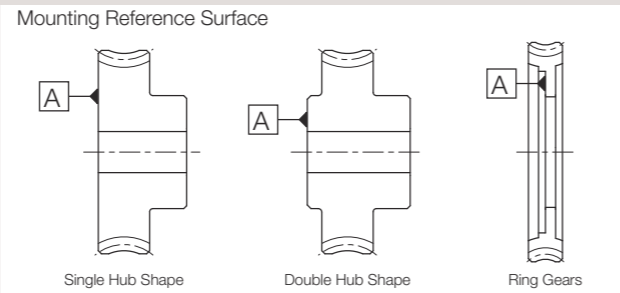

- ③ As the tooth trace of worm gears is spiraled, axial thrust force is generated. Also, the directions of thrust change with the hand of helix and the direction of rotation. This is illustrated below. The bearings must be selected properly to be able to handle these thrust forces. For details, use gear calculation software GCSW.

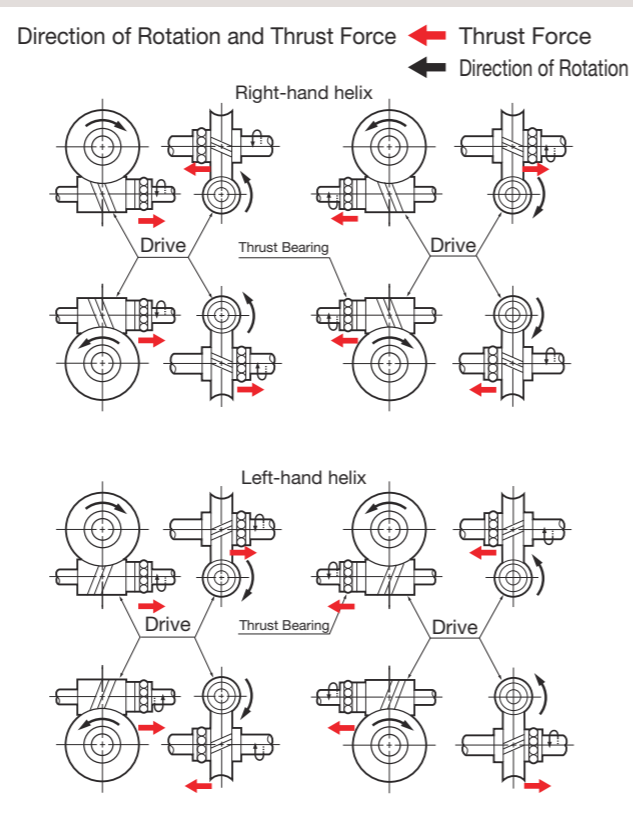


- ④ The worm may move due to a large thrust force that acts on the worm if it is not sufficiently attached to the shaft. Use a stepped shaft to secure the worm and shaft, and be careful not to loosen the bearing.


4. Confirming the installation

The wear of a worm gear is greatly affected by the quality of assembly. When assembling, confirm the following items for tooth contact and the like before use.


- The shaft angle tolerance between the worm shaft and worm wheel shaft is $90^\circ \pm 1'$.

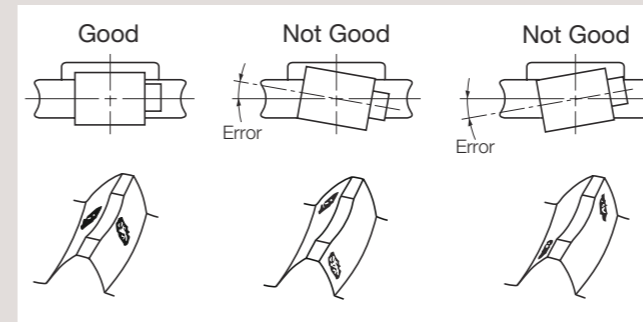


- The center distance tolerance recommended by the worm gear assembly distance is Ground Worm Gears...H7
Cut Worm Gears...H8.

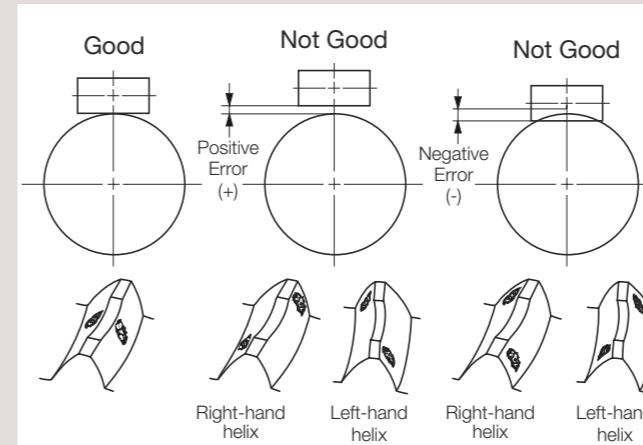

- The tolerance between the center of the worm shaft and center of the worm wheel tooth width is ± 0.2 mm.

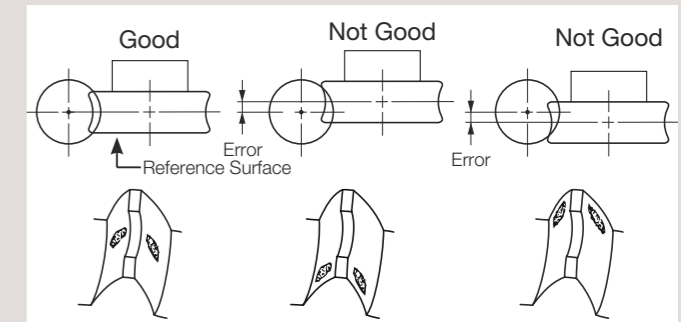

- The tolerance between the center of the worm wheel shaft and center of the worm tooth width is ± 2 mm.

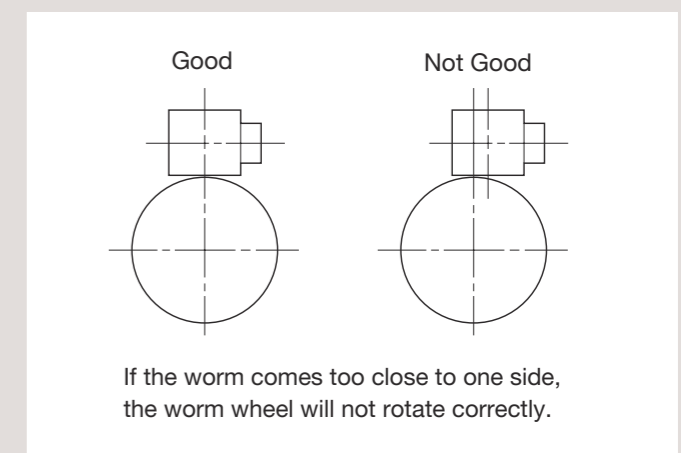

5. Cautions on Starting

- ① Check the following items before starting.
 - Are the gears installed securely?
 - Is there uneven tooth contact?
 - Is there adequate backlash?
(Be sure to avoid zero-backlash.)
 - Has proper lubrication been supplied?
- ② If gears are exposed, be sure to attach a safety cover to ensure safety. Also, be careful not to touch rotating gears.

- ③ If there is any abnormality such as noise or vibration during startup, stop the operation immediately and check the assembly condition such as tooth contact, eccentricity and looseness.

KHK considers safety a priority in the use of our products.

When handling, adding secondary operations, assembling, and operating KHK products, please be aware of the following issues in order to prevent accidents.

Warning: Precautions for preventing physical and property damage

1. When using KHK products, follow relevant safety regulations (Occupational Safety and Health Regulations, etc.).
2. Pay attention to the following items when installing, removing, or performing maintenance and inspection of the product.
 - ① Turn off the power switch.
 - ② Do not reach or crawl under the product.
 - ③ Wear appropriate clothing and protective equipment for the work.

Caution: Cautions in Preventing Accidents

1. Before using a KHK product, read the precautions in the catalog carefully in order to use it correctly.
2. Avoid use in environments that may adversely affect the product.
3. Our products are manufactured under a superior quality control system based on the ISO9000 quality management system; if you notice any malfunctions upon purchasing a product, please contact the supplier.


Description of duplex worm gears

The usual method of adjusting the backlash of a worm gear assembly is to modify the center distance. Once assembled, such adjustment requires a major rework of the gearbox housing. The use of duplex worm gears allows the backlash adjustment to be made by axially shifting the worm. This simplifies greatly the assembly and maintenance operations. Because of the unique characteristics of the product, please take time to study its construction and proper use.

Backlash adjustment mechanism and method of adjustment

The dual-lead worm is formed to give a difference between the right tooth surface and left tooth surface so that it provides a unique tooth profile in which the tooth thickness varies continuously, corresponding with the lead difference. (Fig.1)

The worm gear is also formed in its right and left tooth surface. When such a worm and worm gear are set up at a constant assembly distance and the worm is moved in the axial direction, the tooth thickness of the worm in mesh with the worm gear changes making backlash adjustment possible.

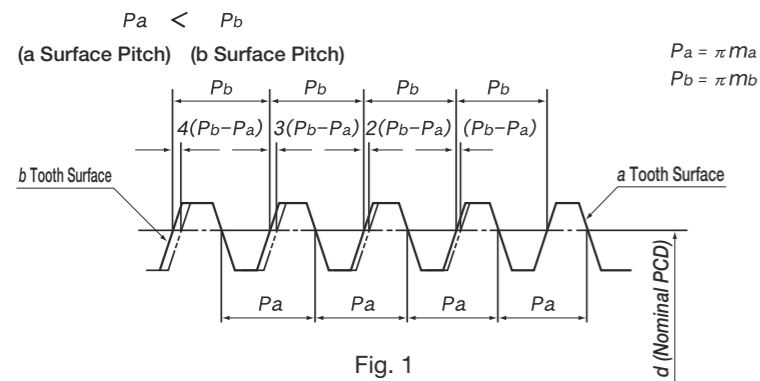


[CAUTION] The amount of change in backlash (Δj mm) in relation to the axial movement of the duplex worm shaft (V mm) can be calculated from the formula below.

$$\Delta j = 2V \frac{m_b - m_a}{m_a + m_b}$$

Where
 m_a = Nominal Axial Module - (0.01 × Nominal Axial Module)
 m_b = Nominal Axial Module + (0.01 × Nominal Axial Module)



An arrow marking on the outer circumference of the hub of the KHK duplex worm indicates the direction of assembly as well as acts as a direction for the backlash adjustment. When the worm is held with arrow mark pointing right, the tooth thickness is thinner on the right and thicker on the left. Therefore, moving the worm to the right causes the thicker teeth to come into actual engagement with the worm gear, thereby reducing the backlash. (Fig.2)

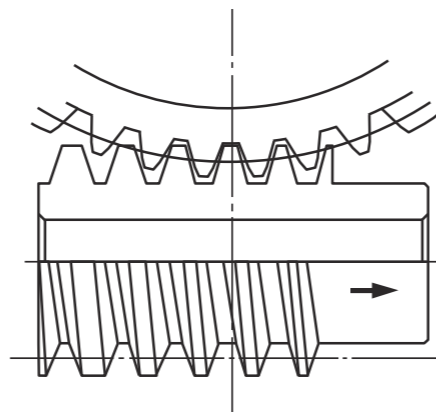

[CAUTION] The KHK duplex worm is designed so that, for all modules, the backlash reduces by 0.02 mm when the worm is shifted 1 mm.

Application Examples * The illustration is a design example, not a design for machinery or a device in actual use.


Two diagrams illustrate adjustment methods. The first, "Adjustment by using Screws", shows an adjusting screw being used to shift the worm gear housing. The second, "Adjustment by using Shims", shows an adjusting shim being placed between the worm gear housing and the worm gear to adjust the center distance.

Points of caution during assembly

KHK duplex worm gears differ in module between the right and left tooth surface and, therefore, you must orient the worm and worm wheel properly. Please carefully verify the following two aspects before proceeding with assembly.

1. Verifying the orientation of assembly

An arrow indicating the orientation of assembly is stamped on both the duplex worm and worm wheel. When assembling the worm and worm wheel, check the worm wheel of the arrow mark on the front such that the direction of arrow mark on the worm coincides with that on the worm wheel. Incorrect assembly results in difficulty of assembly and improper gear engagement. (Fig.3)

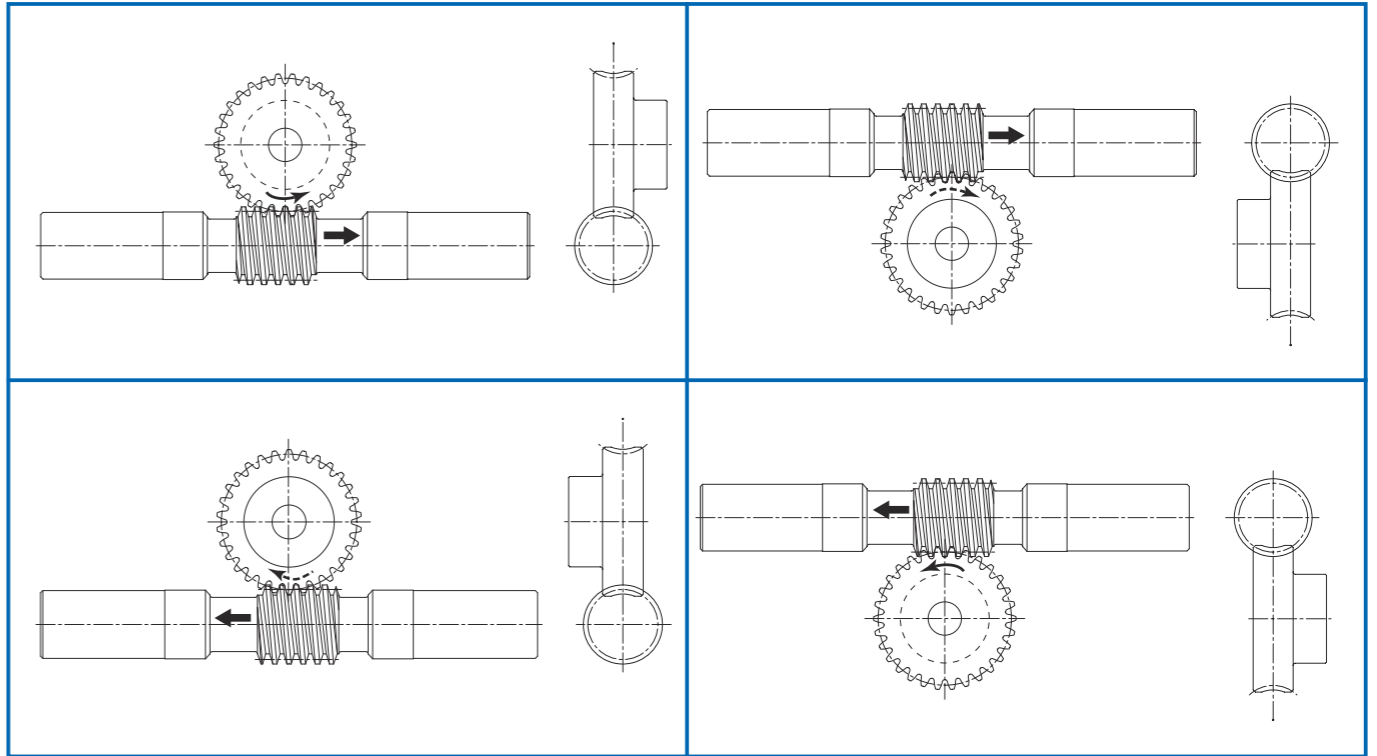

Arrow mark indicates the correct orientation of two gears when assembled. As shown, the two arrows must point in the same direction. Fig. 3

2. Verifying the reference position

A V-groove (60°, 0.3 mm deep line) on tip peripheral of the duplex worm tooth marks the reference tooth. The gear set is designated to have a backlash of nearly zero (tolerance: ±0.045) when the reference tooth is positioned in alignment with the center of rotation of the worm wheel with the center distance set at the value "a". (Fig.4)


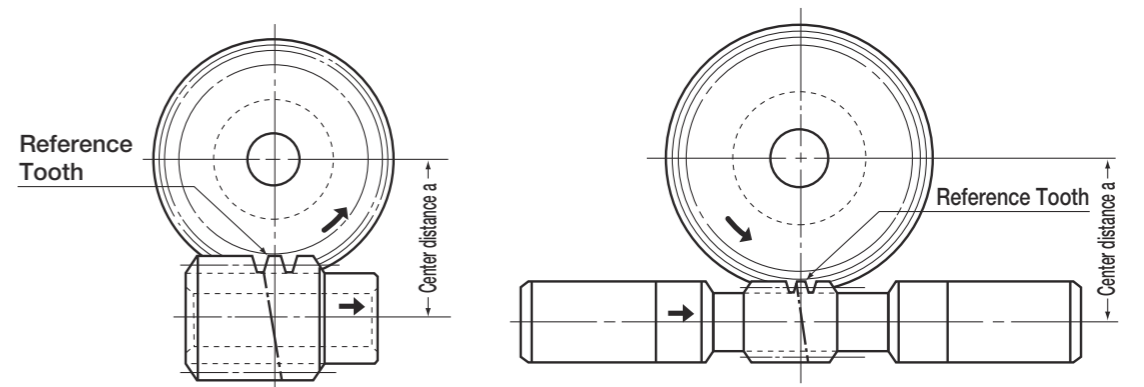



Fig. 4



Specifications	
Precision grade	KHK W 001 grade 1
Reference section of gear	Axial direction
Gear teeth	Standard full depth
Normal pressure angle	17°30'
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part

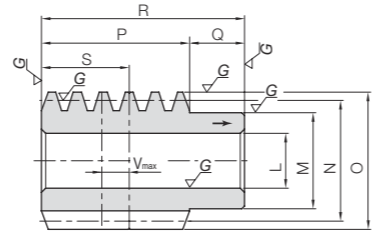

W4

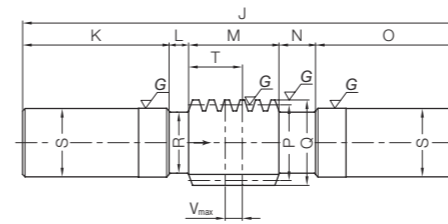

W6

Catalog Number	Nominal axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length
						L _{H7}	M	N	O	P	Q	R
KWGDL2-R1	m2	1	3°41'	R	W4	14	25	31	35	36	14	50

Position of reference tooth	Max. allowable shift	Weight (kg)	Catalog Number
S	V _{max}		
22	8	0.21	KWGDL2-R1


Catalog Number	Nominal axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Total Length	Shaft length (L)	Neck length (left)	Face width	Neck length (right)	Shaft length (R)	Pitch dia.
						J	K	L	M	N	O	P
KWGDL1.5-R1	m1.5	1	3°26'	R	W6	190	66	12	28	18	66	25
KWGDL2-R1	m2	1	3°41'	R	W6	220	75	13	36	21	75	31

Outside dia.	Neck dia.	Shaft dia.	Position of reference tooth	Max. allowable shift	Weight (kg)	Catalog Number
Q	R	S	T	V _{max}		
28	21	26.2	17	6	0.74	KWGDL1.5-R1
35	24	30.2	22	8	1.17	KWGDL2-R1

AGDL
Duplex Worm Wheels



Specifications	
Precision grade	KHK W 002 grade 1
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Normal pressure angle	17°30'
Material	CAC702 (old JIS A & BC2)
Heat Treatment	—
Tooth hardness	—



H1




Catalog Number	Reduction ratio	Nominal transverse module	No. of teeth	Lead angle	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Throat dia.	Outside dia.	Face width	Hub width
							A _{H7}	B	C	D	D'	E	F
AGDL1.5-20R1	20	m1.5	20	3°26'	R	H1	8	22	30	33	34.5	14	10
AGDL1.5-30R1	30		10				30	45	48	49.5			
AGDL1.5-36R1	36		10				35	54	57	58.5			
AGDL1.5-40R1	40		12				35	60	63	64.5			
AGDL1.5-50R1	50		12				45	75	78	79.5			
AGDL1.5-60R1	60		12				50	90	93	94.5			
AGDL2-20R1	20	m2	20	3°41'	R	H1	12	33	40	44	46	18	15
AGDL2-30R1	30		15				40	60	64	66			
AGDL2-36R1	36		15				45	72	76	78			
AGDL2-40R1	40		15				45	80	84	86			
AGDL2-50R1	50		15				50	100	104	106			
AGDL2-60R1	60		15				60	120	124	126			

NOTE 1: Allowable torque based on worm speed (rpm)


Total length	Web thickness	Web O.D.	Mounting distance	Allowable torque (N·m) <small>NOTE 1</small>								Backlash (mm)	Weight (kg)	Catalog Number
				30 _{rpm}	100 _{rpm}	300 _{rpm}	600 _{rpm}	900 _{rpm}	1200 _{rpm}	1800 _{rpm}				
24	—	—	J	27.5	9.84	8.18	6.40	5.30	4.68	4.25	3.68	0±0.045	0.10	AGDL1.5-20R1
				35	20.8	17.5	13.9	11.7	10.4	9.40	8.28			
				39.5	29.3	24.6	19.8	16.8	14.9	13.5	11.9			
				42.5	35.6	30.0	24.2	20.6	18.3	16.6	14.6			
				50	53.8	45.4	36.9	31.6	28.3	25.8	22.6			
				57.5	75.3	63.8	51.9	44.7	40.4	36.7	32.4			
33	—	—	J	35.5	21.0	17.5	13.6	11.2	9.84	8.94	7.75	0±0.045	0.26	AGDL2-20R1
				45.5	44.3	37.3	29.6	24.8	21.9	19.8	17.4			
				51.5	62.3	52.6	42.0	35.5	31.3	28.4	25.0			
				55.5	75.8	64.0	51.4	43.6	38.5	34.9	30.7			
				65.5	115	96.8	78.4	66.9	59.5	54.2	47.6			
				75.5	160	136	110	94.6	84.9	77.2	68.1			



Specifications	
Precision grade	KHK W 001 grade 1
Reference section of gear	Axial direction
Gear teeth	Standard full depth
Normal pressure angle	17°30'
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part

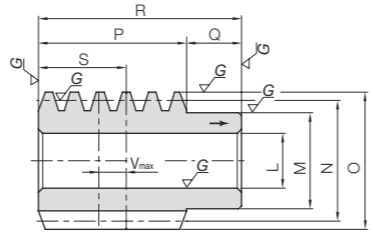

W4

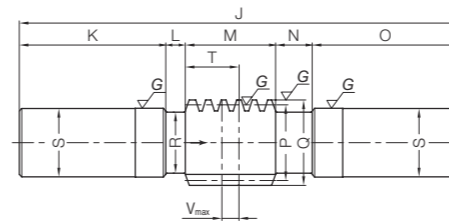

W6

Catalog Number	Nominal axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width		Total length
						L _{H7}	M				N	O	
KWGDL2.5-R1	m2.5	1	3°52'	R	W4	18	30	37	42	48	17	65	
KWGDL3-R1	m3	1	3°54'	R	W4	20	35	44	50	54	20	74	

Position of reference tooth	Max. allowable shift	Weight (kg)	Catalog Number
S	Vmax	0.37	KWGDL2.5-R1
29	10	0.61	KWGDL3-R1
32	10		


Catalog Number	Nominal axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Total Length		Neck length (left)	Face width	Neck length (right)	Shaft length (R)		Pitch dia.
						J	K				L	M	
KWGDL2.5-R1	m2.5	1	3°52'	R	W6	260	85	16	48	26	85	37	
KWGDL3-R1	m3	1	3°54'	R	W6	300	100	18	54	28	100	44	

Outside dia.	Neck dia.	Shaft dia.	Position of reference tooth	Max. allowable shift	Weight (kg)	Catalog Number
Q	R	S	T	Vmax	2.00	KWGDL2.5-R1
42	30	36.2	29	10	2.95	KWGDL3-R1
50	34	40.2	32	10		


AGDL
Duplex Worm Wheels



Specifications	
Precision grade	KHK W 002 grade 1
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Normal pressure angle	17°30'
Material	CAC702 (old JIS A & BC2)
Heat Treatment	—
Tooth hardness	—



H1



HB

* CS has a forged finish surface.

NOTE 1: Allowable torque based on worm speed (rpm)


Catalog Number	Reduction ratio	Nominal transverse module	No. of teeth	Lead angle	Direction of helix	Shape	Bore		Hub dia.	Pitch dia.	Throat dia.	Outside dia.	Face width	Hub width		
							A _{H7}	B							C	D
AGDL2.5-20R1	20	m2.5	20	3°52'	R	H1	15	40	50	55	57.5	22	15			
AGDL2.5-30R1	30		H1			40								75	80	82.5
AGDL2.5-36R1	36		H1			45								90	95	97.5
AGDL2.5-40R1	40		HB			45								100	105	107.5
AGDL2.5-50R1	50		HB			60								125	130	132.5
AGDL2.5-60R1	60		HB			80								150	155	157.5
AGDL3-20R1	20	m3	20	3°54'	R	H1	20	50	60	66	69	28	17			
AGDL3-30R1	30		H1			55								90	96	99
AGDL3-36R1	36		H1			60								108	114	117
AGDL3-40R1	40		HB			60								120	126	129
AGDL3-50R1	50		HB			70								150	156	159
AGDL3-60R1	60		HB			80								180	186	189

Total length	Web thickness	Web O.D.	Mounting distance	Allowable torque (N·m) <small>NOTE 1</small>								Backlash (mm)	Weight (kg)	Catalog Number		
				30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm						
G	(H)	(I)	J	30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm	0±0.045	0.45	AGDL2.5-20R1			
				38.1	31.4	24.5	20.1	17.6	16.0	13.8						
				56	67.1	53.1	44.5	39.1	35.5	30.9						
				63.5	94.5	75.5	63.8	56.0	51.0	44.3						
				(10)	(86)	68.5	138	115	92.4	78.3				68.8	62.7	54.4
				(12)	(108)	81	208	174	141	120				106	97.3	84.3
(12)	(133)	93.5	291	245	198	170	152	139	121	2.90	AGDL2.5-60R1					
45	(14)	(106)	82	30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm	0±0.045	0.81	AGDL3-20R1			
				65.0	53.3	41.5	33.8	29.5	26.9	22.8						
				67	114	90.0	74.7	65.5	59.5	51.2						
				76	160	128	107	93.8	85.6	73.4						
				(14)	(134)	97	355	295	239	202				178	163	140
				(14)	(164)	112	497	415	336	285				254	233	200






Specifications	
Precision grade	KHK W 001 grade 1
Reference section of gear	Axial direction
Gear teeth	Standard full depth
Normal pressure angle	17°30'
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part

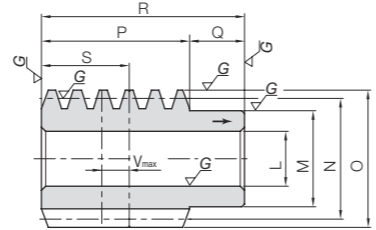

W4

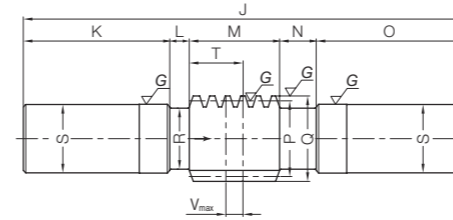

W6

Catalog Number	Nominal axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width		Total length
						L _{H7}	M				N	O	
KWGD3.5-R1	m3.5	1	3°47'	R	W4	24	44	53	60	62	23	85	
KWGD4-R1	m4	1	3°41'	R	W4	28	50	62	70	74	26	100	

Position of reference tooth	Max. allowable shift	Weight (kg)	Catalog Number
S	V _{max}		
37	12	1.05	KWGD3.5-R1
44	14	1.67	KWGD4-R1

Catalog Number	Nominal axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Total Length		Neck length (left)	Face width	Neck length (right)	Shaft length (R)		Pitch dia.
						J	K				L	M	
KWGDLS3.5-R1	m3.5	1	3°47'	R	W6	330	110	18	62	30	110	53	
KWGDLS4-R1	m4	1	3°41'	R	W6	360	120	16	74	30	120	62	


Outside dia.	Neck dia.	Shaft dia.	Position of reference tooth	Max. allowable shift	Weight (kg)	Catalog Number
Q	R	S	T	V _{max}		
60	42	48.2	37	12	4.72	KWGDLS3.5-R1
70	50	56.2	44	14	7.10	KWGDLS4-R1

AGDL
Duplex Worm Wheels




Specifications	
Precision grade	KHK W 002 grade 1
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Normal pressure angle	17°30'
Material	CAC702 (old JIS A & BC2) *
Heat treatment	—
Tooth hardness	—

*The hub material of H5 is S45C.

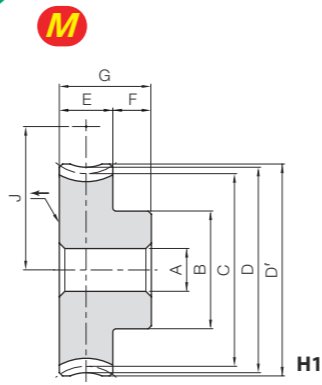

H1

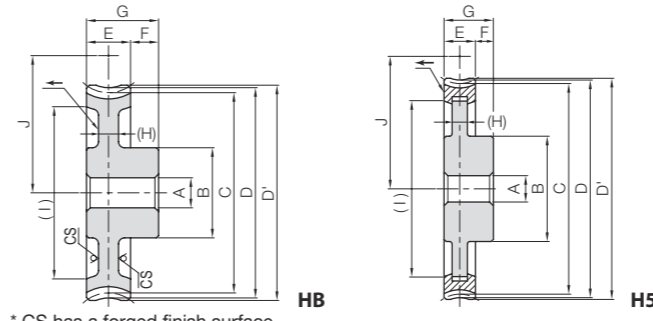

HB

H5

* CS has a forged finish surface.

NOTE 1: Allowable torque based on worm speed (rpm)

Catalog Number	Reduction ratio	Nominal transverse module	No. of teeth	Lead angle	Direction of helix	Shape	Bore		Hub dia.	Pitch dia.	Throat dia.	Outside dia.	Face width	Hub width
							A _{H7}	B						
AGDL3.5-20R1	20		20			H1		55	70	77	80.5			
AGDL3.5-30R1	30	m3.5	30	3°47'	R	H1	20	60	105	112	115.5	32	18	
AGDL3.5-36R1	36		36			H1		70	126	133	136.5			
AGDL3.5-40R1 (Made to Order)	40	m3.5	40	3°47'	R	HB	20	70	140	147	150.5	32	18	
AGDL3.5-50R1	50	m3.5	50	3°47'	R	HB	20	80	175	182	185.5	32	18	
AGDL3.5-60R1	60		60			HB		90	210	217	220.5			
AGDL4-20R1	20	m4	20	3°41'	R	H1	20	60	80	88	92	35	20	
AGDL4-30R1 (Made to Order)	30	m4	30	3°41'	R	HB	20	65	120	128	132	35	20	
AGDL4-36R1 (Made to Order)	36		36			HB		75	144	152	156			
AGDL4-40R1	40		40			HB	20	75	160	168	172			
AGDL4-50R1	50	m4	50	3°41'	R	HB	20	90	200	208	212	35	20	
AGDL4-60R1	60		60			H5	30	120	240	248	252			


[Precautions for Made to Order Products] Prices and lead times for Made to Order products require separate estimates. Contact your dealer.

Total length	Web thickness	Web O.D.	Mounting distance	Allowable torque (N·m) <small>NOTE 1</small>								Backlash (mm)	Weight (kg)	Catalog Number
				30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm				
G	(H)	(I)	J	30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm				
50	—	—	61.5	98.5	80.4	62.5	50.4	44.2	40.0	33.7	0±0.045	1.24	AGDL3.5-20R1	
	—	—	79	208	172	136	111	98.1	88.3	75.7		2.51	AGDL3.5-30R1	
	—	—	89.5	293	242	193	160	141	127	109		3.61	AGDL3.5-36R1	
50	(15)	(124)	96.5	356	295	236	196	173	156	133	0±0.045	3.34	AGDL3.5-40R1 (Made to Order)	
50	(16)	(155)	114	538	446	360	301	267	243	207	0±0.045	5.02	AGDL3.5-50R1	
	(16)	(189)	131.5	753	627	506	425	381	345	296		6.87	AGDL3.5-60R1	
55	—	—	71	134	109	84.8	67.9	59.7	53.4	44.8	0±0.045	1.76	AGDL4-20R1	
	(17)	(99)	91	284	234	184	150	132	118	101	0±0.045	3.01	AGDL4-30R1 (Made to Order)	
	(17)	(121)	103	400	329	262	215	190	170	144		4.18	AGDL4-36R1 (Made to Order)	
55	(17)	(137)	111	486	400	320	264	233	208	177	0±0.045	4.78	AGDL4-40R1	
	(17)	(177)	131	735	605	488	405	361	324	275		7.07	AGDL4-50R1	
	(17)	(200)	151	1030	851	687	572	515	461	393		11.5	AGDL4-60R1	





Specifications	
Precision grade	KHK W 001 grade 2
Reference section of gear	Axial direction
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC

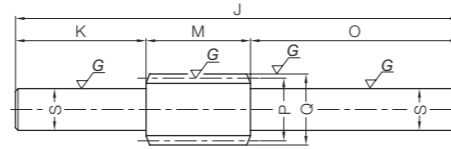


W5

Catalog Number	Axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Total Length	Shaft length (L)	Neck length (left)	Face width	Neck length (right)	Shaft length (R)	Pitch dia.
						J	K	L	M	N	O	P
KWG0.5-R1 KWG0.5-R2	m0.5	1 2	3°11' 6°20'	R	W5	65	19	—	12	—	34	9
KWG0.8-R1 KWG0.8-R2	m0.8	1 2	3°49' 7°36'	R	W5	85	25	—	20	—	40	12


Outside dia.	Neck dia.	Shaft dia.	Weight (kg)	Catalog Number
Q	R	Sh7		
10	—	6	0.018	KWG0.5-R1 KWG0.5-R2
13.6	—	8	0.043	KWG0.8-R1 KWG0.8-R2



Specifications	
Precision grade	KHK W 002 grade 2
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC702 (old JIS A & BC2)
Heat Treatment	—
Tooth hardness	—



HA

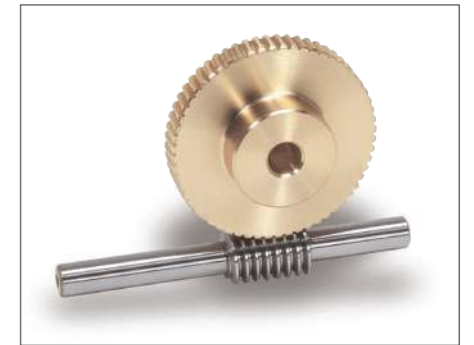


Catalog Number	Reduction ratio	Transverse module	No. of teeth	No. of starts of mating worm	Lead angle	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Throat dia.	Outside dia.	Face width	Hub width					
								AH7	B	C	D	D'	E	F					
AG0.5-20R1 AG0.5-20R2 AG0.5-30R1 AG0.5-30R2 AG0.5-40R1	20 10 30 15 40	m0.5	20 20 30 30 40	1 2 1 2 1	3°11' 6°20' 3°11' 6°20' 3°11'	R	HA	4 4 4 4 5	9 9 12 12 15	10 10 15 15 20	—	11 11 16 16 21	5	7					
AG0.5-50R1 AG0.5-60R1	50 60		50 60	1 1	3°11' 3°11'			5 5	20 25	25 30	26 31								
AG0.8-20R1 AG0.8-20R2 AG0.8-30R1 AG0.8-30R2 AG0.8-40R1	20 10 30 15 40		m0.8	20 20 30 30 40	1 2 1 2 1			3°49' 7°36' 3°49' 7°36' 3°49'	R	HA	5 5 5 5 6	12 12 18 18 20			16 16 24 24 32	—	17.6 17.6 25.6 25.6 33.6	8	8
AG0.8-50R1 AG0.8-60R1	50 60			50 60	1 1			3°49' 3°49'			8 8	25 25			40 48	41.6 49.6			

NOTE 1: Allowable torque based on worm speed (rpm)

Total length	Web thickness	Web O.D.	Mounting distance	Allowable torque (N·m) <small>NOTE 1</small>								Backlash (mm)	Weight (kg)	Catalog Number
				30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm				
12	—	—	J	9.5	0.52	0.44	0.36	0.30	0.26	0.24	0.21	0.02~0.12	0.0056	AG0.5-20R1 AG0.5-20R2 AG0.5-30R1 AG0.5-30R2 AG0.5-40R1
				9.5	0.51	0.42	0.33	0.27	0.24	0.22	0.19			
				12	1.09	0.94	0.77	0.65	0.58	0.53	0.48			
				12	1.09	0.92	0.73	0.60	0.54	0.49	0.43			
				14.5	1.86	1.60	1.34	1.15	1.02	0.94	0.84			
16	—	—	J	17	2.82	2.42	2.05	1.77	1.58	1.46	1.30	0.02~0.12	0.035	AG0.5-50R1 AG0.5-60R1
				19.5	3.94	3.41	2.89	2.50	2.26	2.08	1.87			
				14	1.78	1.50	1.21	1.00	0.88	0.82	0.71			
				14	1.76	1.44	1.11	0.91	0.80	0.74	0.63			
				18	3.77	3.21	2.62	2.20	1.96	1.81	1.61			
16	—	—	J	18	3.75	3.14	2.46	2.02	1.80	1.65	1.45	0.02~0.12	0.043	AG0.8-20R1 AG0.8-20R2 AG0.8-30R1 AG0.8-30R2 AG0.8-40R1
				22	6.45	5.49	4.55	3.87	3.46	3.19	2.83			
				26	9.75	8.31	6.94	5.94	5.34	4.96	4.38			
				30	13.6	11.7	9.77	8.39	7.63	7.05	6.27			
				30	13.6	11.7	9.77	8.39	7.63	7.05	6.27			



Specifications	
Precision grade	KHK W 001 grade 2
Reference section of gear	Axial direction
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part

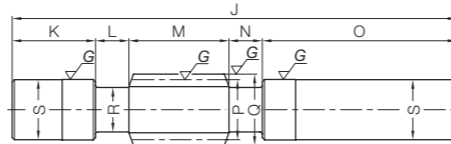

W6

Catalog Number	Axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Total Length		Shaft length (L)	Neck length (left)	Face width	Neck length (right)	Shaft length (R)	Pitch dia.
						J	K	L	M	N	O	P	
KWG1-R1 KWG1-R2	m1	1 2	3°35' 7°08'	R	W6	140	35	10	30	10	55	16	
KWG1.5-R1 KWG1.5-R2	m1.5	1 2	3°26' 6°51'	R	W6	190	50	15	40	15	70	25	

Outside dia.	Neck dia.	Shaft dia.	Weight (kg)	Catalog Number
Q	R	S		
18	13	18.2	0.25	KWG1-R1 KWG1-R2
28	21	26.2	0.74	KWG1.5-R1 KWG1.5-R2


AG Module 1, 1.5
Worm Wheels



Specifications	
Precision grade	KHK W 002 grade 2
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC702 (old JIS A & BC2)
Heat Treatment	—
Tooth hardness	—

* The precision grade of J Series products is equivalent to the value shown in the table.

A _{H7}	Bore
B	Hub dia.
C	Pitch dia.
D	Throat dia.
D'	Outside dia.
E	Face width
F	Hub width
G	Total length
J	Mounting distance

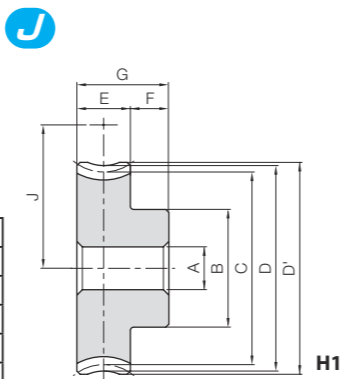


H1

NOTE 1: Allowable torque based on worm speed (rpm)

Catalog Number	Reduction ratio	No. of teeth	No. of starts of mating worm	Lead angle helix direction	Shape	A _{H7}	B	C	D	D'	E	F	G	J	Allowable torque (N·m) NOTE 1								Backlash (mm)	Weight (kg)				
															30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm							
AG1-20R1	20	20	1	3°35'	R	H1	6	16	20	22	23			18	3.35	2.79	2.23	1.83	1.63	1.50	1.30	0.04~0.14	0.038					
AG1-20R2	10	20	2	7°08'			6	16	20	22	23				18	3.31	2.69	2.06	1.68	1.48	1.35			1.15				
AG1-30R1	30	30	1	3°35'			6	20	30	32	33				23	7.08	5.98	4.84	4.05	3.63	3.31			2.92				
AG1-30R2	15	30	2	7°08'			6	20	30	32	33	10	10	20	23	7.03	5.84	4.56	3.72	3.33	3.03			2.63				
AG1-40R1	40	40	1	3°35'			8	26	40	42	43				28	12.1	10.2	8.43	7.12	6.38	5.86			5.13				
AG1-50R1	50	50	1	3°35'			8	30	50	52	53				33	18.3	15.5	12.9	10.9	9.87	9.09			7.95				
AG1-60R1	60	60	1	3°35'			10	35	60	62	63				38	25.6	21.8	18.1	15.4	14.1	12.9			11.4				
AG1.5-20R1	20	20	1	3°26'			R	H1	8	22	30	33	34.5			27.5	9.84	8.18	6.40	5.30	4.68			4.25	3.68	0.04~0.14	0.10	
AG1.5-20R2	10	20	2	6°51'					8	22	30	33	34.5				27.5	9.72	7.87	5.92	4.87			4.25	3.83			3.27
AG1.5-30R1	30	30	1	3°26'					10	30	45	48	49.5				35	20.8	17.5	13.9	11.7			10.4	9.40			8.28
AG1.5-30R2	15	30	2	6°51'	10	30			45	48	49.5	14	10	24	35	20.7	17.1	13.1	10.8	9.56	8.58	7.46						
AG1.5-40R1	40	40	1	3°26'	12	35			60	63	64.5				42.5	35.6	30.0	24.2	20.6	18.3	16.6	14.6						
AG1.5-50R1	50	50	1	3°26'	12	45			75	78	79.5				50	53.8	45.4	36.9	31.6	28.3	25.8	22.6						
AG1.5-60R1	60	60	1	3°26'	12	50			90	93	94.5				57.5	75.3	63.8	51.9	44.7	40.4	36.7	32.4						

Worm Wheels

J Series

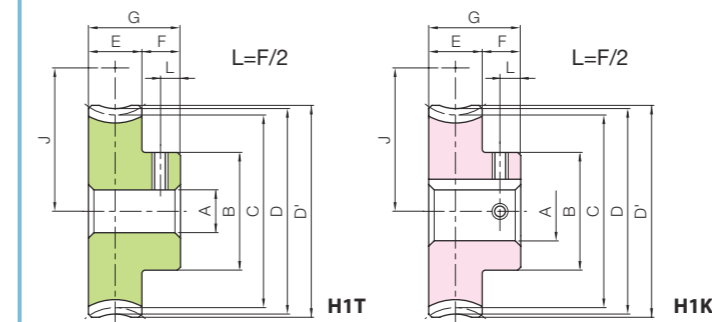


To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore H7	* The product shapes of J Series items are identified by background color.														
	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30
Keyway JS9	—		4x1.8			5x2.3			6x2.8			8x3.3			
Screw size	—		4x1.8			5x2.3			6x2.8			8x3.3			
Catalog Number	M4	M5	M4			M5			M6						
AG1-20R1 J BORE	H1T														
AG1-20R2 J BORE	H1T														
AG1-30R1 J BORE	H1T	H1T													
AG1-30R2 J BORE	H1T	H1T													
AG1-40R1 J BORE		H1T	H1K	H1K											
AG1-50R1 J BORE		H1T	H1K	H1K	H1K	H1K	H1K	H1K							
AG1-60R1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K					
AG1.5-20R1 J BORE		H1T	H1K												
AG1.5-20R2 J BORE		H1T	H1K												
AG1.5-30R1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K							
AG1.5-30R2 J BORE			H1K	H1K	H1K	H1K	H1K	H1K							
AG1.5-40R1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K					
AG1.5-50R1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	
AG1.5-60R1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K



Specifications	
Precision grade	KHK W 001 grade 2
Reference section of gear	Axial direction
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part

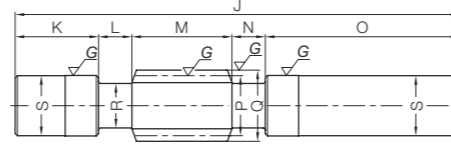

W6

* For products not categorized in our KHK Stock Gear series, custom gear production services with short lead times are available. Please see Page 26 for more details about custom-made orders.


Catalog Number	Axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Total Length		Neck length (left)	Face width	Neck length (right)	Shaft length (R)	Pitch dia.
						J	K					
KWG2-R1	m2	1	5°12'	R	W6	200	35	25	40	25	75	22
KWG2-R2		2	10°18'									
KWG2.5-R1	m2.5	1	4°46'	R	W6	250	50	27	46	27	100	30
KWG2.5-R2		2	9°28'									

Outside dia.	Neck dia.	Shaft dia.	Weight (kg)	Catalog Number
Q	R	S		
26	17	25.2	0.64	KWG2-R1 KWG2-R2
35	23	30.2	1.27	KWG2.5-R1 KWG2.5-R2


AGF Module 2, 2.5
Worm Wheels



Specifications	
Precision grade	KHK W 002 grade 2
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC702 (old JIS A & BC2) *
Heat treatment	—
Tooth hardness	—



H6

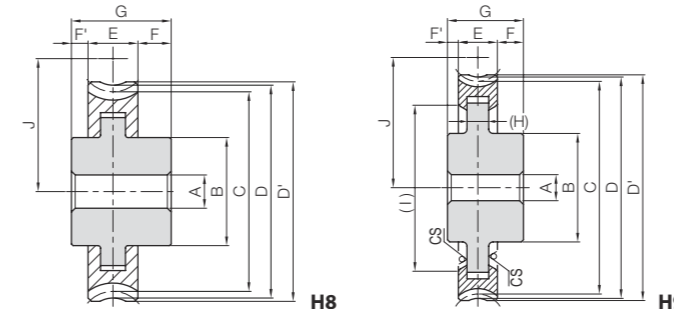

H8

H9

* CS has a forged finish surface.




* The hub material of H8 and H9 is FC200. FC200's tensile strength (200N/mm²) is derived from test specimens and does not represent that of the boss.

Catalog Number	Reduction ratio	Transverse module	No. of teeth	No. of starts of mating worm	Profile shift coefficient	Lead angle	Direction of helix	Shape	Bore		Pitch dia.		Throat dia.		Outside dia.		Face width	Hub width (right)	Hub width (left)	
									A _{H7}	B	C	D	D'	E	F	F'				
AGF2-20R1	20	m2	20	1	-0.5	5°12'	R	H6	12	32	40	42	44	18	12	5	—	—	—	—
AGF2-20R2	10		20	2		10°18'														
AGF2-25R1	25		25	1		5°12'														
AGF2-30R1	30		30	1	5°12'															
AGF2-30R2	15		30	2	10°18'															
AGF2-36R1	36		36	1	0	5°12'														
AGF2-40R1	40	40	1	-0.5	5°12'	H8	45	80	82	84										
AGF2-50R1	50	50	1	-0.5	5°12'	H9	50	100	102	104										
AGF2-60R1	60	60	1	-0.5	5°12'	H9	50	120	122	124										
AGF2.5-20R1	20	m2.5	20	1	0	4°46'	R	H6	12	35	50	55	57.5	20	15	5	—	—	—	—
AGF2.5-20R2	10		20	2		9°28'														
AGF2.5-25R1	25		25	1		4°46'														
AGF2.5-30R1	30		30	1		4°46'														
AGF2.5-30R2	15		30	2		9°28'														
AGF2.5-40R1	40		40	1		4°46'														
AGF2.5-50R1	50	50	1	4°46'	H9	55	125	130	132.5											
AGF2.5-60R1	60	60	1	4°46'	H9	60	150	155	157.5											

Total length	Web thickness	Web O.D.	Mounting distance	Allowable torque (N·m) NOTE 1							Backlash (mm)	Weight (kg)	Catalog Number	
				30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm				
35	—	—	30	19.4	16.1	12.8	10.5	9.30	8.49	7.31	0.06~0.16	0.25	AGF2-20R1	
				30	19.9	16.1	12.2	9.99	8.75	7.92				6.74
				35	29.4	24.5	19.6	16.3	14.4	13.2				11.4
				40	41.1	34.5	27.7	23.2	20.7	18.8				16.4
				40	42.3	35.0	27.0	22.1	19.9	17.7				15.4
				47	57.8	48.6	39.3	33.2	29.6	27.0				23.6
40	—	—	40	35.1	29.0	22.6	18.6	16.3	14.8	12.8	0.06~0.16	0.44	AGF2.5-20R1	
				40	34.6	27.9	20.9	17.1	14.8	13.4				11.3
				46.25	53.0	43.9	34.8	28.9	25.3	23.0				20.0
				52.5	74.1	62.0	49.1	41.2	36.7	32.8				28.7
				52.5	73.6	60.6	46.2	37.8	33.2	29.9				25.8
				65	127	106	85.4	72.4	63.7	57.9				50.5
				(13)	192	161	130	111	98.4	90.0				78.3
				(13)	268	226	183	157	141	128				112
				(13)	268	226	183	157	141	128				112
				(13)	268	226	183	157	141	128				112
				(13)	268	226	183	157	141	128				112
				(13)	268	226	183	157	141	128				112



Specifications	
Precision grade	KHK W 001 grade 2
Reference section of gear	Axial direction
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part



W6

* For products not categorized in our KHK Stock Gear series, custom gear production services with short lead times are available. Please see Page 26 for more details about custom-made orders.


Catalog Number	Axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Total Length	Shaft length (L)	Neck length (left)	Face width	Neck length (right)	Shaft length (R)	Pitch dia.
						J	K	L	M	N	O	P
KWG3-R1	m3	1	4°31'	R	W6	300	55	30	60	30	125	38
KWG3-R2		2	8°58'									
KWG4-R1	m4	1	5°43'	R	W6	360	70	32.5	75	32.5	150	40
KWG4-R2		2	11°19'									

Outside dia.	Neck dia.	Shaft dia.	Weight (kg)	Catalog Number
Q	R	S		
44	30	40.2	2.66	KWG3-R1 KWG3-R2
48	29	45.2	3.85	KWG4-R1 KWG4-R2

AGF Module 3, 4
Worm Wheels



Specifications	
Precision grade	KHK W 002 grade 2
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC702 (old JIS A & BC2) *
Heat treatment	—
Tooth hardness	—




H6

* The hub material of H8 and H9 is FC200. FC200's tensile strength (200N/mm²) is derived from test specimens and does not represent that of the boss.

Catalog Number	Reduction ratio	Transverse module	No. of teeth	No. of starts of mating worm	Profile shift coefficient	Lead angle	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Throat dia.	Outside dia.	Face width	Hub width (right)	Hub width (left)
									A _{H7}	B	C	D	D'	E	F	F'
AGF3-20R1	20	m3	20	1	+0.333	4°31'	R	H6	20	50	60	68	71	25	17.5	7.5
AGF3-20R2	10		20	2	+0.333	8°58'				50	60	68	71			
AGF3-25R1	25		25	1	0	4°31'				55	75	81	84			
AGF3-30R1	30		30	1	+0.333	4°31'				55	90	98	101			
AGF3-30R2	15		30	2	+0.333	8°58'				55	90	98	101			
AGF3-40R1	40		40	1	+0.333	4°31'				65	120	128	131			
AGF3-50R1	50	50	1	+0.333	4°31'	75	150	158	161							
AGF3-60R1	60	60	1	+0.333	4°31'	80	180	188	191							
AGF4-20R1	20	m4	20	1	0	5°43'	R	H6	20	60	80	88	92	30	20	10
AGF4-20R2	10		20	2		11°19'				60	80	88	92			
AGF4-25R1	25		25	1		5°43'				65	100	108	112			
AGF4-30R1	30		30	1		5°43'				65	120	128	132			
AGF4-30R2	15		30	2		11°19'				65	120	128	132			
AGF4-40R1	40		40	1		5°43'				80	160	168	172			
AGF4-50R1	50	50	1	5°43'	90	200	208	212								
AGF4-60R1	60	60	1	5°43'	160	—	240	248	252							

Worm Wheels

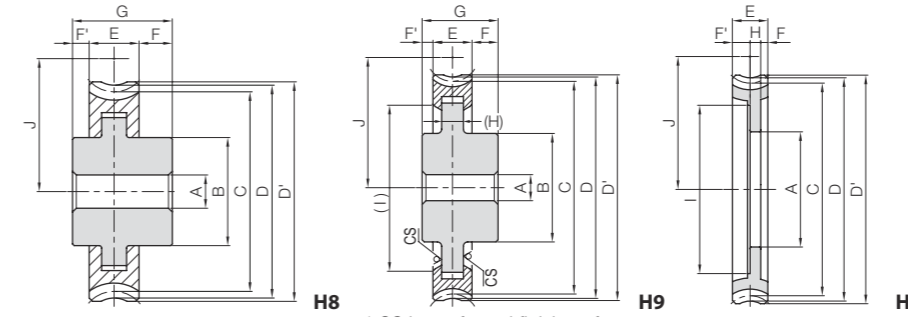

* CS has a forged finish surface.


NOTE 1: Allowable torque based on worm speed (rpm)



Total length	Web thickness	Web O.D.	Mounting distance	Allowable torque (N·m) NOTE 1								Backlash (mm)	Weight (kg)	Catalog Number
				30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm				
50	—	—	J	50	59.7	49.1	38.3	31.5	27.5	25.1	21.5	0.06~0.16	0.88	AGF3-20R1
				50	60.2	48.2	36.1	29.5	25.4	23.0	19.4			
				56.5	90.2	74.3	58.8	48.9	42.6	39.0	33.5			
				65	126	105	83.1	69.6	61.0	55.4	48.2			
				65	128	105	79.8	65.2	57.2	51.6	44.3			
				80	216	180	145	122	108	98.0	84.9			
60	—	—	J	60	123	101	78.8	64.6	56.3	51.5	43.8	0.06~0.16	1.77	AGF4-20R1
				60	127	101	76.0	61.9	53.2	48.3	40.5			
				70	186	153	121	100	87.3	79.9	68.5			
				80	260	216	171	143	125	114	98.4			
				80	270	220	168	137	120	108	92.2			
				100	445	370	297	251	220	201	173			
60	(20)	(128)	J	60	673	560	454	385	340	312	269	0.06~0.16	7.35	AGF4-50R1
				120	941	788	638	544	486	444	385			
				140	941	788	638	544	486	444	385			



Specifications	
Precision grade	KHK W 001 grade 2
Reference section of gear	Axial direction
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	SCM440
Heat treatment	Thermal refined, gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part




W6


* For products not categorized in our KHK Stock Gear series, custom gear production services with short lead times are available. Please see Page 26 for more details about custom-made orders.

Catalog Number	Axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Total Length		Neck length (L)	Face width	Neck length (right)	Shaft length (R)	Pitch dia.
						J	K					
KWG5-R1	m5	1	5°43'	R	W6	400	75	30	90	30	175	50
KWG6-R1	m6	1	5°43'	R	W6	400	60	40	100	40	160	60

Outside dia.	Neck dia.	Shaft dia.	Weight (kg)	Catalog Number
Q	R	S		
60	36	50.2	5.75	KWG5-R1
72	44	60.2	8.09	KWG6-R1




Specifications	
Precision grade	KHK W 002 grade 2
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC702 (old JIS A & BC2)
Heat treatment	—
Tooth hardness	—



H6

* The hub material of H8 and H9 is FC200. FC200's tensile strength (200N/mm²) is derived from test specimens and does not represent that of the boss.

Catalog Number	Reduction ratio	Transverse module	No. of teeth	No. of starts of mating worm	Profile shift coefficient	Lead angle	Direction of helix	Shape	Bore		Pitch dia.	Throat dia.	Outside dia.	Face width	Hub width (right)	Hub width (left)
									AH7	B						
AGF5-20R1	20	m5	20	1	0	5°43'	R	H6	75	100	110	115	35	23	12	
AGF5-30R1	30		H8					75	150	160	165					
AGF5-40R1	40		H9					110	200	210	215					
AGF5-50R1	50		—					250	260	265						
AGF5-60R1	60		H0					200	300	310	315					
AGF6-20R1	20	m6	20	1	0	5°43'	R	H6	85	120	132	138	40	23	12	
AGF6-30R1	30		H8					100	180	192	198					
AGF6-40R1	40		—					240	252	258						
AGF6-50R1	50		H0					190	300	312	318					
AGF6-60R1	60		—					250	360	372	378					

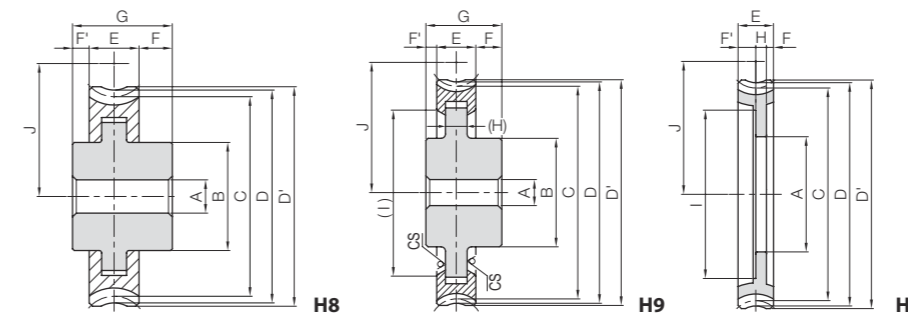


* CS has a forged finish surface. NOTE 1: Allowable torque based on worm speed (rpm)



Total length	Web thickness	Web O.D.	Mounting distance	Allowable torque (N·m) NOTE 1								Backlash (mm)	Weight (kg)	Catalog Number
				30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm				
70	—	—	75	211	172	134	108	95.0	86.2	72.7	0.07~0.19	3.26	AGF5-20R1	
				446	369	291	239	211	191	164				
35	10	(26)	125	763	632	506	421	371	337	288	5.28	6.48	AGF5-30R1	
				956	772	646	574	523	446					
75	—	—	90	329	268	208	167	146	131	110	0.07~0.19	4.95	AGF6-20R1	
				696	572	451	368	325	290	248				
40	12	190	150	1190	981	784	648	572	513	436	6.20	8.00	AGF6-30R1	
				1800	1480	1200	994	885	796	676				
—	—	310	210	2520	2090	1680	1410	1260	1130	969	10.0	—	AGF6-40R1	
				—	—	—	—	—	—	—				




Specifications	
Precision grade	KHK W 001 grade 2*
Reference section of gear	Axial direction
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part



W2


* The precision grade of J Series products is equivalent to the value shown in the table.

Catalog Number	Axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width (right)	Hub width (left)
						L _{H7}	M	N	O	P	Q	Q'
● J Series (Available-on-request) SWG1-R1 SWG1-R2	m1	1 2	3°35' 7°08'	R	W2	8	—	16	18	(20)	—	—
● J Series (Available-on-request) SWG1.5-R1 ● SWG1.5-R1J10 SWG1.5-R2 ● SWG1.5-R2J10	m1.5	1 2	3°26' 6°51'	R	W1 W1K W1 W1K	10	20	25	28	30	10	—



W1

J Series



W1K



Total length	Keyway	Socket head screw	Weight	Catalog Number	
R	Width × Depth	Size	(kg)	● J Series (Available-on-request)	
32	—	M4	5	0.037	SWG1-R1 SWG1-R2
40	4 x 1.8	—	—	0.12	● SWG1.5-R1
		—	—	0.11	● SWG1.5-R1J10
	4 x 1.8	—	—	0.12	● SWG1.5-R2
		—	—	0.11	● SWG1.5-R2J10




Worm Wheels

AG Module 1, 1.5
Worm Wheels



Specifications	
Precision grade	KHK W 002 grade 2
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC702 (old JIS A & BC2)
Heat Treatment	—
Tooth hardness	—



H1


* The precision grade of J Series products is equivalent to the value shown in the table.

A _{H7}	Bore
B	Hub dia.
C	Pitch dia.
D	Throat dia.
D'	Outside dia.
E	Face width
F	Hub width
G	Total length
J	Mounting distance


NOTE 1: Allowable torque based on worm speed (rpm)

Catalog Number	Reduction ratio	No. of teeth	No. of starts of mating worm	Lead angle helix direction	Shape	A _{H7}	B	C	D	D'	E	F	G	J	Allowable torque (N·m) NOTE 1								Backlash (mm)	Weight (kg)
															30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm			
AG1-20R1	20	20	1	3°35'		6	16	20	22	23				18	3.35	2.79	2.23	1.83	1.63	1.50	1.30		0.038	
AG1-20R2	10	20	2	7°08'		6	16	20	22	23				18	3.31	2.69	2.06	1.68	1.48	1.35	1.15		0.038	
AG1-30R1	30	30	1	3°35'		6	20	30	32	33				23	7.08	5.98	4.84	4.05	3.63	3.31	2.92		0.078	
AG1-30R2	15	30	2	7°08'	R	6	20	30	32	33	10	10	20	23	7.03	5.84	4.56	3.72	3.33	3.03	2.63	0.04~0.14	0.078	
AG1-40R1	40	40	1	3°35'		8	26	40	42	43				28	12.1	10.2	8.43	7.12	6.38	5.86	5.13		0.13	
AG1-50R1	50	50	1	3°35'		8	30	50	52	53				33	18.3	15.5	12.9	10.9	9.87	9.09	7.95		0.20	
AG1-60R1	60	60	1	3°35'		10	35	60	62	63				38	25.6	21.8	18.1	15.4	14.1	12.9	11.4		0.29	
AG1.5-20R1	20	20	1	3°26'		8	22	30	33	34.5				27.5	9.84	8.18	6.40	5.30	4.68	4.25	3.68		0.10	
AG1.5-20R2	10	20	2	6°51'		8	22	30	33	34.5				27.5	9.72	7.87	5.92	4.87	4.25	3.83	3.27		0.10	
AG1.5-30R1	30	30	1	3°26'		10	30	45	48	49.5				35	20.8	17.5	13.9	11.7	10.4	9.40	8.28		0.22	
AG1.5-30R2	15	30	2	6°51'	R	10	30	45	48	49.5	14	10	24	35	20.7	17.1	13.1	10.8	9.56	8.58	7.46	0.04~0.14	0.22	
AG1.5-40R1	40	40	1	3°26'		12	35	60	63	64.5				42.5	35.6	30.0	24.2	20.6	18.3	16.6	14.6		0.37	
AG1.5-50R1	50	50	1	3°26'		12	45	75	78	79.5				50	53.8	45.4	36.9	31.6	28.3	25.8	22.6		0.59	
AG1.5-60R1	60	60	1	3°26'		12	50	90	93	94.5				57.5	75.3	63.8	51.9	44.7	40.4	36.7	32.4		0.83	

J Series



H1T



H1K




To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore H7	* The product shapes of J Series items are identified by background color.															
	6	8	10	12	14	15	16	17	18	19	20	22	25	28	30	
Keyway JS9	—		4x1.8		5x2.3				6x2.8				8x3.3			
Screw size	—		4x1.8		5x2.3				6x2.8				8x3.3			
Catalog Number	M4	M5	M4				M5				M6					
AG1-20R1 J BORE	H1T															
AG1-20R2 J BORE	H1T															
AG1-30R1 J BORE	H1T	H1T														
AG1-30R2 J BORE	H1T	H1T														
AG1-40R1 J BORE		H1T	H1K	H1K												
AG1-50R1 J BORE		H1T	H1K	H1K	H1K	H1K	H1K	H1K								
AG1-60R1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K						
AG1.5-20R1 J BORE		H1T	H1K													
AG1.5-20R2 J BORE		H1T	H1K													
AG1.5-30R1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K								
AG1.5-30R2 J BORE			H1K	H1K	H1K	H1K	H1K	H1K								
AG1.5-40R1 J BORE				H1K	H1K	H1K	H1K	H1K	H1K	H1K						
AG1.5-50R1 J BORE					H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K		
AG1.5-60R1 J BORE						H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	



Specifications	
Precision grade	KHK W 001 grade 2*
Reference section of gear	Axial direction
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part




W3

* The precision grade of J Series products is equivalent to the value shown in the table.

Catalog Number ● : J Series (Available-on-request)	Axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width (right)	Hub width (left)	
						LH7	M						
SWG2-R1 ● SWG2-R1J12 ● SWG2-R1J14	m2	1	3°41'	R	W3	12	25	31	35	32	15	3	
						W3K							12
						W3K							14
SWG2-R2 ● SWG2-R2J12 ● SWG2-R2J14	m2	2	7°21'	R	W3	12	25	31	35	32	15	3	
						W3K							12
						W3K							14
SWG2.5-R1 ● SWG2.5-R1J15 ● SWG2.5-R1J16 ● SWG2.5-R1J17	m2.5	1	3°52'	R	W3	15	30	37	42	45	17	3	
						W3K							15
						W3K							16
SWG2.5-R2 ● SWG2.5-R2J15 ● SWG2.5-R2J16 ● SWG2.5-R2J17	m2.5	2	7°42'	R	W3	15	30	37	42	45	17	3	
						W3K							15
						W3K							16

J Series



W3K



Total length R	Keyway Width × Depth	Socket head screw		Weight (kg)	Catalog Number ● : J Series (Available-on-request)
		Size	S		
50	—	—	—	0.21	SWG2-R1 ● SWG2-R1J12 ● SWG2-R1J14
	4 × 1.8	M4	7.5	0.21	
	5 × 2.3	M4	7.5	0.19	
65	—	—	—	0.21	SWG2-R2 ● SWG2-R2J12 ● SWG2-R2J14
	4 × 1.8	M4	7.5	0.21	
	5 × 2.3	M4	7.5	0.19	
65	—	—	—	0.40	SWG2.5-R1 ● SWG2.5-R1J15 ● SWG2.5-R1J16 ● SWG2.5-R1J17
	5 × 2.3	M4	8.5	0.39	
	5 × 2.3	M4	8.5	0.37	
65	—	—	—	0.40	SWG2.5-R2 ● SWG2.5-R2J15 ● SWG2.5-R2J16 ● SWG2.5-R2J17
	5 × 2.3	M4	8.5	0.39	
	5 × 2.3	M4	8.5	0.37	

AG Module 2, 2.5
Worm Wheels




Specifications	
Precision grade	KHK W 002 grade 2*
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC702 (old JIS A & BC2)**
Heat treatment	—
Tooth hardness	—

Specifications	
AH7	Bore
B	Hub dia.
C	Pitch dia.
D	Throat dia.
D'	Outside dia.
E	Face width
F	Hub width
G	Total length
(H)	Web thickness
(I)	Web O.D.
J	Mounting distance

* The precision grade of J Series products is equivalent to the value shown in the table.
** The hub material of H4 and H5 is FC200. FC200's tensile strength (200N/mm²) is derived from test specimens and does not represent that of the boss.

NOTE 1: Allowable torque based on worm speed (rpm)



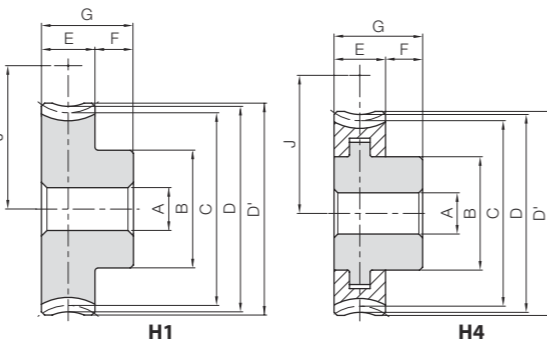


H1

H4

H5

J Series



H1K

H4K

H5K


To order J Series products, please specify: **Catalog No. + J + BORE.**

Catalog Number	Reduction ratio	No. of teeth	No. of starts of mating worm	Lead angle helix direction	Shape	AH7	B	C	D	D'	E	F	G	(H)	(I)	J	Allowable torque (N-m) NOTE 1								Backlash (mm)	Weight (kg)		
																	30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm					
																											18	15
AG2-20R1	20	20	1	3°41'	H1	12	33	40	44	46							35.5	21.0	17.5	13.6	11.2	9.84	8.94	7.75	0.06~0.16	0.26		
AG2-20R2	10	20	2	7°21'	H1	12	33	40	44	46							35.5	20.7	16.8	12.6	10.3	8.93	8.05	6.89				
AG2-30R1	30	30	1	3°41'	H4	12	40	60	64	66							45.5	44.3	37.3	29.6	24.8	21.9	19.8	17.4				
AG2-30R2	15	30	2	7°21'	H4	12	40	60	64	66							45.5	44.0	36.5	27.8	22.8	20.1	18.0	15.7				
AG2-40R1	40	40	1	3°41'	H4	12	45	80	84	86							55.5	75.8	64.0	51.4	43.6	38.5	34.9	30.7				
AG2-50R1	50	50	1	3°41'	H5	15	50	100	104	106				(8)	(83)	65.5	115	96.8	78.4	66.9	59.5	54.2	47.6	1.05	1.05			
AG2-60R1	60	60	1	3°41'	H5	15	55	120	124	126				(11)	(100)	75.5	160	136	110	94.6	84.9	77.2	68.1	1.52	1.52			
AG2.5-20R1	20	20	1	3°52'	H1	12	35	50	55	57.5							43.5	34.6	28.5	22.3	18.3	16.0	14.6	12.5	0.06~0.16	0.39		
AG2.5-20R2	10	20	2	7°42'	H1	12	35	50	55	57.5							43.5	34.2	27.4	20.6	16.8	14.5	13.1	11.1				
AG2.5-30R1	30	30	1	3°52'	H4	12	40	75	80	82.5							56	73.2	61.0	48.3	40.5	35.5	32.2	28.1			0.79	0.79
AG2.5-30R2	15	30	2	7°42'	H4	12	40	75	80	82.5							56	72.7	59.6	45.5	37.2	32.6	29.4	25.3			0.79	0.79
AG2.5-40R1	40	40	1	3°52'	H5	15	45	100	105	107.5				(11)	(81)	68.5	125	105	84.0	71.2	62.5	57.0	49.5	1.11			1.11	
AG2.5-50R1	50	50	1	3°52'	H5	15	55	125	130	132.5				(12)	(106)	81	189	158	128	109	96.7	88.5	76.7	1.70	1.70			
AG2.5-60R1	60	60	1	3°52'	H5	15	60	150	155	157.5				(12)	(130)	93.5	265	222	180	154	138	126	110	2.32	2.32			

Bore H7	* The product shapes of J Series items are identified by background color.															
	12	14	15	16	17	18	19	20	22	25	28	30	32	35		
Keyway Js9	4×1.8		5×2.3				6×2.8				8×3.3		10×3.3			
Screw size	M4				M5				M6				M8			
Catalog Number	AG2-20R1 J BORE				AG2-20R2 J BORE				AG2-30R1 J BORE				AG2-30R2 J BORE			
	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K		
	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K		
	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K		
	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K		
	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K		
	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K		
	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K		
	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K		
	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K		
	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K		
	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K	H4K		
	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K		



Specifications	
Precision grade	KHK W 001 grade 2*
Reference section of gear	Axial direction
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part




W3

* The precision grade of J Series products is equivalent to the value shown in the table.

Catalog Number ● : J Series (Available-on-request)	Axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width (right)	Hub width (left)
						LH7	M					
SWG3-R1 ● SWG3-R1J17 ● SWG3-R1J18 ● SWG3-R1J19 ● SWG3-R1J20	m3	1	3°54'	R	W3	16	35	44	50	50	20	4
17												
18												
19												
20												
16												
17												
18												
19												
20												
16												
17												
18												
19												
20												
16												
17												
18												
19												
20												
SWG4-R1 SWG4-R2 SWG4-R3	m4	1 2 3	3°41' 7°21' 10°57'	R	W3	22	50	62	70	70	25	5

J Series



W3K



Total length	Keyway	Socket head screw	Weight (kg)	Catalog Number	
				● : J Series (Available-on-request)	
74	5 x 2.3 6 x 2.8 6 x 2.8 6 x 2.8 6 x 2.8	M4 M5 M5 M5 M5	10 10 10 10 10	0.66	SWG3-R1
				0.64	● SWG3-R1J17
				0.62	● SWG3-R1J18
				0.60	● SWG3-R1J19
				0.58	● SWG3-R1J20
				0.66	SWG3-R2
0.64	● SWG3-R2J17				
0.62	● SWG3-R2J18				
0.60	● SWG3-R2J19				
0.58	● SWG3-R2J20				
100	5 x 2.3 6 x 2.8 6 x 2.8 6 x 2.8	M4 M5 M5 M5	10 10 10 10	1.82	SWG3-R3
				0.64	● SWG3-R3J17
				0.62	● SWG3-R3J18
				0.60	● SWG3-R3J19
				0.58	● SWG3-R3J20
					SWG4-R1
	SWG4-R2				
	SWG4-R3				

AG Module 3, 4
Worm Wheels




Specifications	
Precision grade	KHK W 002 grade 2*
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC702 (old JIS A & BC2)**
Heat treatment	—
Tooth hardness	—

* The precision grade of J Series products is equivalent to the value shown in the table.

** The hub material of H4 and H5 is FC200. FC200's tensile strength (200N/mm²) is derived from test specimens and does not represent that of the boss.

AH7	Bore
B	Hub dia.
C	Pitch dia.
D	Throat dia.
D'	Outside dia.
E	Face width
F	Hub width
G	Total length
(H)	Web thickness
(I)	Web O.D.
J	Mounting distance

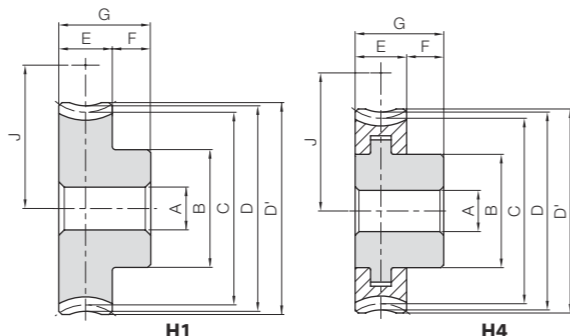


H1

H4

NOTE 1: Allowable torque based on worm speed (rpm)

Catalog Number	Reduction ratio	No. of teeth	No. of starts of mating worm	Lead angle helix direction	Shape	AH7	B	C	D	D'	E	F	G	(H)	(I)	J	Allowable torque (N·m) NOTE 1								Backlash (mm)	Weight (kg)
																	30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm			
																	30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm	1800 rpm			
AG3-20R1	20	20	1	3°54'	H1	20	50	60	66	69						52	59.5	48.8	38.0	30.9	27.0	24.7	20.9	0.75		
AG3-20R2	10	20	2	7°46'	H1	20	50	60	66	69						52	58.7	46.9	35.1	28.4	24.5	22.2	18.5	0.75		
AG3-30R1	30	30	1	3°54'	H4	20	55	90	96	99						67	126	104.3	82.4	68.4	59.9	54.5	46.9	1.46		
AG3-30R2	15	30	2	7°46'	H4	20	55	90	96	99						67	125	102	77.6	62.8	55.1	49.7	42.2	1.46		
AG3-30R3	10	30	3	11°34'	H4	20	55	90	96	99	25	18	43			67	129	103	77.1	62.4	53.8	48.7	40.6	0.06~0.16	1.46	
AG3-40R1	40	40	1	3°54'	H5	20	65	120	126	129					(10)	82	215	179	143	120	106	96.4	82.5	2.03		
AG3-50R1	50	50	1	3°54'			75	150	156	159			(15)	97	325	270	219	185	163	150	128			3.22		
AG3-60R1	60	60	1	3°54'			85	180	186	189			(15)	112	455	380	308	261	233	213	183			4.52		
AG4-20R1	20	20	1	3°41'	H1	20	60	80	88	92						71	115	93.6	72.7	58.2	51.1	45.7	38.4	1.53		
AG4-20R2	10	20	2	7°21'	H1	20	60	80	88	92						71	114	90.0	67.2	53.5	46.4	41.2	34.1	1.53		
AG4-30R1	30	30	1	3°41'	H4	20	65	120	128	132						91	244	200	158	129	114	101	86.3	3.00		
AG4-30R2	15	30	2	7°21'	H4	20	65	120	128	132						91	242	196	148	118	104	92.2	77.6	3.00		
AG4-30R3	10	30	3	10°57'	H4	20	65	120	128	132	30	20	50			91	250	198	147	117	102	90.2	74.7	0.06~0.16	3.00	
AG4-40R1	40	40	1	3°41'	H5	20	80	160	168	172					(15)	111	417	343	274	226	200	179	152	4.32		
AG4-50R1	50	50	1	3°41'			90	200	208	212			(16)	131	630	519	418	347	309	277	236			6.25		
AG4-60R1	60	60	1	3°41'			100	240	248	252			(17)	151	881	730	589	491	441	395	337			8.74		

Worm Wheels

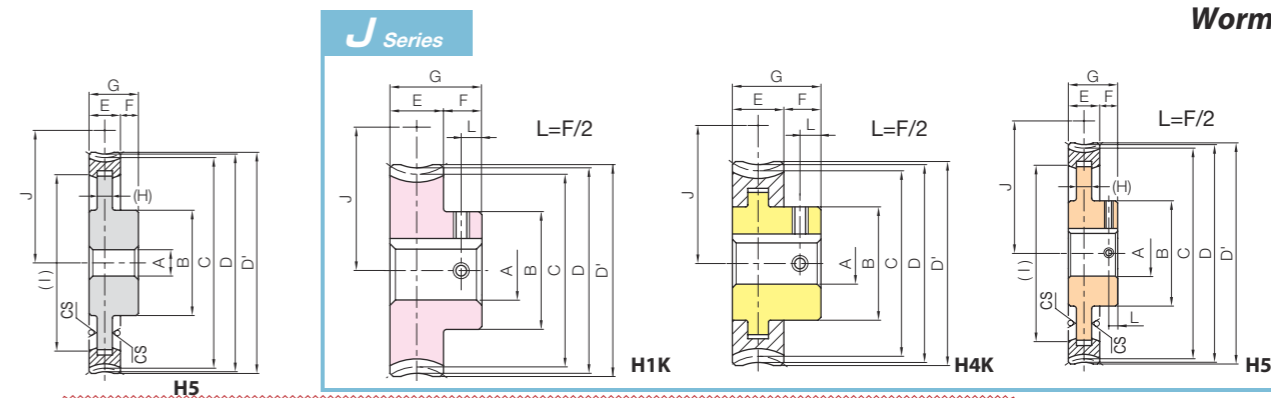


To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore H7	* The product shapes of J Series items are identified by background color.										
	20	22	25	28	30	32	35	40	45	50	
Keyway Js9	6x2.8		8x3.3				10x3.3		12x3.3		14x3.8
Screw size	M5					M6			M8		M10
Catalog Number	H1K	H1K	H1K	H1K	H1K	H4K	H4K	H4K	H4K	H5K	
AG3-20R1 J BORE	H1K	H1K	H1K	H1K	H1K						
AG3-20R2 J BORE	H1K	H1K	H1K	H1K	H1K						
AG3-30R1 J BORE	H4K	H4K	H4K	H4K	H4K	H4K					
AG3-30R2 J BORE	H4K	H4K	H4K	H4K	H4K	H4K					
AG3-30R3 J BORE	H4K	H4K	H4K	H4K	H4K	H4K					
AG3-40R1 J BORE	H5K	H5K	H5K	H5K	H5K	H5K	H5K				
AG3-50R1 J BORE	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K			
AG3-60R1 J BORE	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	H5K	



Specifications	
Precision grade	KHK W 001 grade 2
Reference section of gear	Axial direction
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coated except for ground part



W3

Catalog Number	Axial module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width (right)		Hub width (left)
						L _{H7}	M				N	O	
SWG5-R1	m5	1	4°05'	R	W3	25	56	70	80	85	30	5	
SWG5-R2		2	8°08'										
SWG6-R1	m6	1	4°17'	R	W3	30	63	80	92	100	35	5	
SWG6-R2		2	8°32'										


Total length	Socket head screw		Weight (kg)	Catalog Number
	R	Size		
120	—	—	2.78	SWG5-R1 SWG5-R2
140	—	—	4.15	SWG6-R1 SWG6-R2

AG Module 5, 6
Worm Wheels




Specifications	
Precision grade	KHK W 002 grade 2
Reference section of gear	Rotating plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC702 (old JIS A & BC2) *
Heat treatment	—
Tooth hardness	—

* The hub material of H4 and H5 is FC200. FC200's tensile strength (200N/mm²) is derived from test specimens and does not represent that of the boss.



H4



H5




Catalog Number	Reduction ratio	Transverse module	No. of teeth	No. of starts of mating worm	Lead angle	Direction of helix	Shape	Bore		Hub dia.	Pitch dia.	Throat dia.	Outside dia.	Face width			
								A _{H7}	B						C	D	D'
AG5-20R1	20	m5	20	1	4°05'	R	H4	22	75	100	110	115	35				
AG5-20R2	10		H4	75	100		110							115			
AG5-30R1	30		H5	75	150		160							165			
AG5-30R2	15		H5	30	2		8°08'							75	150	160	165
AG5-40R1	40		H5	40	1		4°05'							110	200	210	215
AG5-50R1	50	m6	50	1	4°05'	H5	25	120	250	260	265	40					
AG5-60R1	60		H5	60	1	4°05'							130	300	310	315	
AG6-20R1	20	m6	20	1	4°17'	R	H4	25	85	120	132	138	40				
AG6-20R2	10		H4	85	120		132							138			
AG6-30R1	30		H5	100	180		192							198			
AG6-30R2	15		H5	30	2		8°32'							100	180	192	198
AG6-40R1	40		H5	40	1		4°17'							120	240	252	258
AG6-50R1	50	m6	50	1	4°17'	R	H5	25	130	300	312	318	40				
AG6-60R1	60		H5	60	1		4°17'							150	360	372	378

NOTE 1: Allowable torque based on worm speed (rpm)

Hub width	Total length	Web thickness	Web O.D.	Mounting distance	Allowable torque (N·m) NOTE 1								Backlash (mm)	Weight (kg)	Catalog Number
					30 _{rpm}	100 _{rpm}	300 _{rpm}	600 _{rpm}	900 _{rpm}	1200 _{rpm}	1800 _{rpm}				
25	60	—	—	85	202	163	127	101	88.4	79.0	65.5	0.07~0.19	2.79	AG5-20R1	
		—	—	85	200	157	117	93.2	80.2	71.1	58.1				
		(21)	(120)	110	427	348	275	224	196	175	147				
		(21)	(120)	110	425	340	259	206	180	159	132				
		(23)	(168)	135	731	597	478	394	346	309	259				
30	70	(23)	(215)	160	1110	903	729	605	534	479	402	0.07~0.19	12.7	AG5-50R1	
		(24)	(260)	185	1550	1270	1030	855	763	682	575				
		—	—	100	315	252	196	157	135	121	99.6				
		—	—	100	314	244	182	145	124	110	89.3				
		(26)	(142)	130	666	538	424	346	300	267	224				
30	70	(26)	(142)	130	668	532	403	321	278	246	203	0.07~0.19	8.52	AG6-30R1	
		(30)	(200)	160	1140	923	738	609	528	472	394				
		(30)	(258)	190	1720	1400	1130	935	816	733	611				
		(30)	(312)	220	2410	1960	1580	1320	1170	1040	875				
		(30)	(312)	220	2410	1960	1580	1320	1170	1040	875				



Specifications	
Precision grade	KHK W 001 grade 4
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating



W2

Catalog Number	Normal module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width (right)	Hub width (left)
						L _{H8}	M	N	O	P	Q	Q'
SW0.5-R1 SW0.5-R2	m0.5	1 2	2°36' 5°13'	R	W2	5	—	11	12	(10)	—	—
SW0.8-R1 SW0.8-R2	m0.8	1 2	3°17' 6°34'	R	W2	6	—	14	15.6	(18)	—	—


Total length	Socket head screw		Weight (kg)	Catalog Number
	R	S		
18	M3	3	0.010	SW0.5-R1 SW0.5-R2
30	M4	5	0.029	SW0.8-R1 SW0.8-R2

BG Module 0.5, 0.8
Worm Wheels


Bronze Worm Wheels



Specifications	
Precision grade	KHK W 002 grade 4
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC502 (old JIS PBC2)
Heat Treatment	—
Tooth hardness	—



HAT



HA



Catalog Number	Reduction ratio	Normal module	No. of teeth	No. of starts of mating worm	Lead angle	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Throat dia.	Outside dia.	Face width
								A _{H7}	B	C	D	D'	E
BG0.5-20R1 BG0.5-20R2 BG0.5-30R1 BG0.5-30R2 BG0.5-40R1	20 10 30 15 40	m0.5	20 20 30 30 40	1 2 1 2 1	2°36' 5°13' 2°36' 5°13' 2°36'	R	HAT	4 4 4 4 5	9 9 12 12 15	10.01 10.04 15.02 15.06 20.02	—	11 11 16 16 21	5
BG0.5-50R1 BG0.5-60R1	50 60		50 60	1 1	2°36' 2°36'			5 5	20 25	25.03 30.03		26 31	

Catalog Number	Reduction ratio	Normal module	No. of teeth	No. of starts of mating worm	Lead angle	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Throat dia.	Outside dia.	Face width
								A _{H7}	B	C	D	D'	E
BG0.8-20R1 BG0.8-20R2 BG0.8-30R1 BG0.8-30R2 BG0.8-40R1	20 10 30 15 40	m0.8	20 20 30 30 40	1 2 1 2 1	3°17' 6°34' 3°17' 6°34' 3°17'	R	HA	5 5 5 5 6	12 12 18 18 20	16.03 16.11 24.04 24.16 32.05	—	17.6 17.6 25.6 25.6 33.6	9
BG0.8-50R1 BG0.8-60R1	50 60		50 60	1 1	3°17' 3°17'			8 8	25 25	40.06 48.08		41.6 49.6	

NOTE 1: Allowable torque based on worm speed (rpm)


Hub width	Total length	Mounting distance	Socket head screw		Allowable torque (N·m) <small>NOTE 1</small>						Backlash (mm)	Weight (kg)	Catalog Number
			Size	L	30 _{rpm}	100 _{rpm}	300 _{rpm}	600 _{rpm}	900 _{rpm}	1200 _{rpm}			
7	12	10.5	M3	3.5	0.27	0.23	0.19	0.15	0.14	0.13	0~0.16	0.0061	BG0.5-20R1 BG0.5-20R2 BG0.5-30R1 BG0.5-30R2 BG0.5-40R1
			M3		0.28	0.23	0.18	0.15	0.13	0.12		0.0061	
			M3		0.58	0.50	0.41	0.34	0.30	0.28		0.014	
			M3		0.59	0.49	0.39	0.32	0.29	0.26		0.014	
			M4		0.99	0.85	0.71	0.60	0.54	0.50		0.023	
			M4		1.50	1.28	1.08	0.92	0.83	0.77		0.039	
7	12	18	M4	3.5	1.50	1.28	1.08	0.92	0.83	0.77	0~0.16	0.039	BG0.5-50R1 BG0.5-60R1
			M4		2.10	1.80	1.52	1.31	1.19	1.09		0.059	
			M4		2.10	1.80	1.52	1.31	1.19	1.09		0.059	

NOTE 1: Allowable torque based on worm speed (rpm)

Hub width	Total length	Mounting distance	Allowable torque (N·m) <small>NOTE 1</small>						Backlash (mm)	Weight (kg)	Catalog Number
			30 _{rpm}	100 _{rpm}	300 _{rpm}	600 _{rpm}	900 _{rpm}	1200 _{rpm}			
9	18	15	1.05	0.88	0.71	0.58	0.52	0.48	0.04~0.22	0.023	BG0.8-20R1 BG0.8-20R2 BG0.8-30R1 BG0.8-30R2 BG0.8-40R1
			1.06	0.86	0.66	0.54	0.48	0.44		0.023	
			1.23	1.89	1.53	1.29	1.15	1.06		0.055	
			1.24	1.87	1.46	1.20	1.07	0.98		0.055	
			3.81	3.24	2.67	2.26	2.02	1.87		0.087	
			3.81	3.24	2.67	2.26	2.02	1.87		0.087	
9	18	27	5.76	4.90	4.07	3.47	3.13	2.90	0.04~0.22	0.13	BG0.8-50R1 BG0.8-60R1
			8.06	6.88	5.73	4.90	4.46	4.12		0.18	



Specifications	
Precision grade	KHK W 001 grade 4
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating



W2

Catalog Number	Normal module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width (right)	Hub width (left)
						L _{H7(H8)}	M						
SW1-R1 SW1-R2	m1	1 2	3°35' 7°11'	R	W2	6 ^{H8}	—	—	16	18	(20)	—	—
SW1.25-R1 SW1.25-R2	m1.25	1 2	3°25' 6°50'	R	W2	8	—	—	21	23.5	(25)	—	—

Total length R	Socket head screw		Weight (kg)	Catalog Number
	Size	S		
32	M4	5	0.043	SW1-R1 SW1-R2
37	M5	5	0.085	SW1.25-R1 SW1.25-R2

BG/CG Module 1, 1.25
Worm Wheels




Specifications	
Catalog Number	BG CG
Precision grade	KHK W 002 grade 4*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC502 (old JIS PBC2) FC200**
Heat treatment	—
Tooth hardness	—

* The precision grade of J Series products is equivalent to the value shown in the table.
** FC200's tensile strength (200N/mm²) is derived from test specimens and differs according to the product shape.

A _{H7}	Bore
B	Hub dia.
C	Pitch dia.
D	Throat dia.
D'	Outside dia.
E	Face width
F	Hub width
G	Total length
J	Mounting distance


NOTE 1: Allowable torque based on worm speed (rpm)

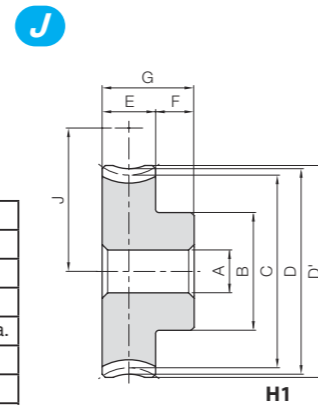

H1

Catalog Number	Reduction ratio	No. of teeth	No. of starts of mating worm	Lead angle helix direction	Shape	A _{H7}	B	C	D	D'	E	F	G	J	Allowable torque (N·m) NOTE 1						Backlash (mm)	Weight (kg)	
															30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm			
															BG1-20R1	20	20	1	3°35'	R			H1
BG1-20R2	10	20	2	7°11'	R	H1	6	16	20.16	22	23	—	—	—	18	1.90	1.54	1.18	0.97	0.85	0.78	0.06~0.24	0.043
BG1-30R1	30	30	1	3°35'	R	H1	6	20	30.07	32	33	10	10	20	23	4.00	3.38	2.74	2.29	2.05	1.87	0.06~0.24	0.089
BG1-30R2	15	30	2	7°11'	R	H1	6	20	30.24	32	33	—	—	—	23	4.03	3.35	2.62	2.14	1.91	1.74	0.06~0.24	0.089
BG1-40R1	40	40	1	3°35'	R	H1	8	26	40.08	42	43	—	—	—	28	6.85	5.79	4.76	4.03	3.61	3.31	0.06~0.24	0.15
BG1-50R1	50	50	1	3°35'	R	H1	8	30	50.10	52	53	—	—	—	33	10.3	8.76	7.27	6.18	5.58	5.14	0.06~0.24	0.23
BG1.25-20R1	20	20	1	3°25'	R	H1	6	20	25.04	27.5	28.75	—	—	—	23	3.19	2.65	2.10	1.72	1.53	1.40	0.08~0.26	0.070
BG1.25-20R2	10	20	2	6°50'	R	H1	6	20	25.18	27.5	28.75	—	—	—	23	3.19	2.58	1.96	1.60	1.40	1.27	0.08~0.26	0.070
BG1.25-30R1	30	30	1	3°25'	R	H1	6	25	37.57	40	41.25	11	9	20	29.25	6.75	5.67	4.56	3.81	3.40	3.09	0.08~0.26	0.15
BG1.25-30R2	15	30	2	6°50'	R	H1	6	25	37.77	40	41.25	—	—	—	29.25	6.77	5.60	4.33	3.54	3.16	2.85	0.08~0.26	0.15
BG1.25-40R1	40	40	1	3°25'	R	H1	8	30	50.09	52.5	53.75	—	—	—	35.5	11.5	9.71	7.92	6.70	5.98	5.47	0.08~0.26	0.24
BG1.25-50R1	50	50	1	3°25'	R	H1	8	40	62.61	65	66.25	—	—	—	41.75	17.4	14.7	12.1	10.3	9.25	8.49	0.08~0.26	0.40
CG1-60R1	60	60	1	3°35'	R	H1	10	30	60.12	62	63	—	—	—	38	8.69	7.39	6.14	5.24	4.78	4.39	0.06~0.24	0.25
CG1-80R1	80	80	1	3°35'	R	H1	10	35	80.16	82	83	—	—	—	48	14.7	12.6	10.5	9.11	8.30	7.72	0.06~0.24	0.43
CG1-100R1	100	100	1	3°35'	R	H1	10	40	100.20	102	103	—	—	—	58	21.9	19.0	16.0	13.9	12.7	11.9	0.06~0.24	0.66
CG1-120R1	120	120	1	3°35'	R	H1	10	40	120.24	122	123	—	—	—	68	30.5	26.7	22.5	19.6	18.0	16.7	0.06~0.24	0.91

Bronze Worm Wheels & Gray Iron Worm Wheels

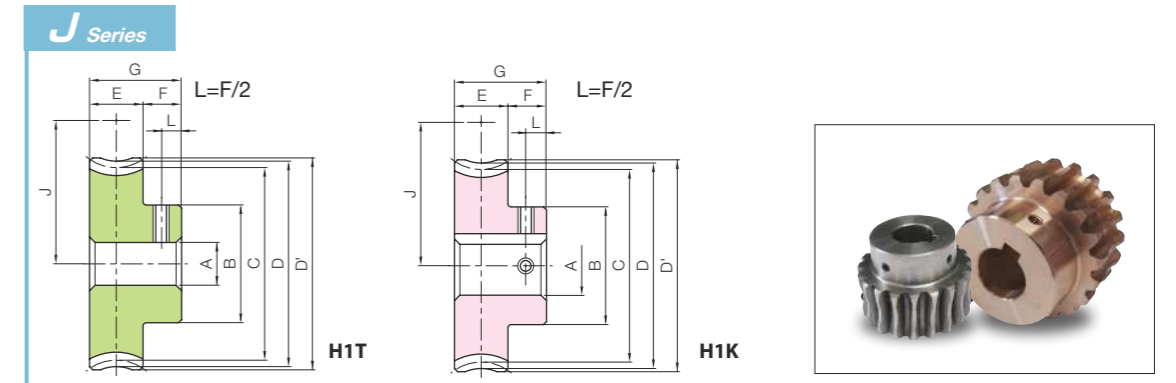

To order J Series products, please specify: **Catalog No. + J + BORE.**


Bore H7	* The product shapes of J Series items are identified by background color.											
	6	8	10	12	14	15	16	17	18	19	20	22
Keyway J _{S9}	—											
Screw size	4x1.8			5x2.3						6x2.8		
Catalog Number	M4	M5	M4						M5			
BG1-20R1 J BORE	H1T											
BG1-20R2 J BORE	H1T											
BG1-30R1 J BORE	H1T	H1T										
BG1-30R2 J BORE	H1T	H1T										
BG1-40R1 J BORE		H1T	H1K	H1K								
BG1-50R1 J BORE		H1T	H1K	H1K	H1K	H1K	H1K	H1K				
BG1.25-20R1 J BORE	H1T	H1T										
BG1.25-20R2 J BORE	H1T	H1T										
BG1.25-30R1 J BORE	H1T	H1T	H1K	H1K								
BG1.25-30R2 J BORE	H1T	H1T	H1K	H1K								
BG1.25-40R1 J BORE		H1T	H1K	H1K	H1K	H1K	H1K	H1K				
BG1.25-50R1 J BORE		H1T	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K		
CG1-60R1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K				
CG1-80R1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K		
CG1-100R1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	
CG1-120R1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K






Specifications	
Precision grade	KHK W 001 grade 4*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

* The precision grade of J Series products is equivalent to the value shown in the table.

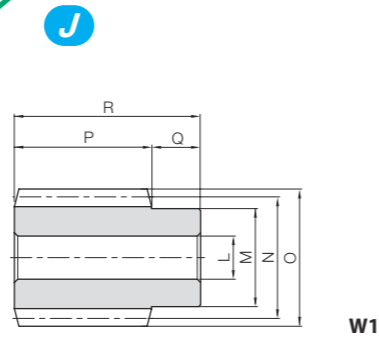

Catalog Number ● : J Series (Available-on-request)	Normal module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width (right)	Hub width (left)
						L _{H7}	M						
SW1.5-R1 ● SW1.5-R1J8 ● SW1.5-R1J10	m1.5	1	3°26'	R	W1	8	20	25	28	30	10	—	
W1T					8								
SW1.5-R2 ● SW1.5-R2J8 ● SW1.5-R2J10	m1.5	2	6°54'	R	W1	8	20	25	28	30	10	—	
W1T					8								
					W1K	10							

J Series

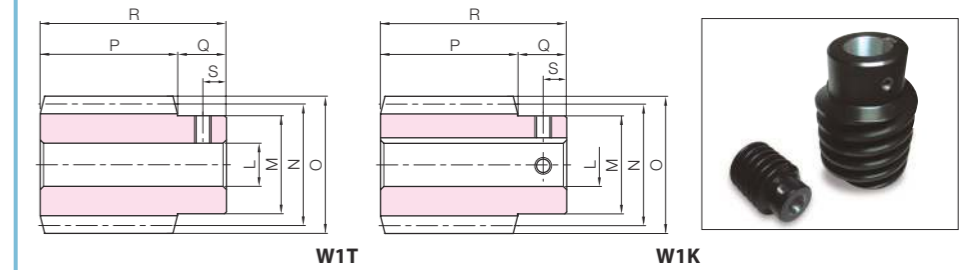

Total length R	Keyway Width × Depth	Socket head screw		Weight (kg)	Catalog Number ● : J Series (Available-on-request)
		Size	S		
40	—	—	—	0.12	SW1.5-R1
		M5	5	0.12	● SW1.5-R1J8
	4 x 1.8	M4	5	0.11	● SW1.5-R1J10
		—	—	0.12	SW1.5-R2
	—	M5	5	0.12	● SW1.5-R2J8
	4 x 1.8	M4	5	0.11	● SW1.5-R2J10


BG/CG Module 1.5
Worm Wheels



Specifications	
Catalog Number	BG CG
Precision grade	KHK W 002 grade 4*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC502 (old JIS PBC2) FC200**
Heat treatment	—
Tooth hardness	—

* The precision grade of J Series products is equivalent to the value shown in the table.
** FC200's tensile strength (200N/mm²) is derived from test specimens and differs according to the product shape.

A _{H7}	Bore
B	Hub dia.
C	Pitch dia.
D	Throat dia.
D'	Outside dia.
E	Face width
F	Hub width
G	Total length
J	Mounting distance

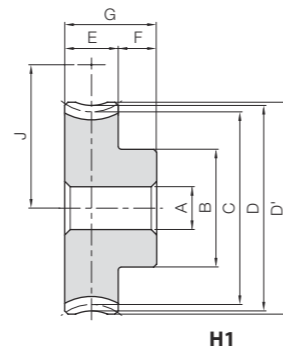


NOTE 1: Allowable torque based on worm speed (rpm)

Catalog Number	Reduction ratio	No. of teeth	No. of starts of mating worm	Lead angle helix direction	Shape	A _{H7}	B	C	D	D'	E	F	G	J	Allowable torque (N·m) NOTE 1							Backlash (mm)	Weight (kg)
															30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm			
BG1.5-20R1	20	20	1	3°26'	R	H1	8	22	30.05	33	34.5	12	22	27.5	4.76	3.96	3.10	2.56	2.27	2.06	0.08~0.26	0.10	
BG1.5-20R2	10	20	2	6°54'			8	22	30.22	33	34.5	12	22	27.5	4.75	3.85	2.89	2.38	2.08	1.87			
BG1.5-30R1	30	30	1	3°26'			10	30	45.08	48	49.5	12	22	35	10.1	8.47	6.72	5.67	5.03	4.55			
BG1.5-30R2	15	30	2	6°54'			10	30	45.33	48	49.5	12	22	35	10.1	8.37	6.40	5.26	4.67	4.20			
BG1.5-40R1	40	40	1	3°26'			12	30	60.11	63	64.5	12	22	42.5	17.2	14.5	11.7	9.96	8.86	8.04			
BG1.5-50R1	50	50	1	3°26'			12	40	75.13	78	79.5	14	24	50	30.4	25.6	20.8	17.8	16.0	14.6			
CG1.5-30R1	30	30	1	3°26'	R	H1	10	30	45.08	48	49.5	12	22	35	6.04	5.08	4.03	3.40	3.02	2.73	0.08~0.26	0.18	
CG1.5-40R1	40	40					12	30	60.11	63	64.5	12	22	42.5	10.3	8.71	7.01	5.98	5.31	4.83			
CG1.5-50R1	50	50					12	40	75.13	78	79.5	14	24	50	18.2	15.4	12.5	10.7	9.59	8.74			
CG1.5-50R1	50	50					12	40	75.13	78	79.5	14	24	50	18.2	15.4	12.5	10.7	9.59	8.74			
CG1.5-60R1	60	60					12	40	90.16	93	94.5	14	24	57.5	25.5	21.6	17.6	15.1	13.7	12.4			

Bronze Worm Wheels & Gray Iron Worm Wheels

J Series

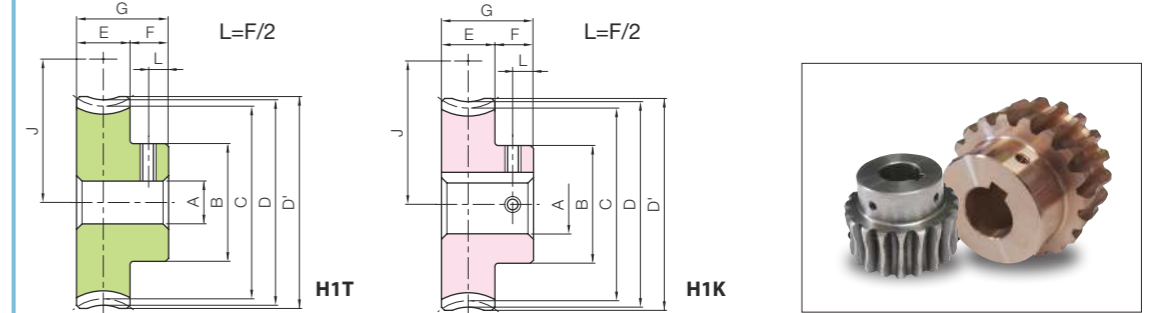

To order J Series products, please specify: **Catalog No. + J + BORE.**


* The product shapes of J Series items are identified by background color.

Bore H7	8	10	12	14	15	16	17	18	19	20	22	25	28	30
Keyway J _{s9}	8	10	12	14	15	16	17	18	19	20	22	25	28	30
Screw size	—	4x1.8			5x2.3			6x2.8			8x3.3			
Catalog Number	M5	M4			M5			M6						
BG1.5-20R1 J BORE	H1T	H1K												
BG1.5-20R2 J BORE	H1T	H1K												
BG1.5-30R1 J BORE		H1K	H1K	H1K	H1K	H1K	H1K							
BG1.5-30R2 J BORE		H1K	H1K	H1K	H1K	H1K	H1K							
BG1.5-40R1 J BORE			H1K	H1K	H1K	H1K	H1K							
BG1.5-50R1 J BORE				H1K	H1K	H1K	H1K	H1K	H1K	H1K				
CG1.5-30R1 J BORE		H1K	H1K	H1K	H1K	H1K	H1K							
CG1.5-40R1 J BORE			H1K	H1K	H1K	H1K	H1K							
CG1.5-50R1 J BORE				H1K	H1K	H1K	H1K	H1K	H1K	H1K				
CG1.5-60R1 J BORE					H1K	H1K	H1K	H1K	H1K	H1K				




Specifications	
Precision grade	KHK W 001 grade 4*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

* The precision grade of J Series products is equivalent to the value shown in the table.

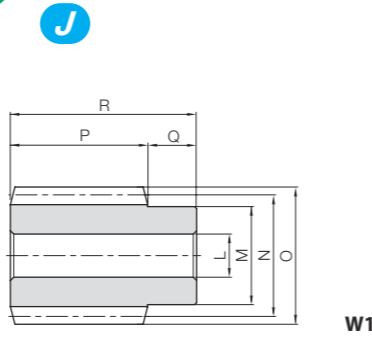

W1

J Series



W1K




Catalog Number ● : J Series (Available-on-request)	Normal module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width (right)		Hub width (left)	
						LH7	M					N	O	P	Q
SW2.5-R1 ● SW2.5-R1J15 ● SW2.5-R1J16 ● SW2.5-R1J17	m2.5	1	3°52'	R	W1	15	30	37	42	45	18	—	—	—	—
W1K					15										
W1K					16										
W1K					17										
SW2.5-R2 ● SW2.5-R2J15 ● SW2.5-R2J16 ● SW2.5-R2J17		2	7°46'	R	W1	15									
W1K					15										
W1K					16										
W1K					17										
SW2.5-L1 ● SW2.5-L1J15 ● SW2.5-L1J16 ● SW2.5-L1J17	1	3°52'	L	W1	15										
W1K				15											
W1K				16											
W1K				17											
SW2.5-L2 ● SW2.5-L2J15 ● SW2.5-L2J16 ● SW2.5-L2J17	2	7°46'	L	W1	15										
W1K				15											
W1K				16											
W1K				17											

Total length R	Keyway Width × Depth	Socket head screw		Weight (kg)	Catalog Number ● : J Series (Available-on-request)		
		Size	S				
63	—	—	—	0.39	SW2.5-R1 ● SW2.5-R1J15 ● SW2.5-R1J16 ● SW2.5-R1J17		
		5 × 2.3	M4	9		0.39	
		5 × 2.3	M4	9		0.37	
	5 × 2.3	—	—	0.39		SW2.5-R2 ● SW2.5-R2J15 ● SW2.5-R2J16 ● SW2.5-R2J17	
		5 × 2.3	M4	9			0.39
		5 × 2.3	M4	9			0.37
	5 × 2.3	—	—	0.39		SW2.5-L1 ● SW2.5-L1J15 ● SW2.5-L1J16 ● SW2.5-L1J17	
		5 × 2.3	M4	9			0.39
		5 × 2.3	M4	9			0.37
	5 × 2.3	—	—	0.39		SW2.5-L2 ● SW2.5-L2J15 ● SW2.5-L2J16 ● SW2.5-L2J17	
		5 × 2.3	M4	9			0.39
		5 × 2.3	M4	9			0.37




BG/CG Module 2.5
Worm Wheels

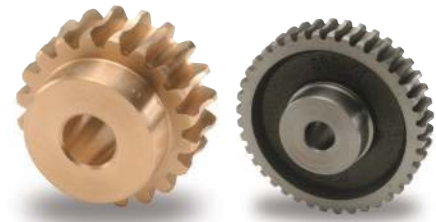

Specifications	
Catalog Number	BG CG
Precision grade	KHK W 002 grade 4*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	CAC502 (old JIS PBC2) FC200*
Heat treatment	—
Tooth hardness	—

* The precision grade of J Series products is equivalent to the value shown in the table.
** FC200's tensile strength (200N/mm²) is derived from test specimens and differs according to the product shape.

A _{H7}	Bore
B	Hub dia.
C	Pitch dia.
D	Throat dia.
D'	Outside dia.
E	Face width
F	Hub width
G	Total length
(H)	Web thickness
(I)	Web O.D.
J	Mounting distance

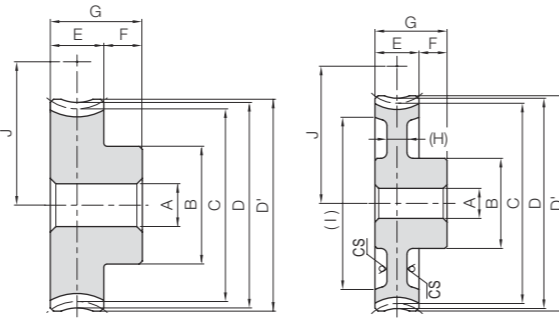

H1


HB

** CS has a forged finish surface.

NOTE 1: Allowable torque based on worm speed (rpm)

Catalog Number	Reduction ratio	No. of teeth	No. of starts of mating worm	Lead angle helix direction	Shape	A _{H7}	B	C	D	D'	E	F	G	(H)	(I)	J	Allowable torque (N·m) NOTE 1						Backlash (mm)	Weight (kg)	
																	30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm			
BG2.5-20R1	20	10	1	3°52'	R	12	35	50.11	55	57.5	22	14	36	—	—	43.5	21.5	17.7	13.8	11.4	9.94	9.07	0.13~0.31	0.49	
BG2.5-20R2	10	20	2	7°46'	H1	12	35	50.46	55	57.5	22	14	36	—	—	43.5	21.5	17.3	13.0	10.6	9.14	8.27			
BG2.5-20L1	20	10	1	3°52'	L	12	40	50.11	80	82.5	22	14	36	—	—	43.5	21.5	17.7	13.8	11.4	9.94	9.07	0.13~0.31	0.49	
BG2.5-20L2	10	20	2	7°46'	H1	12	40	50.46	80	82.5	22	14	36	—	—	43.5	21.5	17.3	13.0	10.6	9.14	8.27			
CG2.5-20R1	20	20	1	3°52'	R	12	35	50.11	55	57.5	22	14	36	—	—	43.5	12.9	10.6	8.30	6.83	5.97	5.44	0.13~0.31	0.40	
CG2.5-20R2	10	20	2	7°46'	H1	12	35	50.46	55	57.5	22	14	36	—	—	43.5	12.9	10.4	7.78	6.36	5.49	4.96			
CG2.5-30R1	30	30	1	3°52'	R	12	40	75.17	80	82.5	22	14	36	—	—	43.5	56	27.3	22.8	18.0	15.1	13.2	12.0	0.13~0.31	0.82
CG2.5-30R2	15	30	2	7°46'	H1	12	40	75.68	80	82.5	22	14	36	—	—	43.5	56	27.5	22.5	17.2	14.1	12.3	11.1		
CG2.5-40R1	40	40	1	3°52'	R	15	45	100.23	105	107.5	22	14	36	—	—	68.5	46.7	39.0	31.3	26.5	23.3	21.2	0.13~0.31	1.39	
CG2.5-50R1	50	50	1	3°52'	HB	15	50	125.29	130	132.5	22	14	36	(110)	81	70.6	59.0	47.8	40.7	36.1	33.0	33.0			
CG2.5-60R1	60	60	1	3°52'	HB	15	55	150.34	155	157.5	22	14	36	(136)	93.5	98.8	82.9	67.3	57.6	51.5	47.0	47.0	47.0	0.13~0.31	2.02
CG2.5-20L1	20	20	1	3°52'	L	12	35	50.11	55	57.5	22	14	36	—	—	43.5	12.9	10.6	8.30	6.83	5.97	5.44			
CG2.5-20L2	10	20	2	7°46'	H1	12	35	50.46	55	57.5	22	14	36	—	—	43.5	12.9	10.4	7.78	6.36	5.49	4.96	0.13~0.31	0.40	
CG2.5-40L1	40	40	1	3°52'	H1	15	45	100.23	105	107.5	22	14	36	—	—	68.5	46.7	39.0	31.3	26.5	23.3	21.2			

J Series

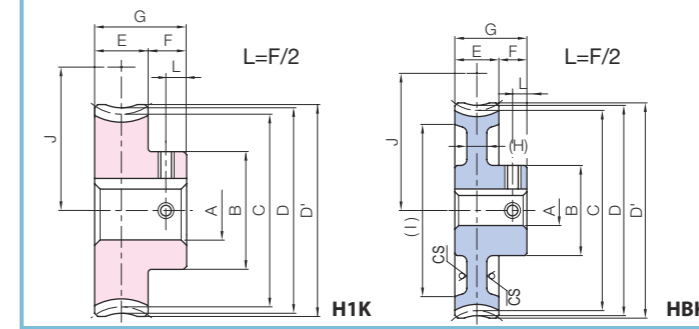

H1K

HBK




Bronze Worm Wheels & Gray Iron Worm Wheels

To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore H7	* The product shapes of J Series items are identified by background color.																
	12	14	15	16	17	18	19	20	22	25	28	30	32	35			
Keyway J _{s9}	4x1.8			5x2.3						6x2.8			8x3.3			10x3.3	
Screw size	M4			M5						M6			M8				
Catalog Number	M4																
BG2.5-20R1 J BORE	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K									
BG2.5-20R2 J BORE	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K									
BG2.5-20L1 J BORE	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K									
BG2.5-20L2 J BORE	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K									
CG2.5-20R1 J BORE	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K									
CG2.5-20R2 J BORE	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K									
CG2.5-30R1 J BORE	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K							
CG2.5-30R2 J BORE	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K							
CG2.5-40R1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K						
CG2.5-50R1 J BORE			HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK		
CG2.5-60R1 J BORE			HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK		
CG2.5-20L1 J BORE	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K									
CG2.5-20L2 J BORE	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K									
CG2.5-40L1 J BORE			H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K						



Specifications	
Precision grade	KHK W 001 grade 4*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	14°30'
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating




W1

* The precision grade of J Series products is equivalent to the value shown in the table.

Catalog Number ● : J Series (Available-on-request)	Normal module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width (right)	Hub width (left)
						L _{H7}	M						
SW3-R1 ● SW3-R1J17 ● SW3-R1J18 ● SW3-R1J19 ● SW3-R1J20	m3	1	3°55'	R	W1	16	35	44	50	50	20	—	
W1K					17								
W1K					18								
W1K					19								
W1K		20											
W1		16											
W1K		17											
W1K		18											
W1K	19												
W1K	20												
SW3-L1 ● SW3-L1J17 ● SW3-L1J18 ● SW3-L1J19 ● SW3-L1J20	L	1	3°55'	L	W1	16							
W1K					17								
W1K					18								
W1K					19								
W1K	20												
SW3-L2 ● SW3-L2J17 ● SW3-L2J18 ● SW3-L2J19 ● SW3-L2J20	L	2	7°50'	L	W1	16							
W1K					17								
W1K					18								
W1K					19								
W1K	20												

J Series




W1K



Total length R	Keyway Width × Depth	Socket head screw		Weight (kg)	Catalog Number ● : J Series (Available-on-request)
		Size	S		
70	5 × 2.3	M4	10	0.64	SW3-R1
				0.62	● SW3-R1J17
				0.60	● SW3-R1J18
				0.58	● SW3-R1J19
	6 × 2.8	M5	10	0.56	● SW3-R1J20
				0.64	SW3-R2
				0.62	● SW3-R2J17
				0.60	● SW3-R2J18
	6 × 2.8	M5	10	0.58	● SW3-R2J19
				0.56	● SW3-R2J20
				0.64	SW3-L1
				0.62	● SW3-L1J17
6 × 2.8	M5	10	0.60	● SW3-L1J18	
			0.58	● SW3-L1J19	
			0.56	● SW3-L1J20	
			0.64	SW3-L2	
6 × 2.8	M5	10	0.62	● SW3-L2J17	
			0.60	● SW3-L2J18	
			0.58	● SW3-L2J19	
			0.56	● SW3-L2J20	




BG/CG Module 3
Worm Wheels

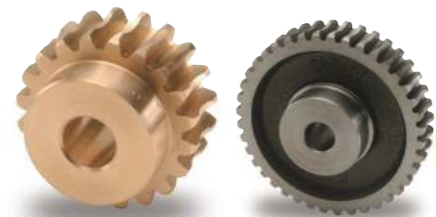

Specifications	
Catalog Number	BG CG
Precision grade	KHK W 002 grade 4*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	14°30'
Material	CAC502 (old JIS PBC2) FC200**
Heat treatment	—
Tooth hardness	—

* The precision grade of J Series products is equivalent to the value shown in the table.
** FC200's tensile strength (200N/mm²) is derived from test specimens and differs according to the product shape.

	A _{H7}	Bore
B		Hub dia.
C		Pitch dia.
D		Throat dia.
D'		Outside dia.
E		Face width
F		Hub width
G		Total length
(H)		Web thickness
(I)		Web O.D.
J		Mounting distance

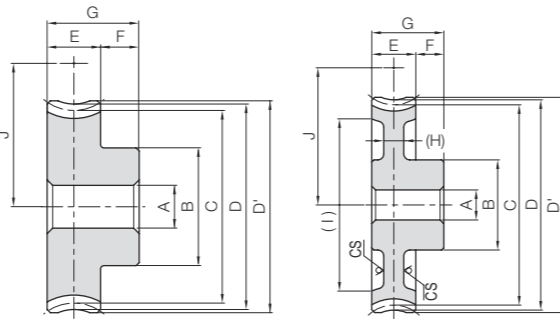

H1


HB

** CS has a forged finish surface.

Catalog Number	Reduction ratio	No. of teeth	No. of starts of mating worm	Lead angle helix direction	Shape	A _{H7}	B	C	D	D'	E	F	G	(H)	(I)	J	Allowable torque (N·m) NOTE 1						Backlash (mm)	Weight (kg)
																	NOTE 1							
																	30 rpm	100 rpm	300 rpm	600 rpm	900 rpm	1200 rpm		
BG3-20R1	20	10	1	3°55'	R	20	50	60.14	66	69	28	15	43	—	—	52	36.8	30.1	23.5	19.1	16.7	15.2	0.15~0.33	0.89
BG3-20R2	10	20	2	7°50'	R	20	50	60.57	66	69	28	15	43	—	—	52	37.0	29.5	22.1	17.9	15.4	14.0		
BG3-20L1	20	10	1	3°55'	L	20	50	60.14	66	69	28	15	43	—	—	52	36.8	30.1	23.5	19.1	16.7	15.2	0.15~0.33	0.89
BG3-20L2	10	20	2	7°50'	L	20	50	60.57	66	69	28	15	43	—	—	52	37.0	29.5	22.1	17.9	15.4	14.0		
CG3-20R1	20	20	1	3°55'	R	20	50	60.14	66	69	28	15	43	—	—	52	22.1	18.1	14.1	11.5	10.0	0.15~0.33	0.73	
CG3-20R2	10	20	2	7°50'	R	20	50	60.57	66	69	28	15	43	—	—	52	22.2	17.7	13.3	10.7	9.24			
CG3-30R1	30	30	1	3°55'	R	20	55	90.21	96	99	30	45	(9)	(107)	(138)	82	79.8	66.3	53.2	44.6	39.1	0.15~0.33	1.50	
CG3-30R2	15	30	2	7°50'	R	20	55	90.85	96	99	30	45	(9)	(138)	(166)	97	121	100	81.1	68.4	60.5			
CG3-40R1	40	40	1	3°55'	R	20	63	150.28	126	129	30	45	(9)	(107)	(138)	82	79.8	66.3	53.2	44.6	39.1	0.15~0.33	1.93	
CG3-50R1	50	50	1	3°55'	R	20	63	150.35	156	159	30	45	(9)	(138)	(166)	97	121	100	81.1	68.4	60.5			
CG3-60R1	60	60	1	3°55'	R	20	70	180.42	186	189	30	45	(9)	(138)	(166)	112	169	141	114	96.7	86.3	0.15~0.33	3.58	
CG3-20L1	20	20	1	3°55'	L	20	50	60.14	66	69	28	43	—	—	52	22.1	18.1	14.1	11.5	10.0				
CG3-20L2	10	20	2	7°50'	L	20	50	60.57	66	69	28	43	—	—	52	22.2	17.7	13.3	10.7	9.24				
CG3-30L1	30	30	1	3°55'	L	20	55	90.21	96	99	30	45	—	—	52	22.1	18.1	14.1	11.5	10.0				
CG3-50L1	50	50	1	3°55'	L	20	63	150.35	156	159	30	45	(9)	(138)	(166)	97	121	100	81.1	68.4	60.5	0.15~0.33	2.67	
CG3-60L1	60	60	1	3°55'	L	20	70	180.42	186	189	30	45	(9)	(138)	(166)	112	169	141	114	96.7	86.3			

NOTE 1: Allowable torque based on worm speed (rpm)

J Series

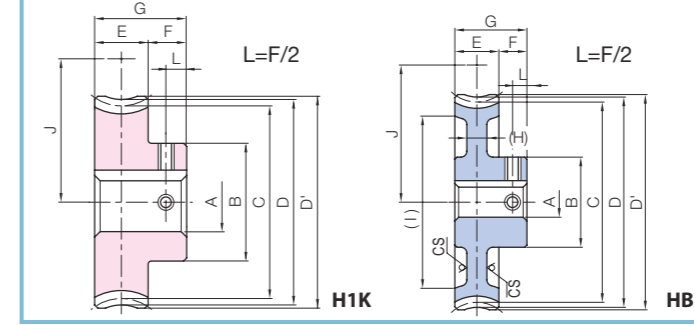

H1K

HBK




Bronze Worm Wheels & Gray Iron Worm Wheels

To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore H7	* The product shapes of J Series items are identified by background color.							
Keyway JS9	20	22	25	28	30	32	35	40
Screw size	6×2.8			8×3.3			10×3.3	
Catalog Number	M5			M6			M8	
BG3-20R1 J BORE	H1K	H1K	H1K	H1K	H1K			
BG3-20R2 J BORE	H1K	H1K	H1K	H1K	H1K			
BG3-20L1 J BORE	H1K	H1K	H1K	H1K	H1K			
BG3-20L2 J BORE	H1K	H1K	H1K	H1K	H1K			
CG3-20R1 J BORE	H1K	H1K	H1K	H1K	H1K			
CG3-20R2 J BORE	H1K	H1K	H1K	H1K	H1K			
CG3-30R1 J BORE	H1K	H1K	H1K	H1K	H1K	H1K		
CG3-30R2 J BORE	H1K	H1K	H1K	H1K	H1K	H1K		
CG3-40R1 J BORE	HBK	HBK	HBK	HBK	HBK	HBK		
CG3-50R1 J BORE	HBK	HBK	HBK	HBK	HBK	HBK	HBK	
CG3-60R1 J BORE	HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK
CG3-20L1 J BORE	H1K	H1K	H1K	H1K	H1K			
CG3-20L2 J BORE	H1K	H1K	H1K	H1K	H1K			
CG3-30L1 J BORE	H1K	H1K	H1K	H1K	H1K	H1K		
CG3-50L1 J BORE	HBK	HBK	HBK	HBK	HBK	HBK	HBK	
CG3-60L1 J BORE	HBK	HBK	HBK	HBK	HBK	HBK	HBK	HBK



Specifications	
Precision grade	KHK W 001 grade 4
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	14°30'
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating




W1

Catalog Number	Normal module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width (right)	Hub width (left)
						L _{H7}	M	N	O	P	Q	Q'
SW4-R1 SW4-R2	m4	1 2	3°42' 7°25'	R	W1	22	50	62	70	70	25	—

Total length	Socket head screw		Weight (kg)	Catalog Number
R	Size	S		
95	—	—	1.76	SW4-R1 SW4-R2


BG/CG Module 4
Worm Wheels

Bronze Worm Wheels & Gray Iron Worm Wheels

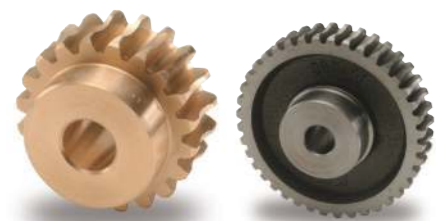

Specifications	
Catalog Number	BG CG
Precision grade	KHK W 002 grade 4 KHK W 002 grade 4
Reference section of gear	Normal plane Normal plane
Gear teeth	Standard full depth Standard full depth
Normal pressure angle	14°30' 14°30'
Material	CAC502 (old JIS PBC2) FC200*
Heat Treatment	— —
Tooth hardness	— —


* FC200's tensile strength (200N/mm²) is derived from test specimens and differs according to the product shape.




H1

Catalog Number	Reduction ratio	Normal module	No. of teeth	No. of starts of mating worm	Lead angle	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Throat dia.	Outside dia.	Face width
								A _{H7}	B	C	D	D'	E
BG4-20R1 BG4-20R2	20 10	m4	20	1 2	3°42' 7°25'	R	H1	20	60	80.17 80.67	88	90	35

Catalog Number	Reduction ratio	Normal module	No. of teeth	No. of starts of mating worm	Lead angle	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Throat dia.	Outside dia.	Face width
								A _{H7}	B	C	D	D'	E
CG4-20R1 CG4-20R2	20 10	m4	20	1 2	3°42' 7°25'	R	H1	20	60	80.17	88	90	35
CG4-30R1 CG4-30R2	30 15		30	1 2	3°42' 7°25'				60	80.67	88	90	
CG4-40R1	40		40	1	3°42'				60	120.25	128	130	
CG4-50R1 CG4-50R2	50 25		50	1 2	3°42' 7°25'				70	200.42	208	211	
CG4-60R1	60		60	1	3°42'				70	201.69	208	211	
									80	240.5	248	251	



HB



H2

* CS has a forged finish surface.

NOTE 1: Allowable torque based on worm speed (rpm)

Hub width	Total length	Mounting distance	Allowable torque (N·m) NOTE 1						Backlash (mm)	Weight (kg)	Catalog Number
			30 _{rpm}	100 _{rpm}	300 _{rpm}	600 _{rpm}	900 _{rpm}	1200 _{rpm}			
F	G	J	75.9	61.7	47.9	38.4	33.7	30.1	0.17~0.37	1.91	BG4-20R1 BG4-20R2
17	52	71	75.9	60.0	44.8	35.7	30.9	27.5			


NOTE 1: Allowable torque based on worm speed (rpm)

Hub width	Total length	Web thickness	Web O.D.	Mounting distance	Allowable torque (N·m) NOTE 1				Backlash (mm)	Weight (kg)	Catalog Number	
					30 _{rpm}	100 _{rpm}	300 _{rpm}	600 _{rpm}				
17	52	—	—	71	45.6	37.0	28.7	23.0	0.17~0.37	1.56	CG4-20R1	
		—	—	71	45.5	36.0	26.9	21.4			CG4-20R2	
		—	—	91	96.3	79.1	62.3	50.9			CG4-30R1	
		—	—	91	96.8	78.3	59.4	47.3			CG4-30R2	
		(11)	(136)	111	165	136	108	89.4			4.02	CG4-40R1
		(12)	(176)	131	249	205	165	137			4.97	CG4-50R1
(12)	(176)	131	250	204	160	130	4.97	CG4-50R2				
(12)	(218)	151	348	288	233	194	6.58	CG4-60R1				





Specifications	
Precision grade	KHK W 001 grade 4
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	14°30'
Material	S45C
Heat treatment	—
Tooth hardness	(less than 194HB)
Surface treatment	Black oxide coating

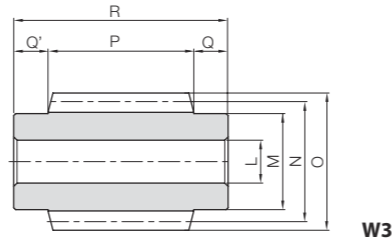


Catalog Number	Normal module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width (right)		Hub width (left)
						L _{H7}	M				N	O	
SW5-R1 SW5-R2	m5	1 2	4°06' 8°13'	R	W3	25	56	70	80	85	20	20	
SW6-R1 SW6-R2	m6	1 2	4°18' 8°38'	R	W3	30	64	80	92	100	25	25	

Total length R	Socket head screw		Weight (kg)	Catalog Number
	Size	S		
125	—	—	2.86	SW5-R1 SW5-R2
150	—	—	4.38	SW6-R1 SW6-R2

BG/CG Module 5, 6
Worm Wheels



Specifications	
Catalog Number	BG CG
Precision grade	KHK W 002 grade 4
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	14°30'
Material	CAC502 (old JIS PBC2) FC200*
Heat Treatment	—
Tooth hardness	—




* FC200's tensile strength (200N/mm²) is derived from test specimens and differs according to the product shape.

Catalog Number	Reduction ratio	Normal module	No. of teeth	No. of starts of mating worm	Lead angle	Direction of helix	Shape	Bore		Pitch dia.	Throat dia.	Outside dia.	Face width
								A _{H7}	B				
BG5-20R1 BG5-20R2	20 10	m5	20	1 2	4°06' 8°13'	R	H1	22	75	100.26 101.04	110	113	45
BG6-20R1 BG6-20R2	20 10	m6	20	1 2	4°18' 8°38'	R	H1	25	100	120.34 121.38	132	136	52

Catalog Number	Reduction ratio	Normal module	No. of teeth	No. of starts of mating worm	Lead angle	Direction of helix	Shape	Bore		Pitch dia.	Throat dia.	Outside dia.	Face width
								A _{H7}	B				
CG5-20R1 CG5-30R1 CG5-30R2 CG5-40R1	20 30 15 40	m5	20 30 30 40	1 1 2 1	4°06' 4°06' 8°13' 4°06'	R	H1 HB H2	22	75	100.26 150.38 151.56 200.51	110 160 160 210	113 163 163 213	45
CG5-50R1 CG5-60R1	50 60		50 60	1 1	4°06' 4°06'		H2		90 100	250.61 300.77	260 310	263 313	
CG6-20R1 CG6-30R1 CG6-40R1	20 30 40	m6	20 30 40	1 1 1	4°18' 4°18' 4°18'	R	H1 HB H2	25	100	120.34 180.51 240.68	132 192 252	136 196 256	52
CG6-50R1 CG6-60R1	50 60		50 60	1 1	4°18' 4°18'		H2		100 120	300.85 361.02	312 372	316 376	

Bronze Worm Wheels & Gray Iron Worm Wheels

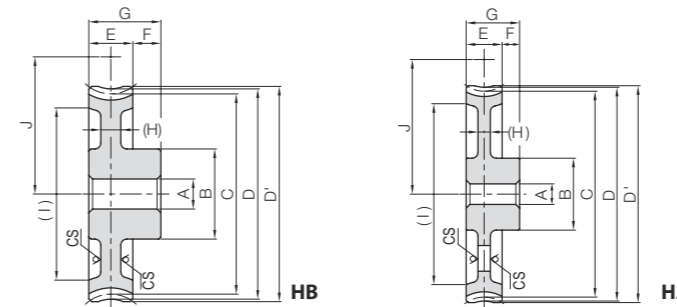

* CS has a forged finish surface.

NOTE 1: Allowable torque based on worm speed (rpm)

Hub width F	Total length G	Mounting distance J	Allowable torque (N·m) ^{NOTE 1}						Backlash (mm)	Weight (kg)	Catalog Number
			30 _{rpm}	100 _{rpm}	300 _{rpm}	600 _{rpm}	900 _{rpm}	1200 _{rpm}			
20	65	85	146 146	117 115	91.2 85.8	73.0 68.4	63.7 58.8	56.9 52.2	0.20~0.40	3.89	BG5-20R1 BG5-20R2
20	72	100	232 235	185 183	144 136	115 109	99.2 92.3	88.8 82.0	0.22~0.42	6.60	BG6-20R1 BG6-20R2

NOTE 1: Allowable torque based on worm speed (rpm)


Hub width F	Total length G	Web thickness (H)	Web O.D. (I)	Mounting distance J	Allowable torque (N·m) ^{NOTE 1}				Backlash (mm)	Weight (kg)	Catalog Number
					30 _{rpm}	100 _{rpm}	300 _{rpm}	600 _{rpm}			
20	65	— (13) (13) (16)	— (127) (127) (172)	85	87.4	70.3	54.7	43.8	0.20~0.40	3.18 5.07 5.07 7.75	CG5-20R1 CG5-30R1 CG5-30R2 CG5-40R1
				110	185	150	119				
				110	187	150	114				
				135	316	258	206				
20	72	— (15) (15) (16)	— (155) (213) (275)	100	139	111	86.2	0.22~0.42	5.39 8.72 11.4 20.3	CG6-20R1 CG6-30R1 CG6-40R1 CG6-50R1 CG6-60R1	
				130	294	237	187				
				160	502	407	325				
				190	760	615	496				



Stainless Steel Worms



Specifications	
Precision grade	KHK W 001 grade 4
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)



W2

Catalog Number	Normal module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore	Hub dia.	Pitch dia.	Outside dia.	Face width	Hub width	Total length
						L _{H8}	M	N	O	P	Q	R
SUW0.5-R1	m0.5	1	2°36'	R	W2	5	—	11	12	(10)	—	18
SUW0.5-R2		2	5°13'									
SUW0.8-R1	m0.8	1	3°17'	R	W2	6	—	14	15.6	(18)	—	30
SUW0.8-R2		2	6°34'									

Socket head screw		Weight (kg)	Catalog Number
Size	S		
M3	3	0.011 0.010	SUW0.5-R1 SUW0.5-R2
M4	5	0.029	SUW0.8-R1 SUW0.8-R2




Worm Wheels *Additional*

Plastic Worm Wheels



Specifications	
Precision grade	KHK W 002 grade 5 *
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	MC901
Heat treatment	—
Tooth hardness	—



HA

* The precision grade is equivalent to the value shown in the table.

Catalog Number	Normal module	Reduction ratio	No. of teeth	No. of starts of mating worm	Lead angle helix direction	Shape	A _{-0.05/-0.10}	B	C	D	D'	E
PG0.5-20R1	m0.5	20	20	1	2°36'	R	HA	4	9	10.01	—	11
PG0.5-20R2		10	20	2	5°13'			4	9	10.04		11
PG0.5-30R1		30	30	1	2°36'			4	12	15.02		16
PG0.5-30R2		15	30	2	5°13'			4	12	15.06		16
PG0.5-40R1		40	40	1	2°36'			5	15	20.02		21
PG0.5-50R1	m0.5	50	50	1	2°36'	R	HA	5	20	25.03	—	26
PG0.5-60R1		60	60	1				5	25	30.03		31
PG0.8-20R1	m0.8	20	20	1	3°17'	R	HA	5	12	16.03	—	17.6
PG0.8-20R2		10	20	2	6°34'			5	12	16.11		17.6
PG0.8-30R1		30	30	1	3°17'			5	18	24.04		25.6
PG0.8-30R2		15	30	2	6°34'			5	18	24.16		25.6
PG0.8-40R1		40	40	1	3°17'			6	20	32.05		33.6
PG0.8-50R1	m0.8	50	50	1	3°17'	R	HA	8	25	40.07	—	41.6
PG0.8-60R1		60	60	1				8	25	48.08		49.6


F	G	J	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (kg)	Catalog Number
			Bending strength	Bending strength			
7	12	10.5	0.077	0.0078	0.09~0.17	0.83	PG0.5-20R1
		10.5	0.077	0.0078		0.83	PG0.5-20R2
		13	0.13	0.013		1.82	PG0.5-30R1
		13	0.13	0.013		1.82	PG0.5-30R2
		15.5	0.19	0.019		3.06	PG0.5-40R1
9	18	18	0.24	0.025	0.13~0.23	5.24	PG0.5-50R1
		20.5	0.31	0.031		7.96	PG0.5-60R1
		15	0.35	0.036		3.06	PG0.8-20R1
9	18	15	0.36	0.036	0.13~0.23	3.06	PG0.8-20R2
		19	0.59	0.060		7.27	PG0.8-30R1
		19	0.60	0.061		7.27	PG0.8-30R2
		23	0.86	0.087		11.51	PG0.8-40R1
		27	1.13	0.12		17.76	PG0.8-50R1
31	1.41	0.14	23.67	PG0.8-60R1			






Specifications	
Precision grade	KHK W 001 grade 4*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)

* The precision grade of J Series products is equivalent to the value shown in the table.




W2


Catalog Number ● : J Series (Available-on-request)	Normal module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore		Hub dia.	Pitch dia.	Outside dia.	Face width		Hub width	Total length
						L _{H7(H8)}	M				N	O		
SUW1-R1 SUW1-R2	m1	1 2	3°35' 7°11'	R	W2 W2	6 ^{H8}	—	—	16	18	(20)	—	—	32
SUW1.5-R1 ● SUW1.5-R1J8 ● SUW1.5-R1J10	m1.5	1	3°26'	R	W1 W1T W1K	8 8 10	—	20	25	28	30	10	—	40
SUW1.5-R2 ● SUW1.5-R2J8 ● SUW1.5-R2J10		2	6°54'		W1 W1T W1K	8 8 10	—	20	25	28	30	10	—	40



W1



W1T



W1K



Keyway	Socket head screw	Weight (kg)	Catalog Number
Width x Depth	Size	S	● : J Series (Available-on-request)
—	M4	5	SUW1-R1 SUW1-R2
—	—	—	SUW1.5-R1
—	M5	5	● SUW1.5-R1J8
4 x 1.8	M4	5	● SUW1.5-R1J10
—	—	—	SUW1.5-R2
—	M5	5	● SUW1.5-R2J8
4 x 1.8	M4	5	● SUW1.5-R2J10




PG Module 1, 1.5
Worm Wheels



Specifications	
Precision grade	KHK W 002 grade 5*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	20°
Material	MC901
Heat treatment	—
Tooth hardness	—


* The precision grade is equivalent to the value shown in the table.

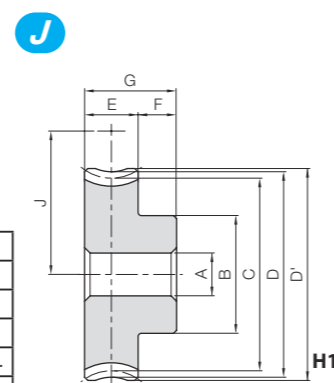


H1

A	Bore
B	Hub dia.
C	Pitch dia.
D	Throat dia.
D'	Outside dia.
E	Face width
F	Hub width
G	Total length
J	Mounting distance

Catalog Number	Reduction ratio	No. of teeth	No. of starts of mating worm	Lead angle helix direction	Shape	A-H _e		D	D'	E	F	G	J	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (kg)
						B	C										
PG1-20R1	20	20	1	3°35'	R	H1	6	16	20.04	22	23	—	—	0.62	0.060	0~0.28	0.0058
PG1-20R2	10	20	2	7°11'			6	16	20.16	22	23	—	—	0.62	0.060		
PG1-30R1	30	30	1	3°35'	R	H1	6	20	30.06	32	33	10	10	1.03	0.10	0~0.28	0.012
PG1-40R1	40	40	1	3°35'			8	26	40.08	42	43	—	—	1.49	0.15		
PG1-50R1	50	50	1	3°35'			8	30	50.1	52	53	—	—	1.96	0.20		
PG1.5-20R1	20	20	1	3°26'	R	H1	8	22	30.05	33	34.5	12	10	1.66	0.17	0~0.30	0.014
PG1.5-20R2	10	20	2	6°54'			8	22	30.22	33	34.5	12	10	22	27.5		



H1T



H1K



Plastic Worm Wheels

To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore	* The product shapes of J Series items are identified by background color.							
Keyway J ₅₉	6	8	10	12	14	15	16	17
Screw size	—			4x1.8		5x2.3		—
Catalog Number	M4	M5	M4					—
PG1-20R1 J BORE	H1T							
PG1-20R2 J BORE	H1T							
PG1-30R1 J BORE	H1T	H1T						
PG1-40R1 J BORE		H1T	H1K	H1K				
PG1-50R1 J BORE		H1T	H1K	H1K	H1K	H1K	H1K	H1K
PG1.5-20R1 J BORE		H1T	H1K					
PG1.5-20R2 J BORE		H1T	H1K					

* In regard to MC Nylon gears, other materials are available for plastic gears, including Ultra High Molecular Weight Polyethylene (U-PE), which has excellent abrasion resistance Poly Ether Ether Ketone (PEEK) also has quality properties. A single piece order is acceptable and will be produced as a custom-made gear. Please see Page 26 for more details on quotations and orders.




Stainless Steel Worms




Specifications	
Precision grade	KHK W 001 grade 4*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	14°30'**
Material	SUS303
Heat treatment	—
Tooth hardness	(less than 187HB)

* The precision grade of J Series products is equivalent to the value shown in the table.
** The pressure angle of module 2.5 is 20°.



W1



W1K



Catalog Number ● : J Series (Available-on-request)	Normal module	Number of Starts	Nominal lead angle	Direction of helix	Shape	Bore		Hub dia. M	Pitch dia. N	Outside dia. O	Face width P	Hub width Q	Total length R
						LH7							
SUW2-R1 ● SUW2-R1J12 ● SUW2-R1J14	m2	1	3°42'	R	W1	12	25	31	35	32	14	46	
W1K						14							
SUW2-R2 ● SUW2-R2J12 ● SUW2-R2J14	m2	2	7°25'	R	W1	12	30	37	42	45	18	63	
W1K						14							
SUW2.5-R1 ● SUW2.5-R1J15 ● SUW2.5-R1J16 ● SUW2.5-R1J17	m2.5	1	3°52'	R	W1	15	35	44	50	50	20	70	
W1K						16							
SUW2.5-R2 ● SUW2.5-R2J15 ● SUW2.5-R2J16 ● SUW2.5-R2J17	m2.5	2	7°46'	R	W1	15	35	44	50	50	20	70	
W1K						16							
SUW3-R1 ● SUW3-R1J17 ● SUW3-R1J18 ● SUW3-R1J19 ● SUW3-R1J20	m3	1	3°55'	R	W1	16	35	44	50	50	20	70	
W1K						17							
SUW3-R2 ● SUW3-R2J17 ● SUW3-R2J18 ● SUW3-R2J19 ● SUW3-R2J20	m3	2	7°50'	R	W1	16	35	44	50	50	20	70	
W1K						17							

[Cautions on Secondary Operations Series] ① Secondary operations series include the J Series, F Series, R Series, E Series, Hardened Plus, Hardened Plus J Series, Semi-custom Products, and Semi-custom J Series.
② Because products are machined upon order receipt, cancellation is not possible. For lead times and allowable order sizes, see the Delivery Date Guide on Page 38.

Keyway Width x Depth	Socket head screw Size	S	Weight (kg)	Catalog Number ● : J Series (Available-on-request)	
				Worm	Gear
—	—	—	0.20	SUW2-R1	
4 x 1.8	M4	7	0.20	● SUW2-R1J12	
5 x 2.3	M4	7	0.18	● SUW2-R1J14	
—	—	—	0.20	SUW2-R2	
4 x 1.8	M4	7	0.20	● SUW2-R2J12	
5 x 2.3	M4	7	0.18	● SUW2-R2J14	
—	—	—	0.40	SUW2.5-R1	
5 x 2.3	M4	9	0.39	● SUW2.5-R1J15	
5 x 2.3	M4	9	0.38	● SUW2.5-R1J16	
5 x 2.3	M4	9	0.36	● SUW2.5-R1J17	
—	—	—	0.40	SUW2.5-R2	
5 x 2.3	M4	9	0.39	● SUW2.5-R2J15	
5 x 2.3	M4	9	0.38	● SUW2.5-R2J16	
5 x 2.3	M4	9	0.36	● SUW2.5-R2J17	
—	—	—	0.64	SUW3-R1	
5 x 2.3	M4	10	0.62	● SUW3-R1J17	
6 x 2.8	M5	10	0.60	● SUW3-R1J18	
6 x 2.8	M5	10	0.59	● SUW3-R1J19	
6 x 2.8	M5	10	0.57	● SUW3-R1J20	
—	—	—	0.64	SUW3-R2	
5 x 2.3	M4	10	0.62	● SUW3-R2J17	
6 x 2.8	M5	10	0.60	● SUW3-R2J18	
6 x 2.8	M5	10	0.59	● SUW3-R2J19	
6 x 2.8	M5	10	0.57	● SUW3-R2J20	




Worm Wheels




Specifications	
Precision grade	KHK W 002 grade 5*
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Normal pressure angle	14°30'**
Material	MC901
Heat treatment	—
Tooth hardness	—

* The precision grade is equivalent to the value shown in the table.
** The pressure angle of module 2.5 is 20°.



H1

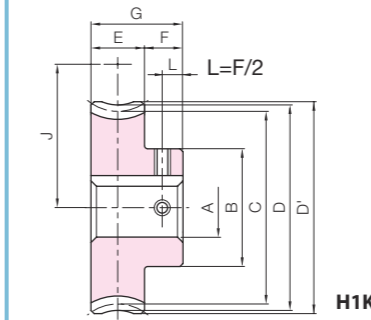

H1K

Plastic Worm Wheels



Catalog Number	Reduction ratio	No. of teeth	No. of starts of mating worm	Lead angle helix direction	Shape	A _{H1}	B	C	D	D'	E	F	G	J	Allowable torque (N·m) Bending strength	Allowable torque (kgf·m) Bending strength	Backlash (mm)	Weight (kg)
PG2-20R1	20	20	1	3°42'	R	H1	10	33	40.08	44	22	13	35	35.5	4.78	0.49	0~0.33	0.046
PG2-20R2	10	20	2	7°25'	R	H1	10	33	40.34	44	22	13	35	35.5	4.82	0.49	0~0.33	0.046
PG2.5-20R1	20	20	1	3°52'	R	H1	12	35	50.11	55	22	14	36	43.5	(8.46)	0.86	0~0.36	0.066
PG2.5-20R2	10	20	2	7°46'	R	H1	12	35	50.46	55	22	14	36	43.5	(8.54)	0.87	0~0.36	0.066
PG3-20R1	20	20	1	3°55'	R	H1	15	50	60.14	66	28	15	43	52	(13.7)	1.40	0~0.38	0.13
PG3-20R2	10	20	2	7°50'	R	H1	15	50	60.57	66	28	15	43	52	(13.8)	1.41	0~0.38	0.13

To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore	* The product shapes of J Series items are identified by background color.															
	10	12	14	15	16	17	18	19	20	22	25	28	30			
Keyway JS9	4x1.8		5x2.3				6x2.8				8x3.3					
Screw size	M4				M5				M6							
Catalog Number	H1K	H1K	H1K	H1K	H1K	H1K										
PG2-20R1 J BORE	H1K	H1K	H1K	H1K	H1K	H1K										
PG2-20R2 J BORE	H1K	H1K	H1K	H1K	H1K	H1K										
PG2.5-20R1 J BORE		H1K	H1K	H1K	H1K	H1K	H1K	H1K								
PG2.5-20R2 J BORE		H1K	H1K	H1K	H1K	H1K	H1K	H1K								
PG3-20R1 J BORE				H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K			
PG3-20R2 J BORE				H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K	H1K			



Custom-made worm gears are available.

KHK offers high-precision products.



- ◆ Production Range
- Module : 0.5~10
- Worm outer diameter : ϕ 100 mm or less
- Wheel outer diameter : ϕ 600 mm or less
- Assembly distance : 350 mm or less



Please see Page 26 for more details about custom-made orders.

High-precision ground gear technology achieves high speed and quiet movement.

Excellent tooth contact and appropriate backlash are essential for worm gears. Give KHK's reliable stock worm gears a try.





Klingelnberg Worm Grinding Machine



Worm Gear Tooth Contact Machine



Gearboxes

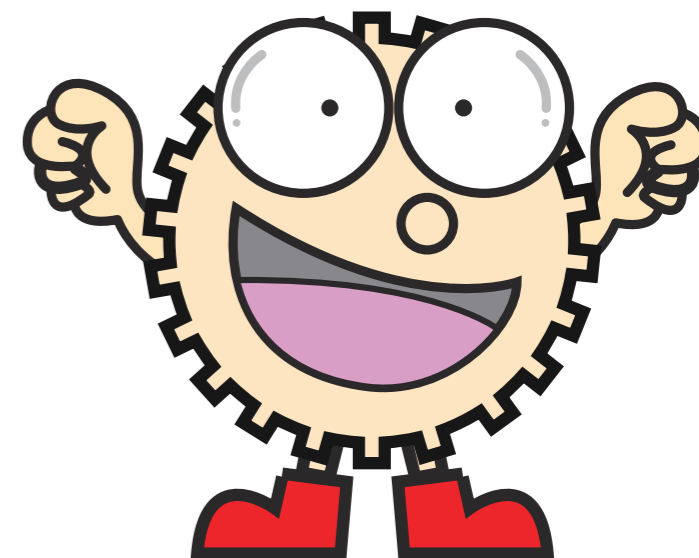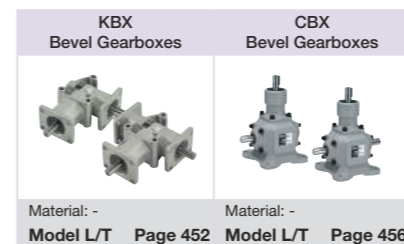

Catalog Number of KHK Stock Gears

The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Gearboxes



- Spur Gears
- Helical Gears
- Internal Gears
- Racks
- CP Racks & Pinions
- Miter Gears
- Bevel Gears
- Screw Gears
- Worm Gears
- Gearboxes**
- Other Products



Features

- ① **Compact**
The structure is simple and the case is made of aluminum die-cast
- ② **Low-noise and high-efficiency**
Uses spiral bevel gears that are made of carburized special steel
- ③ **Flexible mounting direction**
Can be installed in all directions and is easy to install
- ④ **Maintenance-free**
Shipped with high-grade grease enclosed
- ⑤ **Gear ratio**
Gear ratio of 1 and 2 can be selected according to the application

Lubrication

Lubricating oil of specified amount is enclosed at the time of shipment.

Machine Type	Approximate amount of oil	Lubricant type	
KBX-10	10g	Grease	NLGI-00 with Li extreme pressure additive
KBX-15	30g		
KBX-20	50g		

Application Hints


- 1. Installation Location
 - ① Ambient temperature : -10°C to 40°C
 - ② Ambient humidity : 80% or less
 - ③ Atmosphere : A space free of corrosive gas and steam
A well-ventilated space free of dust and dirt
 - ④ Installation location : Indoors

- 2. Installation Method
 - ① Securely fix the mounting surface to a machined flat surface without vibration using bolts.
 - ② No secondary operations such as boring can be made on the case. Also, do not disassemble or modify the product. If the device is damaged, the product will not be covered by the warranty.
 - ③ For devices for which oil must be avoided such as food machinery, be sure to take measures to prevent damage such as oil reservoir in case of oil leakage due to failure, aging, etc.
- 3. Connection with the mating machine
 - ① Check the rotation direction before connecting to the mating machine. There is a risk of the device being damaged due to difference in rotation direction.
 - ② When attaching the coupling, sprocket, pulley, gear or the like to the shaft of the gear box, make sure that it does not interfere with the oil seal or case surface in models that have no steps on the shaft. We also recommend H7 for hole fitting.
 - ③ For direct connection, locate the center accurately so that the axial center of the gear box and mating axis match. We also recommend using flexible fastening supplies.
 - ④ When using a chain, belt or gear, make sure that the gear box shaft and mating shaft are parallel, and install it so that the line connecting the centers of two shafts is perpendicular to the shafts.
- 4. Precautions during driving
 - ① Do not approach or touch rotating objects such as the shafts during operation. There is a risk of entanglement and injury.
 - ② If there is abnormal noise or temperature rise, stop the operation immediately and do not operate until the cause of the abnormality is investigated and measures are taken.
 - ③ Forward and reverse rotations due to plucking adversely affect the gear box and mating machine, so be sure to stop the unit and then start in the opposite direction.
 - ④ Be sure to set the load torque and O.H.L. (overhang load) within the permissible values before operation.

KBX Performance Table

Speed ratio	Model Code	Specification Symbol	X-axis Rotation Speed (rpm)												Allowable Thrust Load (N) {kgf}	
			50	100	200	300	400	600	900	1200	1500	1800	2500	3600	X-axis	Y-axis
1:1	KBX-101	Allowable Capacity (kW)	0.01	0.02	0.05	0.07	0.09	0.14	0.20	0.26	0.31	0.35	0.38	0.44	59 {6}	69 {7}
		Allowable X, Y-axis Torque (N·m) {kgf·m}	2.35 {0.24}	2.35 {0.24}	2.25 {0.23}	2.25 {0.23}	2.16 {0.22}	2.16 {0.22}	2.06 {0.21}	2.06 {0.21}	1.96 {0.20}	1.86 {0.19}	1.47 {0.15}	1.18 {0.12}		
		Allowable X-axis O.H.L. (N) {kgf}	78 {8}	78 {8}	78 {8}	78 {8}	69 {7}	69 {7}	69 {7}	69 {7}	69 {7}	59 {6}	49 {5}	39 {4}		
		Allowable Y-axis O.H.L. (N) {kgf}	127 {13}	127 {13}	118 {12}	118 {12}	118 {12}	118 {12}	108 {11}	108 {11}	108 {11}	98 {10}	78 {8}	59 {6}		
	Transmission Efficiency (Reference)	90%														
	KBX-151	Allowable Capacity (kW)	0.05	0.09	0.18	0.27	0.35	0.51	0.75	0.96	1.16	1.30	1.44	1.66	98 {10}	118 {12}
		Allowable X, Y-axis Torque (N·m) {kgf·m}	8.82 {0.90}	8.82 {0.90}	8.62 {0.88}	8.53 {0.87}	8.33 {0.85}	8.13 {0.83}	7.94 {0.81}	7.64 {0.78}	7.35 {0.75}	6.86 {0.70}	5.49 {0.56}	4.41 {0.45}		
		Allowable X-axis O.H.L. (N) {kgf}	255 {26}	255 {26}	255 {26}	245 {25}	245 {25}	235 {24}	225 {23}	216 {22}	216 {22}	186 {19}	157 {16}	127 {13}		
		Allowable Y-axis O.H.L. (N) {kgf}	294 {30}	294 {30}	284 {29}	284 {29}	274 {28}	265 {27}	265 {27}	255 {26}	245 {25}	216 {22}	176 {18}	147 {15}		
	Transmission Efficiency (Reference)	90%														
	KBX-201	Allowable Capacity (kW)	0.09	0.18	0.36	0.52	0.68	0.95	1.38	1.78	2.15	2.50	2.55	2.95	196 {20}	274 {28}
		Allowable X, Y-axis Torque (N·m) {kgf·m}	17.6 {1.80}	17.6 {1.80}	17.2 {1.75}	16.7 {1.70}	16.2 {1.65}	15.2 {1.55}	14.7 {1.50}	14.2 {1.45}	13.7 {1.40}	13.2 {1.35}	9.80 {1.00}	7.84 {0.80}		
Allowable X-axis O.H.L. (N) {kgf}		353 {36}	353 {36}	343 {35}	333 {34}	333 {34}	323 {33}	314 {32}	304 {31}	294 {30}	265 {27}	216 {22}	176 {18}			
Allowable Y-axis O.H.L. (N) {kgf}		529 {54}	529 {54}	519 {53}	510 {52}	500 {51}	490 {50}	470 {48}	451 {46}	441 {45}	392 {40}	314 {32}	255 {26}			
Transmission Efficiency (Reference)	90%															
1:2	KBX-102	Allowable Capacity (kW)	0.005	0.01	0.02	0.03	0.04	0.06	0.09	0.12	0.14	0.16	0.17	0.20	59 {6}	69 {7}
		Allowable Y-axis Torque (N·m) {kgf·m}	2.06 {0.21}	2.06 {0.21}	2.06 {0.21}	1.96 {0.20}	1.96 {0.20}	1.96 {0.20}	1.86 {0.19}	1.86 {0.19}	1.76 {0.18}	1.67 {0.17}	1.27 {0.13}	1.08 {0.11}		
		Allowable X-axis O.H.L. (N) {kgf}	88 {9}	88 {9}	88 {9}	88 {9}	88 {9}	78 {8}	78 {8}	78 {8}	78 {8}	69 {7}	59 {6}	49 {5}		
		Allowable Y-axis O.H.L. (N) {kgf}	137 {14}	137 {14}	137 {14}	127 {13}	127 {13}	127 {13}	127 {13}	118 {12}	118 {12}	108 {11}	88 {9}	69 {7}		
	Transmission Efficiency (Reference)	90%												85%		
	KBX-152	Allowable Capacity (kW)	0.02	0.04	0.08	0.13	0.17	0.25	0.36	0.46	0.55	0.62	0.69	0.80	98 {10}	118 {12}
		Allowable Y-axis Torque (N·m) {kgf·m}	8.43 {0.86}	8.43 {0.86}	8.23 {0.84}	8.13 {0.83}	8.04 {0.82}	7.84 {0.80}	7.55 {0.77}	7.25 {0.74}	7.06 {0.72}	6.57 {0.67}	5.29 {0.54}	4.21 {0.43}		
		Allowable X-axis O.H.L. (N) {kgf}	255 {26}	255 {26}	255 {26}	245 {25}	245 {25}	235 {24}	225 {23}	216 {22}	216 {22}	186 {19}	157 {16}	127 {13}		
		Allowable Y-axis O.H.L. (N) {kgf}	294 {30}	294 {30}	284 {29}	284 {29}	274 {28}	265 {27}	265 {27}	255 {26}	245 {25}	216 {22}	176 {18}	147 {15}		
	Transmission Efficiency (Reference)	90%												85%		
	KBX-202	Allowable Capacity (kW)	0.05	0.10	0.19	0.28	0.37	0.53	0.77	0.99	1.15	1.31	1.40	1.57	196 {20}	274 {28}
		Allowable Y-axis Torque (N·m) {kgf·m}	19.6 {2.00}	19.6 {2.00}	18.6 {1.90}	18.1 {1.85}	17.6 {1.80}	17.0 {1.73}	16.4 {1.67}	15.7 {1.60}	14.7 {1.50}	13.9 {1.42}	10.8 {1.10}	8.33 {0.85}		
Allowable X-axis O.H.L. (N) {kgf}		372 {38}	372 {38}	363 {37}	363 {37}	353 {36}	343 {35}	333 {34}	323 {33}	314 {32}	274 {28}	235 {24}	186 {19}			
Allowable Y-axis O.H.L. (N) {kgf}		588 {60}	588 {60}	578 {59}	568 {58}	559 {57}	539 {55}	529 {54}	510 {52}	490 {50}	441 {45}	363 {37}	294 {30}			
Transmission Efficiency (Reference)	90%												85%			

- [Note] ① Be sure to use the product below the permissible values. The speed ratio (1:2) decelerates to the Y axis.
 ② The values in this performance table are where the service factor is 1. When using the product under other conditions, refer to the Selection Guide.
 ③ O.H.L. (overhang load) is the allowable load that can be applied to the center of the shaft. When using the product under other conditions, refer to the coefficients K1 and K2 in the Selection Guide (Page 460).
 ④ When the speed ratio (1:2) type is used at increased speed (from Y-axis to X-axis), the allowable X-axis torque is 1/2 of the value in the performance table (allowable Y-axis torque).
 ⑤ Y-axis torque of the model T is the total value of the left and right axes.
 ⑥ Y-axis O.H.L. of the model T is the total value of the left and right axes.

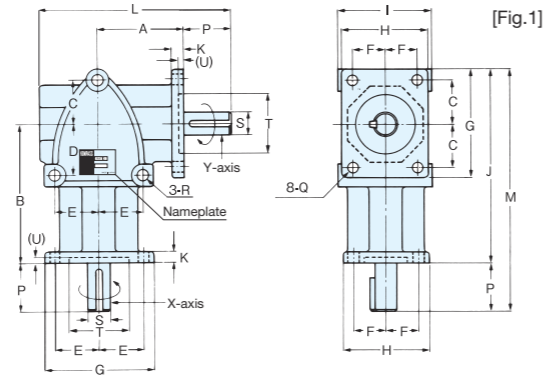



Catalog Number	Speed ratio	A	B	C	D	E	F	G	H	I	J	K	L	M	P	Q	R	S
KBX-101L	1:1	37	58	18	18	18	14	46	38	40	82	5	82	102	20	φ5.5	φ6.5	φ10
KBX-102L	1:2																	
KBX-151L	1:1	66	100	31	36	31	22	80	62	66	140	8	137	170	30	φ8.5	φ8.5	φ15
KBX-152L	1:2																	
KBX-201L	1:1	80	120	36	36	36	26	92	72	76	166	10	168	206	40	φ8.5	φ8.5	φ20
KBX-202L	1:2																	

- [NOTES]
- ① The rotation direction of the arrow does not limit the direction. Both the forward and reverse rotations are allowed.
 - ② The X-axis rotates clockwise and the Y-axis rotates counterclockwise.
 - ③ The phases of the X-axis and Y-axis key grooves do not always match.
 - ④ The shaft diameter tolerance is JIS h7.
 - ⑤ The 1:2 speed ratio type decelerates from the X-axis (input axis) to the Y-axis (output axis).
 - ⑥ JIS B 1301-1976 (normal) is used for the key dimensions
 - ⑦ The indicated angular backlash is reference values measured on the X-axis (input axis).




Key Detail Diagram

T	(U)	Key	Angular Backlash	Weight (kg)	Catalog Number
φ26 _{H7}	(2)	Depth 1 x 15 ℓ Horizontal	16'~44'	0.40	KBX-101L
			30'~1° 23'		KBX-102L
φ42 _{H7}	(3)	5 x 5 x 27 ℓ	10'~37'	1.80	KBX-151L
			19'~1° 09'		KBX-152L
φ52 _{H7}	(4)	6 x 6 x 35 ℓ	8'~33'	3.10	KBX-201L
			15'~60'		KBX-202L

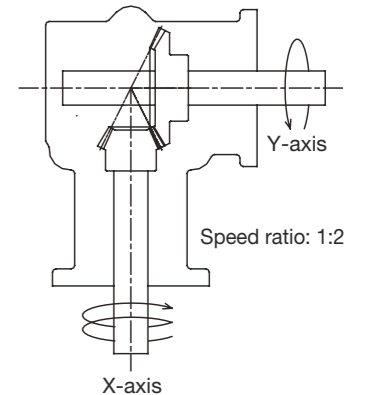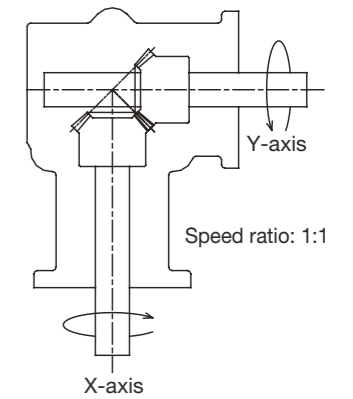


Bevel Gearboxes

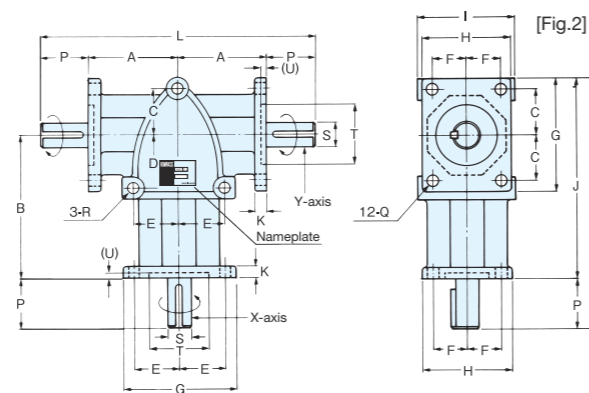



Catalog Number	Speed ratio	A	B	C	D	E	F	G	H	I	J	K	L	M	P	Q	R	S
KBX-101T	1:1	37	58	18	18	18	14	46	38	40	82	5	114	102	20	φ5.5	φ6.5	φ10
KBX-102T	1:2																	
KBX-151T	1:1	66	100	31	36	31	22	80	62	66	140	8	192	170	30	φ8.5	φ8.5	φ15
KBX-152T	1:2																	
KBX-201T	1:1	80	120	36	36	36	26	92	72	76	166	10	240	206	40	φ8.5	φ8.5	φ20
KBX-202T	1:2																	

- [NOTES]
- ① The rotation direction of the arrow does not limit the direction. Both the forward and reverse rotations are allowed.
 - ② The X-axis rotates clockwise and the Y-axis rotates counterclockwise.
 - ③ The phases of the X-axis and Y-axis key grooves do not always match.
 - ④ The shaft diameter tolerance is JIS h7.
 - ⑤ The 1:2 speed ratio type decelerates from the X-axis (input axis) to the Y-axis (output axis).
 - ⑥ JIS B 1301-1976 (normal) is used for the key dimensions
 - ⑦ The indicated angular backlash is reference values measured on the X-axis (input axis).

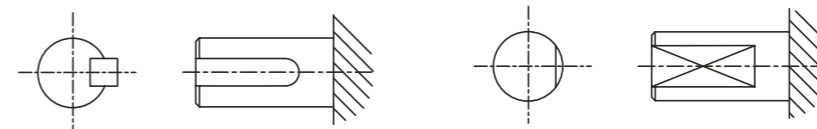

Key Detail Diagram

T	(U)	Key	Angular Backlash	Weight (kg)	Catalog Number
φ26 _{H7}	(2)	Depth 1 x 15 ℓ Horizontal	16'~ 44'	0.50	KBX-101T
			30'~1° 23'		KBX-102T
φ42 _{H7}	(3)	5 x 5 x 27 ℓ	10'~ 37'	2.20	KBX-151T
			19'~1° 09'		KBX-152T
φ52 _{H7}	(4)	6 x 6 x 35 ℓ	8'~ 33'	3.40	KBX-201T
			15'~ 60'		KBX-202T

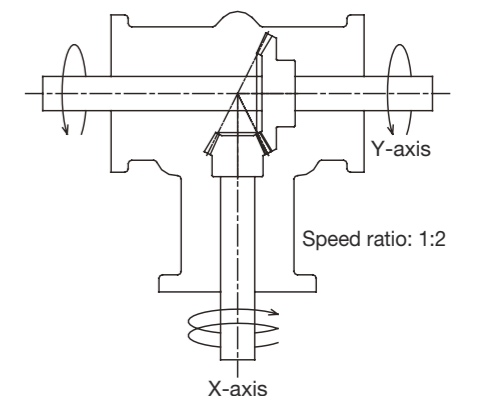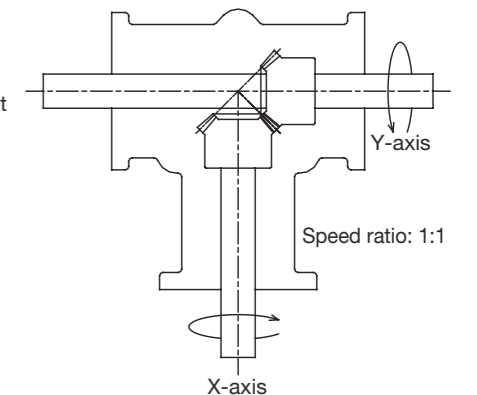

Bevel Gearboxes




Shaft arrangement and shaft arrangement numbers

The CBX bevel box standardizes 24 different shaft arrangements depending on the rotation direction of the shaft. When using the product, consider not only the catalog number but also the shaft arrangement.

[NOTES]

- This figure shows the mounting base and flat surface mounting (floor mounting).
- The rotation direction of the arrow does not limit the direction. Both the forward and reverse rotations are allowed.
- Indicates the wall surface with fuel filler port and drain plug when mounted on a flat surface (floor mounting). Unmarked items are the back of this figure. (standard specifications)
- Shaft arrangement: For products other than LI to LL and TE to TF, the input shaft (X-axis) cannot be installed facing upward.
- When installing the product other than on a flat surface, consider adding an oil drain port (Page 459).

CBX Shaft Arrangement Table

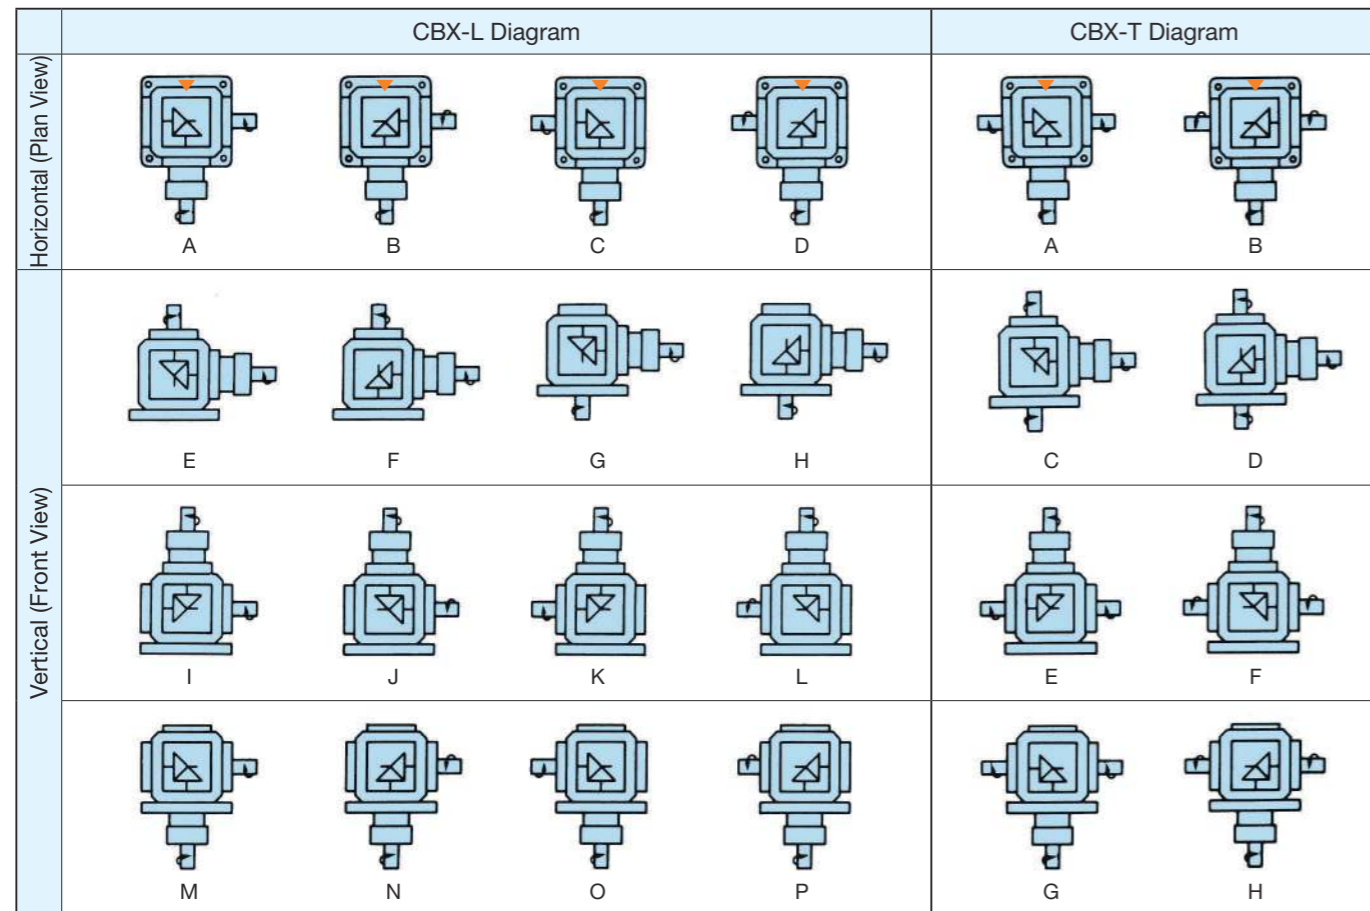

Features

- Tough**
High-grade cast iron is used for the case and tapered roller bearing is used for the bearing
- Low-noise and high-efficiency**
Uses spiral bevel gears that are made of carburized special steel
- Flexible mounting direction**
Various installations are possible depending on the shaft arrangement
- Lubricant enclosed**
High-grade oil enclosed upon shipment
- Speed ratio**
Gear ratio of 1/1 and 1/2 can be selected according to the applications

Lubrication

Lubricating oil of specified amount is enclosed at the time of shipment.

Machine Type	Approximate amount of oil	Lubricant type	
CBX-19	0.3L	Oil	JIS gear oil Class 2 for industrial use
CBX-25	0.7L		
CBX-32	1.0L		
CBX-40	1.5L		

Application Hints



Refer to KBX (Page 452).

CBX Performance Table

Speed ratio	Model Code	Specification Symbol	X-axis Rotation Speed (rpm)												
			20	50	100	200	300	400	600	900	1200	1500	1800	2500	3600
1:1	CBX-191	Allowable Capacity (kW)	0.08	0.20	0.39	0.77	1.15	1.50	2.05	2.67	3.30	3.95	4.40	4.40	4.40
		Allowable X, Y-axis Torque (N·m) (kgf·m)	37.2 {3.8}	37.2 {3.8}	37.2 {3.8}	36.3 {3.7}	36.3 {3.7}	36.3 {3.6}	32.3 {3.3}	28.4 {2.9}	26.5 {2.7}	24.5 {2.5}	23.5 {2.4}	16.7 {1.7}	10.8 {1.1}
		Allowable X-axis O.H.L. (N) (kgf)	1760 {180}	1760 {180}	1760 {180}	1760 {180}	1670 {170}	1620 {165}	1270 {130}	1080 {110}	882 {90}	833 {85}	784 {80}	686 {70}	637 {65}
		Allowable Y-axis O.H.L. (N) (kgf)	1960 {200}	1960 {200}	1960 {200}	1960 {200}	1960 {200}	1810 {185}	1470 {150}	1180 {120}	1030 {105}	980 {100}	931 {95}	784 {80}	735 {75}
	Transmission Efficiency (Reference)	95%													
	CBX-251	Allowable Capacity (kW)	0.25	0.62	1.24	2.47	3.68	4.70	6.40	8.60	10.5	12.3	13.8	—	—
		Allowable X, Y-axis Torque (N·m) (kgf·m)	118 {12.0}	118 {12.0}	118 {12.0}	118 {12.0}	116 {11.8}	112 {11.4}	101 {10.3}	91.1 {9.3}	83.3 {8.5}	78.4 {8.0}	73.5 {7.5}	—	—
		Allowable X-axis O.H.L. (N) (kgf)	3920 {400}	3920 {400}	3920 {400}	3920 {400}	3630 {370}	3330 {340}	2940 {300}	2450 {250}	2160 {220}	1960 {200}	1760 {180}	—	—
		Allowable Y-axis O.H.L. (N) (kgf)	4120 {420}	4120 {420}	4120 {420}	4120 {420}	4020 {410}	3920 {400}	3430 {350}	2940 {300}	2550 {260}	2450 {250}	2250 {230}	—	—
	Transmission Efficiency (Reference)	95%													
	CBX-321	Allowable Capacity (kW)	0.36	0.88	1.77	3.53	5.26	6.72	9.15	12.3	15.0	17.5	19.7	—	—
		Allowable X, Y-axis Torque (N·m) (kgf·m)	167 {17.0}	167 {17.0}	167 {17.0}	167 {17.0}	165 {16.8}	160 {16.3}	144 {14.7}	130 {13.3}	119 {12.1}	112 {11.4}	104 {10.6}	—	—
Allowable X-axis O.H.L. (N) (kgf)		4900 {500}	4900 {500}	4900 {500}	4900 {500}	4610 {470}	4210 {430}	3720 {380}	3140 {320}	2740 {280}	2450 {250}	2160 {220}	—	—	
Allowable Y-axis O.H.L. (N) (kgf)		5190 {530}	5190 {530}	5190 {530}	5190 {530}	5100 {520}	4900 {500}	4310 {440}	3720 {380}	3230 {330}	3140 {320}	2840 {290}	—	—	
Transmission Efficiency (Reference)	95%														
CBX-401	Allowable Capacity (kW)	0.62	1.59	3.18	6.32	9.50	12.0	16.1	22.0	26.5	—	—	—	—	
	Allowable X, Y-axis Torque (N·m) (kgf·m)	294 {30.0}	294 {30.0}	294 {30.0}	294 {30.0}	294 {30.0}	284 {29.0}	225 {26.0}	211 {21.5}	211 {21.5}	—	—	—	—	
	Allowable X-axis O.H.L. (N) (kgf)	9800 {1000}	9800 {1000}	9800 {1000}	7840 {800}	5880 {600}	4900 {500}	4410 {450}	3720 {380}	3430 {350}	—	—	—	—	
	Allowable Y-axis O.H.L. (N) (kgf)	11760 {1200}	11760 {1200}	11760 {1200}	9800 {1000}	7350 {750}	6370 {650}	5880 {600}	5100 {520}	4020 {410}	—	—	—	—	
Transmission Efficiency (Reference)	95%														

Speed ratio	Model Code	Specification Symbol	X-axis Rotation Speed (rpm)												
			20	50	100	200	300	400	600	900	1200	1500	1800	2500	3600
1:2	CBX-192	Allowable Capacity (kW)	0.03	0.07	0.14	0.27	0.40	0.53	0.78	1.15	1.50	1.85	2.17	2.20	2.20
		Allowable Y-axis Torque (N·m) (kgf·m)	25.5 {2.6}	25.5 {2.6}	25.5 {2.6}	25.5 {2.6}	25.5 {2.6}	24.5 {2.5}	24.5 {2.5}	24.5 {2.5}	23.5 {2.4}	23.5 {2.4}	22.5 {2.3}	16.7 {1.7}	10.8 {1.1}
		Allowable X-axis O.H.L. (N) (kgf)	1180 {120}	1180 {120}	1180 {120}	1180 {120}	1180 {120}	1130 {115}	1130 {115}	1080 {110}	1080 {110}	882 {90}	833 {85}	784 {80}	735 {75}
		Allowable Y-axis O.H.L. (N) (kgf)	1760 {180}	1760 {180}	1760 {180}	1760 {180}	1760 {180}	1720 {175}	1670 {170}	1470 {150}	1270 {130}	1080 {110}	980 {100}	833 {85}	784 {80}
	Transmission Efficiency (Reference)	90%													
	CBX-252	Allowable Capacity (kW)	0.09	0.23	0.45	0.90	1.34	1.78	2.67	4.00	5.30	6.33	7.50	7.50	—
		Allowable Y-axis Torque (N·m) (kgf·m)	85.3 {8.7}	85.3 {8.7}	85.3 {8.7}	85.3 {8.7}	85.3 {8.7}	84.3 {8.6}	84.3 {8.6}	84.3 {8.6}	84.3 {8.6}	80.4 {8.2}	79.4 {8.1}	56.8 {5.8}	—
		Allowable X-axis O.H.L. (N) (kgf)	3920 {400}	3920 {400}	3920 {400}	3920 {400}	3920 {400}	3720 {380}	3630 {370}	3530 {360}	3230 {330}	2740 {280}	2250 {230}	1670 {170}	—
		Allowable Y-axis O.H.L. (N) (kgf)	4120 {420}	4120 {420}	4120 {420}	4120 {420}	4020 {410}	3920 {400}	3820 {390}	3720 {380}	3430 {350}	3040 {310}	2650 {270}	2350 {240}	—
	Transmission Efficiency (Reference)	90%													
	CBX-322	Allowable Capacity (kW)	0.13	0.32	0.64	1.28	1.91	2.54	3.80	5.72	7.57	9.05	10.7	—	—
		Allowable Y-axis Torque (N·m) (kgf·m)	123 {12.5}	123 {12.5}	123 {12.5}	123 {12.5}	122 {12.4}	122 {12.4}	121 {12.3}	121 {12.3}	120 {12.2}	115 {11.7}	114 {11.6}	—	—
Allowable X-axis O.H.L. (N) (kgf)		4900 {500}	4900 {500}	4900 {500}	4900 {500}	4900 {500}	4700 {480}	4610 {470}	4410 {450}	4120 {420}	3430 {350}	2840 {290}	—	—	
Allowable Y-axis O.H.L. (N) (kgf)		5190 {530}	5190 {530}	5190 {530}	5190 {530}	5100 {520}	4900 {500}	4800 {490}	4700 {480}	4310 {440}	3820 {390}	3330 {340}	—	—	
Transmission Efficiency (Reference)	90%														
CBX-402	Allowable Capacity (kW)	0.20	0.48	0.96	1.93	2.90	3.84	5.72	8.55	11.0	13.8	16.4	—	—	
	Allowable Y-axis Torque (N·m) (kgf·m)	183 {18.7}	183 {18.7}	183 {18.7}	183 {18.7}	183 {18.7}	182 {18.6}	181 {18.5}	180 {18.4}	174 {17.8}	173 {17.6}	172 {17.5}	—	—	
	Allowable X-axis O.H.L. (N) (kgf)	9800 {1000}	9800 {1000}	9800 {1000}	9800 {1000}	9800 {1000}	8820 {900}	7840 {800}	6860 {700}	5880 {600}	4900 {500}	3920 {400}	—	—	
	Allowable Y-axis O.H.L. (N) (kgf)	11760 {1200}	11760 {1200}	11760 {1200}	11760 {1200}	11760 {1200}	9800 {1000}	8820 {900}	8820 {900}	8820 {900}	7840 {800}	6860 {700}	—	—	
Transmission Efficiency (Reference)	90%														

- [Note]
- Be sure to use the product below the permissible values. The speed ratio (1:2) decelerates to the Y axis.
 - The values in this performance table are where the service factor is 1. When using the product under other conditions, refer to Table 1 (Page 460) Service Factors.
 - O.H.L. (overhang load) is the allowable load that can be applied to the center of the shaft length. When using the product under other conditions, refer to the coefficients K₁ and K₂ in Table 2 and 3 (Page 460).
 - When the speed ratio (1:2) type is used at increased speed (from Y-axis to X-axis), the allowable X-axis torque is 1/2 of the value in the performance table (allowable Y-axis torque).
 - Y-axis torque of the model CBX-T is the total value of the left and right axes.
 - Y-axis O.H.L. of the model CBX-T is the total value of the left and right axes.
 - The allowable thrust load is half of respective O.H.L. value.

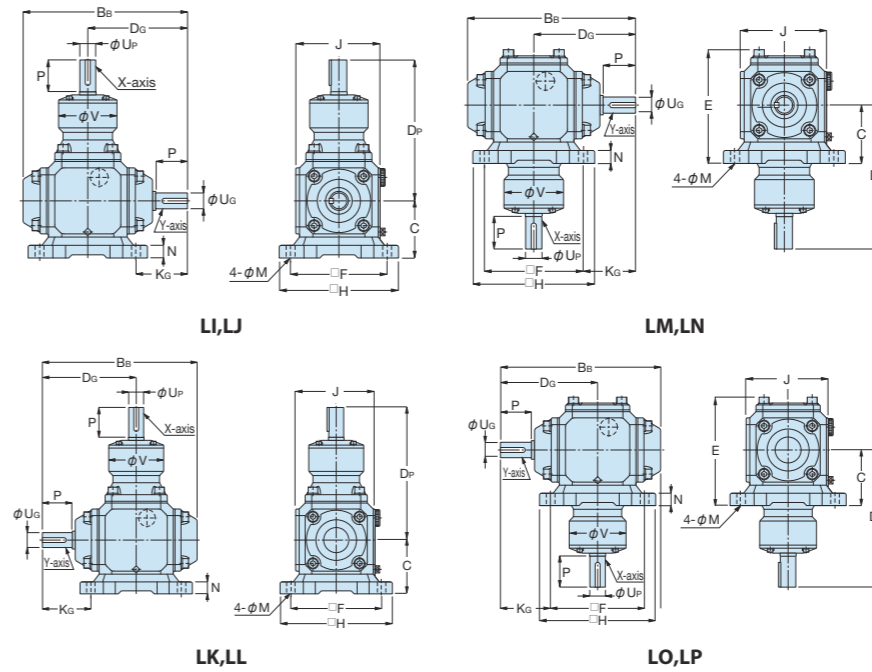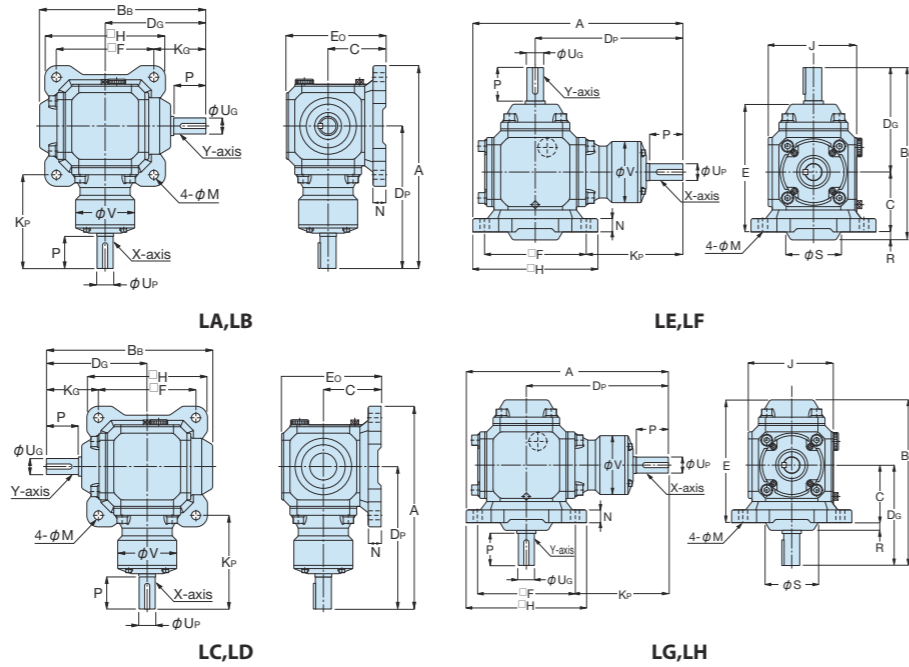

Catalog Number	Speed ratio	A	B _B	C	D _P	D _G	E	E ₀	F	H	J	K _P	K _G	φ _M	N	P	R	φ _S
CBX-191L	1:1	257	193	76	180	116	146	129	125	154	109	117.5	53.5	10.5	17	38	—	—
CBX-192L	1:2																	
CBX-251L	1:1	316	259	90	222	157	177.5	155	152	188	133	146	81	14	20	50	12	82.5
CBX-252L	1:2																	
CBX-321L	1:1	340	277	100	242	168	192.5	174	160	196	151	162	88	14	20	55	9	88.5
CBX-322L	1:2																	
CBX-401L	1:1	425	337	115	308	208	225	200	195	234	173	210.5	110.5	14	22	75	14	114.5
CBX-402L	1:2																	


φ _V	X-axis diameter φ _{U_P}	Y-axis diameter φ _{U_G}	Key	Angular Backlash	Weight (kg)	Catalog Number
66	19	19	6 x 6 x 27 ℓ	11'~30'	10.0	CBX-191L
	18			17'~47'		CBX-192L
92	25	25	8 x 7 x 40 ℓ	9'~22'	17.0	CBX-251L
				15'~36'		CBX-252L
100	32	32	10 x 8 x 50 ℓ	9'~21'	22.0	CBX-321L
				15'~36'		CBX-322L
124	40	40	12 x 8 x 60 ℓ	8'~20'	33.0	CBX-401L
				15'~37'		CBX-402L

[NOTES]

- The phases of the X-axis and Y-axis key grooves do not always match.
 - The shaft diameter tolerance is JIS h6.
 - JIS B 1301-1976 (normal) is used for the key dimensions
 - The indicated angular backlash is reference values measured on the X-axis (input axis).
 - The standard specifications of the oil plug are flat surface mounting (floor mounting), oil filler port → PF1/2, and oil drain port → PT1/4.
- When mounting on the ceiling or on the wall, an oil drain port can be added to the position shown in the figure below as a custom order.

Standard specifications



Oil plug PF1/2 (oil filler port)



Oil plug PT1/4 (oil drain port)

When placing an order, select the model code (A to P) from the Shaft Arrangement Table on Page 456 in the □ at the end of the catalog number.

CBX T
Bevel Gearboxes

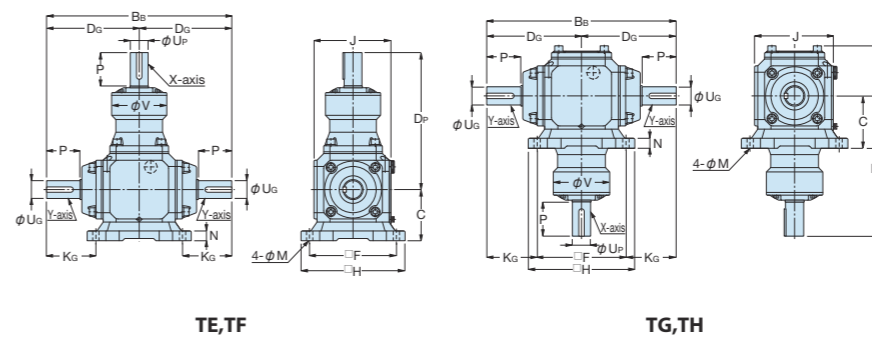
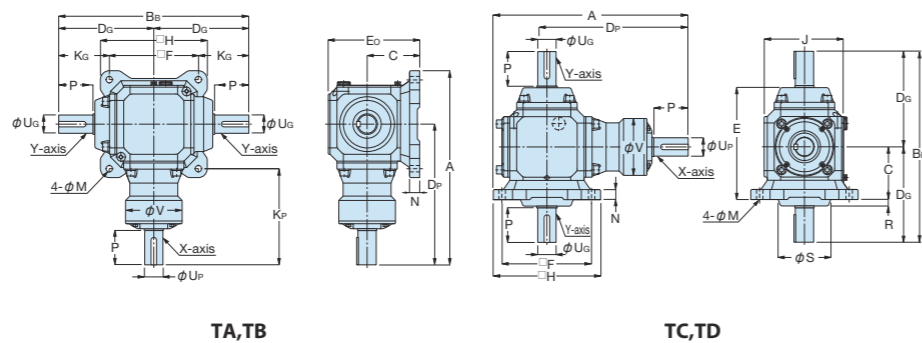


Catalog Number	Speed ratio	A	B _B	C	D _P	D _G	E	E ₀	F	H	J	K _P	K _G	φ _M	N	P	R	φ _S
CBX-191T	1:1	257	232	76	180	116	146	129	125	154	109	117.5	53.5	10.5	17	38	—	—
CBX-192T	1:2																	
CBX-251T	1:1	316	314	90	222	157	177.5	155	152	188	133	146	81	14	20	50	12	82.5
CBX-252T	1:2																	
CBX-321T	1:1	340	336	100	242	168	192.5	174	160	196	151	162	88	14	20	55	9	88.5
CBX-322T	1:2																	
CBX-401T	1:1	425	416	115	308	208	225	200	195	234	173	210.5	110.5	14	22	75	14	114.5
CBX-402T	1:2																	

φ _V	X-axis diameter φ _{U_P}	Y-axis diameter φ _{U_G}	Key	Angular Backlash	Weight (kg)	Catalog Number
66	19	19	6 x 6 x 27 ℓ	11'~30'	10.0	CBX-191T
	18			17'~47'		CBX-192T
92	25	25	8 x 7 x 40 ℓ	9'~22'	18.0	CBX-251T
				15'~36'		CBX-252T
100	32	32	10 x 8 x 50 ℓ	9'~21'	23.0	CBX-321T
				15'~36'		CBX-322T
124	40	40	12 x 8 x 60 ℓ	8'~20'	34.0	CBX-401T
				15'~37'		CBX-402T

Oil drain port added (estimated separately)

Oil plug drain port PT1/4 can be added at the marked location. Please make the request when asking for a quote.

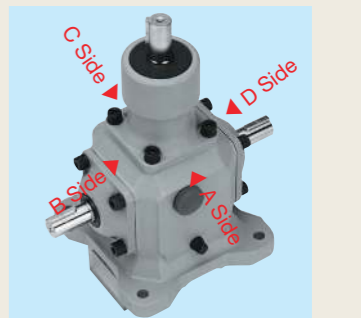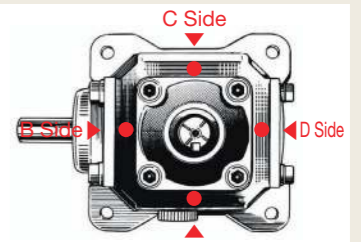

* The side with the standard oil plug is the A side, and B, C and D are displayed clockwise when viewed from above.

When placing an order, select the model code (A to H) from the Shaft Arrangement Table on Page 456 in the □ at the end of the catalog number.

* As this product is assembled according to customer specifications, delivery will be made about 10 days after an order is received. Please be aware of this when ordering.

Bevel Box Selection Guide

Selection Guide

Items required for selection

Load torque, prime mover type, input rotation speed, speed ratio, operating time, connection method, frequency of start/stop

Selection Procedure

The performance table in the catalog is where the load is uniform, the prime mover is a motor and the operating time is 10 hours/day.

A) When using under other conditions, correct the load torque according to the Service Factors in <Table 1>.

Corrected load torque = Load torque applied to the gear box × Service factor <See Table 1>

Load State	Service Factor (Sf)		
	Operation of 3H or less / day	Operation of 3-10H / day	Operation of 10H or more / day
Uniform load	1 (1)	1 (1.25)	1.25 (1.50)
Light impact load	1 (1.25)	1.25 (1.50)	1.50 (1.75)
Severe impact load	1.25 (1.50)	1.50 (1.75)	1.75 (2.00)

(Note) 1. If the frequency of start/stop is 10 times or more per hour, the coefficient in parentheses will be used.
2. For a prime mover other than electric motor is used (engine, etc.), the coefficient in parentheses will also be used.

Make sure that the corrected load torque is smaller than the X/Y-axis allowable torque or the Y-axis allowable torque in the performance table at the operating rotation speed.

B) For the shaft arrangement, select from the Shaft Arrangement Diagram of respective model.

C) Confirming the overhang load (O.H.L.)

Overhang load (O.H.L.) is a suspended load acting on the shaft. The O.H.L. must be considered if a chain, belt, gear or the like is used to connect the gear box shaft and mating machine.


$$O.H.L. = \frac{T_{LE} \times K_1 \times K_2}{R} \text{ (N) \{kgf\}}$$

T_{LE} : Corrected load torque (N-m) {kgf-m} applied to the gear box shaft
 R : Pitch circle radius (m) of a sprocket, pulley, gear or the like attached to the gear box shaft
 K_1 : Coefficient by connection method <See Table 2>
 K_2 : Coefficient by load position <See Table 3>

* Make sure that the O.H.L. calculated using the above formula is smaller than the allowable O.H.L. for the X-axis and Y-axis shown in the performance table.

Connection method	K ₁
Chain, timing belt	1.00
Gear	1.25
V-belt	1.50

Load position	K ₂
Shaft root	0.75
Shaft center	1.00
Shaft end	1.50



D) Select a model that satisfies all of A), B) and C) obtained using the above formula.



KBX-L



KBX-T

Selection Example

Selection example 1


Application / Conveyor (uniform load)
 Load torque / 78.4N·m {8kgf·m}
 X-axis rotation speed / 300rpm
 Speed ratio / 1:2
 Shaft arrangement / As shown in the diagram on the right
 Operating time / 12 hours/day
 Connection method / X-axis - Coupling
 Y-axis - Chain (located in the center of the shaft)
 Installation method / Horizontal mounting
 Installation location / Indoors



CBX-L



CBX-T

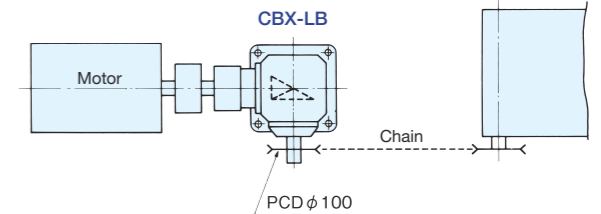

① Considering the torque

The service factor based on the load status is $S_f = 1.25$ as shown in <Table 1>.
 Therefore, the corrected load torque applied to the Y-axis is:
 $T_{LE} = 78.4 \times 1.25 = 98 \text{ N}\cdot\text{m}$ { $T_{LE} = 8 \times 1.25 = 10 \text{ kgf}\cdot\text{m}$ }

② Considering the O.H.L.

The load O.H.L. of Y-axis is:


$$O.H.L. = \frac{T_{LE} \times K_1 \times K_2}{R} = \frac{98 \times 1 \times 1}{\frac{100}{2 \times 1000}} = 1960 \text{ N} \text{ \{ O.H.L. = } \frac{T_{LE} \times K_1 \times K_2}{R} = \frac{10 \times 1 \times 1}{\frac{100}{2 \times 1000}} = 200 \text{ kgf} \}$$

③ Determining the model

A model that satisfies all the conditions, torque and O.H.L. is **CBX-322LB**.

Selection example 2

Application / Line shaft drive
 Load torque / Load A, B, and C are 58.8N·m {6kgf·m} respectively (uniform load)
 Rotation speed / 600rpm
 Speed ratio / 1:1
 Shaft arrangement / As shown in the diagram on the right
 Operating time / 8 hours/day
 Connection method / All coupling
 Installation method / Horizontal mounting
 Installation location / Indoors

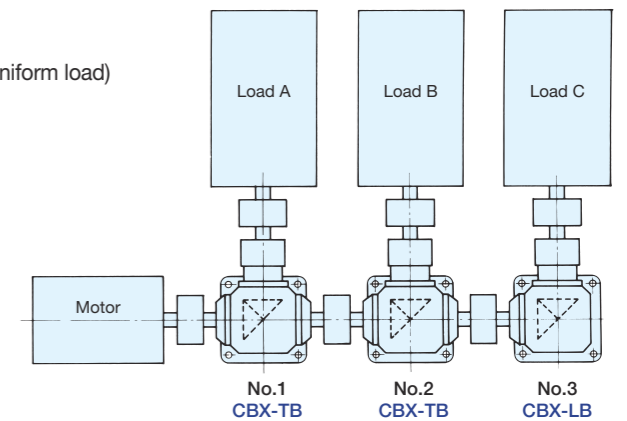

For line shaft drive, the load applied to the Y-axis differs depending on the position of the gear box, so it is necessary to select each separately. The Service Factors <Table 1> based on the conditions are all $S_f = 1.0$.

① Gearboxes No.1

The corrected load torque applied to the X-axis drives only load A.
 Therefore, $58.8 \times 1.0 = 58.8 \text{ N}\cdot\text{m}$ { $6 \times 1.0 = 6 \text{ kgf}\cdot\text{m}$ }
 The corrected load torque applied to the Y-axis drives loads A, B and C.
 Therefore, $(58.8 + 58.8 + 58.8) \times 1.0 = 176.4 \text{ N}\cdot\text{m}$
 {(6 + 6 + 6) × 1.0 = 18kgf·m}
 Based on the performance table, **CBX-401TB** is selected.

② Gearboxes No.2

The corrected load torque applied to the X-axis drives only load B.
 Therefore, $58.8 \times 1.0 = 58.8 \text{ N}\cdot\text{m}$ { $6 \times 1.0 = 6 \text{ kgf}\cdot\text{m}$ }
 The corrected load torque applied to the Y-axis drives loads B and C.
 Therefore, $(58.8 + 58.8) \times 1.0 = 117.6 \text{ N}\cdot\text{m}$
 {(6 + 6) × 1.0 = 12kgf·m}
 Based on the performance table, **CBX-321TB** is selected.

③ Gearboxes No.3

The corrected load torque applied to the X-axis drives only load C.
 Therefore, $58.8 \times 1.0 = 58.8 \text{ N}\cdot\text{m}$ { $6 \times 1.0 = 6 \text{ kgf}\cdot\text{m}$ }
 The corrected load torque applied to the Y-axis drives only load C.
 Therefore, $58.8 \times 1.0 = 58.8 \text{ N}\cdot\text{m}$ { $6 \times 1.0 = 6 \text{ kgf}\cdot\text{m}$ }
 Based on the performance table, **CBX-251LB** is selected.

④ Determining the model

No.1 Gear Box **CBX-401TB**
 No.2 Gear Box **CBX-321TB**
 No.3 Gear Box **CBX-251LB**



Moment of Inertia of KBX Bevel Box

Unit: kg·m²

Model	Item	Pinion Axis (X)	Gear Axis (Y)
L	KBX-101L	4.45×10 ⁻⁶	4.45×10 ⁻⁶
	KBX-102L	2.16×10 ⁻⁶	8.65×10 ⁻⁶
	KBX-151L	5.30×10 ⁻⁵	5.30×10 ⁻⁵
	KBX-152L	3.65×10 ⁻⁵	1.47×10 ⁻⁴
	KBX-201L	1.79×10 ⁻⁴	1.79×10 ⁻⁴
	KBX-202L	7.85×10 ⁻⁵	3.15×10 ⁻⁴
T	KBX-101T	4.75×10 ⁻⁶	4.75×10 ⁻⁶
	KBX-102T	2.23×10 ⁻⁶	8.93×10 ⁻⁶
	KBX-151T	5.60×10 ⁻⁵	5.60×10 ⁻⁵
	KBX-152T	3.37×10 ⁻⁵	1.50×10 ⁻⁴
	KBX-201T	1.94×10 ⁻⁴	1.94×10 ⁻⁴
	KBX-202T	8.20×10 ⁻⁵	3.28×10 ⁻⁴

[NOTES] Consider the indicated moment of inertia as reference values.








Moment of Inertia of CBX Bevel Box

Unit: kg·m²


Model	Item	Pinion Axis (X)	Gear Axis (Y)
L	CBX-191L	4.00×10 ⁻⁴	4.00×10 ⁻⁴
	CBX-192L	1.86×10 ⁻⁴	7.43×10 ⁻⁴
	CBX-251L	2.48×10 ⁻³	2.48×10 ⁻³
	CBX-252L	1.03×10 ⁻³	4.13×10 ⁻³
	CBX-321L	4.00×10 ⁻³	4.00×10 ⁻³
	CBX-322L	1.29×10 ⁻³	5.18×10 ⁻³
	CBX-401L	8.95×10 ⁻³	8.95×10 ⁻³
	CBX-402L	3.83×10 ⁻³	1.53×10 ⁻²
T	CBX-191T	4.05×10 ⁻⁴	4.05×10 ⁻⁴
	CBX-192T	1.87×10 ⁻⁴	7.48×10 ⁻⁴
	CBX-251T	2.50×10 ⁻³	2.50×10 ⁻³
	CBX-252T	1.04×10 ⁻³	4.15×10 ⁻³
	CBX-321T	4.08×10 ⁻³	4.08×10 ⁻³
	CBX-322T	1.31×10 ⁻³	5.25×10 ⁻³
	CBX-401T	9.20×10 ⁻³	9.20×10 ⁻³
	CBX-402T	3.88×10 ⁻³	1.55×10 ⁻²

[NOTES] Consider the indicated moment of inertia as reference values.



SRT/SRT-C Ratchets & Pawls	SRTB/SRT-C Ratchets & Pawls	GC/GC-I Gear Couplings	SV/SVI Involute Spline Shafts, Spline Bushings	GCU Gear Assembly Kit	DLS Rack & Pinion Lubrication System
					
Material: S45C P2.09-12.57 Page 464	Material: S45C P2.09-12.57 Page 466	Material: S45C m2, 2.5 Page 468	Material: S45C m1.667 Page 470	Material: - Page 472	Material: - Page 474
Racks & Pinions Aluminum Frame Transport Device					
					
Material: - Page 30					

 Includes Made to Order

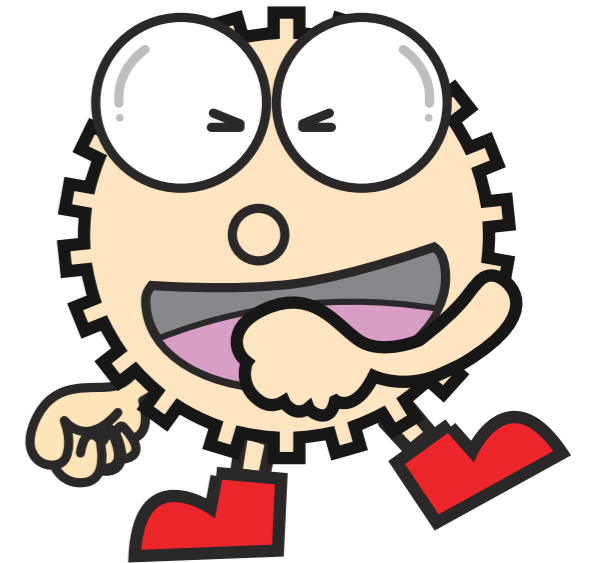

Catalog Number of KHK Stock Gears


The Catalog Number for KHK stock gears is based on the simple formula listed below. Please order KHK gears by specifying the Catalog Numbers.

(Example) Other Products





Specifications	
Tooth groove angle	60°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating




Characteristics of Pawls and Ratchets

- A simple structure used to restrict the rotational direction in one-way.
- The tips of pawls and the teeth of ratchets are induction hardened and therefore have superior durability.

Catalog Number	Pitch	No. of teeth	Shape	Bore		Outside dia.	Face width	Hub width	Total length	Tooth height	Center distance	Mounting height	Allowable torque (N·m)		Weight (kg)
				A	B								Bending strength	Bending strength	
SRT2/3-50	2.09	50	T4	10		33.3				33.84	15.67	3.07	0.31	0.035	
SRT2/3-60		60		10		40				35.51	19	4.10	0.42	0.053	
SRT2/3-80		80		12	—	53.3	6	—	6	1	39.48	25.67	6.00	0.61	0.096
SRT2/3-90		90		12		60					41.73	29	7.11	0.73	0.12
SRT2/3-100		100		12		66.6					44.11	32.33	8.24	0.84	0.15
SRT1-50	3.14	50	T4	12		50				45.48	23.4	14.7	1.50	0.16	
SRT1-60		60		15		60				48.24	28.4	19.5	1.99	0.24	
SRT1-80		80		15	—	80	12	—	12	1.6	54.73	38.4	29.4	3.00	0.44
SRT1-90		90		15		90					58.35	43.4	34.5	3.52	0.56
SRT1-100		100		15		100					62.16	48.4	39.4	4.02	0.70
SRT2-30	6.28	30	T4			60				61.23	26.9	29.0	2.96	0.28	
SRT2-40		40		15	—	80	15	—	15	3.1	66.23	36.9	49.2	5.02	0.53
SRT2-50		50				100					72.28	46.9	70.8	7.22	0.85
SRT2-60		60				120					79.14	56.9	94.3	9.61	1.24
SRT3-30	9.42	30	T4	15		90				76.32	40	92.6	9.44	0.86	
SRT3-40		40		20	—	120	20	—	20	5	85.15	55	158	16.1	1.58
SRT3-50		50		20		150					95.52	70	229	23.3	2.54
SRT4-30	12.57	30	T4			120				95.74	52.6	226	23.0	1.89	
SRT4-40		40		20	—	160	25	—	25	7.4	108.03	72.6	385	39.3	3.53
SRT4-50		50		20		200					122.37	92.6	559	57.0	5.66

- [Caution on Product Characteristics] ① The bore may slightly vary due to the effect of heat treatment. When using with the indicated hole diameter, provide machining with a reamer or the like before use.
- [Caution on Secondary Operations] ① Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).

J Series



To order J Series products, please specify: **Catalog No. + J + BORE.**


Bore H7	* The product shapes of J Series items are identified by background color.																											
	10	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50										
Keyway JS9	4x1.8										5x2.3					6x2.8				8x3.3			10x3.3		12x3.3		14x3.8	
Screw size	4x1.8										5x2.3					6x2.8				8x3.3			10x3.3		12x3.3		14x3.8	
Catalog Number	—																											
SRT2/3-50J BORE	T4K	T4K	T4K																									
SRT2/3-60 J BORE	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K																				
SRT2/3-80 J BORE			T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K																	
SRT2/3-90 J BORE			T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K																
SRT2/3-100 J BORE			T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K														
SRT1-50 J BORE			T4K	T4K	T4K	T4K	T4K	T4K	T4K																			
SRT1-60 J BORE					T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K																
SRT1-80 J BORE					T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K													
SRT1-90 J BORE					T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K											
SRT1-100 J BORE					T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K										
SRT2-30 J BORE					T4K	T4K	T4K	T4K	T4K	T4K																		
SRT2-40 J BORE					T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K													
SRT2-50 J BORE					T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K											
SRT2-60 J BORE					T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K										
SRT3-30 J BORE					T4K	T4K	T4K	T4K	T4K																			
SRT3-40 J BORE										T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K									
SRT3-50 J BORE										T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K	T4K									
SRT4-30 J BORE																			T4K									
SRT4-40 J BORE																			T4K									
SRT4-50 J BORE																			T4K									

- [Caution on J series] ① As available-on-request products, these require a lead-time for shipping of 2 working days (excludes the day ordered), after placing an order. Because the machining starts immediately, we cannot accept cancellations. Please see Page 38 for more details.
- ② Number of pieces we can process for one order is 1 to 20 units. For larger quantities, please request price and delivery quotes.
- ③ Keyways are made according to JIS B1301 standards, Js9 tolerance. Also note that tooth phase matching is not performed.
- ④ Black oxide is not re-applied after hole and key secondary operations.
- ⑤ Certain products which would otherwise have a very long tapped hole are counterbored. Please see the website for more details.

SRT-C Pitch 2.09~12.57
Ratchet Pawls



Specifications	
Tooth angle	60°
Material	S45C
Heat treatment	Pawl induction hardened
Pawl hardness	50 to 60HRC
Surface treatment	Black oxide coating

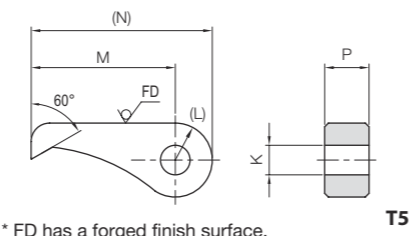


* FD has a forged finish surface.

Catalog Number	Shape	K	(L)	M	(N)	P	Weight (kg)
SRT2/3-C	T5	5	(8)	30	(38)	6	0.020
SRT1-C		8	(10)	39	(49)	12	0.057
SRT2-C		10	(12.5)	55	(67.5)	15	0.13
SRT3-C		12	(15)	65	(80)	20	0.23
SRT4-C		13	(18)	80	(98)	25	0.38

- [Caution on Product Characteristics] ① The ratchet pawl is for preventing reverse rotation. It cannot be used for feeding or indexing.
- ② SRT2/3-C is a lost wax product that uses S45C-equivalent material.

Application Examples

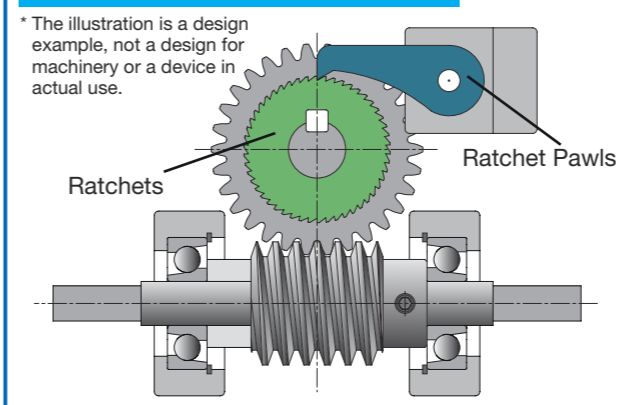

Example: ratchets used for complete reverse prevention of worm gears

Bending Strength of Ratchets

The allowable transmission force F_b (N) of ratchets is the value calculated by the following formula.

$$F_b = \sigma_b \cdot \frac{b \cdot c^2}{6} \cdot \frac{1}{h} \cdot \frac{1}{S_F}$$

Also, the SRT Ratchet's allowable torque T (N·m) for bending strength is calculated by the following formula.


$$T = F_b \cdot r_f$$

Where

- σ_b : Bending stress → Assumed 225.55MPa (23kgf/mm²)
- b : Face width mm → Dimension Table ratchet face width E
- c : Root length mm
→ $e = h \times \tan\left(60 - \frac{360}{\text{No. of teeth}}\right)$ is the calculation
- h : Depth of teeth mm → Dimension Table ratchet tooth depth H
- S_F : Safety factor → Assumed 2
- r_f : Tooth root radius mm
→ $r_f = \frac{\text{Outside dia. } D - 2h}{2000}$ is the calculation



Specifications	
Tooth groove angle	60°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating

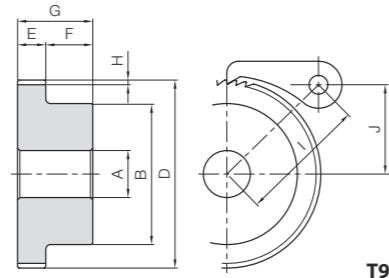

T9

Characteristics of Pawls and Ratchets

- A simple structure used to restrict the rotational direction in one-way.
- The tips of pawls and the teeth of ratchets are induction hardened and therefore have superior durability.

Catalog Number	Pitch	No. of teeth	Shape	Bore	Hub dia.	Outside dia.	Face width	Hub width	Total length	Tooth height	
				A	B	D	E	F	G	H	
SRTB2/3-50 (Made to Order)	2.09	50	T9	10	25	33.3	6	10	16	1	
SRTB2/3-60 (Made to Order)		60		10	30	40					
SRTB2/3-80 (Made to Order)		80		12	35	53.3					
SRTB2/3-90 (Made to Order)		90		12	40	60					
SRTB2/3-100 (Made to Order)		100		12	40	66.6					
SRTB1-50 (Made to Order)	3.14	50		12	35	50	12	12	24	1.6	
SRTB1-60 (Made to Order)		60		15	40	60					
SRTB1-80 (Made to Order)		80		15	50	80					
SRTB1-90 (Made to Order)		90		15	50	90					
SRTB1-100 (Made to Order)		100		15	50	100					
SRTB2-30 (Made to Order)	6.28	30		T9	15	50	60	15	14	29	3.1
SRTB2-40 (Made to Order)		40				60	80				
SRTB2-50 (Made to Order)		50				60	100				
SRTB2-60 (Made to Order)		60				65	120				
SRTB3-30 (Made to Order)		9.42				30	15				
SRTB3-40 (Made to Order)	40		20		80	120					
SRTB3-50 (Made to Order)	50		20		85	150					
SRTB4-30 (Made to Order)	12.57	30	T9		20	90	120	25	18	43	7.4
SRTB4-40 (Made to Order)		40				90	160				
SRTB4-50 (Made to Order)		50				100	200				


Center distance I	Mounting height J	Allowable torque (N·m)		Weight (kg)	Catalog Number
		Bending strength	Bending strength		
33.84	15.67	3.07	0.31	0.067	SRTB2/3-50 (Made to Order)
35.51	19	4.10	0.42	0.10	SRTB2/3-60 (Made to Order)
39.48	25.67	6.00	0.61	0.16	SRTB2/3-80 (Made to Order)
41.73	29	7.11	0.73	0.21	SRTB2/3-90 (Made to Order)
44.11	32.33	8.24	0.84	0.24	SRTB2/3-100 (Made to Order)
45.48	23.4	14.7	1.50	0.24	SRTB1-50 (Made to Order)
48.24	28.4	19.5	1.99	0.34	SRTB1-60 (Made to Order)
54.73	38.4	29.4	3.00	0.61	SRTB1-80 (Made to Order)
58.35	43.4	34.5	3.52	0.73	SRTB1-90 (Made to Order)
62.16	48.4	39.4	4.02	0.87	SRTB1-100 (Made to Order)
61.23	26.9	29.0	2.96	0.47	SRTB2-30 (Made to Order)
66.23	36.9	49.2	5.02	0.82	SRTB2-40 (Made to Order)
72.28	46.9	70.8	7.22	1.14	SRTB2-50 (Made to Order)
79.14	56.9	94.3	9.61	1.59	SRTB2-60 (Made to Order)
76.32	40	92.6	9.44	1.40	SRTB3-30 (Made to Order)
85.15	55	158	16.1	2.17	SRTB3-40 (Made to Order)
95.52	70	229	23.3	3.22	SRTB3-50 (Made to Order)
95.74	52.6	226	23.0	2.75	SRTB4-30 (Made to Order)
108.03	72.6	385	39.3	4.38	SRTB4-40 (Made to Order)
122.37	92.6	559	57.0	6.72	SRTB4-50 (Made to Order)

- [Caution on Product Characteristics] ① For the ratchet with SRTB hub, pay attention to the orientation of the teeth with respect to the hub. Items with opposite orientation can be made to order.
 ② The bore may slightly vary due to the effect of heat treatment. When using with the indicated hole diameter, provide machining with a reamer or the like before use.
- [Caution on Secondary Operations] ① Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).
- [Precautions for Made to Order Products] Prices and lead times for Made to Order products require separate estimates. Contact your dealer.

SRT-C Pitch 2.09~12.57
Ratchet Pawls



Specifications	
Tooth angle	60°
Material	S45C
Heat treatment	Pawl induction hardened
Pawl hardness	50 to 60HRC
Surface treatment	Black oxide coating

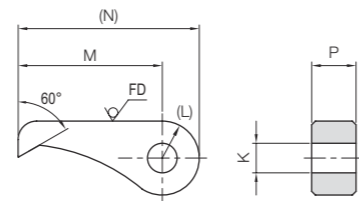

* FD has a forged finish surface.

T5

Catalog Number	Shape	K	(L)	M	(N)	P	Weight (kg)
SRT2/3-C	T5	5	(8)	30	(38)	6	0.020
SRT1-C		8	(10)	39	(49)	12	0.057
SRT2-C		10	(12.5)	55	(67.5)	15	0.13
SRT3-C		12	(15)	65	(80)	20	0.23
SRT4-C		13	(18)	80	(98)	25	0.38

- [Caution on Product Characteristics] ① The ratchet pawl is for preventing reverse rotation. It cannot be used for feeding or indexing.
 ② SRT2/3-C is a lost wax product that uses S45C-equivalent material.

Application Examples

* The illustration is a design example, not a design for machinery or a device in actual use.

Example: ratchets used for complete reverse prevention of worm gears

Bending Strength of Ratchets

The allowable transmission force F_b (N) of ratchets is the value calculated by the following formula.

$$F_b = \sigma_b \cdot \frac{b \cdot e^2}{6} \cdot \frac{1}{h} \cdot \frac{1}{S_F}$$

Also, the SRT Ratchet's allowable torque T (N·m) for bending strength is calculated by the following formula.


$$T = F_b \cdot r_f$$

Where

- σ_b : Bending stress → Assumed 225.55MPa (23kgf/mm²)
- b : Face width mm → Dimension Table ratchet face width E
- e : Root length mm
→ $e = h \times \tan\left(60 - \frac{360}{\text{No. of teeth}}\right)$ is the calculation
- h : Depth of teeth mm → Dimension Table ratchet tooth depth H
- S_F : Safety factor → Assumed 2
- r_f : Tooth root radius mm
→ $r_f = \frac{\text{Outside dia. } D - 2h}{2000}$ is the calculation



Specifications	
Gear teeth	Normal teeth (crowning)
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating

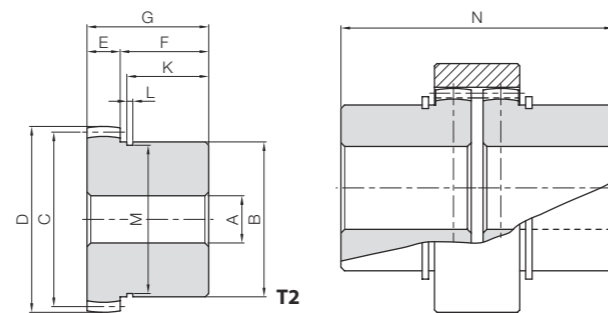


Catalog Number	Module	No. of teeth	Shape	Bore		Pitch dia.	Outside dia.	Face width	Hub width	Total length	C-shaped retaining ring groove					Backlash (mm)	Weight (kg)
				A _{H8}	B						C	D	E	F	G		
GC1-12S	m2	25	T2	12	45	50	54	10	25	35	23	1.95	42.5	73	0.40~0.60	0.43	
GC2-20S	m2	40	T2	20	70	80	84	15	40	55	37	2.7	67	115	0.40~0.60	1.66	
GC3-20S	m2.5	42	T2	20	90	105	110	20	45	65	42	3.2	86.5	135	0.40~0.60	3.43	

[Caution on Product Characteristics] ① A snap ring is included as an accessory.

[Caution on Secondary Operations] ① Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).




Specifications	
Gear teeth	Standard full depth
Pressure angle	20°
Material	S45C
Heat treatment	Gear teeth induction hardened
Tooth hardness	50 to 60HRC
Surface treatment	Black oxide coating



Catalog Number	Module	No. of teeth	Shape	Inside dia.	Pitch dia.	Outside dia.	Face width	Backlash (mm)	Weight (kg)
				A	C	D	E		
GC1-I	m2	25	T1	46	50	68	25	0.40~0.60	0.33
GC2-I	m2	40	T1	76	80	105	36	0.40~0.60	1.03
GC3-I	m2.5	42	T1	100	105	145	48	0.40~0.60	2.96

[Caution on Secondary Operations] ① Due to the gear teeth being induction hardened, no secondary operations can be performed on tooth areas including the bottom land (approx. 2 to 3 mm).

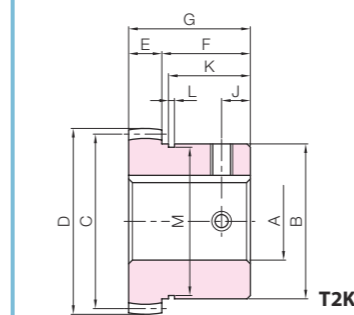

Catalog Number	J
GC1-12SJ BORE	10
GC2-20SJ BORE	13
GC3-20SJ BORE	20



To order J Series products, please specify: **Catalog No. + J + BORE.**

Bore H7	* The product shapes of J Series items are identified by background color.																					
Keyway JS9	12	14	15	16	17	18	19	20	22	25	28	30	32	35	40	45	50					
Screw size	4x1.8				5x2.3				6x2.8				8x3.3				10x3.3		12x3.3		14x3.8	
Catalog Number	M4				M5				M6				M8				M10					
GC1-12SJ BORE	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K	T2K		
GC2-20SJ BORE																						
GC3-20SJ BORE																						

[Caution on J series] ① As available-on-request products, these require a lead-time for shipping of 2 working days (excludes the day ordered), after placing an order. Because the machining starts immediately, we cannot accept cancellations. Please see Page 38 for more details.

- Number of pieces we can process for one order is 1 to 20 units. For larger quantities, please request price and delivery quotes.
- Keyways are made according to JIS B1301 standards, Js9 tolerance. Also note that tooth phase matching is not performed.
- Certain products which would otherwise have a very long tapped hole are counterbored. Please see the Website for more details.
- Areas of products which have been re-worked will not be black oxide coated.
- For products having a tapped hole, a set screw is included.
- Products marked with an * have a bore tolerance of H8.

Characteristics of Gear Couplings

- There are many ways to couple shafts to transmit power. We have developed these standardized gear couplings of our own design. They are easier to connect or disconnect than chain couplings.
- As the external gear (inner cylinder) is crowned, the shaft angle can be up to 5°.
- Due to the induction hardened gear teeth, these couplings have excellent durability.
- The GCJ units are machined complete with keyways, set screw holes and finished bores and are ready for immediate installation. We also offer minimum bore models for users who want to perform their own secondary operations.

Gear Coupling Ordering Method

Gear coupling outer rings and inner hubs can each be purchased individually; however, normal usage requires a set of 1 outer ring and 2 inner hubs.

<E.g.> For 1 set of GC2-20S
GC2-I (outer ring) x 1 piece and GC2-20S (inner hub) x 2 piece set.

Strength of Gear Couplings

The allowable torques of the gear couplings are determined in accordance with the shear strength of the keys. Allowable shear force of keys F (N) is calculated from the following formula.

$$F = b \cdot L \cdot \sigma \cdot \frac{1}{S}$$

Additionally, allowable torques T(N·m) of the inner hubs of the GC gear coupling is calculated using the following formula.


$$T = \frac{F \cdot d}{2000}$$

b : Key Width mm → Keyway width of inner hubs of the GC Gear Coupling
L : Key Length mm → Set at G-2 mm from the total length of the inner hub of the GC Gear Coupling
σ : Allowable Shear Force of keys → Set at 49MPa (5kgf/mm²)
S : Safety Factor → Optionally set
d : Bore size (mm) → Bore size A of the inner hub of the GC Gear Coupling


Caution: Safety Factor (S) must be set at a value between 1 to 3, depending on the load types or the coupling displacement.



Specifications	
Gear teeth	Stub teeth
Pressure angle	20°
Material	S45C
Heat treatment	Thermal refined
Tooth hardness	200 to 270HB
Surface treatment	Black oxide coating

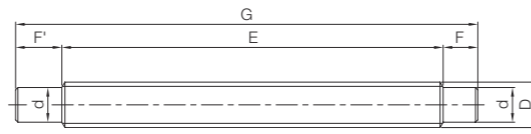

TA

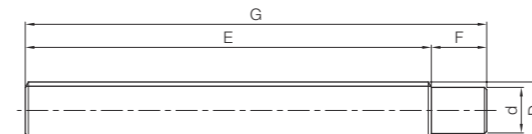

TB



Catalog Number	Module	No. of teeth	Shape	Outside dia.	Hub dia.	Face width	Hub width (left)	Hub width (right)	Total length	Backlash (mm)	Weight (kg)
				D	d ^{+0.25 -0.15}	E	F'	F	G		
SV17-170	m1.667	8	TA	16.67	13	135	20	15	170	0.06~0.15	0.26
SV20-200		10	TA	19.67	15	165	20	15	200		
SV25-250		13	TB	24.67	20	220	—	30	250		
SV30-300		16	TB	29.67	25	270	—	30	300		


[Caution on Secondary Operations] ① When modifying the SV involute spline shaft with secondary operations, be careful not to crush the teeth or bend the shaft.

Characteristics of Involute Spline Shafts

- SV and SVI series are made according to the automotive involute spline standard, JIS B 1603: 1995 (Straight cylindrical involute splines, backlash 0.06 to 0.15).
- Involute spline shafts and bushings are thermal refined to have good abrasion-resistance.
- Spline bushings may be made in CAC (copper) type material as a special custom order item.



Specifications	
Gear teeth	Stub teeth
Pressure angle	20°
Material	S45C
Heat treatment	Thermal refined
Tooth hardness	200 to 270HB
Surface treatment	Black oxide coating



T1

Catalog Number	Module	No. of teeth	Shape	Outside dia.	Outside dia.	Face width	Allowable torque (N·m)	Allowable torque (kgf·m)	Backlash (mm)	Weight (kg)
				A	D	E	Surface durability	Surface durability		
SVI17-40	m1.667	8	T1	13.7	40	25	33.2	3.38	0.06~0.15	0.21
SVI20-45		10		16.7	45	30	59.6	6.08		
SVI25-55		13		21.7	55	38	125	12.8		
SVI30-65		16		26.7	65	45	222	22.6		

[Caution on Product Characteristics] ① The allowable torque shown are reference values calculated from "Surface strength of splines" on Page 471.

② Lubrication is always required on the mating surface of the spline shaft and hub.

Surface Strength of Splines

The design concept of the spline surface strength is the same as that of a key. Here is the formula for the allowable transmission force F(N) of spline.

$$F = \eta \cdot z \cdot h_w \cdot l \cdot \sigma$$

And the formula of allowable torque T (N·m) of spline with respect to the surface strength.

$$T = \frac{F \cdot d_w}{2000}$$

In designing a spline shaft, besides considering the surface strength, we should take into account the torsional and bending stresses of the spline.

Where

η : Contact ratio of surface → 0.75 (assumed)

z : Number of teeth → number of teeth of spline from the table

h_w : Contact depth of tooth (mm) → 1.485


l : Contact length of spline → spline hub face width E from the table

σ : Allowable surface stress of spline → 19.61MPa (2kgf/mm²) (assumed)

d_w : Contact diameter (mm) → Tip diameter of spline shaft D - h_w



See the gears with your own eyes and move them with your own hands to learn about their mechanisms and characteristics.

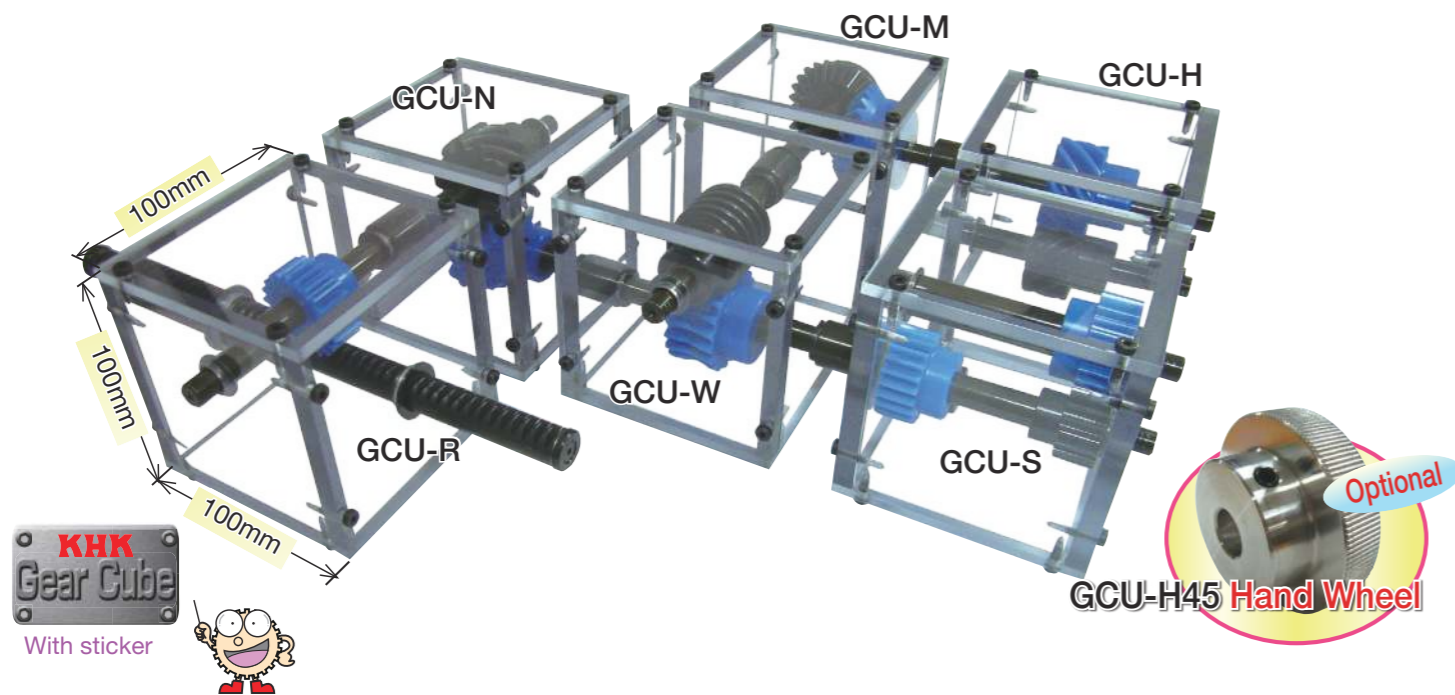

* These kits are not for actual use to transmit power. Please use only as representations of gear systems.

Features of GearCube

- Assembly kits can be connected flexibly.
- The frame is made of polycarbonate with high transparency and impact resistance.
- Gears combine MC nylon and metal, making lubrication unnecessary.
- An instruction manual is included, enabling easily assembly by anyone.



This product is certified by KAWAGUCHI i-mono i-waza

Assembly Procedure

Details are available on the Japanese website

Photo shows GCU-R



Remove protective sheet



Insert bushing



Set in shaft




Assemble into frame


Set Contents



Photo shows GCU-R



Adhere the sticker and it's complete!



Screw-fasten

All six types of assembly kit and input/output shafts can be connected.

GCU-S Spur Gear Kit



Installation: Parallel Axes (Two-stage)
 Gear Type: Spur Gear
 Used Product: 2 units of SS1.5-16
 2 units of PS1.5-22
 Gear Ratio: 1.89
 Weight: Approx. 1kg

The Gear Kit contains a two-stage spur gear train and allows speed increases / reductions, and includes the most commonly used combinations of gears.

GCU-H Helical Gear Kit



Installation: Parallel Axes
 Gear Type: Helical Gears (also for Screw Gears)
 Gears: SN2.5-10L
 PN2.5-10R
 Gear Ratio: 1
 Weight: Approx. 1kg

Helical gears have more strength than spur gears of the same dimensions and have the advantage of being less noisy.


GCU-M Miter Gear Kit



Installation: Intersecting Axes
 Gear Type: Miter
 Gears: SM2-25
 PM2-25
 Gear Ratio: 1
 Weight: Approx. 1kg

The shaft angle of bevel gears can be changed by 90°. It is used to change the direction of the power.

GCU-R Rack Kit

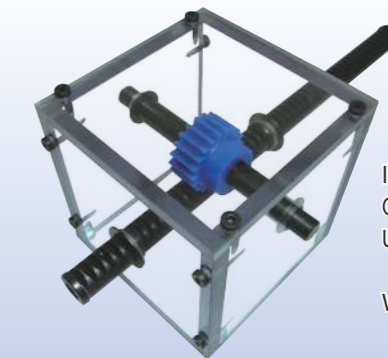

Installation: Parallel Axes
 Gear Type: Racks & Pinions
 Used Product: SRO1.5-500
 PS1.5-20
 Weight: Approx. 1kg

Racks can be used to convert rotation to linear. They are used for elevating devices, etc.

GCU-N Screw Gear Kit



Installation: Nonparallel and nonintersecting gears
 Gear Type: Screw Gears
 Gears: SN2.5-10R
 PN2.5-10R
 Gear Ratio: 1
 Weight: Approx. 1kg

Screw Gears are helical gears used in nonparallel and nonintersecting situations. Applications include devices like conveyers with light loads.

GCU-W Worm Gear Pair Kit



Installation: Nonparallel and nonintersecting gears
 Gear Type: Worm Gear Pair
 Gears: SW2-R1
 PG2-20R1
 Gear Ratio: 20
 Weight: Approx. 1kg

Large deceleration can be made in one step. The worm gear cannot be driven by the worm wheel due to inherent self-locking.

Spur Gears
 Helical Gears
 Internal Gears
 Racks
 CP Racks & Pinions
 Miter Gears
 Bevel Gears
 Screw Gears
 Worm Gears
 Gearboxes
 Other Products

Spur Gears
 Helical Gears
 Internal Gears
 Racks
 CP Racks & Pinions
 Miter Gears
 Bevel Gears
 Screw Gears
 Worm Gears
 Gearboxes
 Other Products



System Configuration




NO.	Product Name
1	Flex pump
2	Grease cartridge
3	Tube connector
4	Tube
5	Mounting shaft
6	Lubricating gear

Features


- Ideal lubrication system for racks & pinions used in open environments.
- A small amount of grease extruded from the pump is automatically supplied through the lubricating gear.
- The amount of lubricant can be adjusted according to the application.
- If pump errors are detected, an error signal is emitted.
- Grease is applied by a polyurethane lubricating gear to form a uniform lubricating film.
- Grease up to consistency No. 2 can be used regardless of the manufacturer.
- Special grease GC-F01 does not drip or pollute the machine.
- Optimized lubricant improves the durability of racks & pinions and reduces the maintenance costs.

* Please use the required amount of lubricant in Table 1 as a guide depending on the module of the product used and the peripheral speed (m/s).

Table 1. Required amount of lubricant

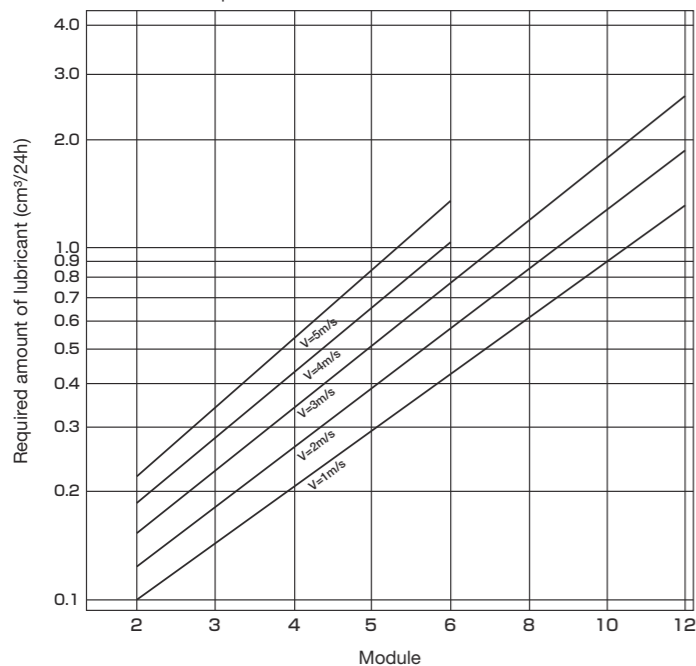

Application Examples

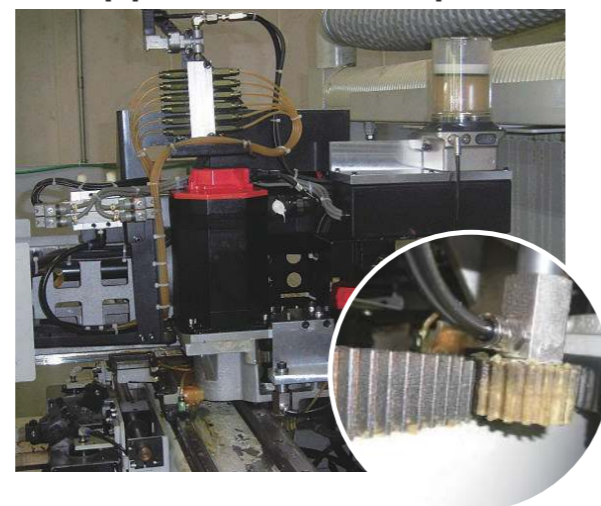

Flex pump

FP401

Mark compatible product.

24 VDC automatic time controlled lubrication pump (1-port type)



* A tube connector (right angle type) and power cable (5m) are included.

Flex pump



FP402

Mark compatible product.

24 VDC automatic time controlled lubrication pump (2-port type)



* A tube connector (right angle type) and power cable (5m) are included.

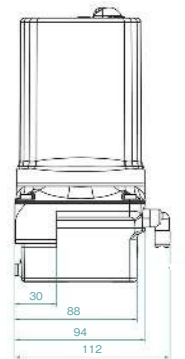

Flex pump

FP400B

Mark compatible product.

6 V battery automatic time controlled lubrication pump (1-port type)



* A tube connector (right angle type) and 6V battery are included.

Specifications	
Dimensions (W x H x D)	Max: 111 x 198.5 x 108mm
Weight (no lubricant)	1450g
Operation method	Piston pump type
Lubricating oil amount	400cm ³
Minimum lubricant supply amount	0.15cm ³
Operating pressure	Up to 70 bar
Lubricant	Grease of consistency up to NLGI No. 2
Operating temperature	-25 to 70°C
Operating voltage	24 VDC (battery type is 6V)
Consumption voltage (24 VDC)	I _{max} ≤ 350mA
Mounting direction	Omni-directional mounting available
Control device	Built-in, electronic type
Pressure monitor	Built-in, electronic type
Lubricant level monitor	Built-in, lead contact type
Error detection	Grease shortage / back pressure increase / battery level decrease
Dustproof/waterproof class	IEC Standard IP54

Grease cartridge

GC-F01

Special grease that contains additives considering the optimum adhesion to metal surfaces. Ideal for racks & pinions used in high-temperature and high-load environments.



(Empty cartridge GC-0)

Specifications	
Consistency number	No. 1
Dropping point	220°C
Operating temperature range	-30 to 150°C
Withstand pressure load	4800N
Internal capacity	400cm ³

Tube

T-6x4-5
T-6x4-10

This tube has excellent pressure resistance, elasticity, restoring force and bending strength. GC-F01 grease is provided before shipment.



Specifications		
Product Name	Material	Outer diameter x Inner diameter x Length
T-6x4-5		6mm x 4mm x 5m
T-6x4-10	Polyamide 6	6mm x 4mm x 10m

Tube connector

TCS/TCR

A tube connector with hex socket with high fluidity and sealing characteristics provided by the O-ring.

■ Straight Type

- TCS-M6
- TCS-G1/8

■ Right Angle Type


- TCR-M6
- TCR-G1/8

Specifications	
Material	CW614N (brass)
Surface treatment	Nickel plated
Operating pressure	Up to 80 bar
Operating temperature	-30 to 100°C

Note: Catalog codes M6 and G1/8 are the screw sizes. Please select according to the mounting shaft.



Specifications	
Gear teeth	Standard full depth
Pressure angle	20°
Material	Polyurethane foam




Catalog Number	Module	No. of teeth	Shape	Bore				Mounting shaft to be set
				A	C	D	E	
PUS1.5-24	m1.5	24	S5	12	36	39	15	MAS1.5 or MAR1.5
PUS2-17	m2	17			34	38	20	MAS2 or MAR2
PUS2.5-17	m2.5				42.5	47.5	24	MAS2.5 or MAR2.5
PUS3-17	m3				51	57	30	MAS3 or MAR3
PUS4-17	m4				68	76	40	MAS4 or MAR4
PUS5-17	m5				85	95	50	MAS5 or MAR5
PUS6-17	m6		17	S5	20	102	114	60
PUS8-17 (made to order)	m8	136				152	80	MAS8 or MAR8
PUS10-17 (made to order)	m10	170				190	100	MAS10 or MAR10

Catalog Number	Pitch mm (Module)	No. of teeth	Shape	Bore				Mounting shaft to be set
				A	C	D	E	
PUSCP5-24	CP5 (1.5915)	24	S5	12	38.2	41.4	15	MAS1.5 or MAR1.5
PUSCP10-15	CP10 (3.1831)	15			47.7	54.1	30	MAS3 or MAR3

- [Application Hints] ① Can be used in temperatures from -30 to 150 °C.
 ② Setting is possible to either a rack or a pinion, but we recommend a pinion as it can provide proper lubrication.
 ③ Avoid operations with high load until grease is applied to the gear teeth of the rack gears and pinion gears.
- [Precautions for Made to Order Products] Prices and lead times for Made to Order products require separate estimates. Contact your dealer.




Specifications	
Reference section of gear	Normal plane
Gear teeth	Standard full depth
Pressure angle	20°
Helix angle	19°31'41"
Material	Polyurethane foam



Catalog Number	Module	No. of teeth	Direction of spiral	Shape	Bore				Mounting shaft to be set
					A	C	D	E	
PUH1.5-24R PUH1.5-24L	m1.5	24	R L	S5	12	38.2	41.2	15	MAS1.5 or MAR1.5
PUH2-17R PUH2-17L	m2	17	R L			36.1	40.1	20	MAS2 or MAR2
PUH3-17R PUH3-17L	m3		R L			54.1	60.1	30	MAS3 or MAR3
PUH4-17R PUH4-17L	m4		R L			72.2	80.2	40	MAS4 or MAR4
PUH5-17R PUH5-17L	m5		R L			90.2	100.2	50	MAS5 or MAR5
PUH6-17R PUH6-17L	m6		R L			108.2	120.2	60	MAS6 or MAR6
PUH8-17R PUH8-17L (made to order)	m8		17	R L	S5	20	144.3	160.3	80
PUH10-17R PUH10-17L (made to order)	m10	R L		180.4			200.4	100	MAS10 or MAR10

- [Application Hints] ① Can be used in temperatures from -30 to 150 °C.
 ② Setting is possible to either a rack or a pinion, but we recommend a pinion as it can provide proper lubrication.
 ③ Avoid operations with high load until grease is applied to the gear teeth of the rack gears and pinion gears.
- [Precautions for Made to Order Products] Prices and lead times for Made to Order products require separate estimates. Contact your dealer.

● **Straight Type**

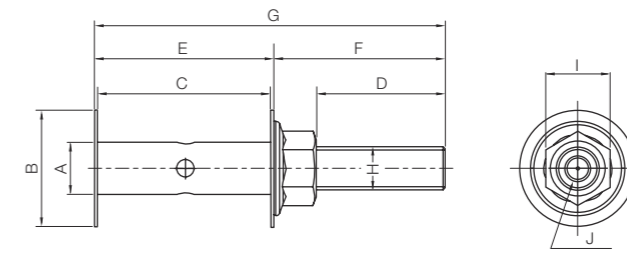


Set Example

Surface treatment: Nickel plated

Catalog Number	A	B	C	D	E	F	G	H	I	J	
										Connected screw	
MAS1.5	12	27	15.2	29.8	34.2	16.4	39.8	60.4	M10	15	M6
MAS2			20.2			21.4					
MAS2.5			24.2			25.4					
MAS3			30.2			31.4					
MAS4			40.2			41.4					
MAS5			50.2			51.4					
MAS6	60.2	61.4	64.9	116.3	M16	24	G1/8"				
MAS8 (made to order)	80.2	81.4	146.3								
MAS10 (made to order)	100.2	101.4	166.3	166.3	M16	24	G1/8"				

- [Application Hints] ① Tube connector is not included.
 [Precautions for Made to Order Products] Prices and lead times for Made to Order products require separate estimates. Contact your dealer.

● **Right Angle Type**

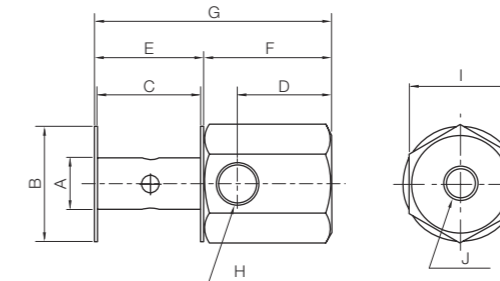

Set Example

Surface treatment: Nickel plated

Catalog Number	A	B	C	D	E	F	G	H	I	J		
								Connected screw				
MAR1.5	12	27	15.2	22	22	30	30	46.4	G1/8"	24	M8×10	
MAR2			20.2									21.4
MAR2.5			24.2									25.4
MAR3			30.2									31.4
MAR4			40.2									41.4
MAR5			50.2									51.4
MAR6	60.2	61.4	64.9	111.4	G1/8"	24	M8×10					
MAR8 (made to order)	80.2	81.4	131.4									
MAR10 (made to order)	100.2	101.4	166.3	166.3	M16	24	G1/8"					

- [Application Hints] ① Tube connector is not included.
 [Precautions for Made to Order Products] Prices and lead times for Made to Order products require separate estimates. Contact your dealer.

Kohara Gear Industry Co.,Ltd.



Factory Introduction



JIT Line

Lathe

Tooth Cutting



Grinding Operations

Machining

Wire Cutting

KHK Group

Kohara Gear Industry Co.,Ltd.

Design, manufacture and sales of KHK stock gears
Order and manufacture of various order-made gears

KHK Noda Co.,Ltd.

Manufacture/sales of gears and stock gears

KHK CO., LTD.

Purchase/sales of gears and variable speed reducers
Trade in transmission items



Quality Assurance / Inspection



Warehouse of KHK Stock Gears

Sales Overseas

KHK's global network is built throughout the world. See the website for details on each country and region.



Production Equipment



Combined Machining Machine (INTEGREX J-200)

Vertical Machining Center (SVC2000)

Plane / Inner Surface Combined Grinding Machine (NVG II -5T)

CNC Hobbing Machine (KN-152)



Hobbing Board (KL-451)

Gear Grinding Machine (VIPER500W)

Wire Electric Discharge Machine (C-600iA)

Combined Machining Machine (DMU 85 FD monoBLOCK)



KHK Noda Co., Ltd. 143 Nakazato, Noda-shi, Chiba, 270-0237



Quality Assurance



Carl Zeiss 3D Coordinate Measuring Machine (ACCUA)




Gear Measuring System (350GMS)

Hardening Equipment



Induction Hardener (MK16A STAT300-50)

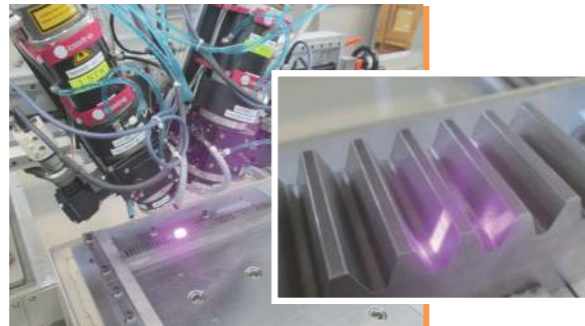

Laser Hardener (LDF4000-40)

Production Equipment



Rack Grinding Machine (ZSM Compact 2200)



CNC Lathe (MW120EXG)



CNC Hobbing Machine (KN-152)



CNC Gear Grinding Machine (300TWG)



CNC Bevel Gear Grinding Machine (PH-280HG)



Vertical Machining Center (VCN-530C)



CNC Screw Grinding Machine (TE-LM200)



Packaging Machine (EPK-S)

All KHK stock gears conform to the RoHS2^{*1} Directive.

*1 The RoHS2 Directive (2011/65/EU) was revised on July 22, 2019 to a total of 10 substances with 4 phthalates added.

RoHS2 Directive


Restriction of Hazardous Substances

Restriction of Hazardous Substances
The RoHS Directive is a law established by the European Union (EU) that restricts the use of certain hazardous substances in electronic and electrical equipment. The use of the 10 environment-related substances specified below is restricted.

Maximum allowable concentration of 10 environment-related substances

- Cadmium: 0.01wt% (100ppm)
- Lead: 0.1 wt% (1000ppm)
*Exception depending on usage
Steel 0.35 wt%, Aluminum 0.4 wt%, Copper alloy 4 wt%
- Mercury: 0.1 wt% (1000ppm)
- Hexavalent chromium: 0.1 wt% (1000ppm)
- PBB (Polybrominated biphenyl): 0.1 wt% (1000ppm)
- PBDE (Polybrominated diphenyl ether): 0.1 wt% (1000ppm)
- DEHP (Di-2-EthylHexyl Phthalate): 0.1 wt% (1000 ppm)
- BBP (Butyl Benzyl Phthalate): 0.1 wt% (1000 ppm)
- DBP (DiButyl Phthalate): 0.1 wt% (1000 ppm)
- DIBP (DiisoButyl Phthalate): 0.1 wt% (1000 ppm)

Cadmium and hexavalent chromium: Environmentally damaging substances are not used.

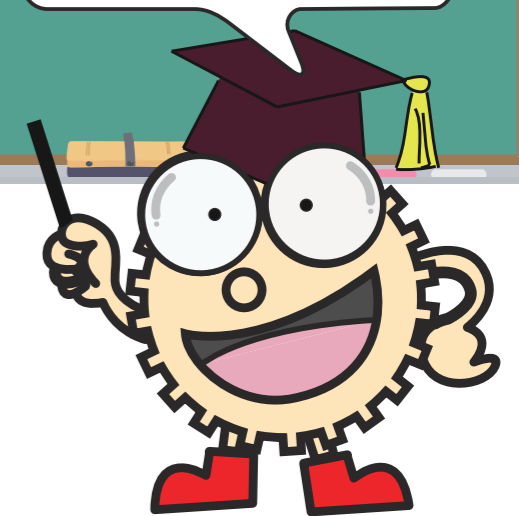

SDGs

SDGs Initiatives

KHK is working to contribute to the realization of the SDGs.

KHK Environmental Practices

Treatment after use of KHK stock gears and packaging materials

Steel Products	Nylon Gears	Cardboards	Paperboards	Plastics
Recycle metal products as scrap metal according to the material.	Nylon gears are plastic waste. Please dispose of as reusable industrial waste.	Treat the cardboard used in the packaging as recycled cardboard.	Treat the cardboard used in the packaging as recycled paper.	Packing materials like foamed polyethylene sheets and plastic boxes are plastic waste. Please dispose of as reusable industrial waste.

SDS Activities

The materials and products used for KHK stock gears, the rust preventive oil and packaging materials, and the auxiliary materials used in the manufacturing process are managed in the safety data sheet for chemical substances, etc., in consideration of the global environment.

Green Purchasing Activities

90 percent of office supplies we purchase are made of environmentally friendly materials.

Discontinued Stock Product Model Number History Table

Category	Discontinued Products		Specifications		Alternative	Sales Period
	Item	Range	Characteristics	Material	Item	
Spur Gears	MSGA/MSGB	Module 1, 1.5, 2, 2.5, 3, 4	Carburized	SCM415	Custom order	1978~2022
	SSG	Some products of module 0.5, 0.8	Finished	S45C	Custom/Made to Order	2008~2022
	SSS	Module 0.5, 0.8, 2, 2.5, 3	Shaft Type	S45C	Custom order	2008~2020
	SS	Some products of module 0.5, 0.8, 1, 1.5	Finished	S45C	Made to Order / Secondary Operations	2008~2020
	SSY	Some products of module 0.8, 1, 1.25	With Hub	S45C	Custom order	1984~2020
	SSAY	Module 1.25	Hubless	S45C	Custom order	1988~2008
	SSAY/K	All	K clamp (patented)	S45C	No production	2002~2017
	SSH	All	Honing treatment on Tooth Surface	S45C	SSG	1973~1975
	LS	m0.5-25,40 m0.8-25,40,60,70,80	Sintered item	SMF5040	SS	2000~2014
	CS	All	Molded	FC200	SS	1973~1984
	SUSL	All	F-loc	SUS303	SUSF	1996~2016
	DSL	All	F-loc	Acetal (SUS303)	DSF	2000~2016
	SUSF	Module 0.5, 1	F-loc	SUS303	Custom order	2016~2022
	DSF	Module 0.5, 1	F-loc	Polyacetal (SUS303)	Custom order	2016~2022
	NSU	Some products of module 1,1.5, 2, 2.5, 3	With core hub	MC602ST (S45C)	Custom order	1988~2022
	PSU	All	With core hub	MC901 (FC200)	PU	1988~1996
	DS	Some products of module 0.5, 0.8, 1	Molded item	Duracon (R) (M90-44)	Custom order	1988~2022
	BSS	Some products of module 0.5, 0.8, 1	Finished	C3604	Made to Order / Secondary Operations	2008~2020
	MSCPG	All	Carburized	SCM415	Made to Order	2014~2020
	KSCP	All	Thermal refined, gear teeth induction hardened	SCM440	KSSCP Hardened Plus	2014~2019
Helical Gears	KHCPG	All	CP, Ground	SCM440	Custom order	1992~1992
	KHG	Some products of module 1,1.5, 2, 2.5, 3	Transverse modules, ground gears	SCM440	Custom order	1989~2022
Internal Ring Gears	CI	All	Molded	FCD55	SI	1973~1978
Racks	KRG	All 500mm	Thermal Refined, Ground	SCM440	KRGF	1984~2020
	KRGD	All	Thermal Refined, Ground	SCM440	KRGFD-HJ	1984~2019
	SR	Lengths over 1000 mm	Common Type	S45C	SRF	1973~2008
	SRG/SRGF	Module 0.5, 0.8	Gear teeth induction hardened	S45C	Made to Order	2008~2022
	SUR	Lengths over 1000 mm	Stainless Steel	SUS304	SURF	2004~2020
	PR	Lengths over 1000 mm	Plastic	MC901	PRF	1984~2020
	BSR	Module 1.25	Contains Brass	C3604	Custom order	1984~2008
	SRO	SRO6-1000	Round Racks	S45C	Custom order	1989~2019
	CR	All	Molded	FC200	SRF	1973~1978
	KRGCP	All 500mm	Thermal Refined, Ground	SCM440	KRGCPF	1986~2020
	KRGCPD	All	CP, Thermal Refined, Ground	SCM440	KRGCPFD-HJ	1984~2019
	SRCP	Lengths over 1000 mm	CP	S45C	SRCPF	1978~2008
	Helical Racks	KRHG	Some products of module 2, 2.5, 3	Thermal Refined, Ground	SCM440	Custom order
KRHGCPF		All	CP, Ground	SCM440	Custom order	1992~1992
Spiral Miter Gears	SMS	Module 1.25	Common Type	S45C	Custom order	1978~2006
	KSP	F Type (Finished Products with Key Groove) All Products, Parts of m1.5 to 6	Finished	SCM415	Made to Order / Secondary Operations	2004~2022
Straight Miter Gears	CM	All	Molded	FC20	SM	1973~1978
	FM	All	Precision Molded	S45C	SM	1973~1978
	SMA/B/C	Some products of module 3.5, 6, 8	Finished	S45C	Custom order	1973~2022

Category	Discontinued Products		Specifications		Alternative	Sales Period
	Item	Range	Characteristics	Material	Item	
Ground Zerol Miter Gears	SMZG	All	Thermal refined, gear teeth induction hardened	S45C	Custom order	2010~2020
High-Ratio Hypoid Gears	MHP	Reduction ratios 90, 120, 180, 200, 20 (m1), 30 (m1.5)	High reduction ratio with a pair of gears	SCM415	No production	2000~2016
Spiral Bevel Gears	MBSA	Some products of module 1.5 or less, 2, 2.5, 3, 4, 5, 6	Finished	SCM415	Custom order	1978~2020
	MBSB	Some products of module 1.5 or less, 2, 2.5, 3, 4, 5, 6	Finished	SCM415	Custom order	1978~2020
	KSP	F Type (Finished Products with Key Groove) All Products, Parts of m1.5 to 6	Finished	SCM415	Custom order	2004~2022
Straight Bevel Gears	FB	All	Precision Molded	S45C	SB	1973~1978
	SB	CB gear mating pinions with module over m5	Common Type	S45C	SBY	1973~2006
	CB	All items having SB	Molded	FC200	SB, SBY	1973~2000
	CB	SB mating gears with module over m5	Molded	FC200	SB, SBY	1973~2006
Ground Zerol Bevel Gears	SBZG	All	High reduction ratio with a pair of gears	S45C	Custom order	2010~2020
Screw Gears	AN	Module 2.5, 3,4	Contains Aluminum Bronze	CAC702 (AIBC2)	Made to Order	1979~2022
Worms	KWGD	Module Over 5	Duplex, Ground	SCM440	Custom order	1988~2002
	KWGDLS	Module Over 5	Duplex, Ground Shaft	SCM440	Custom order	1992~2002
	KWG	Right-hand helix with double threads with module over m5 (R2)	Ground Shaft	SCM440	Custom order	1978~2002
	SW	Left-hand helix with module over m4 (L1, L2)	Common Type	S45C	Custom order	1996~2002 m4 is 1996~2019
Worm Wheels	AG	Module 3, 4	Contains Aluminum Bronze	CAC702 (AIBC2)	Custom order	1973~2022
	AGDL	Module Over 3.5	Duplex	CAC702 (AIBC2)	Custom order	1988~2022
	AGF	Module Over 2	Contains Aluminum Bronze	CAC702 (AIBC2)	Custom order	1978~2022
	BG	Left-hand helix with module over m4 (L1, L2)	Contains Phosphor Bronze	CAC502 (PBC2)	Custom order	1996~2002 m4 is 1996~2019
	CG	Module Over 1.5	Molded	FC200	Custom order	1996~2020 m4 is 1996~2019
	DG	Module 0.5, 0.8	Polyacetal	Polyacetal	Custom order	2008~2022
Gearboxes	PBX	All	Bevel Gearboxes	—	No production	2004~2022
Other Products	SRTB	Some products of modules 2/3~4	Gear teeth induction hardened	S45C	Made to Order	1992~2022
	GC	All TK	Gear Couplings	S45C	GC-J	1975~2020
One-cycle-clutch type geared motor	F	All	Without motor		No production	1973~1980
	IM	All	With motor		No production	1973~1980
	M	All	With motor		No production	1973~1980
Gear calculation software	GCSW	All	General gear calculation		Online GCSW	1988~2009
Electronic catalog (Japanese version only)	30XX	All	Product information for KHK stock gears DXF, strength calculation, etc.		Web Catalog	1992~2011

Customer Trust and Satisfaction



KHK CO., LTD.

Overseas Sales Department 13-15 Nakacho, Kawaguchi-shi, Saitama-ken, 332-0022 Japan
Phone : +81- 48(254)1744 Fax : +81- 48(254)1765

URL <https://khkgears.net/new/> E-mail info@khkgears.net

- All rights reserved herein and no portion of this catalog may be reproduced without the prior consent in writing from the company.
- The company disclaims responsibility for any error or omission regarding technical and product information published.
- KHK Co. Ltd, reserves the right to make changes to specifications and dimensions without notice.

KHK Catalog – Product Guide

First Published 20.April. 1972
2023 First Printing (EN) 1.Apr. 2023
Publisher Toshiharu Kohara

Published by

KHK Co., Ltd.

13-15 Naka-cho, Kawaguchi-shi, Saitama-ken,
332-0022 Japan